

The background of the slide features a large, faint watermark of the Duke University crest. The crest includes a shield with a red cross, topped by a sun with a face and rays, and a banner at the bottom with the Latin motto "IN DEO SPERAMUS".

Search

George Konidakis
gdk@cs.duke.edu

Search

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9



5	3	4	6	7	8	9	1	2
6	7	2	1	9	5	3	4	8
1	9	8	3	4	2	5	6	7
8	5	9	7	6	1	4	2	3
4	2	6	8	5	3	7	9	1
7	1	3	9	2	4	8	5	6
9	6	1	5	3	7	2	8	4
2	8	7	4	1	9	6	3	5
3	4	5	2	8	6	1	7	9

Basic to problem solving:

- *How to take action to reach a goal?*

Search



5	3	4		7	8	9		2
6	7		1	9	5	3	4	8
1	9	8	3	4	2	5	6	7
8	5	9	7	6	1	4	2	3
4	2	6	8		3		9	1
7	1	3		2	4	8	5	6
	6	1	5	3	7	2	8	4
		7	4	1	9	6		5
3	4		2	8	6	1	7	9

Choices have consequences!

Search

Formalizing the problem statement ...

- Problem can be in various *states*.
- Start in an *initial state*.
- Have some *actions* available.
- Each action has a *cost*.
- Want to reach some *goal*, minimizing cost.

Happens in simulation.

Not web search.



Formal Definition

Set of states S

Start state $s \in S$

Set of actions A and action rules $a(s) \rightarrow s'$

Goal test $g(s) \rightarrow \{0, 1\}$

Cost function $C(s, a, s') \rightarrow \mathbb{R}^+$

So a search problem is specified by a tuple, (S, s, A, g, C) .



Problem Statement

Find a sequence of actions a_1, \dots, a_n
and corresponding states s_1, \dots, s_n

... such that:

$$s_0 = s$$

$$s_i = a_i(s_{i-1}), i = 1, \dots, n$$

$$g(s_n) = 1$$

start state

legal moves

end at the goal

while minimizing:

$$\sum_{i=1}^n C(s_{i-1}, a, s_i)$$

minimize sum of costs - *rational agent*



Formal Models

What are they good for?



Example

Sudoku

States: all legal Sudoku boards.

Start state: a particular, partially filled-in, board.

Actions: inserting a *valid* number into the board.

Goal test: all cells filled and no collisions.

Cost function: 1 per move.

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9



Example

Flights - e.g., ITA Software.

States: airports, times.

Start state: TF Green, 5pm.

Actions: available flights from each airport.


Goal test: reached Tokyo by midnight tomorrow.

Cost function: time and/or money.




The Search Tree

Classical conceptualization of search.

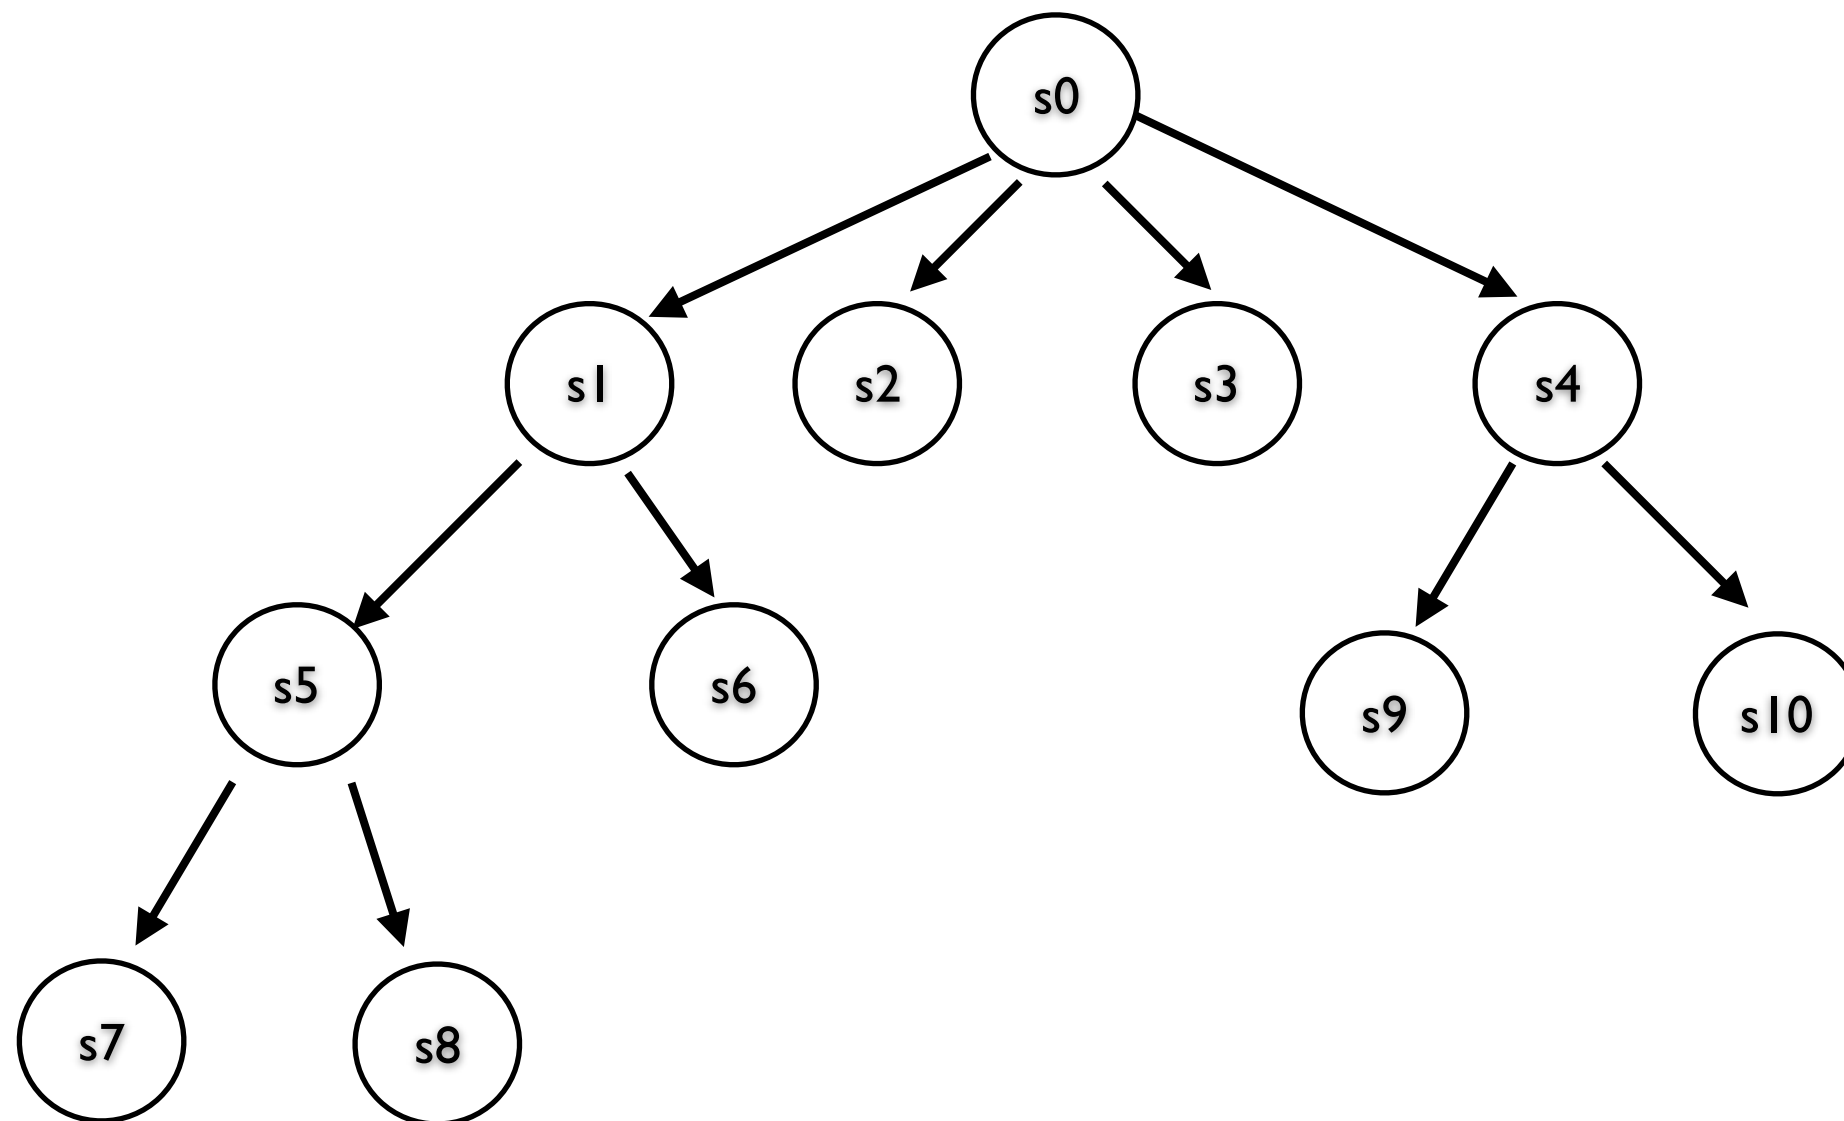


The Search Tree

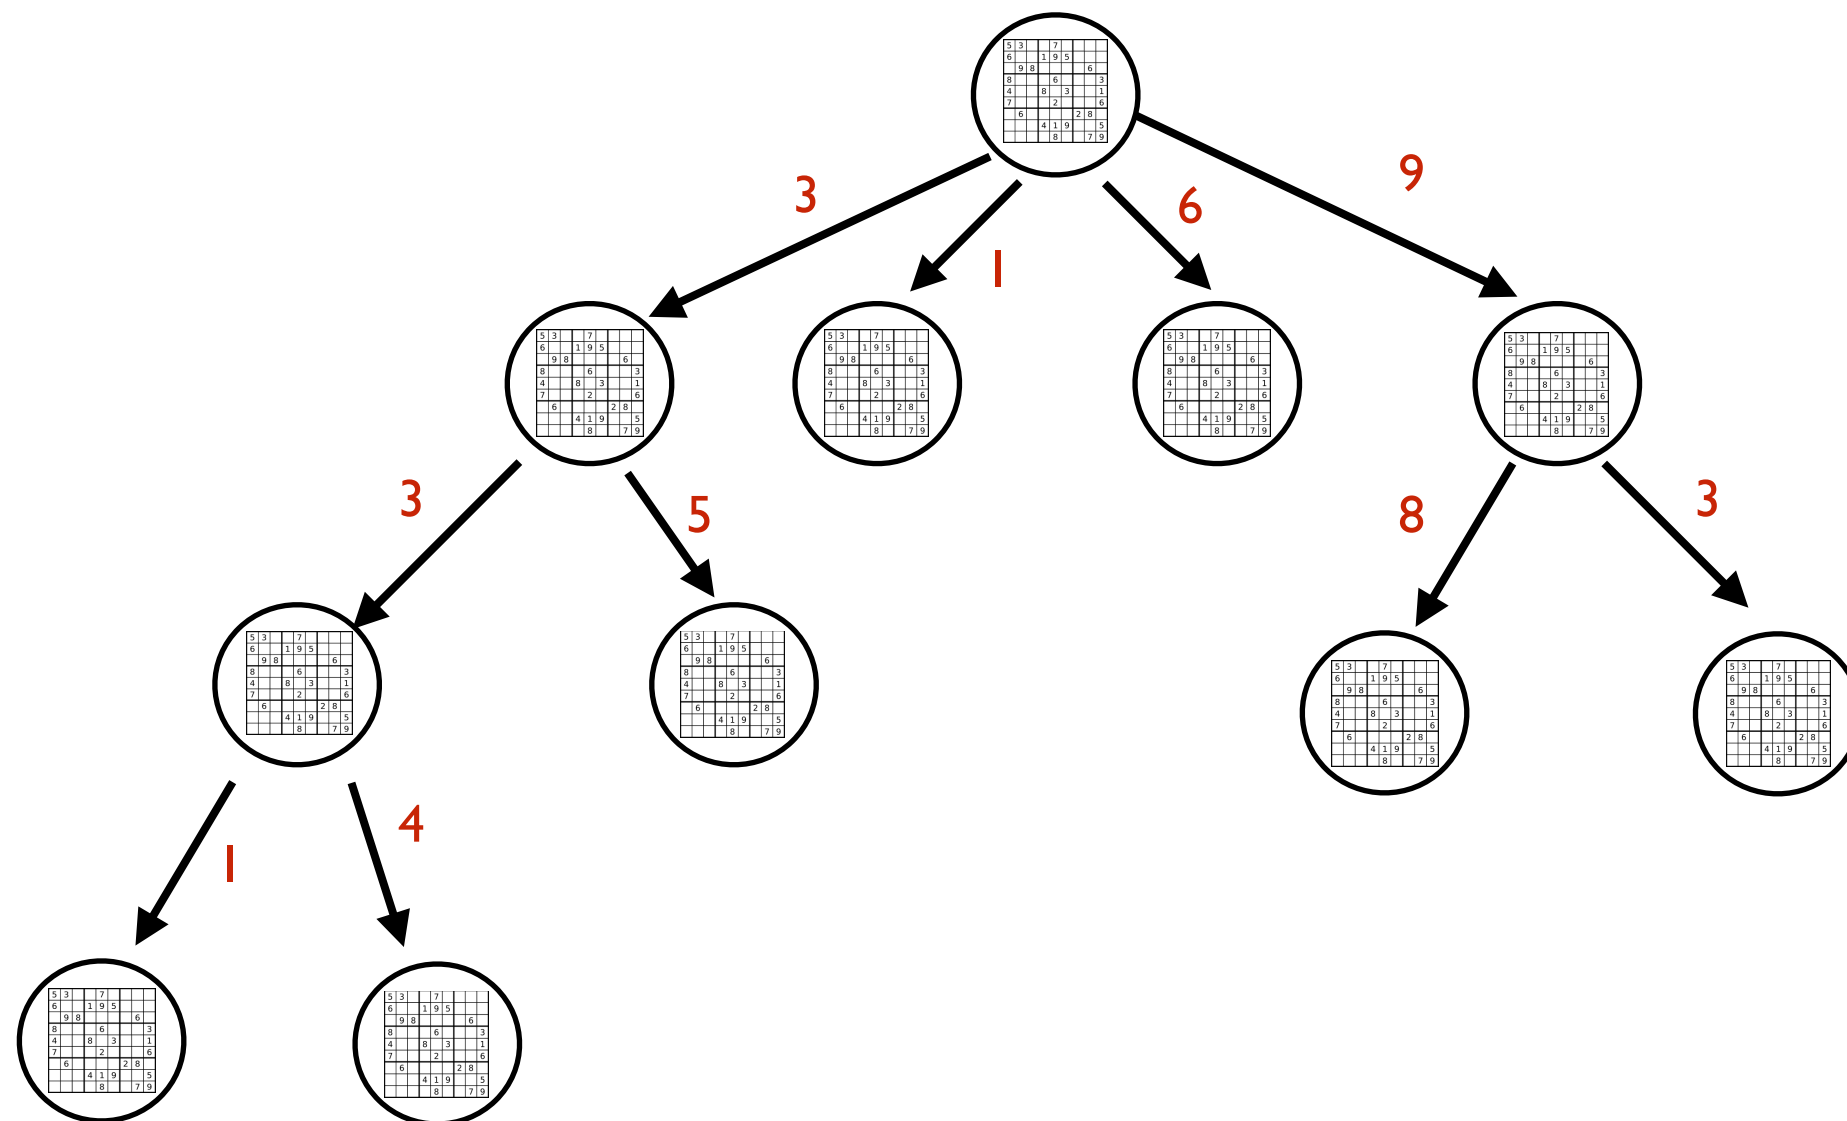

Important Quantities


Breadth (branching factor)

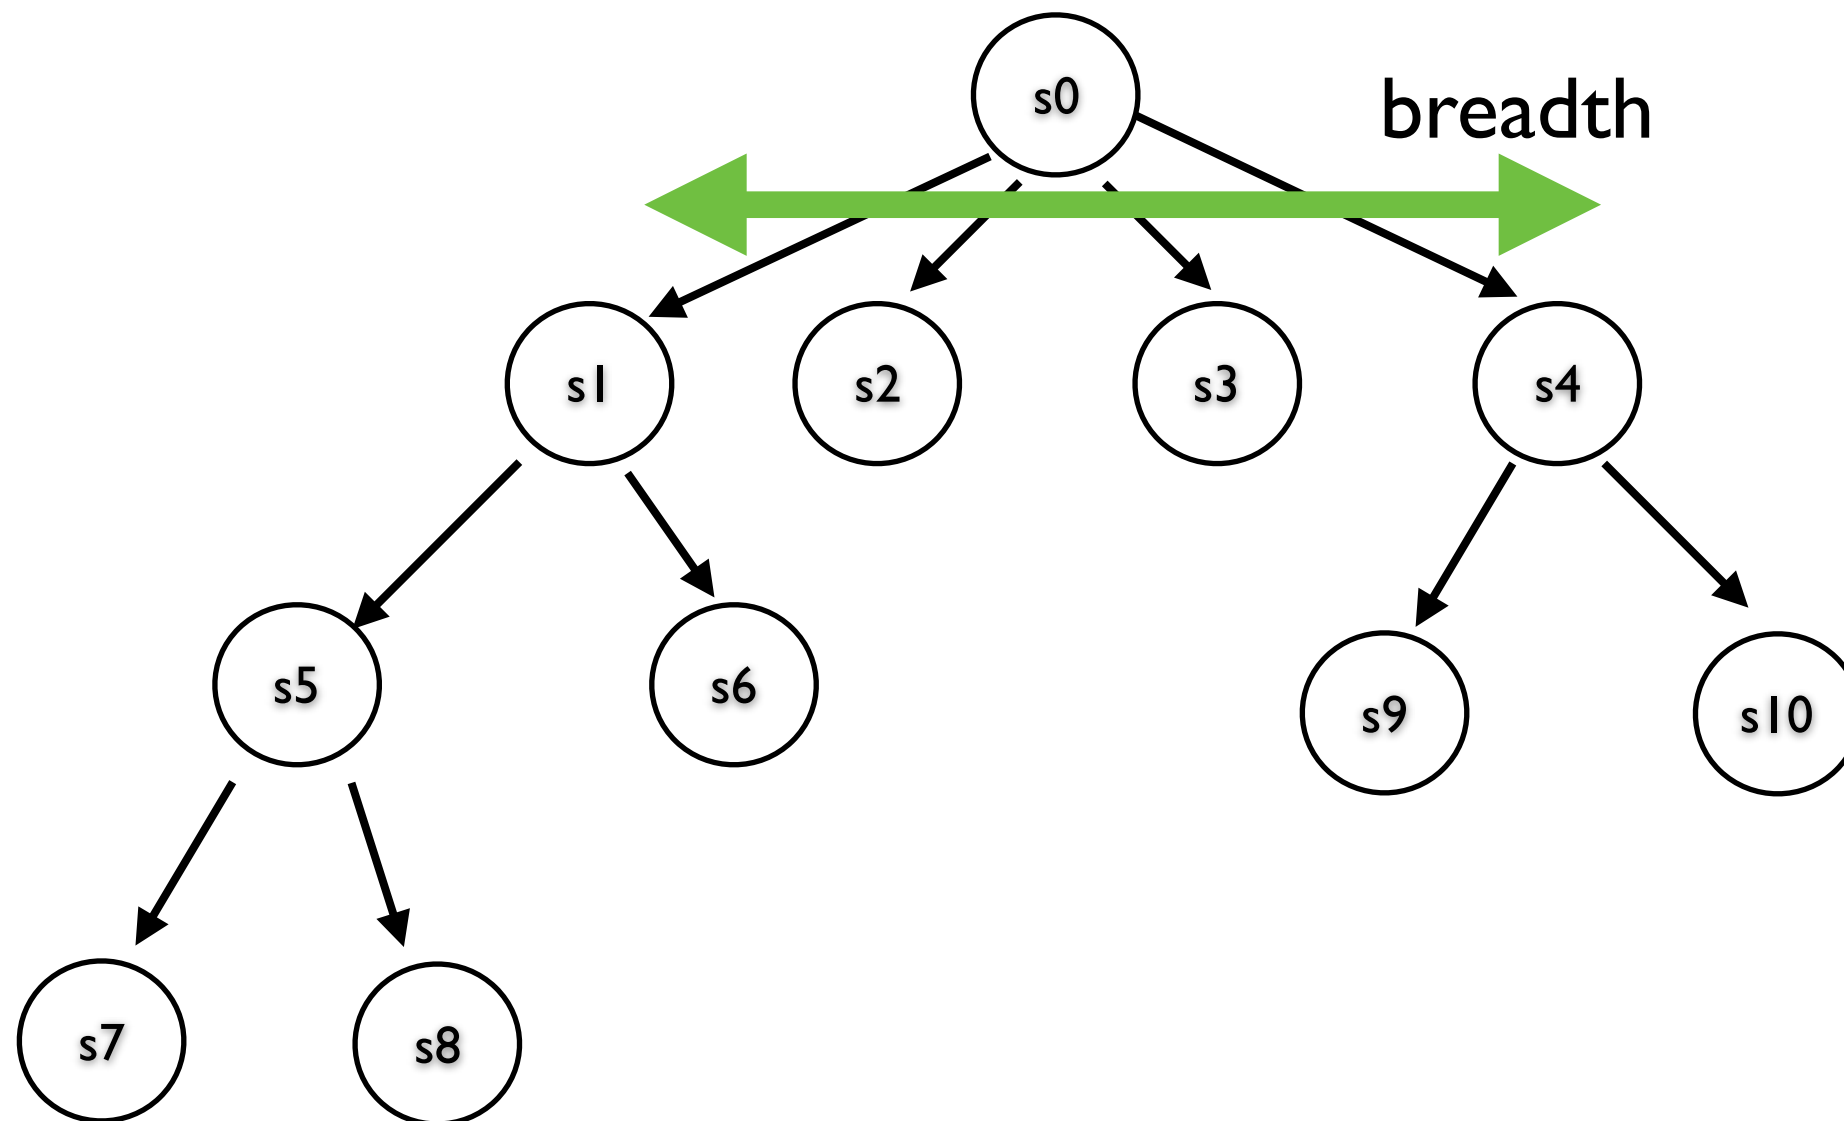

The Search Tree

Depth

- min solution depth m
- depth d

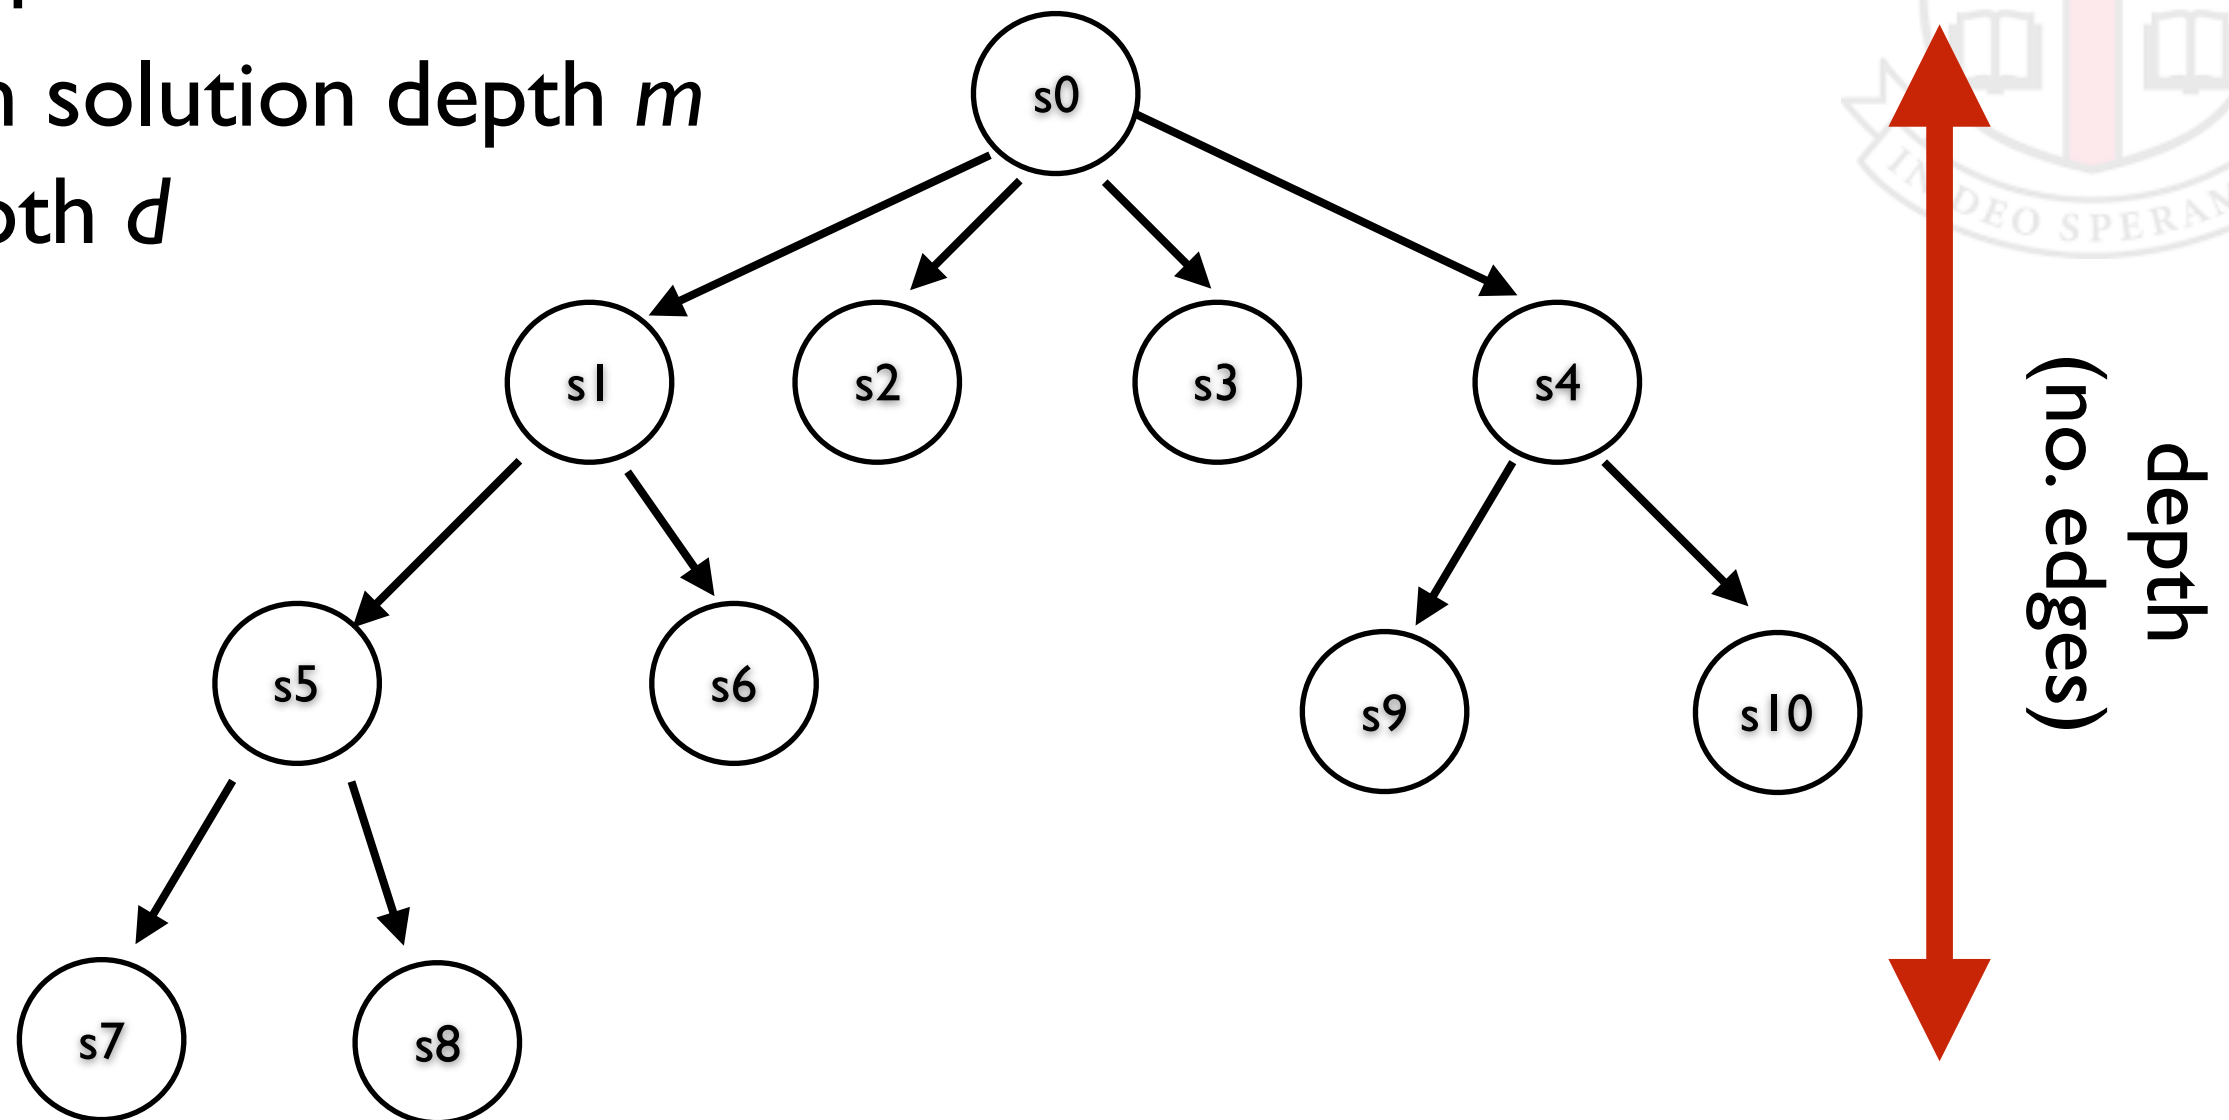


$O(b^d)$ leaves in a tree of breadth b , depth d .

$\sum_{i=0}^d b^i \in O(b^d)$ *total* nodes in the same tree

The Search Tree

Expand the tree one node at a time.

Frontier: set of nodes *in tree*, but not *expanded*.

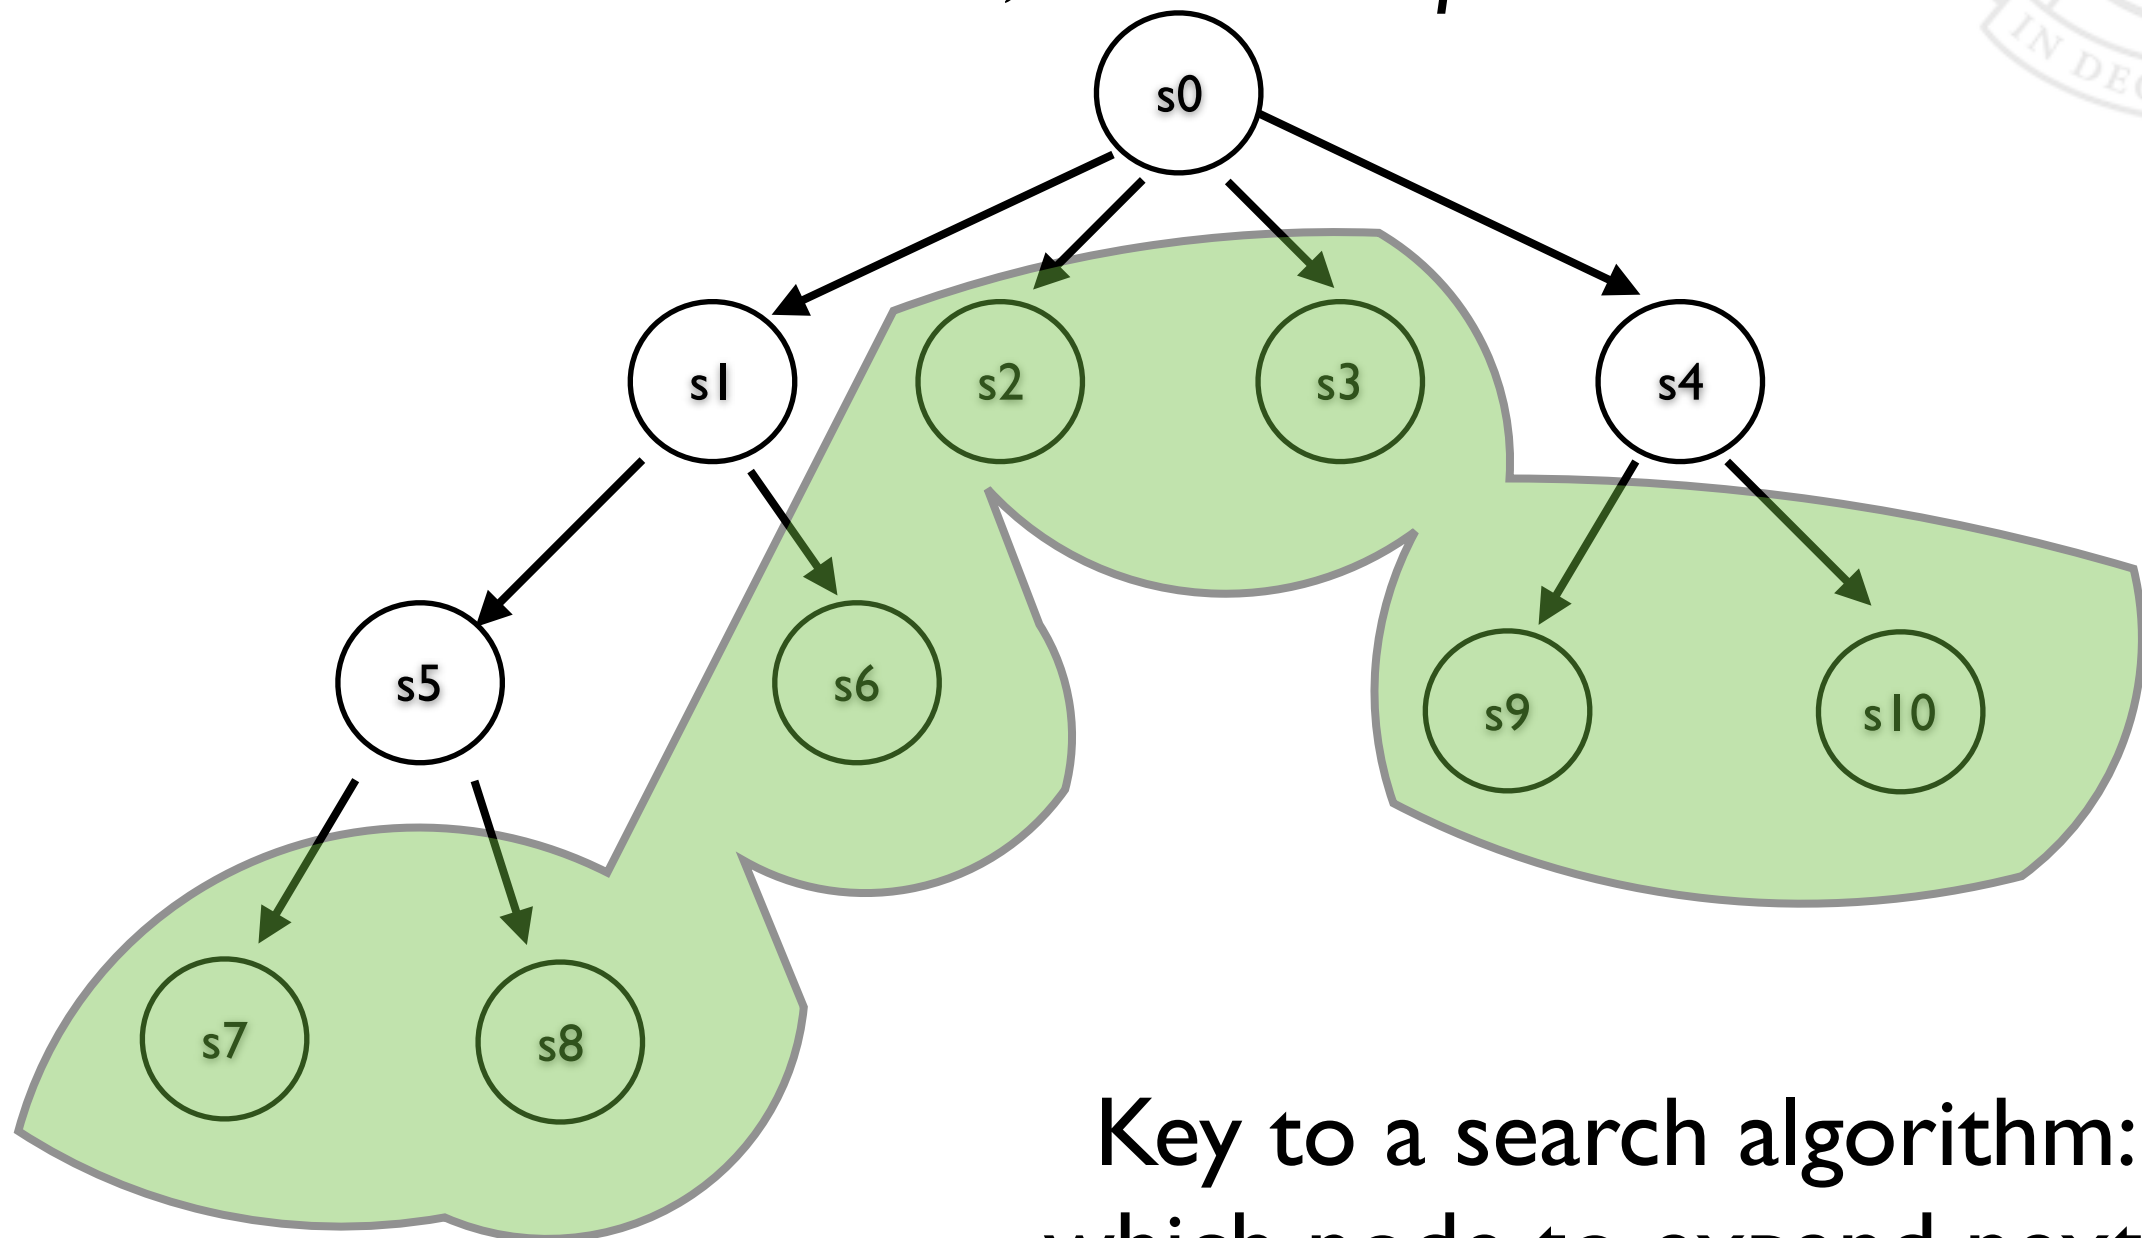

Key to a search algorithm:
which node to expand next?



Searching

```
visited = {}  
frontier = {s0}  
goal_found = false
```

```
while not goal_found:  
    node = frontier.next()  
    frontier.del(node)
```

```
    if(g(node)):  
        goal_found = true  
    else:  
        visited.add(node)  
        for child in node.children:  
            if(not visited.contains(child)):  
                frontier.add(child)
```

expand tree!



How to Expand?

Uninformed strategy:

- nothing known about likely solutions in the tree.

What to do?

- Expand deepest node (*depth-first search*)
- Expand closest node (*breadth-first search*)


Properties

- Completeness
- Optimality
- Time Complexity (*total number of nodes visited*)
- Space Complexity (*size of frontier*)




Depth-First Search

Expand deepest node

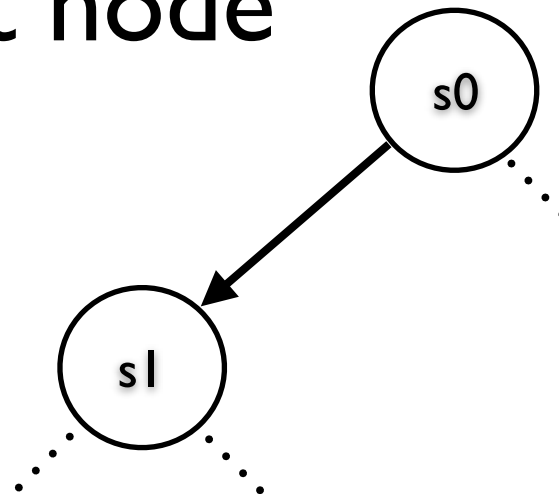


Depth-First Search

Expand deepest node

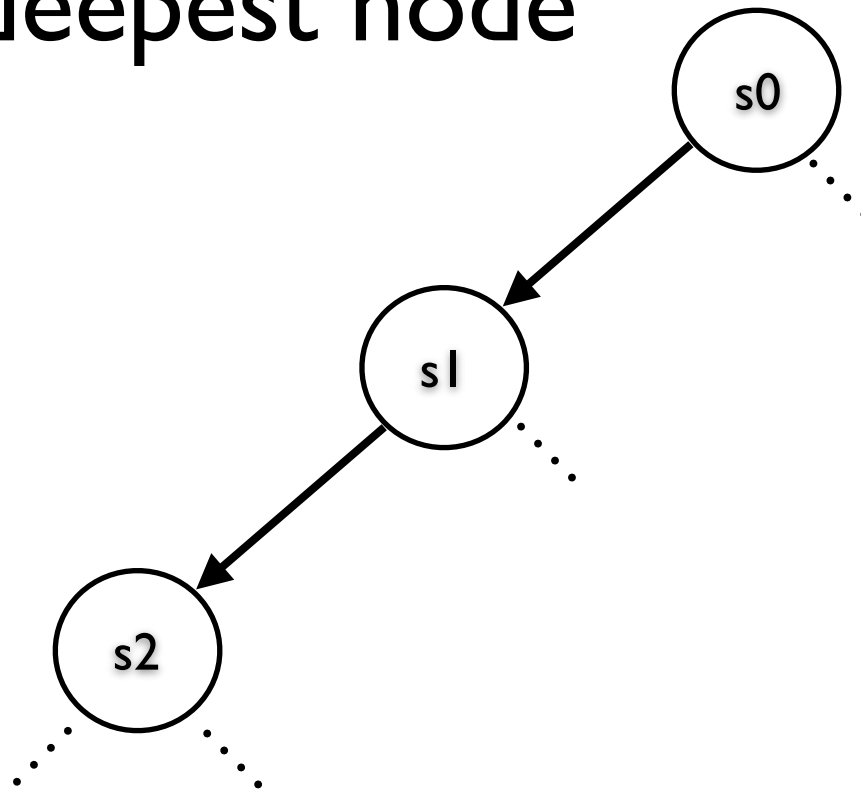


Depth-First Search

Expand deepest node

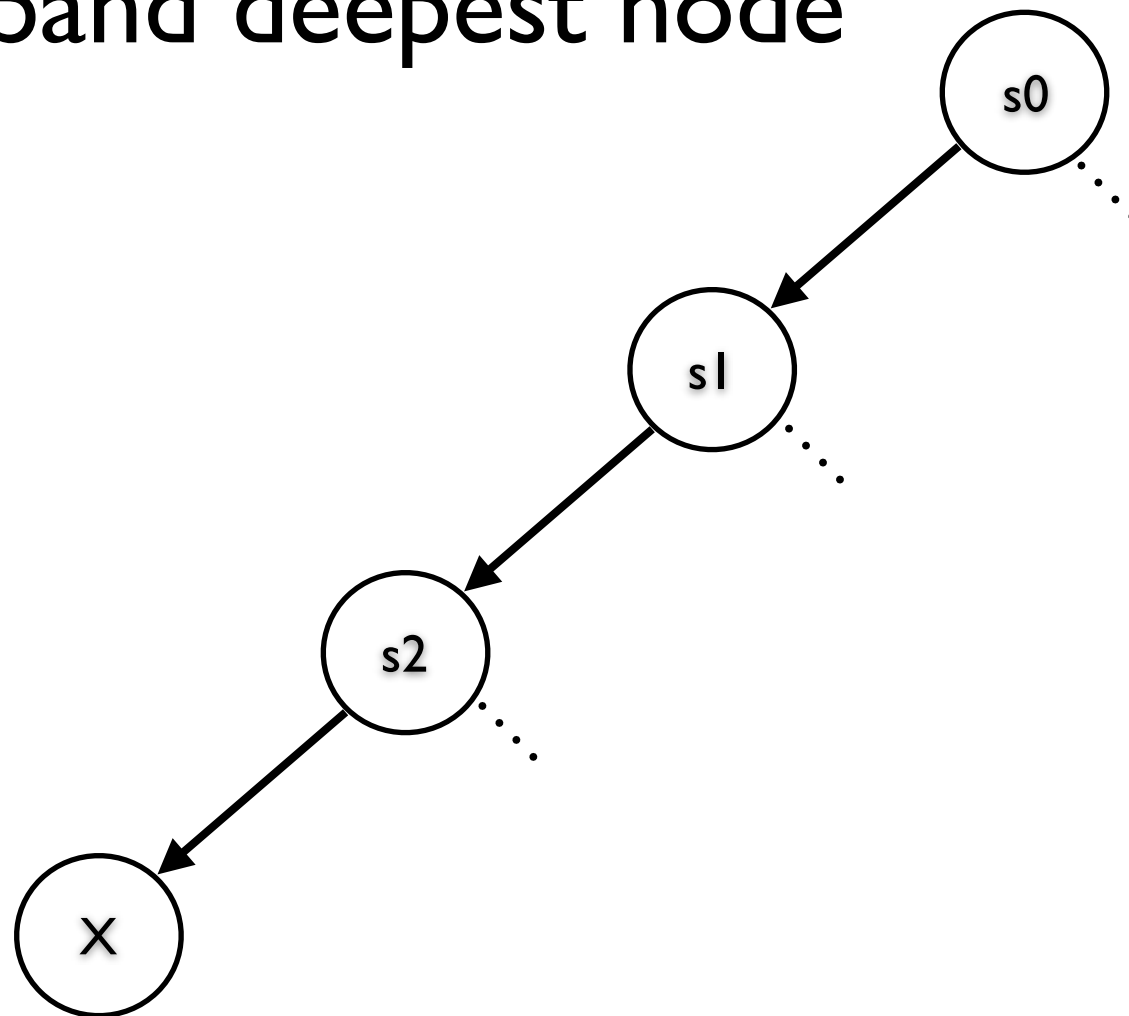


Depth-First Search

Expand deepest node

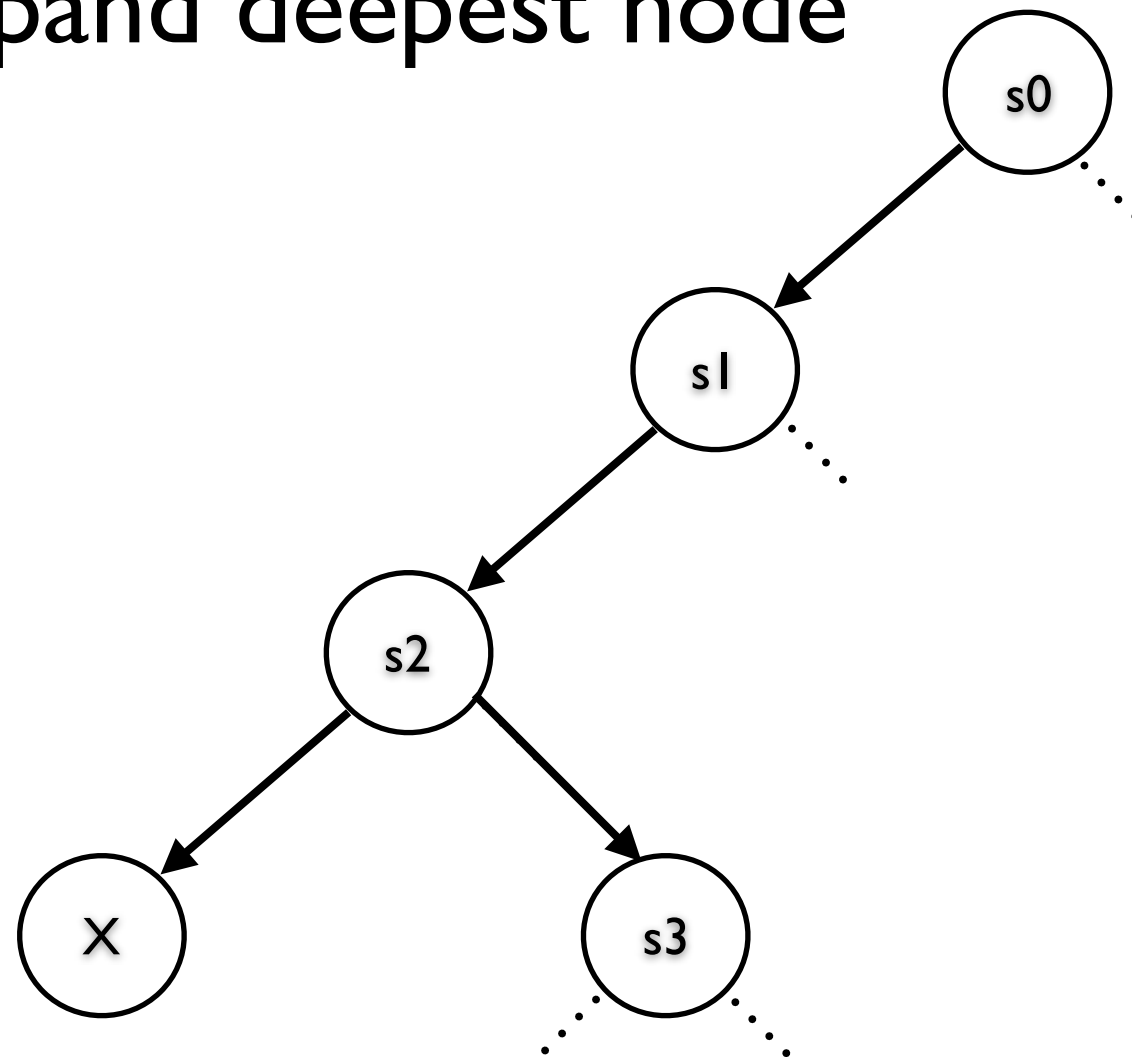


Depth-First Search

Expand deepest node

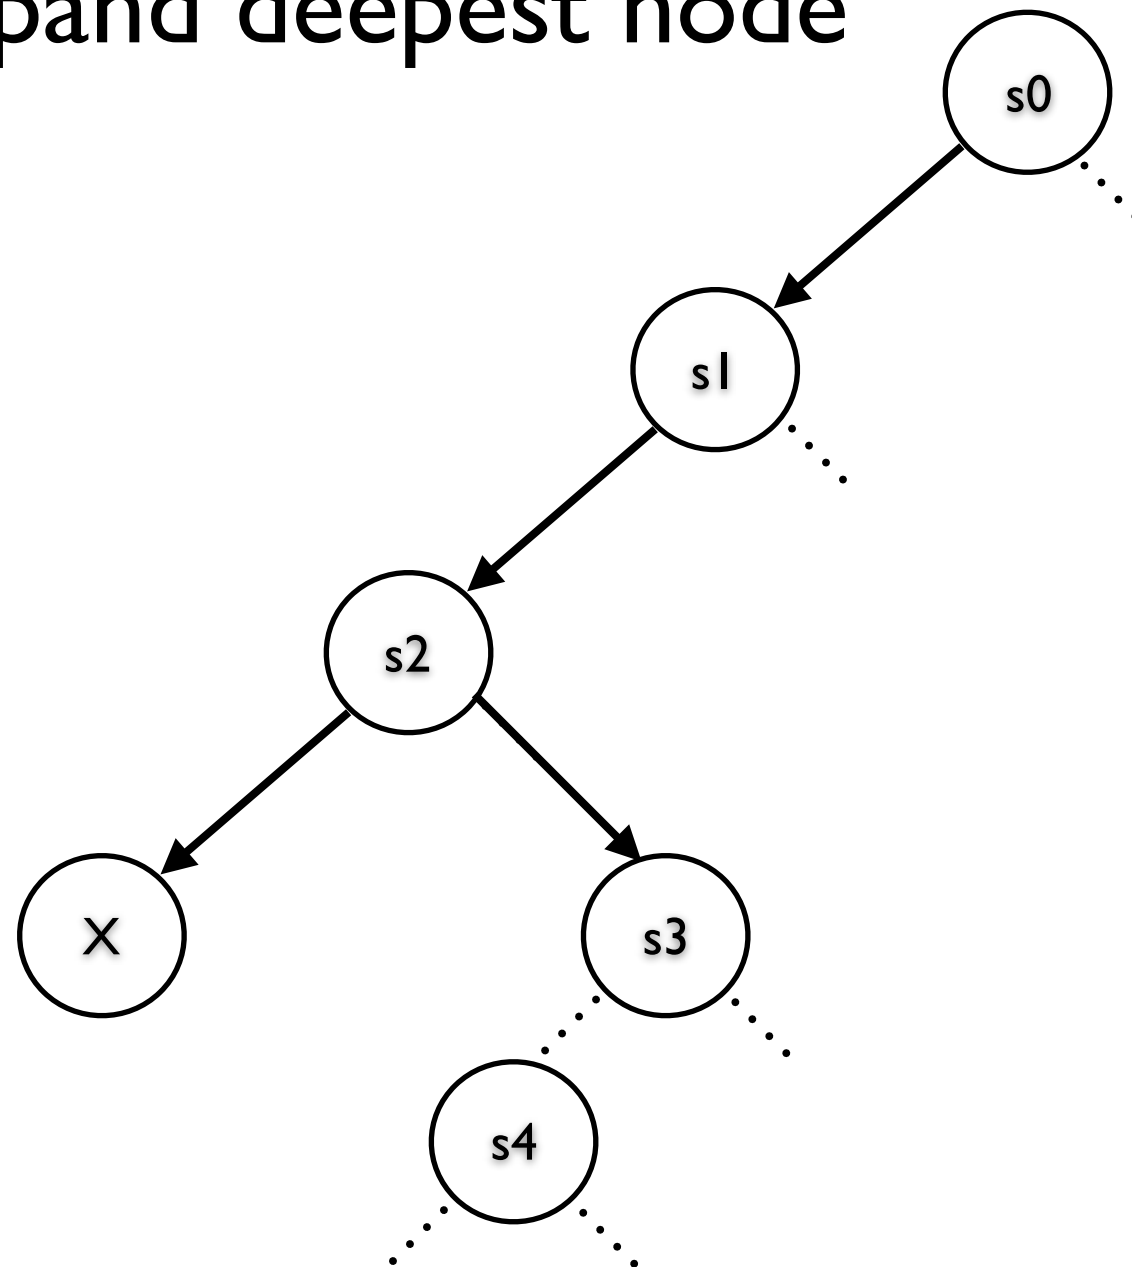


DFS: Time

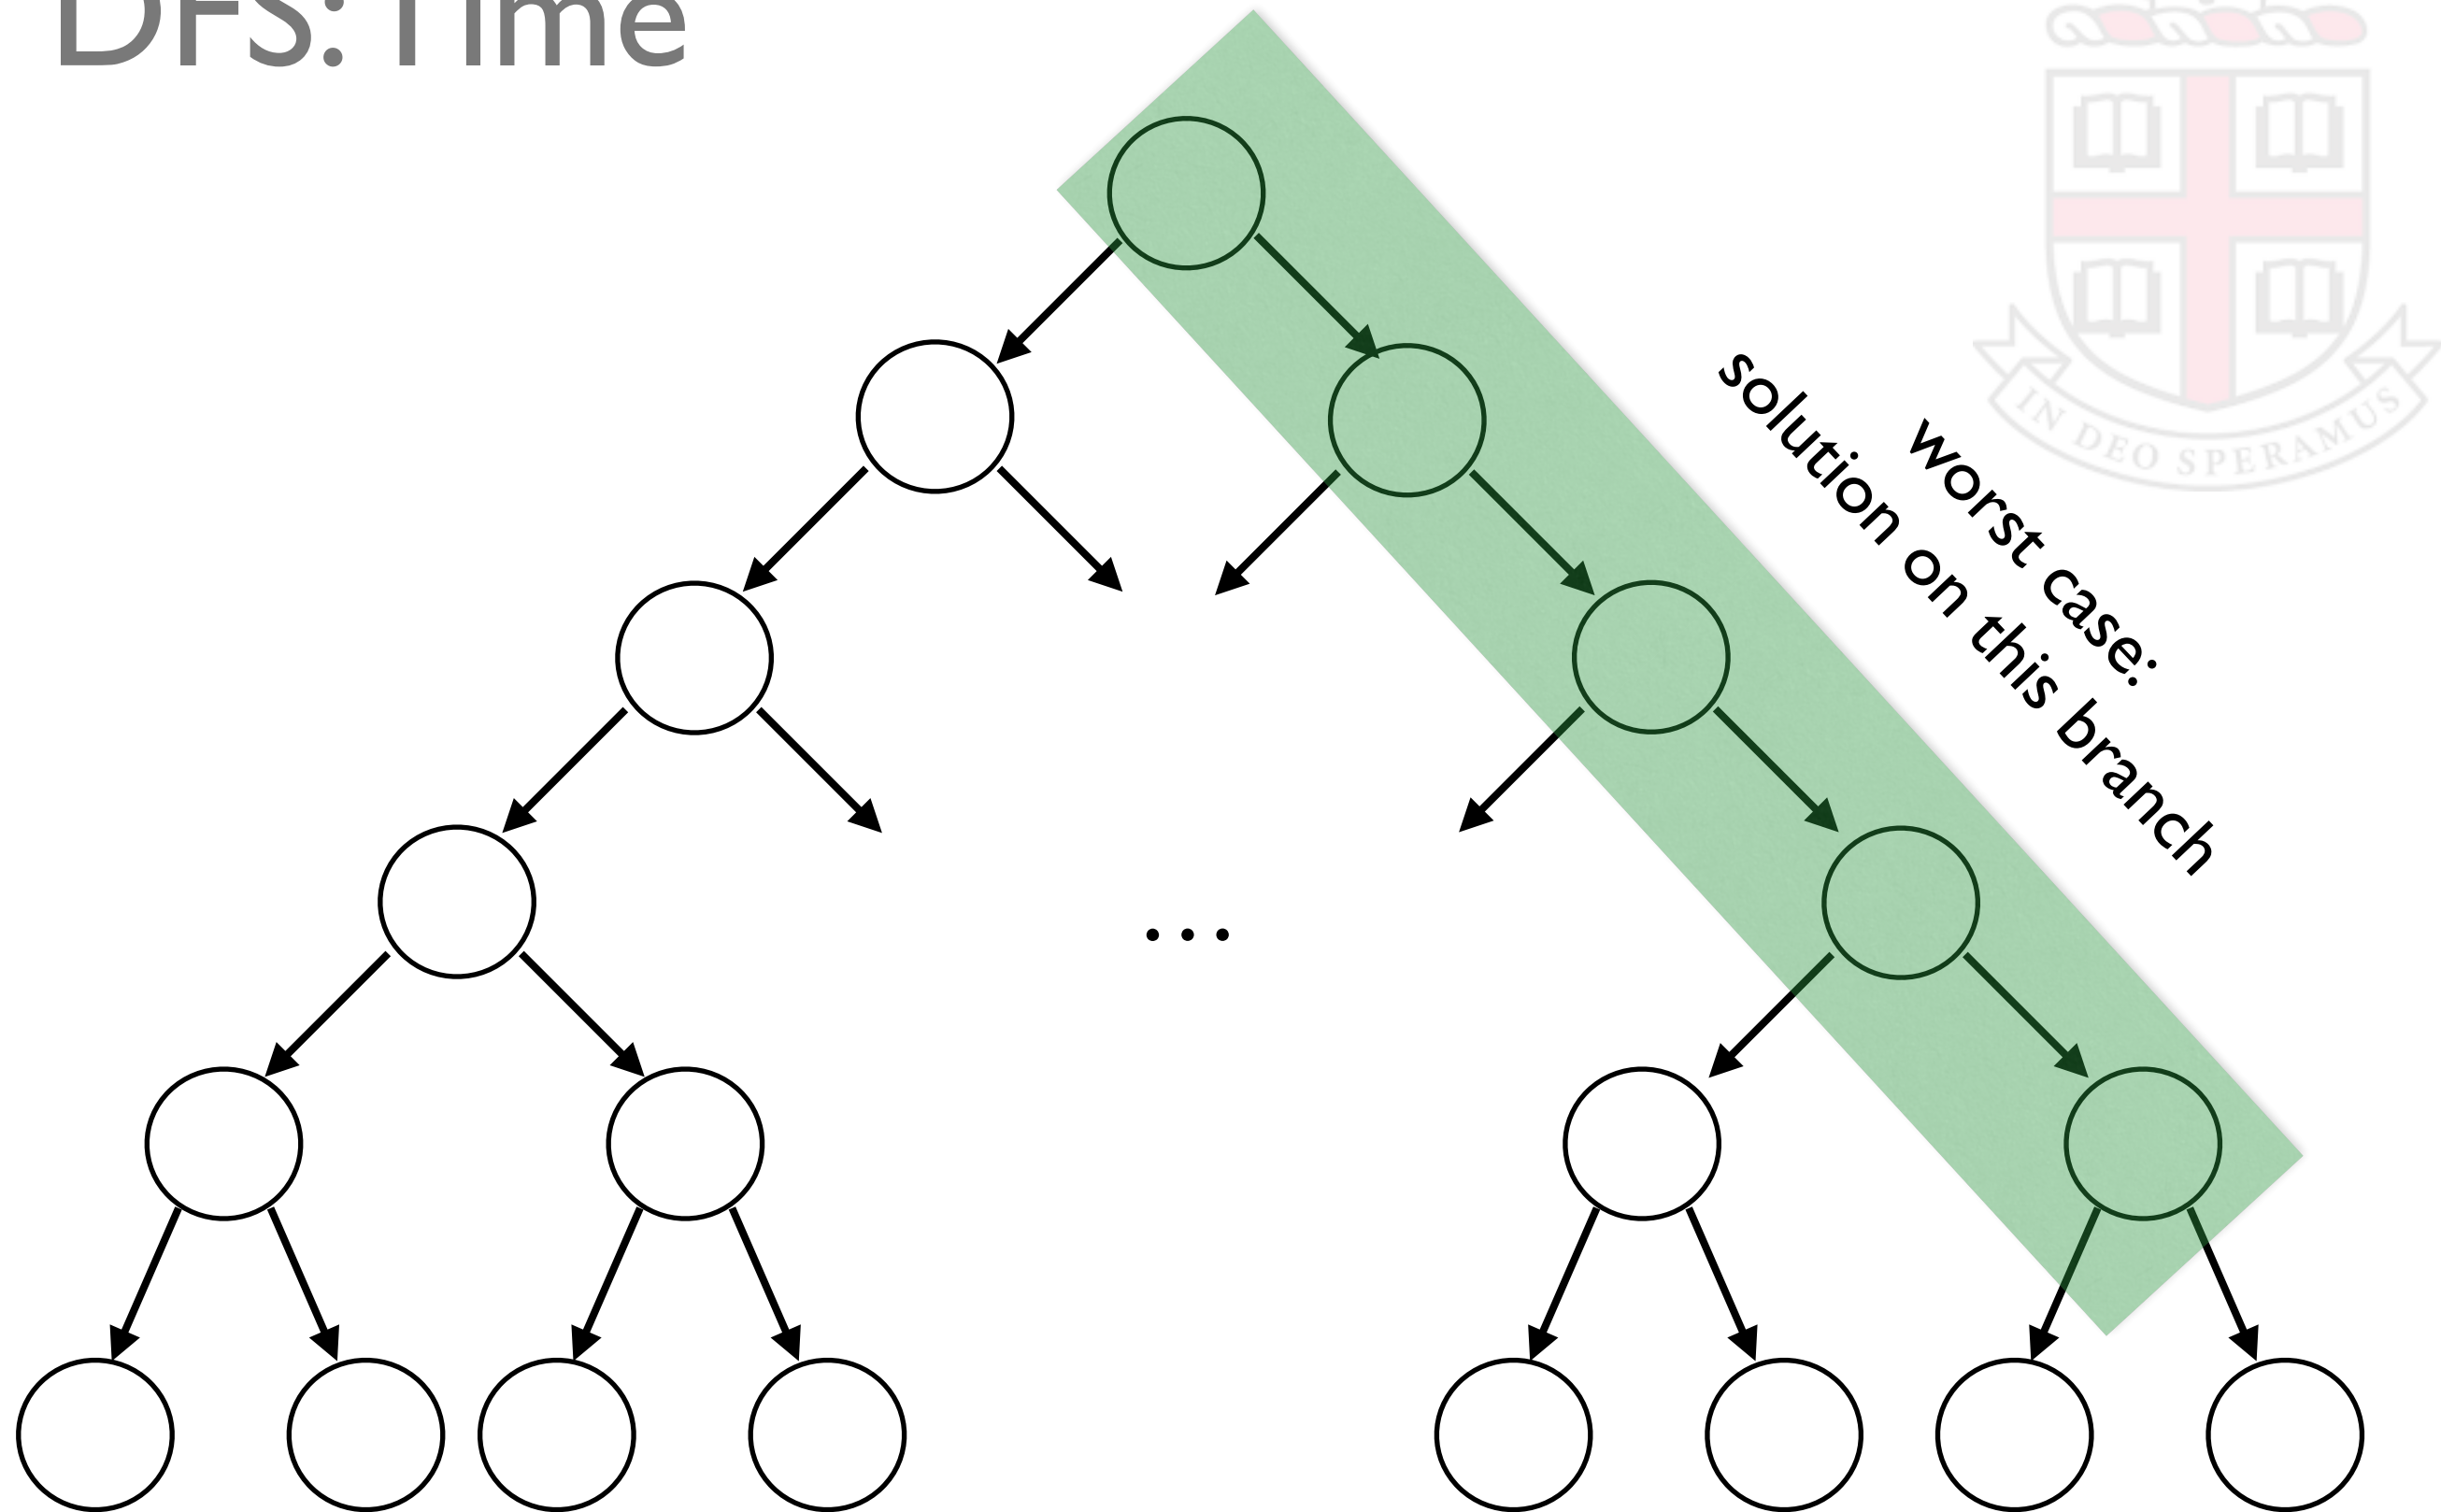

$$O(b^d - b^{d-m}) = O(b^d)$$




DFS: Space

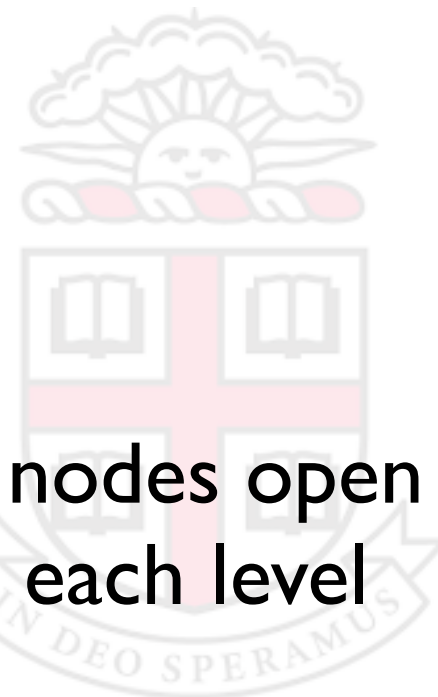

$b-1$ nodes open
at each level

d levels

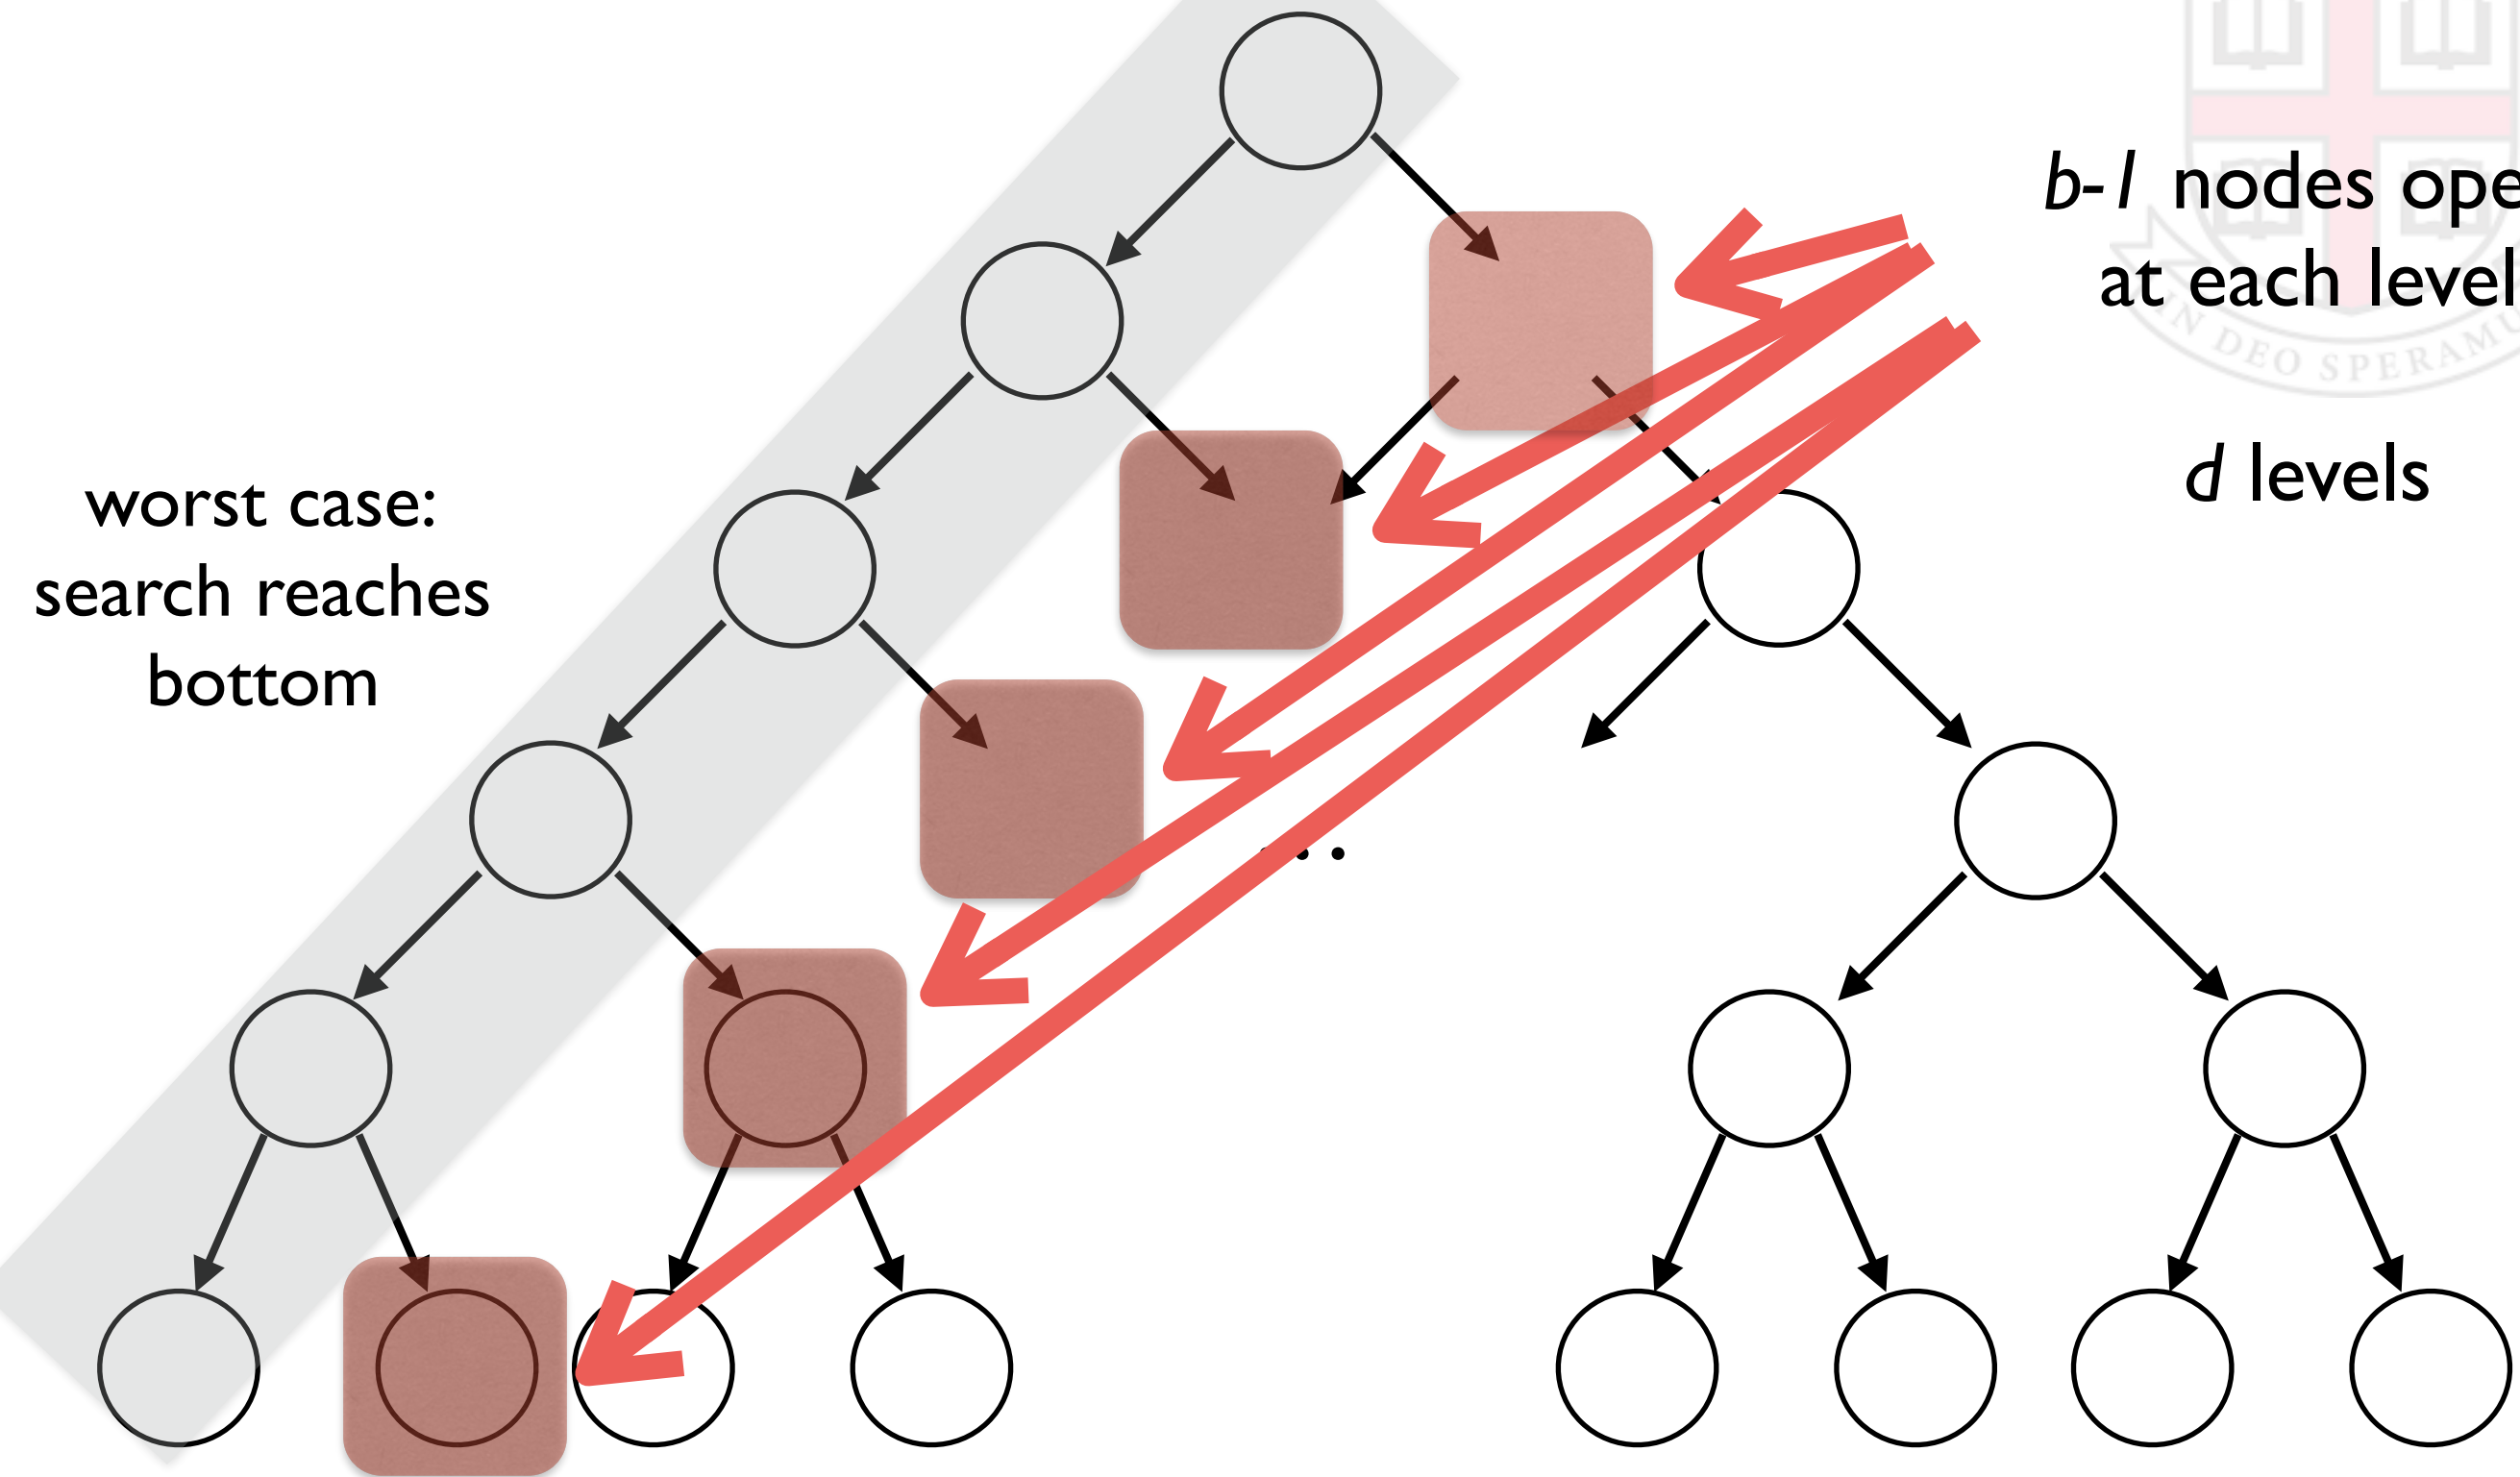

Depth-First Search

Properties:

- Completeness: Only for finite trees.
- Optimality: No.
- Time Complexity: $O(b^d)$
- Space Complexity: $O(bd)$


Note that when reasoning about DFS, m is depth of found solution (*not necessarily min solution depth*).

The deepest node happens to be the one you most recently visited - easy to implement recursively OR manage frontier using LIFO queue.




Breadth-First Search

Expand shallowest node

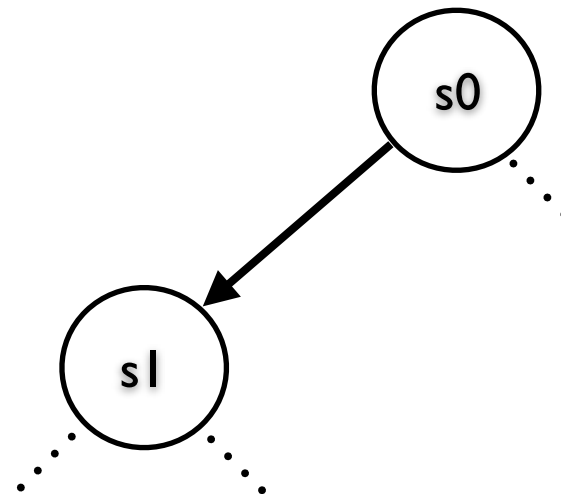


Breadth-First Search

Expand shallowest node

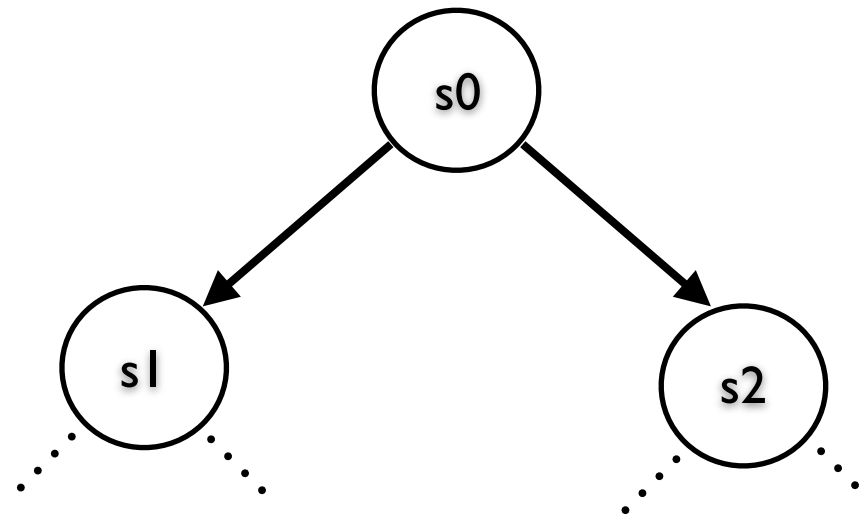


Breadth-First Search

Expand shallowest node

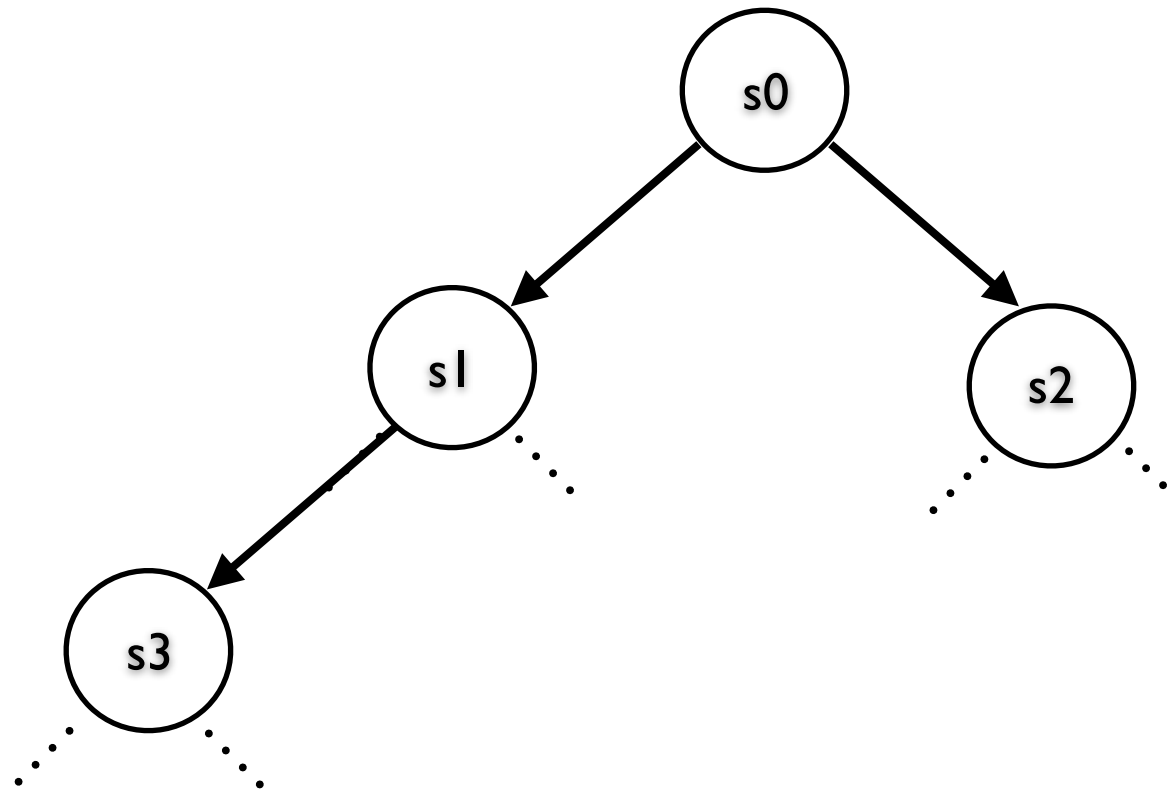


Breadth-First Search

Expand shallowest node

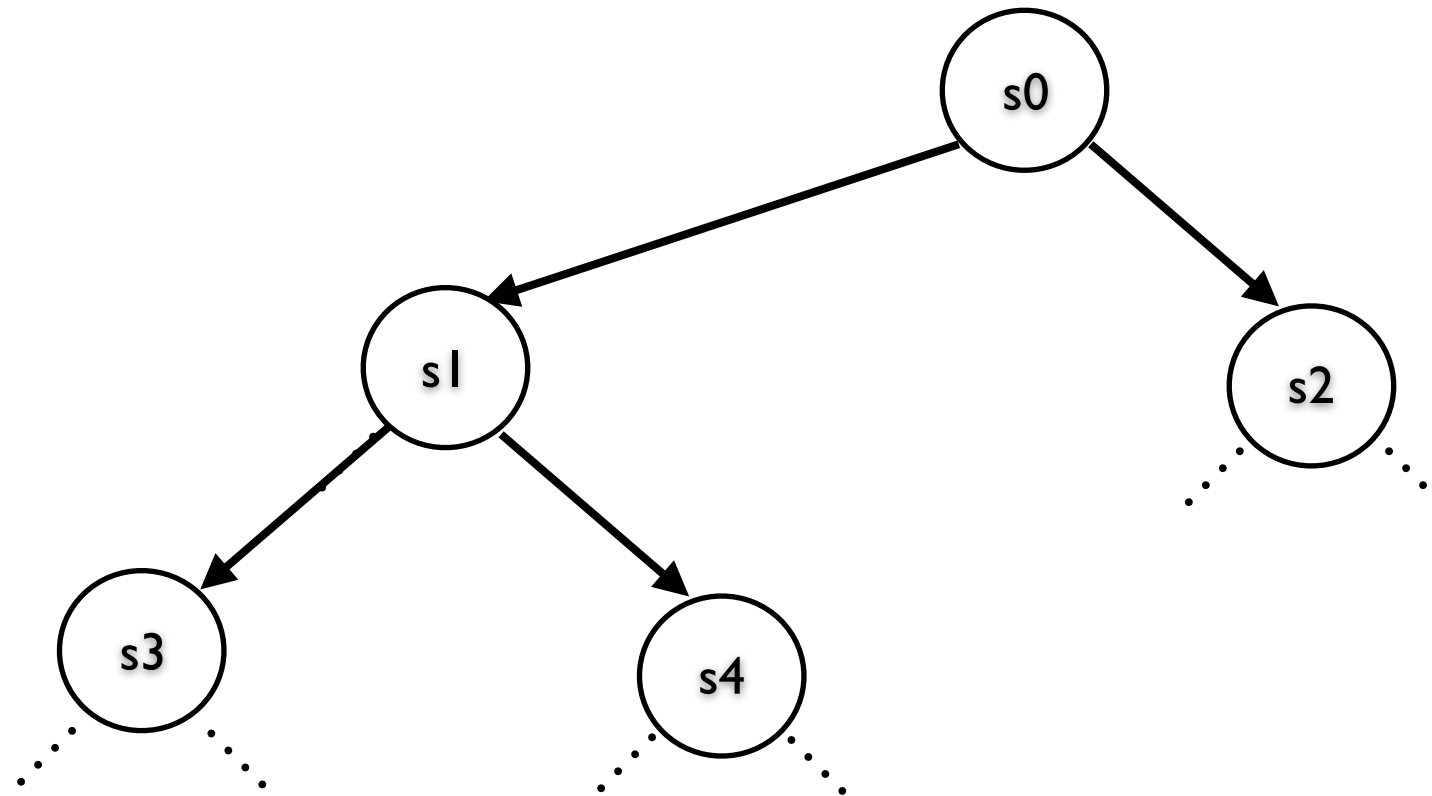


Breadth-First Search


Expand shallowest node

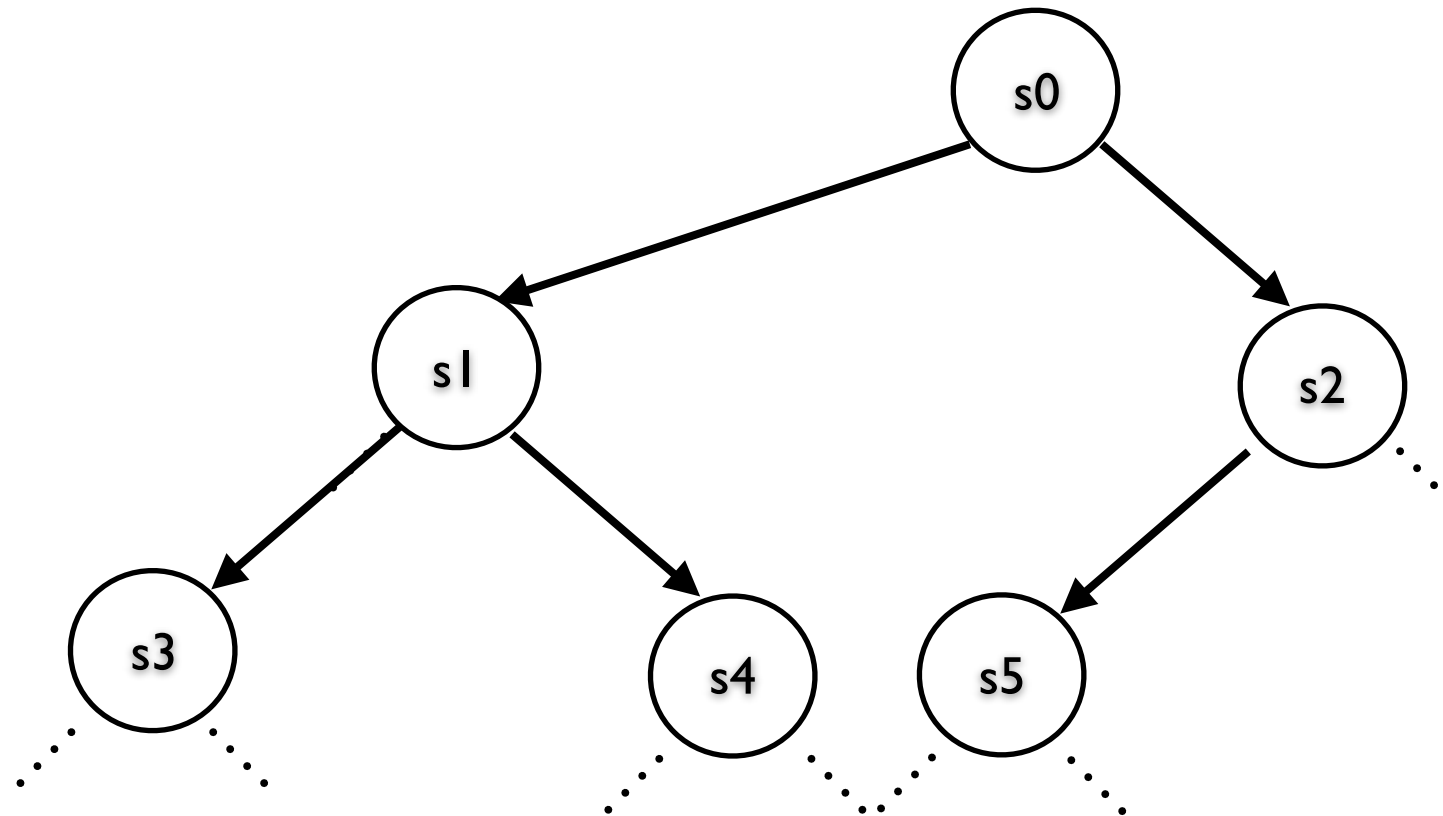

BFS: Time

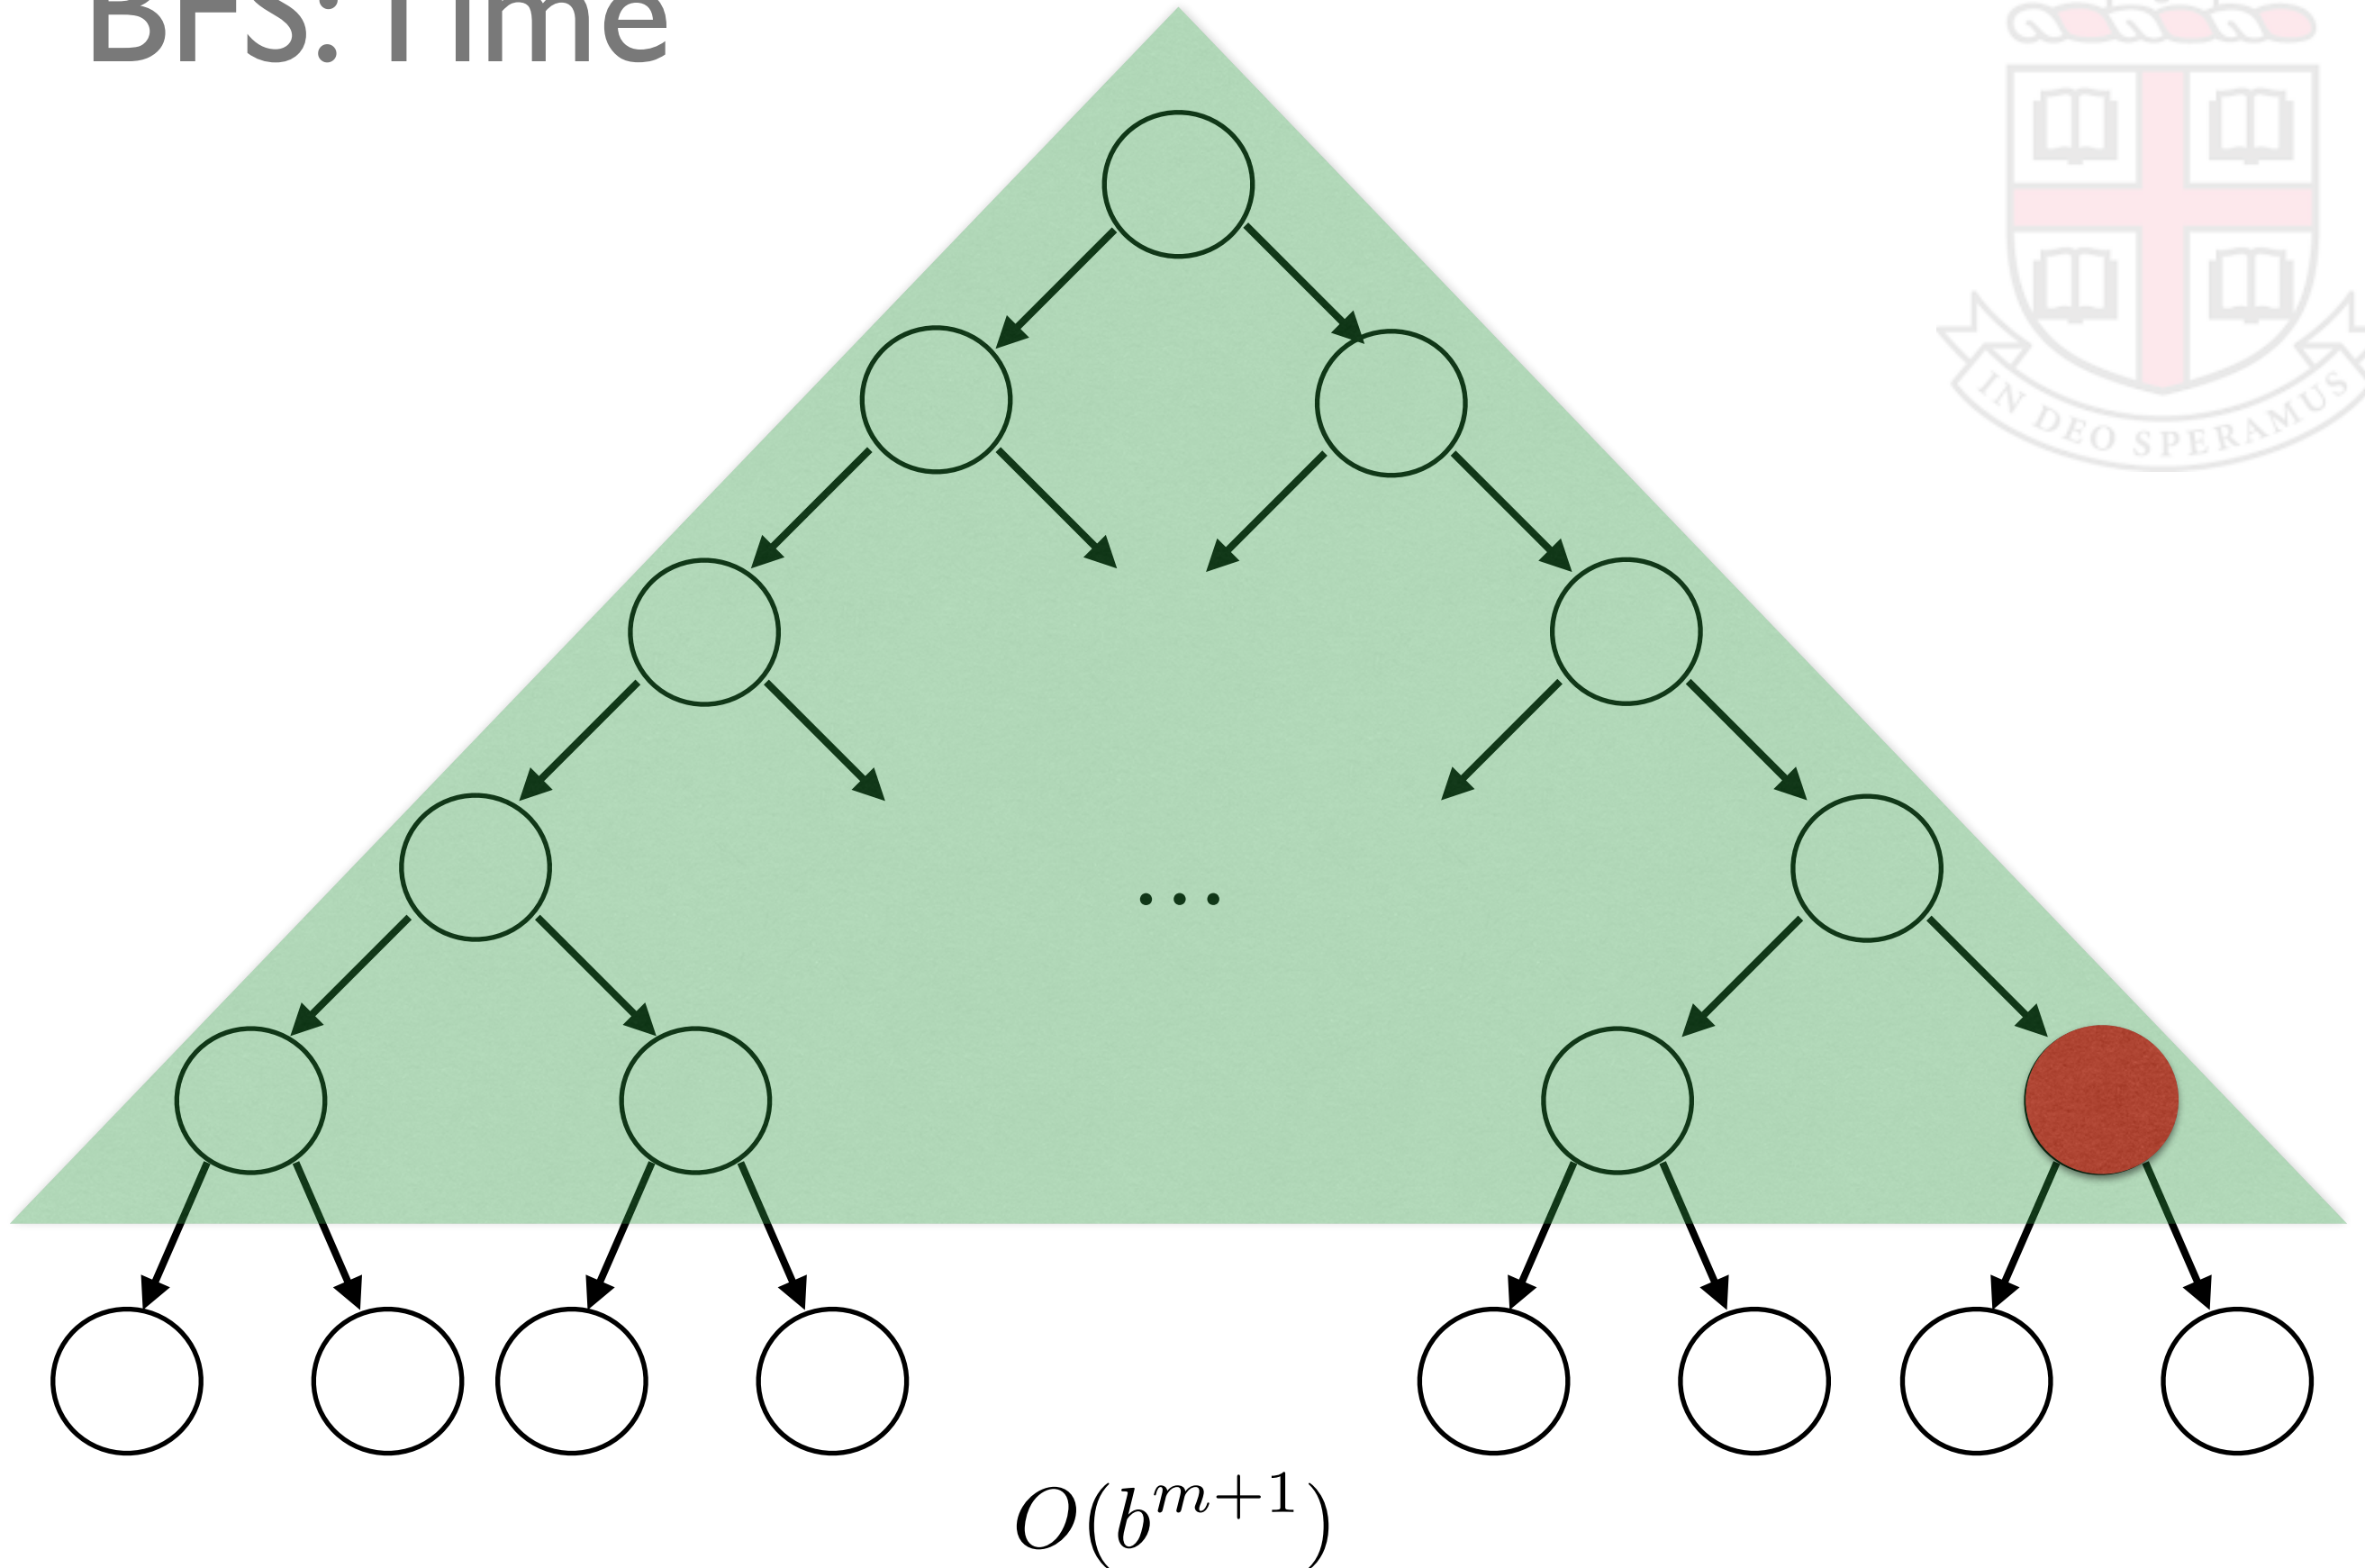

BFS: Space

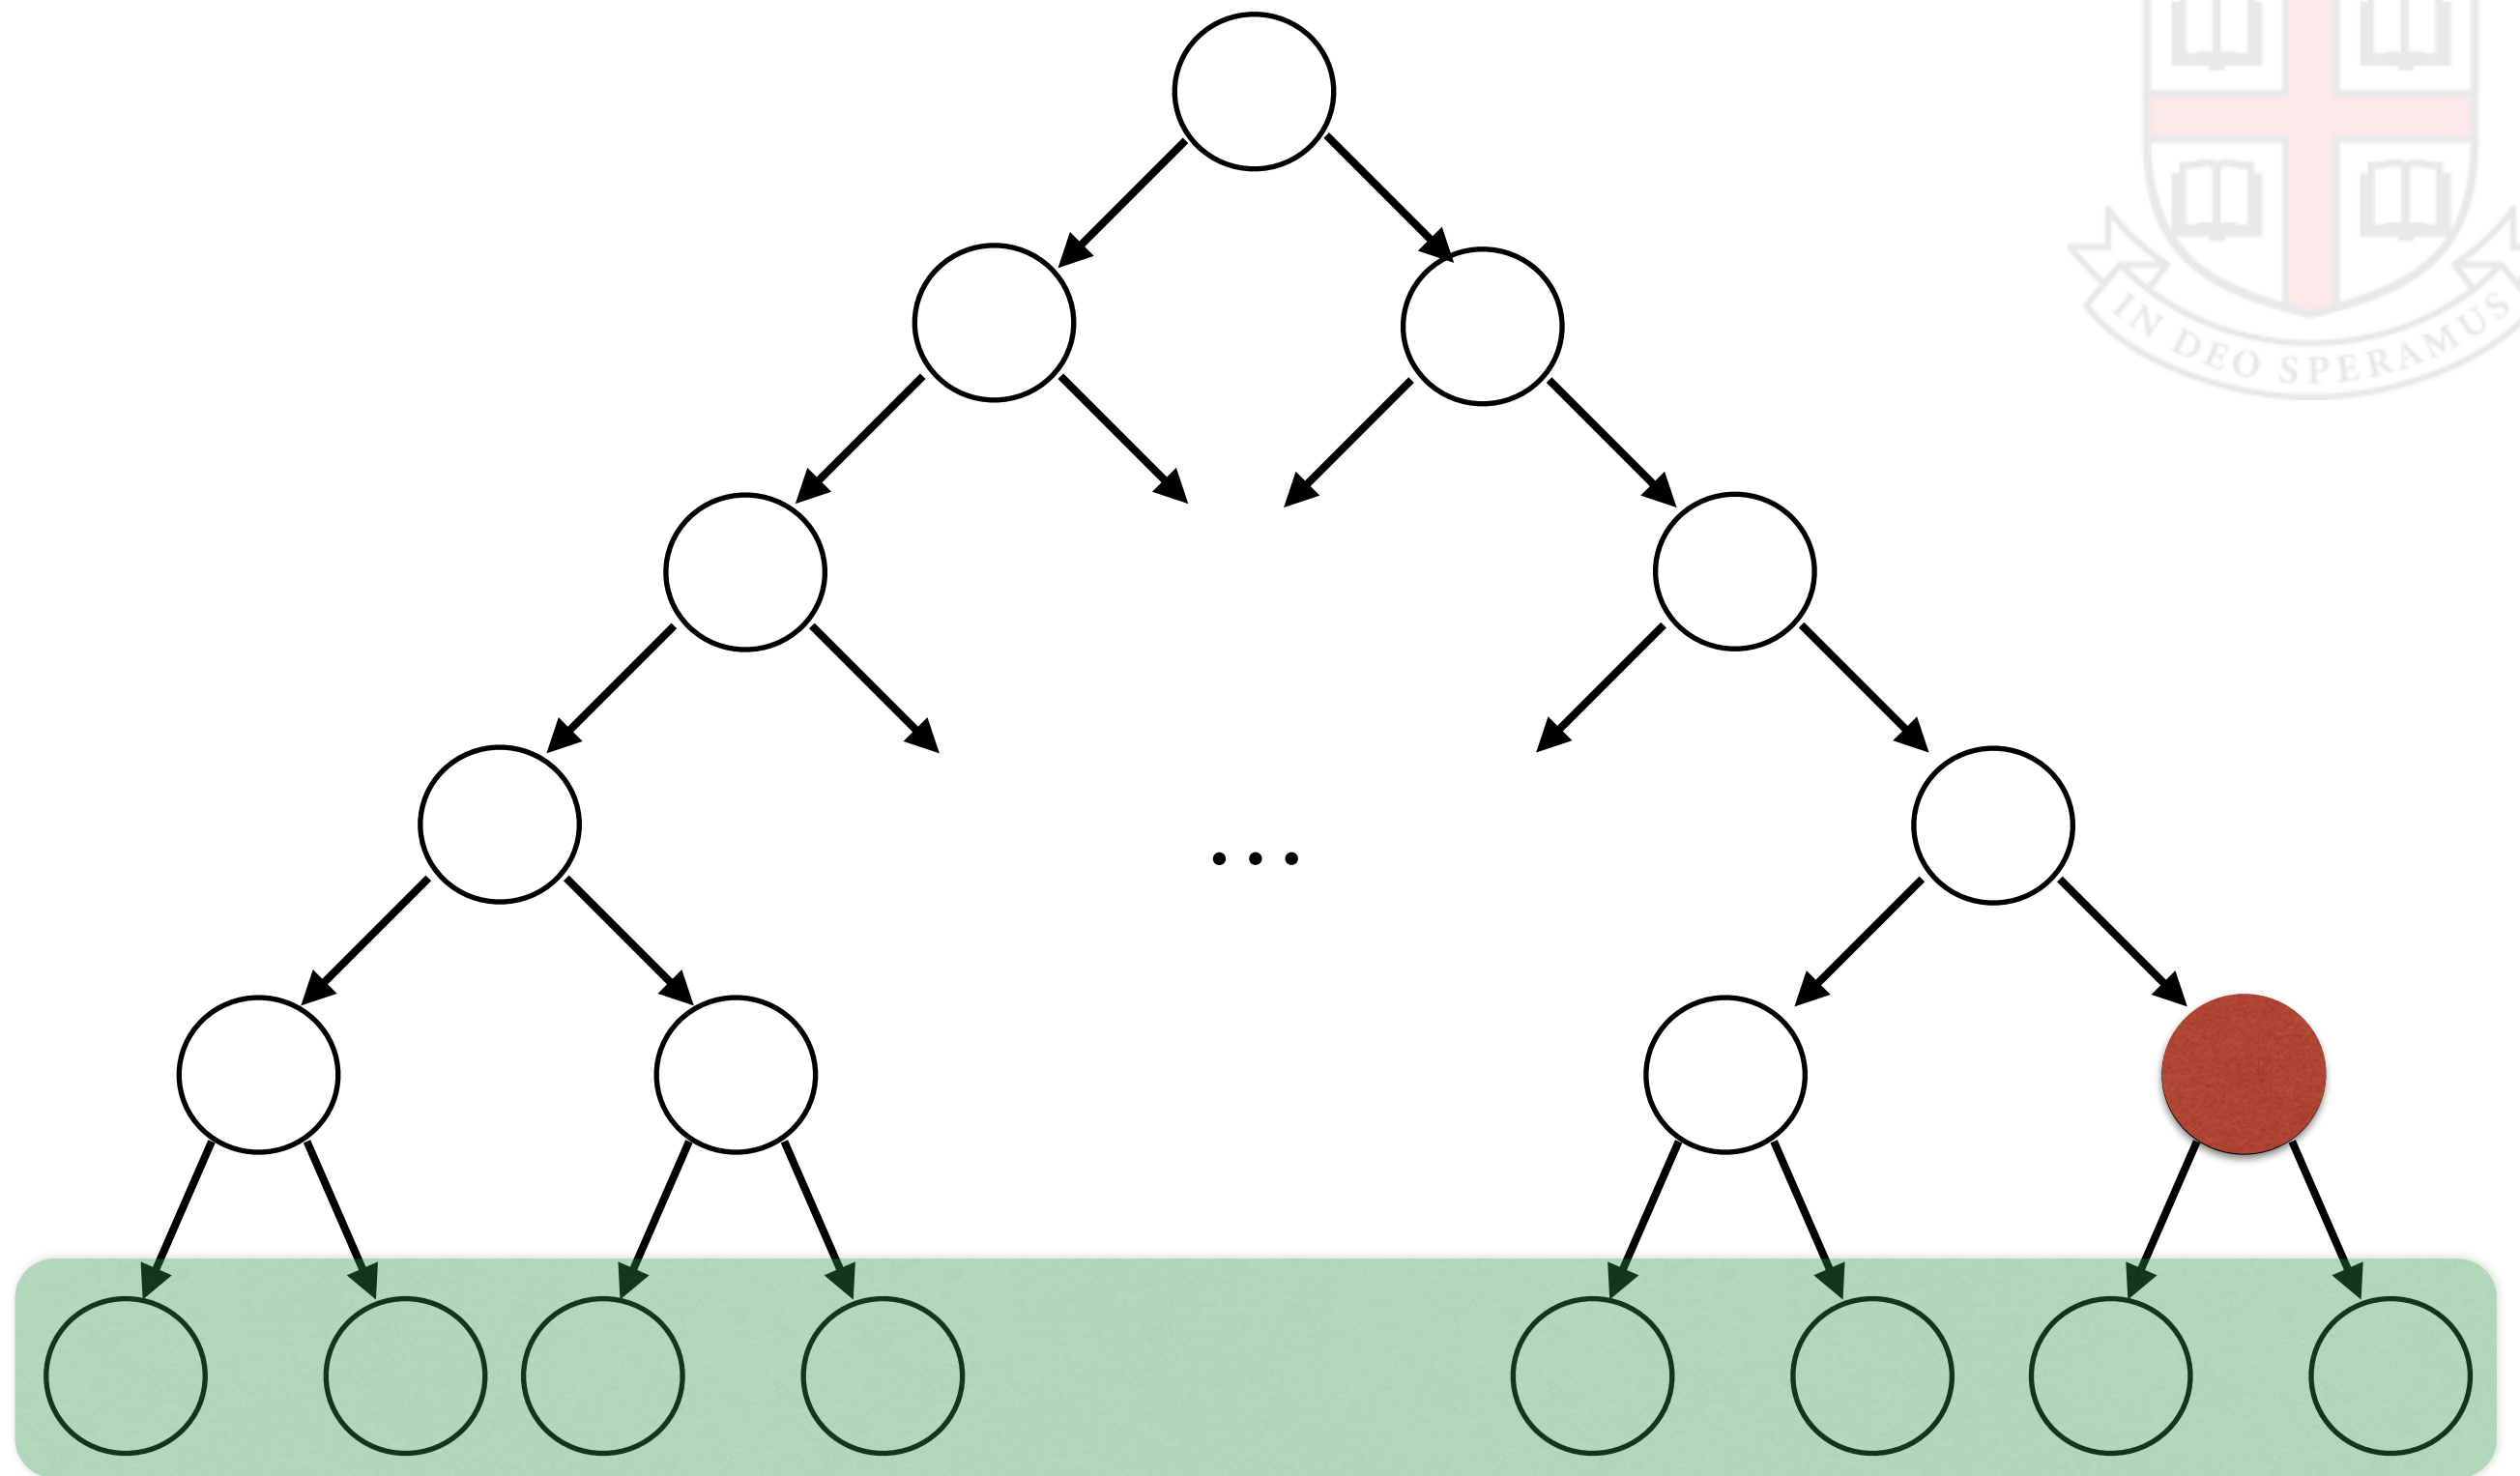

$$O(b^{m+1})$$

Breadth-First Search

Properties:

- Completeness: Yes.
- Optimality: Yes for constant cost.
- Time Complexity: $O(b^{m+1})$
- Space Complexity: $O(b^{m+1})$

Better than depth-first search in all respects except *memory cost* - must maintain a large frontier.

Manage frontier using FIFO queue.



Iterative Deepening Search

Combine these two strengths.

The core problems in DFS are a) *not optimal*, and b) *not complete* ... because it fails to explore other branches.

Otherwise it's a very nice algorithm!


Iterative Deepening:

- Run DFS to a fixed depth z .
- Start at $z=1$. If no solution, increment z and rerun.



IDS

run DFS
to this depth

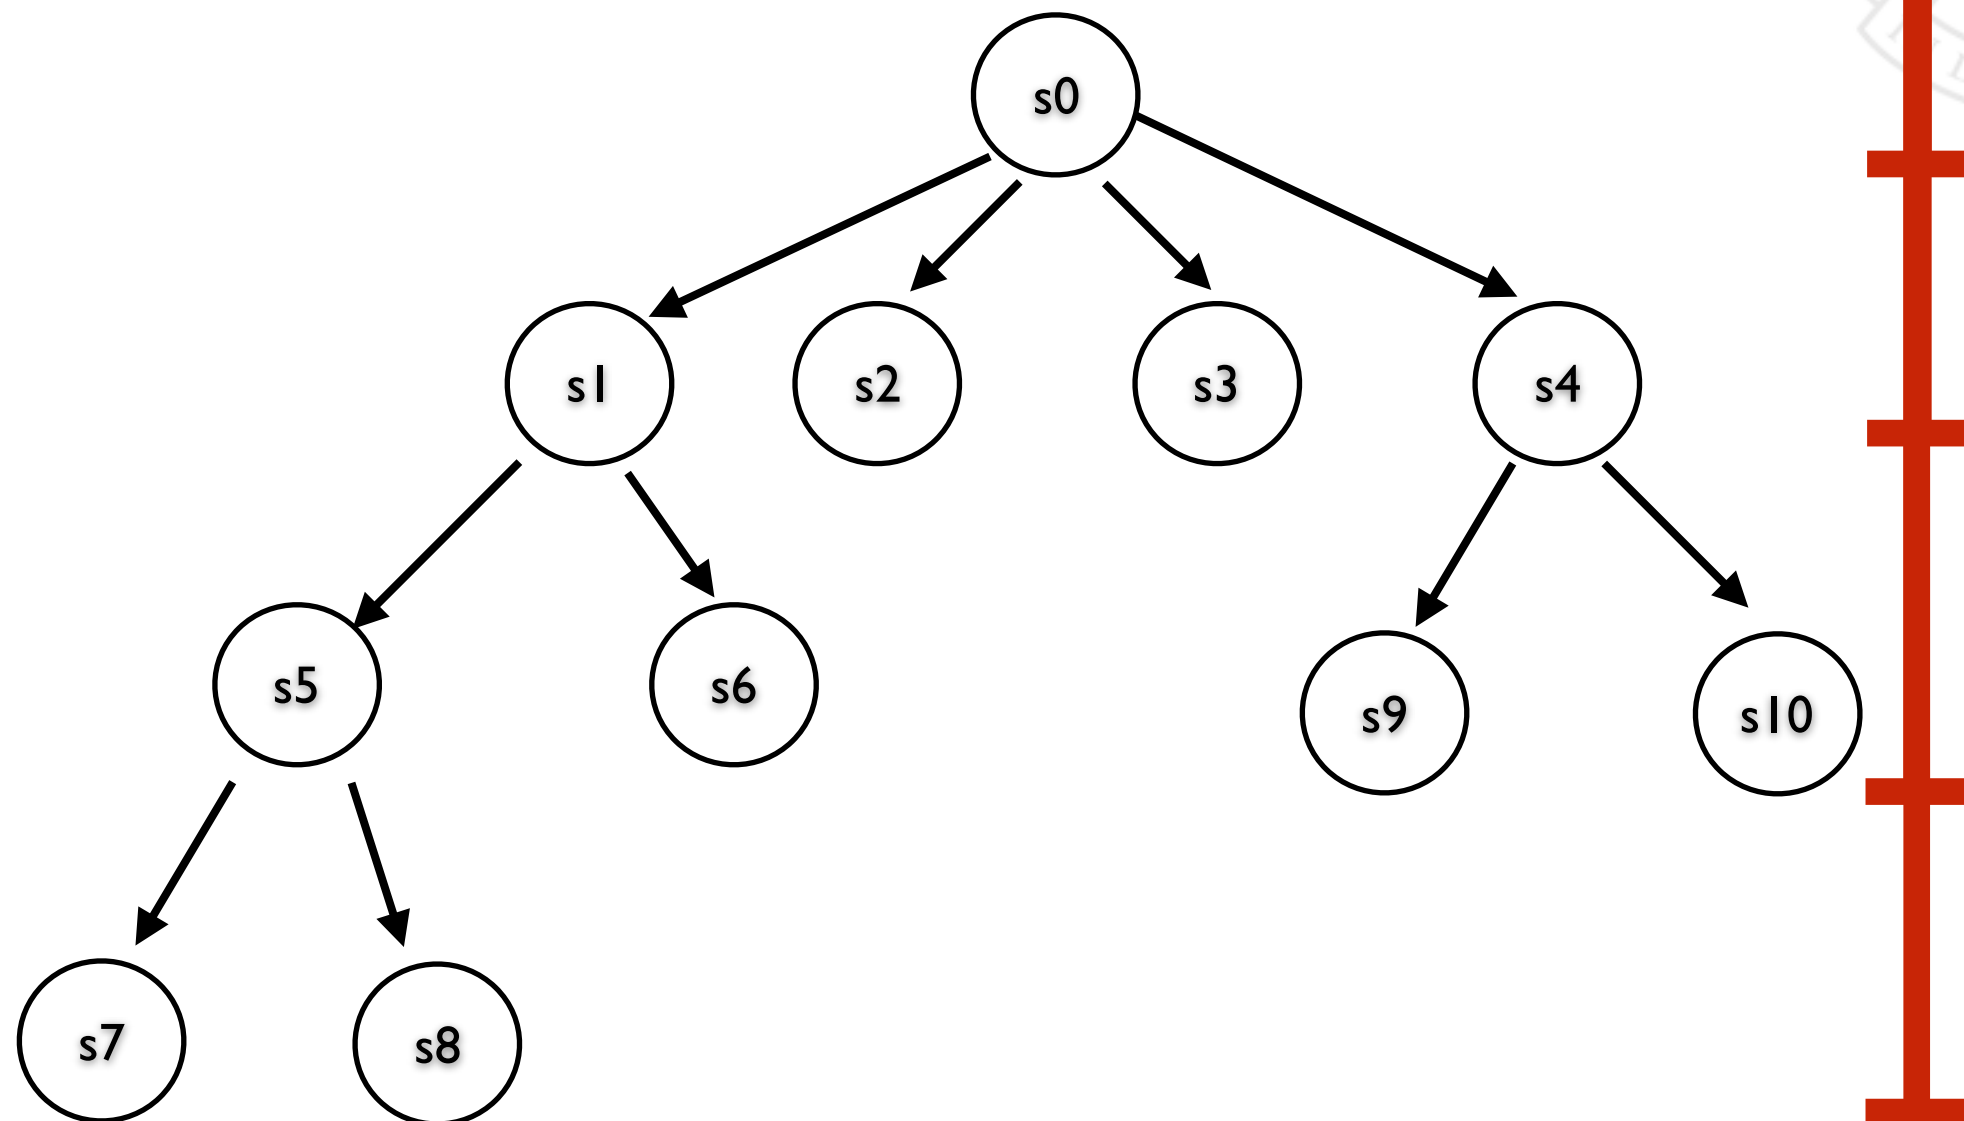

IDS

Optimal for constant cost! Proof?

How can that be a good idea?


It duplicates work.

Sure but:

- Low memory requirement (equal to DFS).
- Not many more nodes expanded than BFS. (About twice as many for binary tree.)



IDS


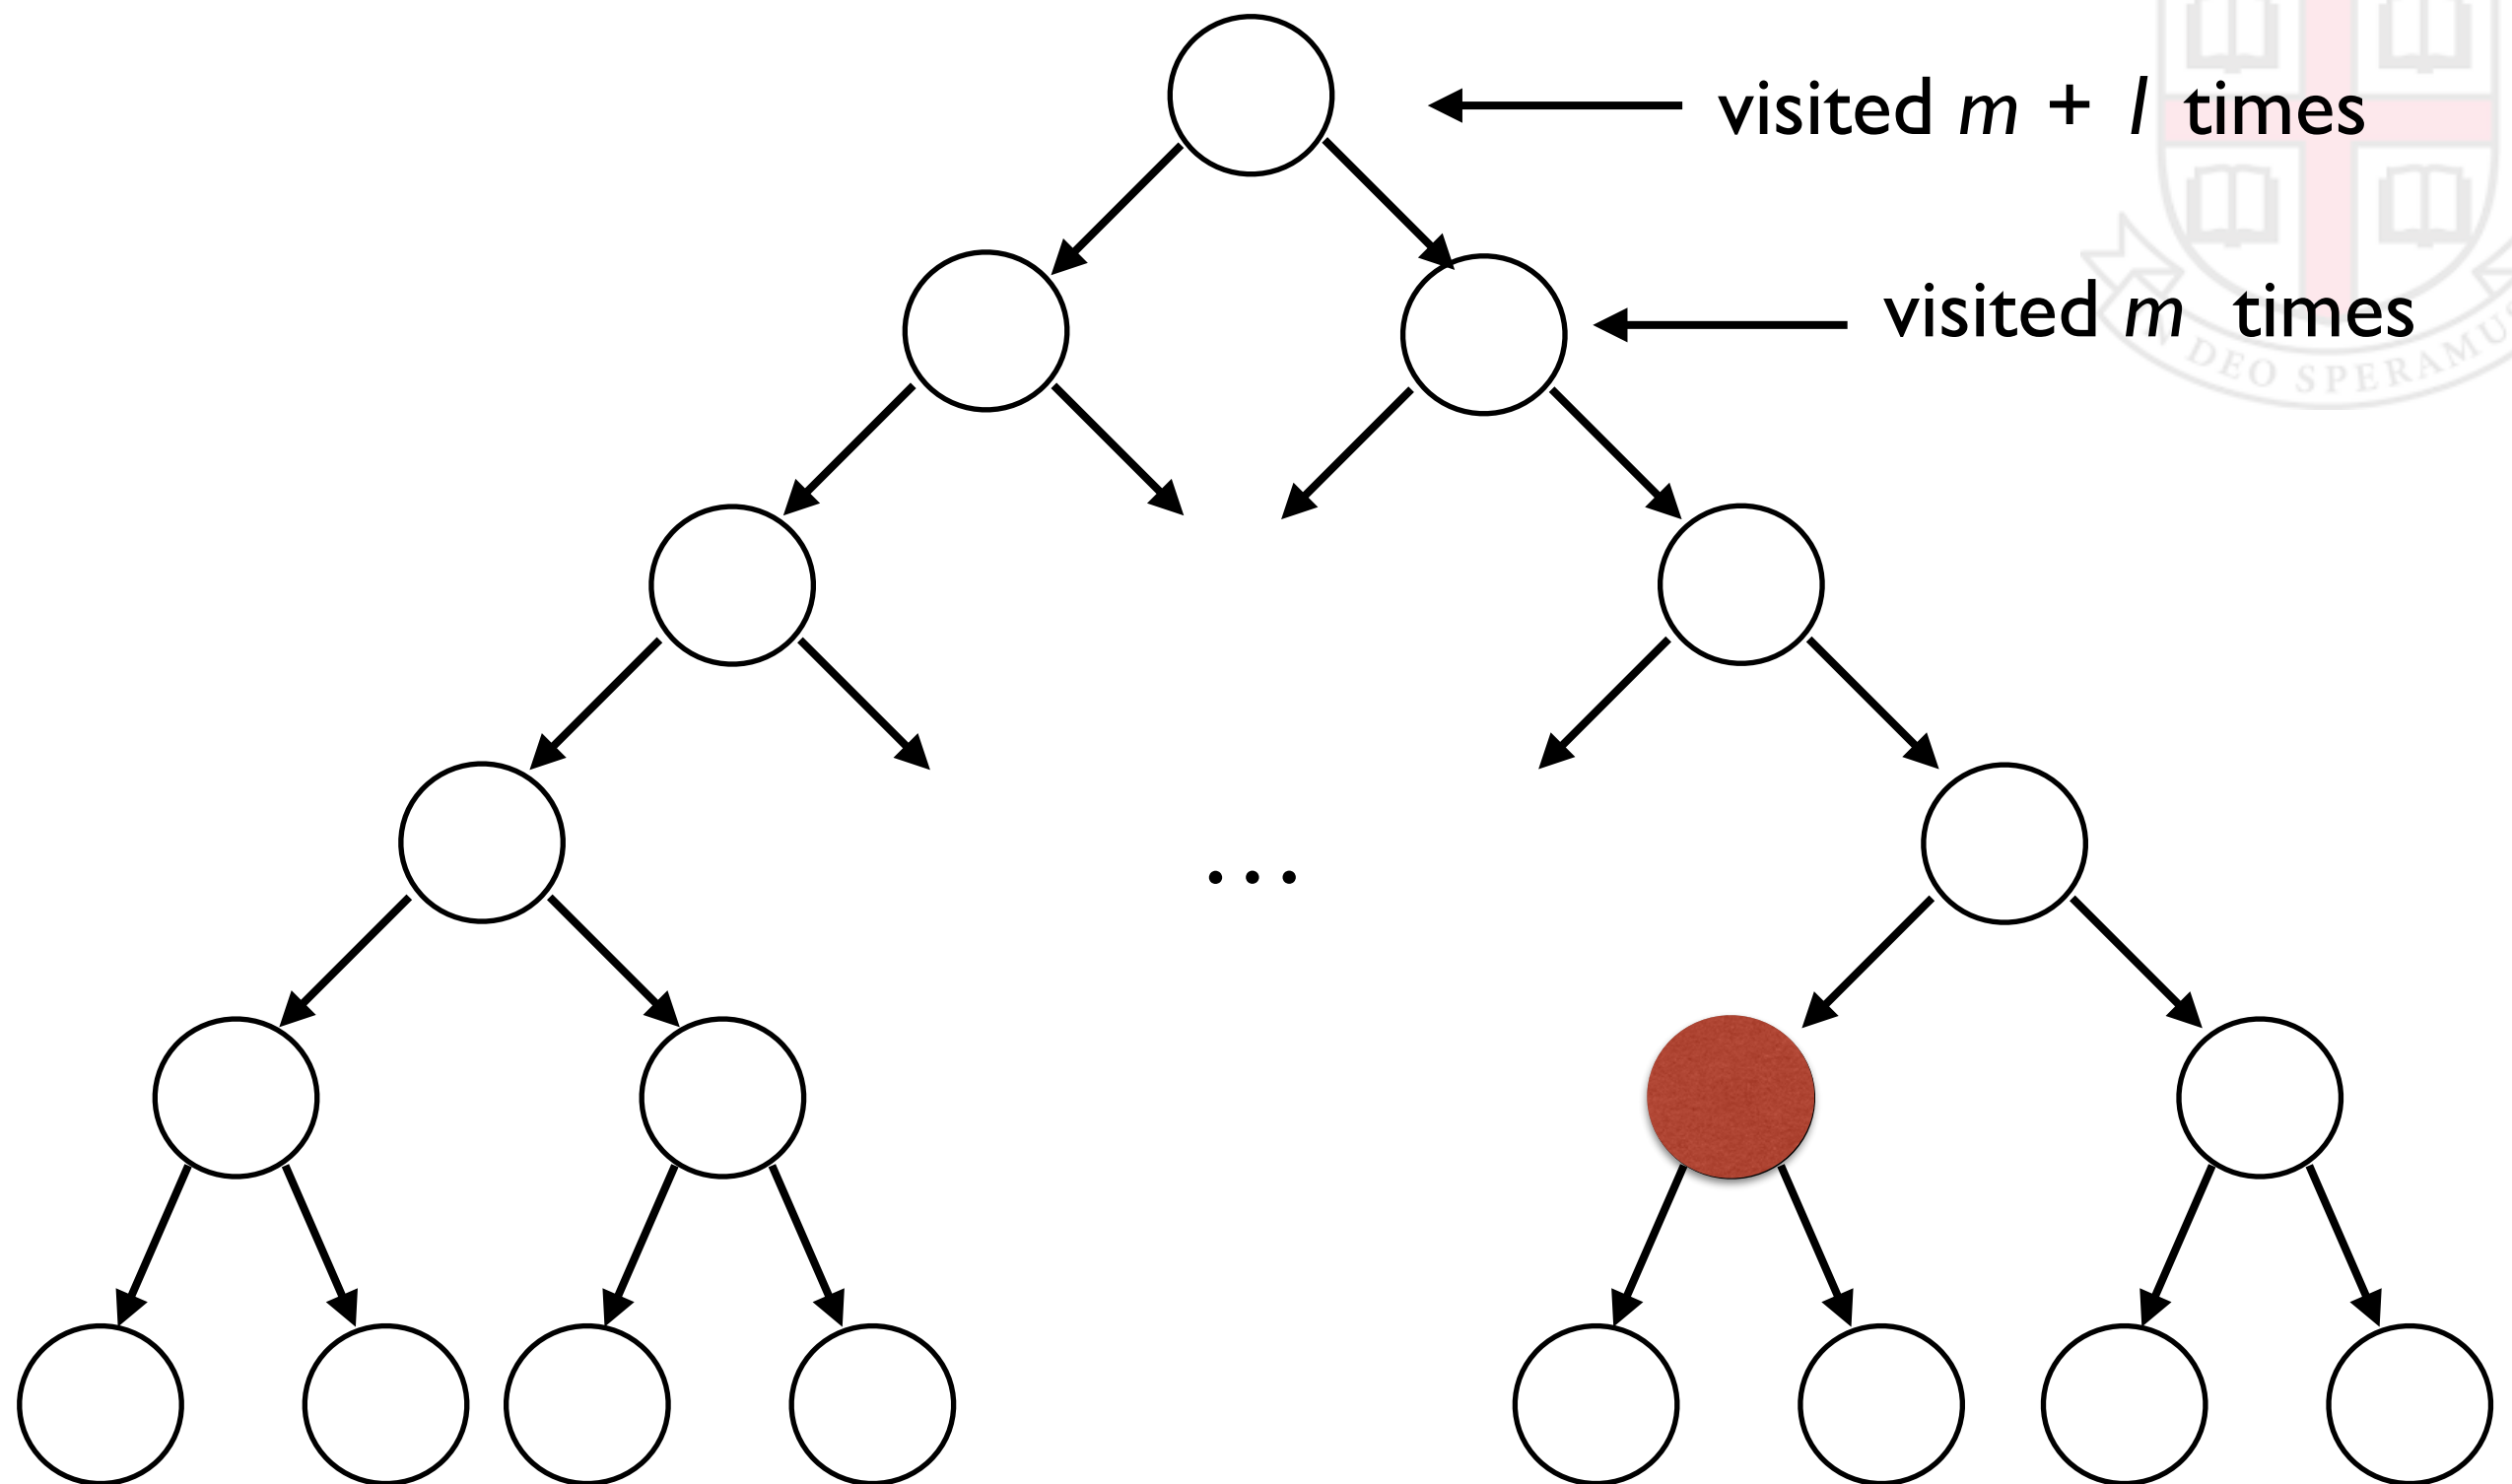


IDS (Reprise)

$$\sum_{i=0}^m b^i (m - i + 1) = \frac{b(b^{m+1} - m - 2) + m + 1}{(b - 1)^2}$$

nodes at level i

revisits

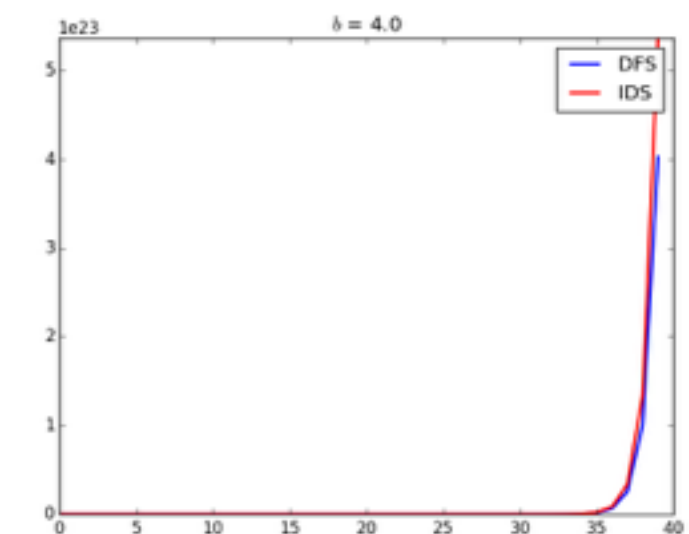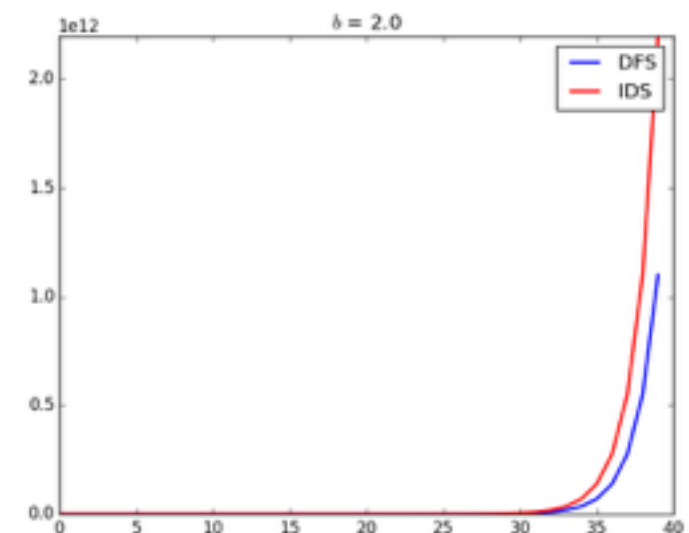

DFS worst case: $\frac{b^{m+1} - 1}{b - 1}$

IDS

Key Insight:

- Many more nodes at depth $m+1$ than at depth m .



MAGIC.

“In general, iterative deepening search is the preferred uninformed search method when the state space is large and the depth of the solution is unknown.” (R&N)

Next Week

Informed searches ... what if you know something about the the solution?

What form should such knowledge take?

How should you use it?

