
# Adversarial Search

George Konidaris

gdk@cs.brown.edu

## Games



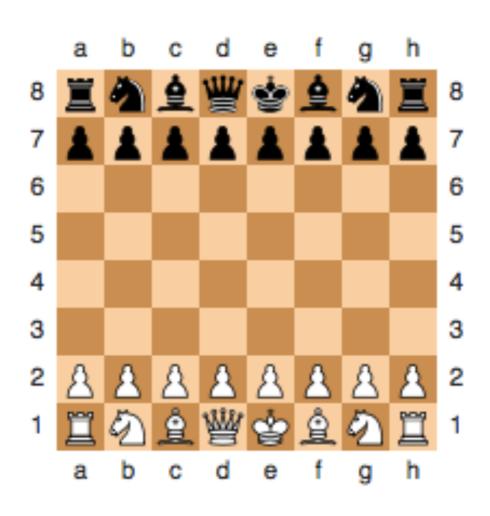

"Chess is the Drosophila of Artificial Intelligence" Kronrod, c. 1966

#### TuroChamp, 1948

# Why Study Games?

#### Of interest:

- Many human activities (especially intellectual ones) can be modeled as games.
- Prestige.

#### Convenient:

- Perfect information.
- Concise, precise rules.
- Well defined "score".

## "Solved" Games

A game is solved if an optimal strategy is known.

Strong solved: all positions.

Weakly solved: some (start) positions.





# Typical Game Setting

#### Games are usually:

- 2 player
- Alternating
- Zero-sum
  - · Gain for one loss for another.
- Perfect information


#### Very much like search:

- Start state
- Successor function
- Terminal states (many)
- Objective function


but alternating control.



## Game Trees

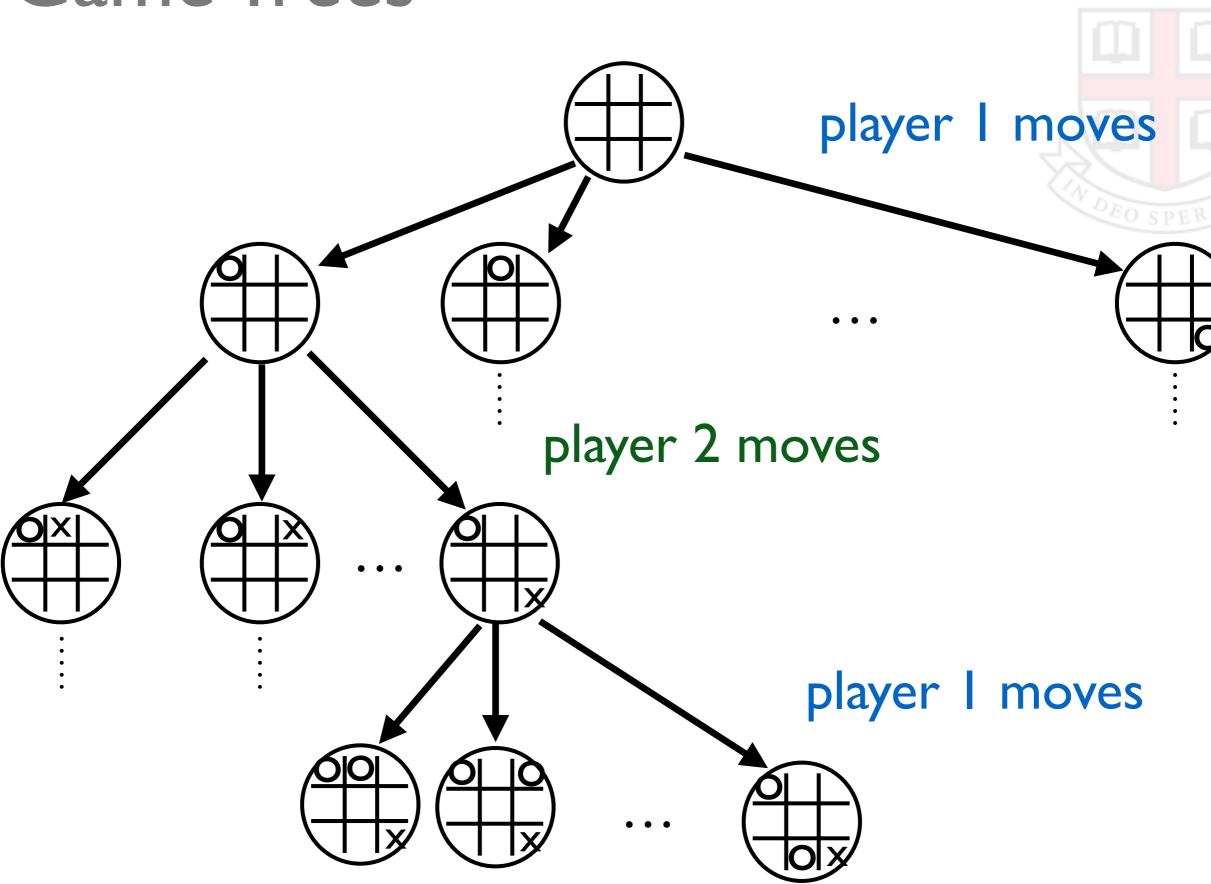

## Key Differences vs. Search

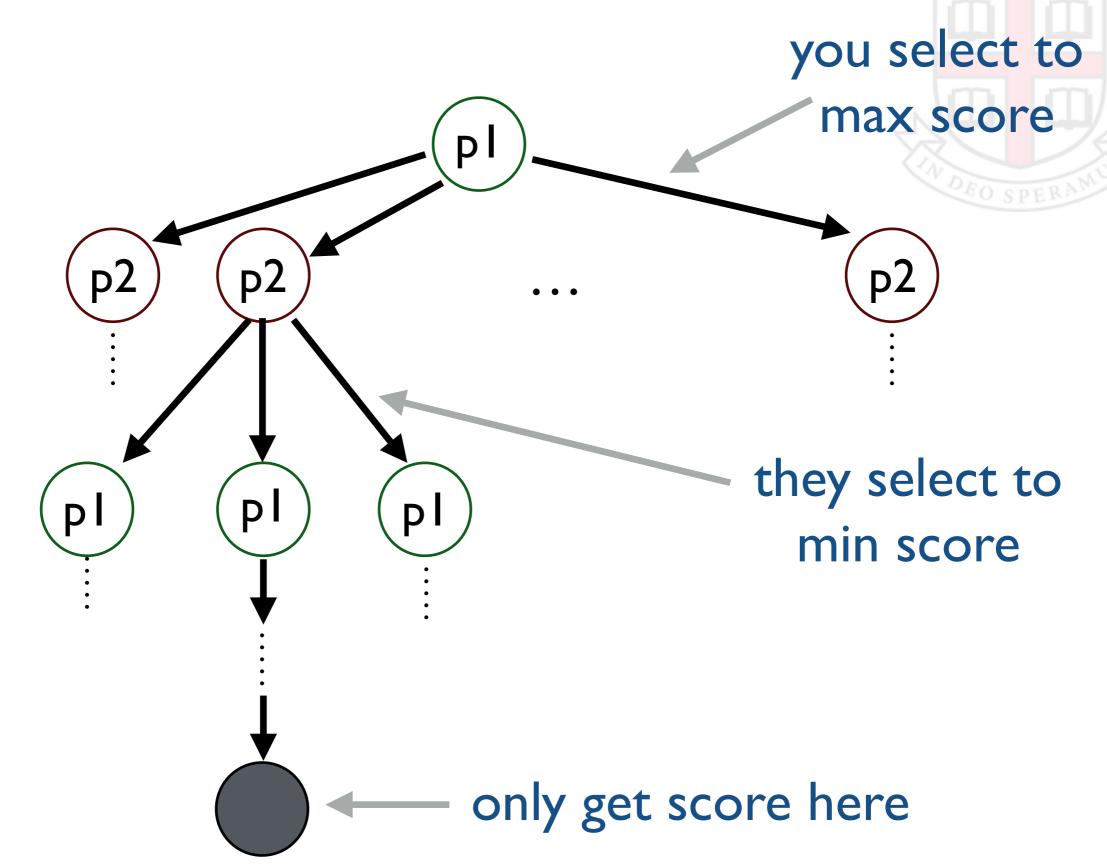

# Minimax Algorithm

Max player: select action to maximize return.

Min player: select action to minimize return.

This is optimal for both players (if zero sum). Assumes perfect play, worst case.


Can run as depth first:

- Time O(b<sup>d</sup>)
- Space O(bd)

Require the agent to evaluate the whole tree.



## Minimax

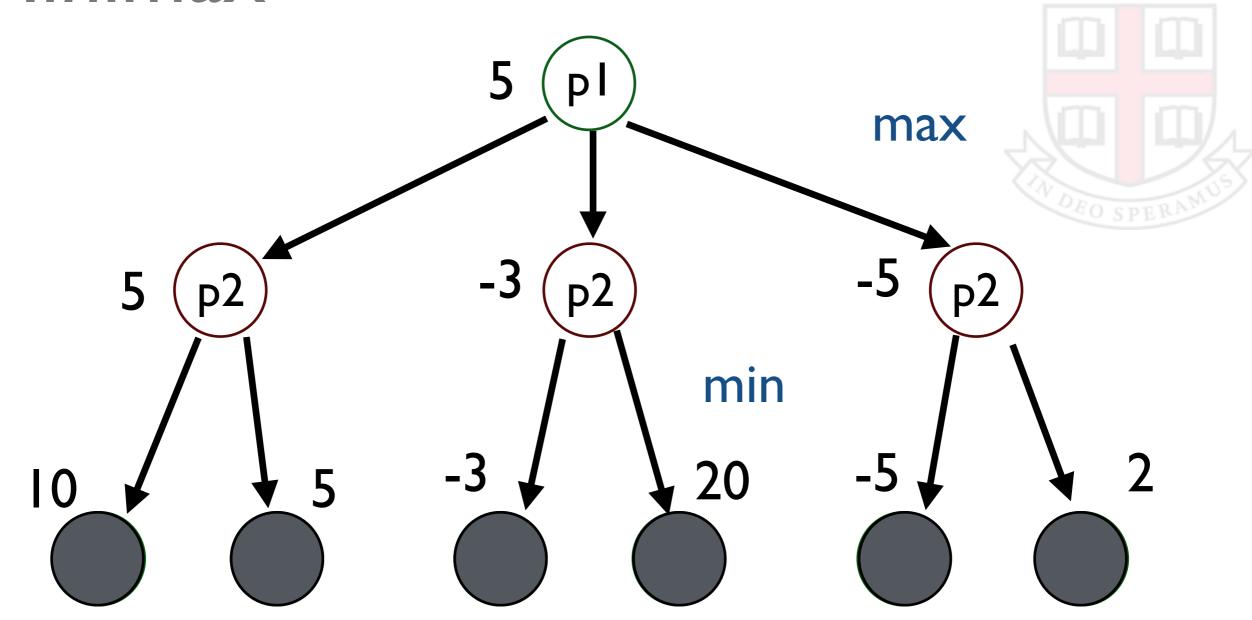

## In Practice

#### Depth is too deep.

10s to 100s of moves.


#### Breadth is too broad.

• Chess: 35, Go: 361.

Full search never terminates for non-trivial games.



## What Is To Be Done?

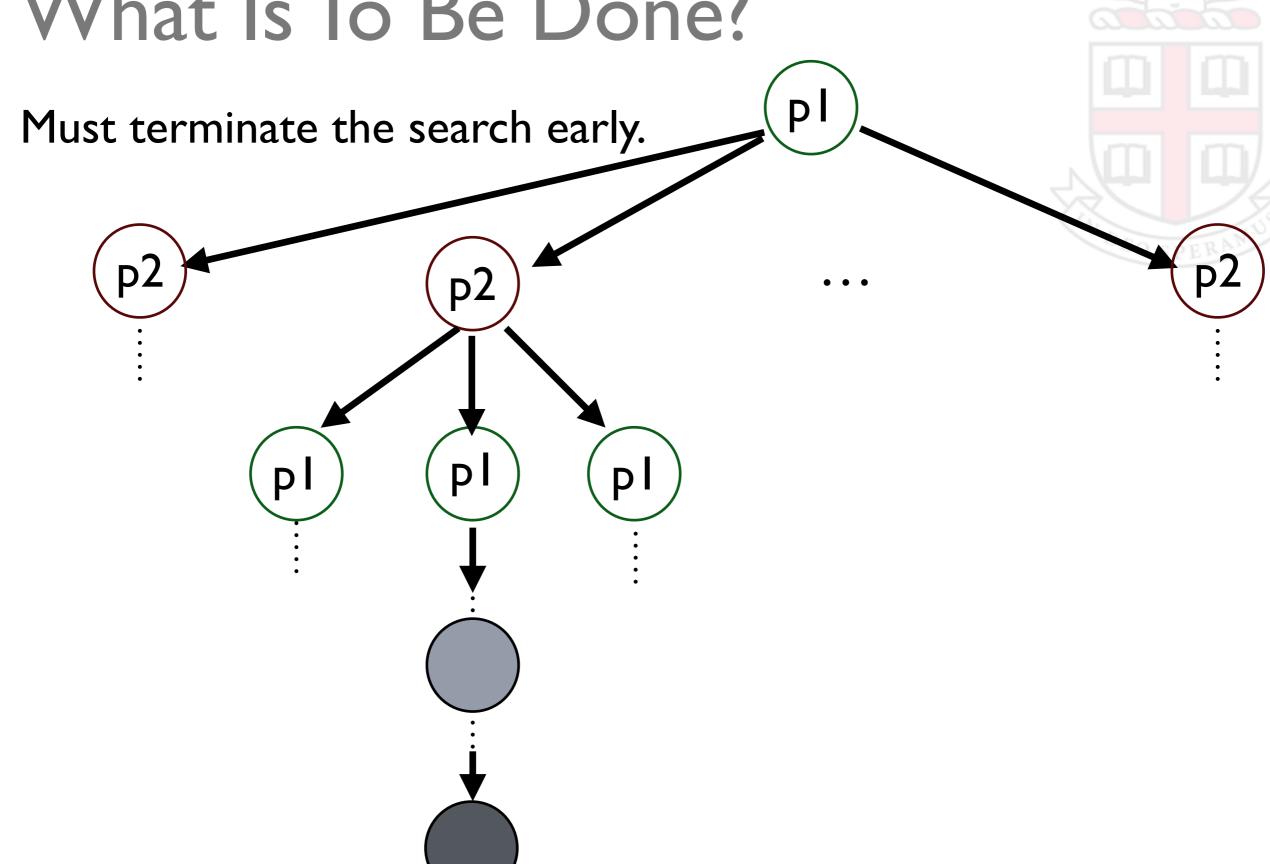


## In Practice

Solution: substitute evaluation function.

- Like a heuristic estimate value.
- In this case, probability of win.



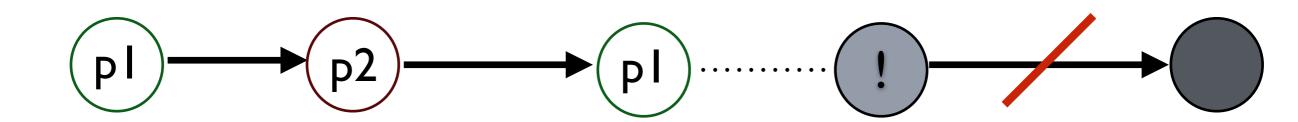

- Common strategy:
  - Run to fixed depth then estimate.
  - Careful lookahead to depth d, then guess.

## Search Control

#### Horizon Effects

- What if something interesting at horizon + 1?
- How do you know?



- When to generate more nodes?
- How to selectively expand the frontier?
- How to allocate fixed move time?




# Alpha-Beta max **p2 p2 p2** min -3 10

# Alpha Beta Pruning

Single most useful search control method:

- Throw away whole branches.
- Use the min-max behavior.



Cutoff search at max nodes when min can force a worse outcome.

Resulting algorithm: alpha-beta pruning.



# Alpha-Beta

Empirically: square roots branching factor.

Effectively doubles the search horizon.



Alpha-beta makes the difference between novice and expert computer game players. Most successful players use alpha-beta.

# Deep Blue (1997)










## Games of Chance

What if there is a chance element?



## Stochasticity

An outcome is called *stochastic* when it is determined at random.

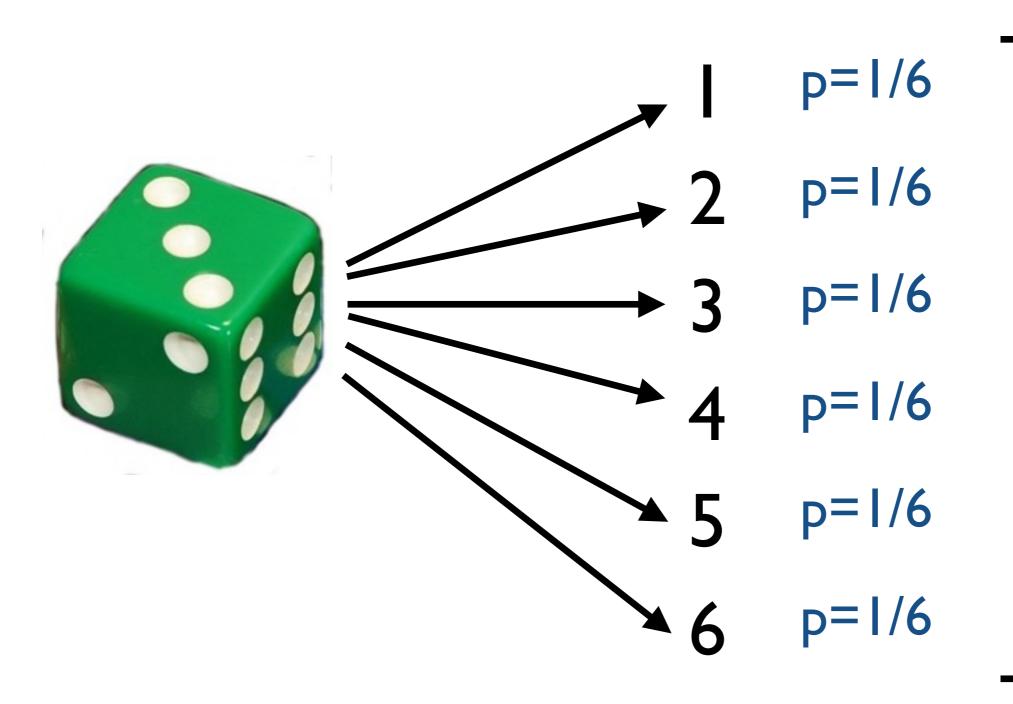

sums to I

## Stochasticity

How to factor in stochasticity?

Agent does not get to choose.

- Selecting the max outcome is optimistic.
- Selecting the min outcome is pessimistic.

Must be probability-aware.



# Expectation

What is the average die value?




$$\frac{(1+2+3+4+5+6)}{6} = 3.5$$

This factors in both probabilities and the value of event.

In general, given random event x and function f(x):

$$E[f(x)] = \sum_{x} P(x)f(x)$$

Insert expectation layer to accommodate stochastic events.

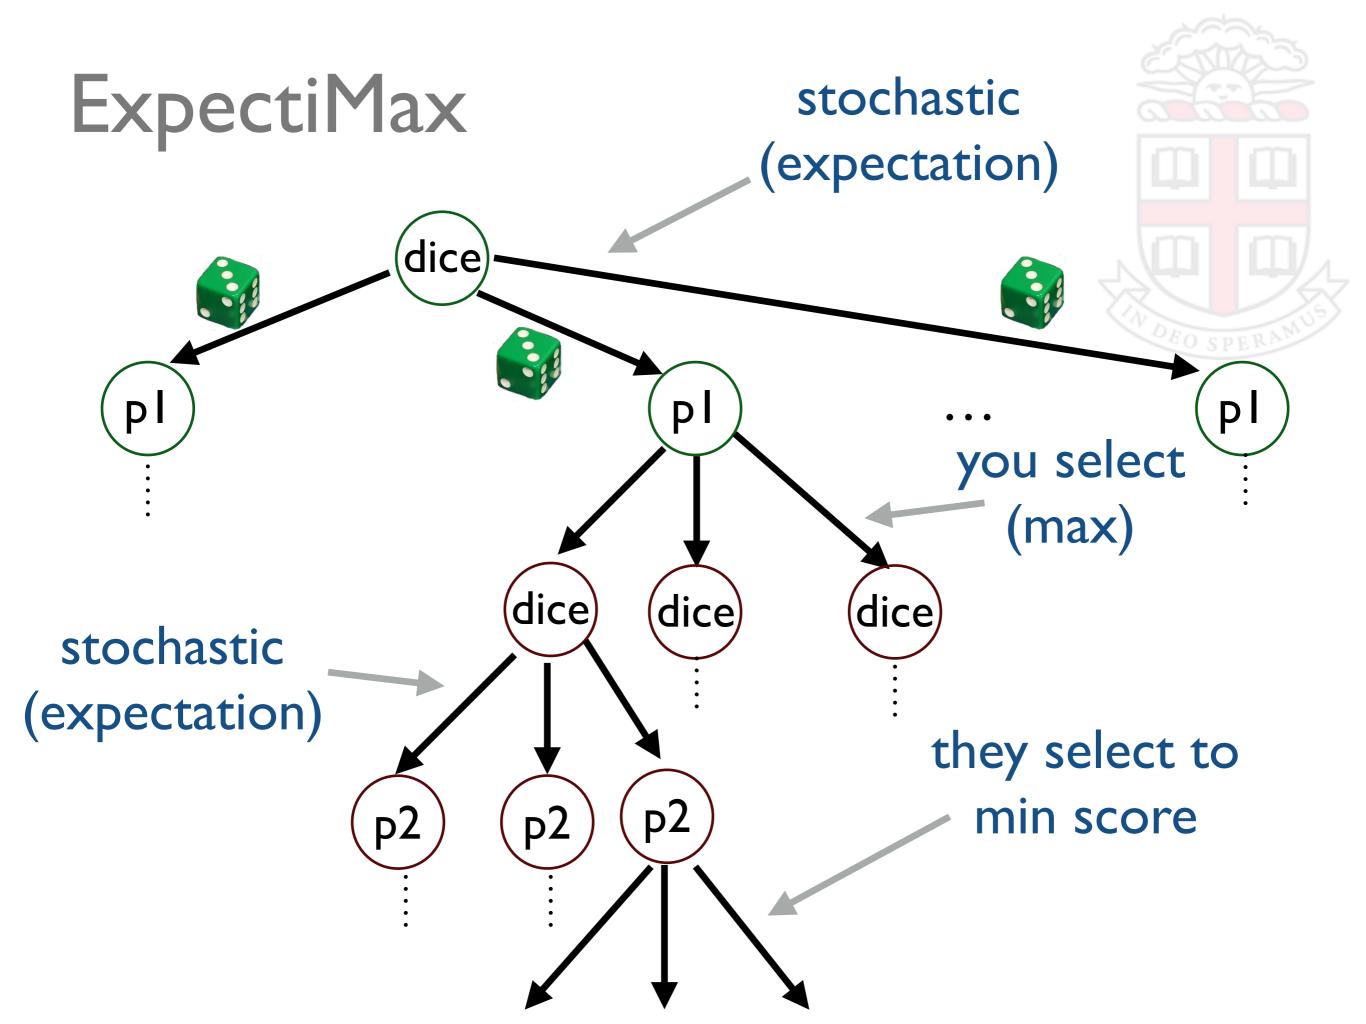

## Games Today

#### World champion level:

- Backgammon
- Chess
- Checkers (solved)
- Othello
- Some poker types:


"Heads-up Limit Hold'em Poker is Solved", Bowling et al., Science, January 2015.

#### Perform well:

- Bridge
- Other poker types

Far off: Co



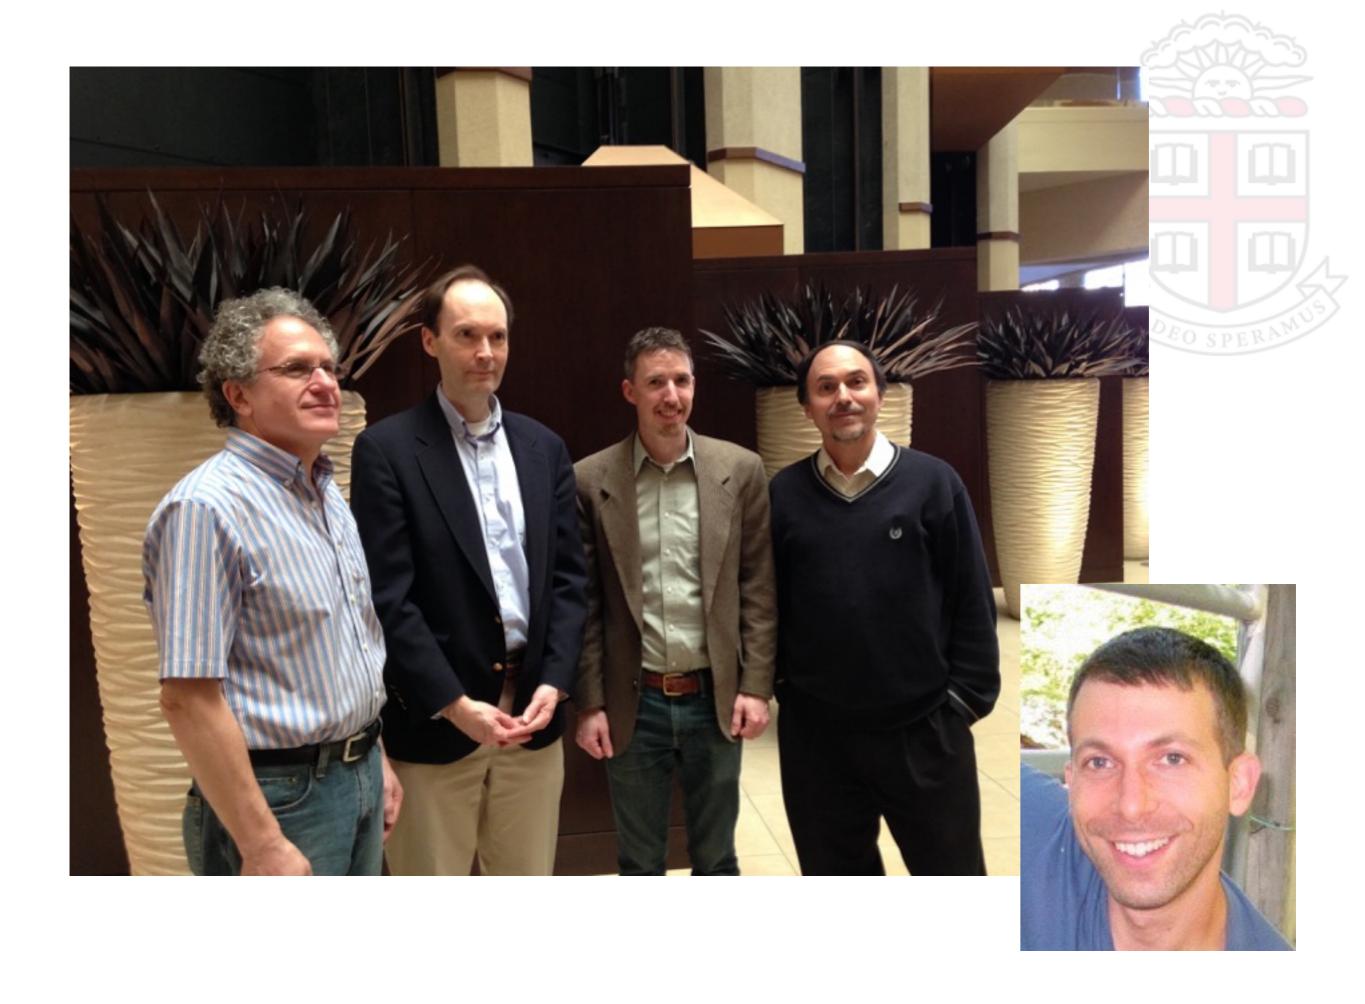

## Go





# Very Recently





**I - 4** 



Lee Sedol

AlphaGo (Google Deepmind)