

# Introduction to Deep Learning

Seung-Hoon Na

Chonbuk National University

# Artificial Intelligence: Challenge

- AI: to make programmable computers intelligence
  - Automate routine labor, understand speech or images, make diagnoses in medicine and support basic scientific research.
- In the early days of AI,
- Problems that can be described by a list of formal, mathematical rules
  - Intellectually difficult for human beings,
  - Relatively straightforward for computers
- Problems that are easy for people to perform
  - we solve intuitively, that feel automatic
  - Hard for people to describe formally
  - They become the **true challenge** to artificial intelligence


# Artificial Intelligence

- *Knowledge base* approach
  - hard-code knowledge about the world in formal languages
  - Cyc project
    - Try to build an inference engine and a database of statements in a language called CycL.
  - Knowledge engineering problem
    - Statements should be entered by a staff of human supervisors
    - People struggle to devise formal rules with enough complexity to accurately describe the world
- Need the ability to acquire their own knowledge, by extracting patterns from raw data.  
→ *machine learning*

*E.g.) Logistic regression, Naive Bayes*

# Machine Learning

- *Representation* of the data
  - Has an enormous effect on the performance of machine learning algorithms
  - *Feature*: Each piece of information included in the representation

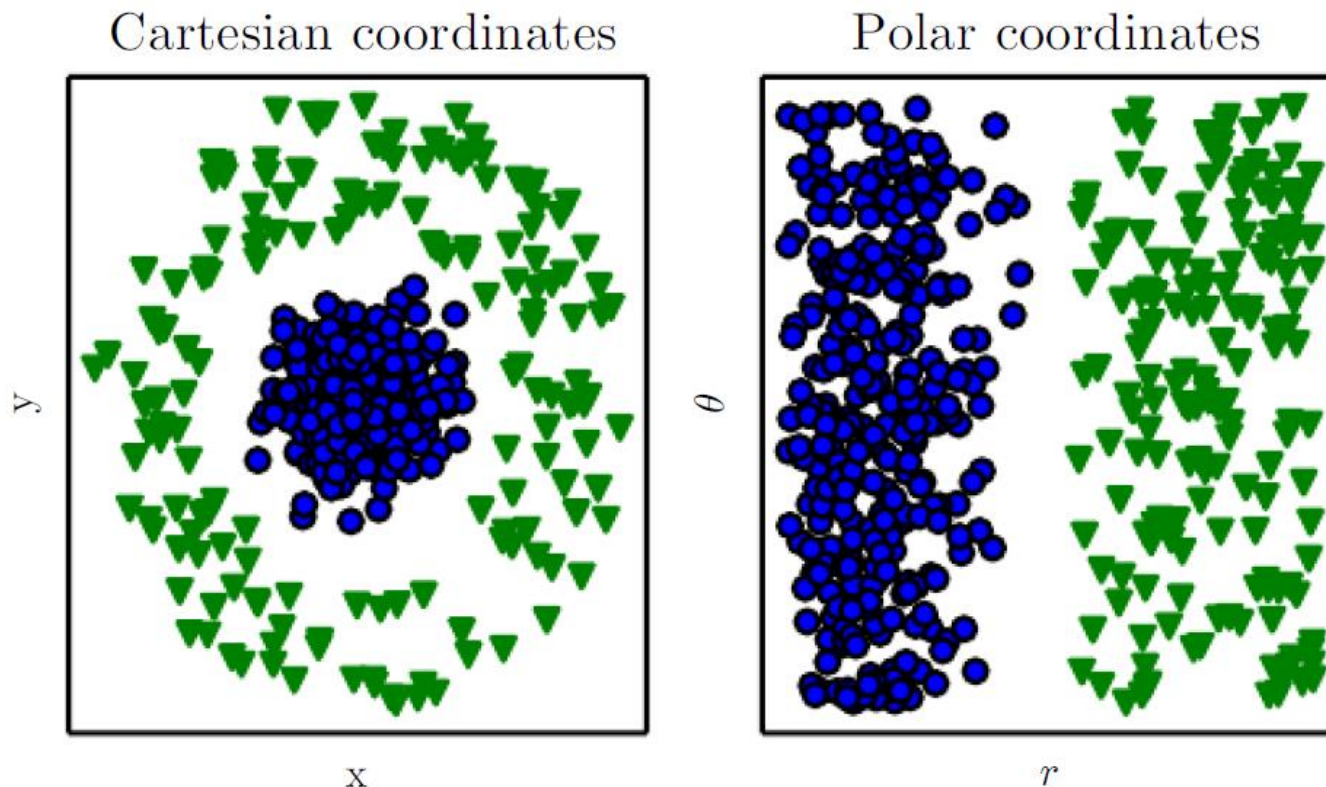

# Representation Learning

- Use machine learning to discover not only the mapping from representation to output but also the representation itself
- Autoencoder
  - *Encoder*: converts the input data into a different representation
  - *Decoder*: converts the new representation back into the original format


# Representation Learning

- Goal: Separate the *factors of variation* that explain the observed data.
  - Factors: separate sources of influence, not combined by multiplication
    - Hidden & latent: often not directly observed
- Difficulty: many of the factors of variation influence every single piece of observed data
  - E.g.) an image of a red car might be very close to black at night, the shape of the car's silhouette depends on the viewing angle
- Require us to *disentangle the factors of variation* and discard the ones that we do not care about.

# Deep learning for Representation Learning

## Representation Learning

- Build complex representation from simpler representations

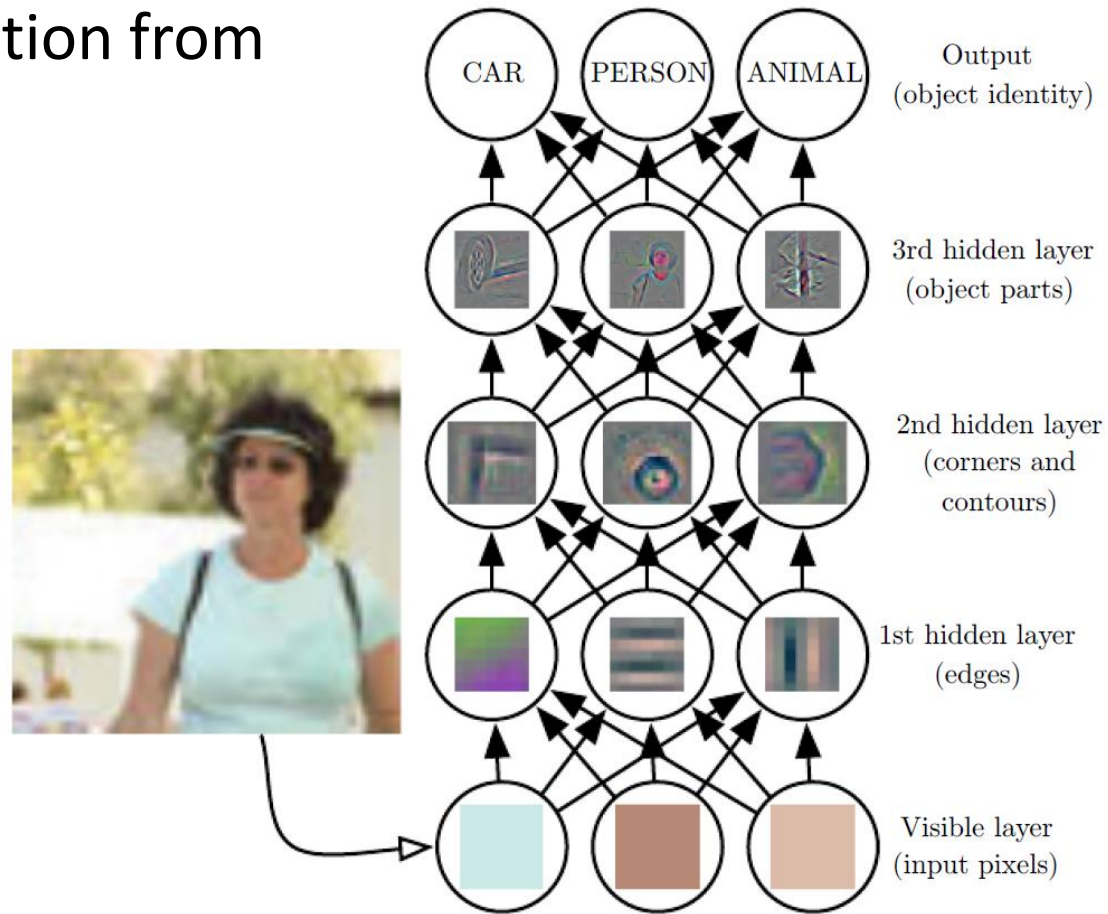

# Deep Learning for Representation Learning

- the feedforward deep network or *multilayer perceptron* (MLP)
  - The quintessential example of a deep learning model
- MLP
  - just a mathematical function mapping some set of input values to output values.
  - The function is formed by *composing many simpler functions*.





# Deep Learning for Learning a Program

- Each layer of the representation: can be thought of as the state of the computer's memory
- Networks with greater depth can execute more instructions in sequence.
- Later instructions can refer back to the results of earlier instructions → Enabling Sequential instructions
- The representation stores information that helps to execute a program that can make sense of the input.
  - could be analogous to a counter or pointer in a traditional computer program

# Deep Learning

- Depth?
- There is no consensus about how much depth a model requires to qualify as **deep**
- Deep learning is about the study of models that either **involve a greater amount of composition of learned functions or learned concepts** than traditional machine learning does.

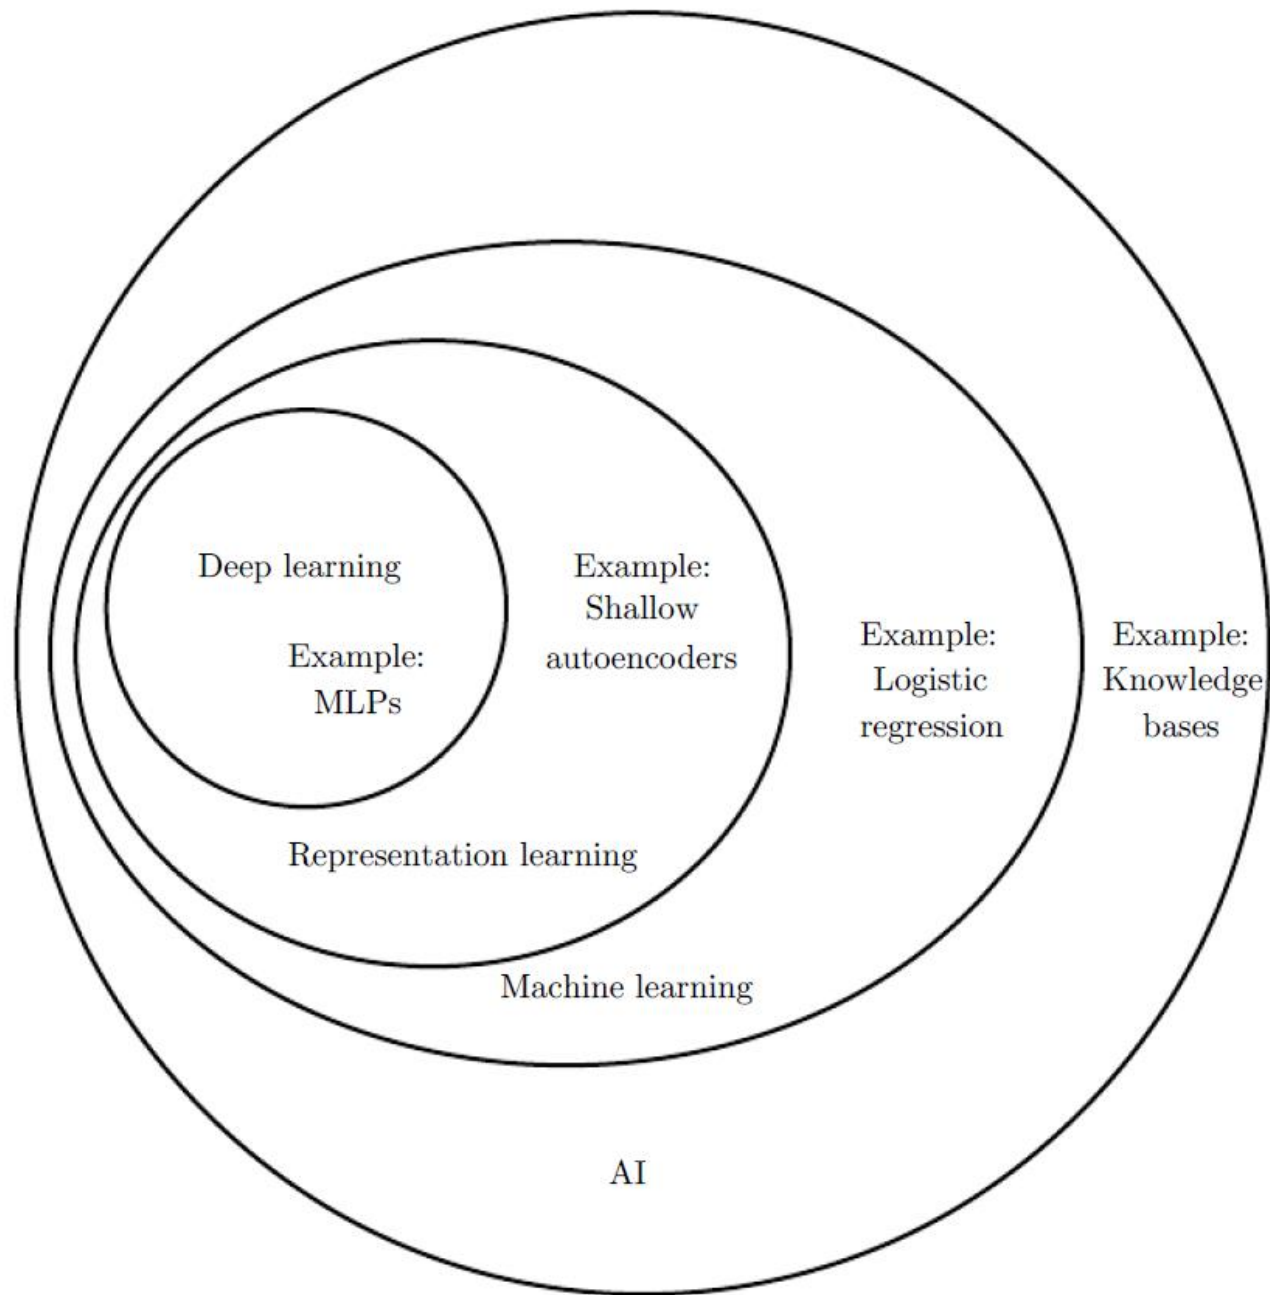

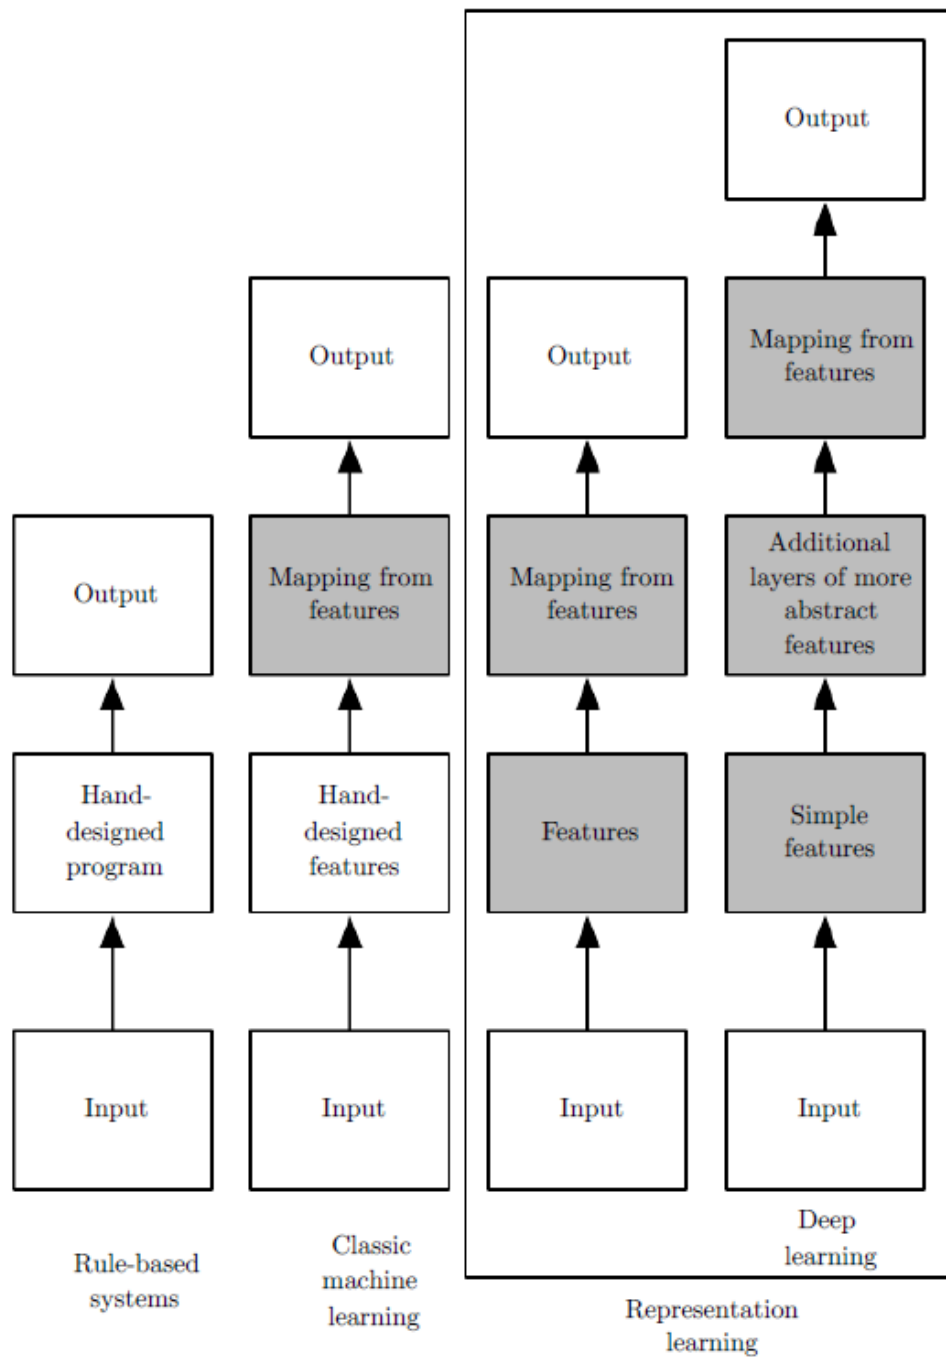


# Deep learning: Trends

- (Name) has gone by many names reflecting different philosophical viewpoints, and has waxed and waned in popularity.
- (Data) become more useful as the amount of available training data has increased.
- (Hardware) Deep learning models have grown in size over time as computer hardware and software infrastructure for deep learning has improved.
- (Accuracy) has solved increasingly complicated applications with increasing accuracy over time.

# Deep learning: Three Waves

- (1940s–1960s) known as *cybernetics*
- (1980s–1990s) known as *connectionism*
- (2006-) the current resurgence under the name deep learning

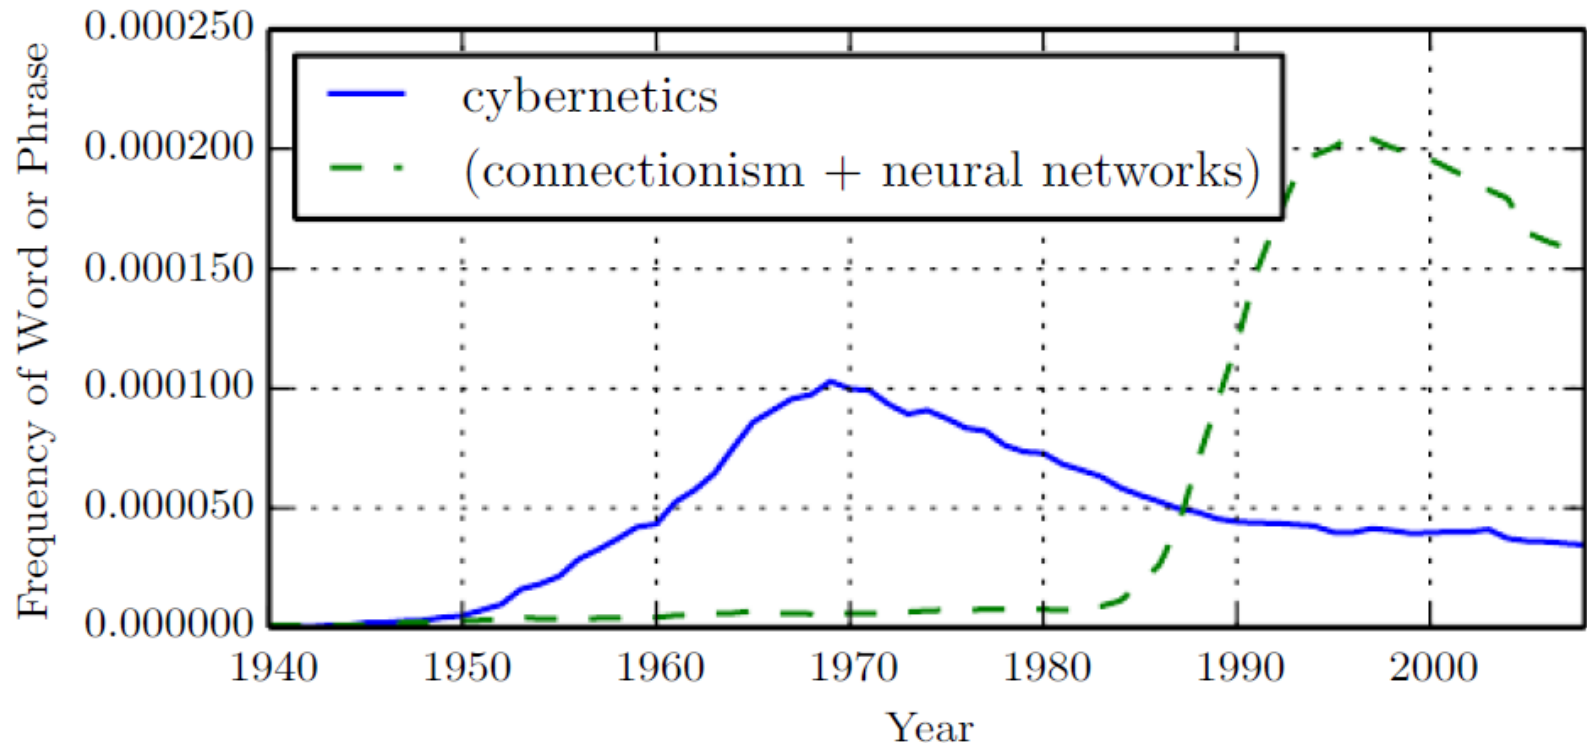


# Deep Learning: Neuroscientific perspective

- *Artificial neural networks* (ANNs)
  - Computational models of biological learning
  - Engineered systems inspired by the biological brain
    - the human brain or the brain of another animal
- Two motivating ideas
  - 1) The brain provides a proof by example that intelligent behavior is possible
  - 2) to understand the brain and the principles that underlie human intelligence → machine learning models become useful

# Deep Learning: Neuroscientific perspective

The fundamental unit of the brain

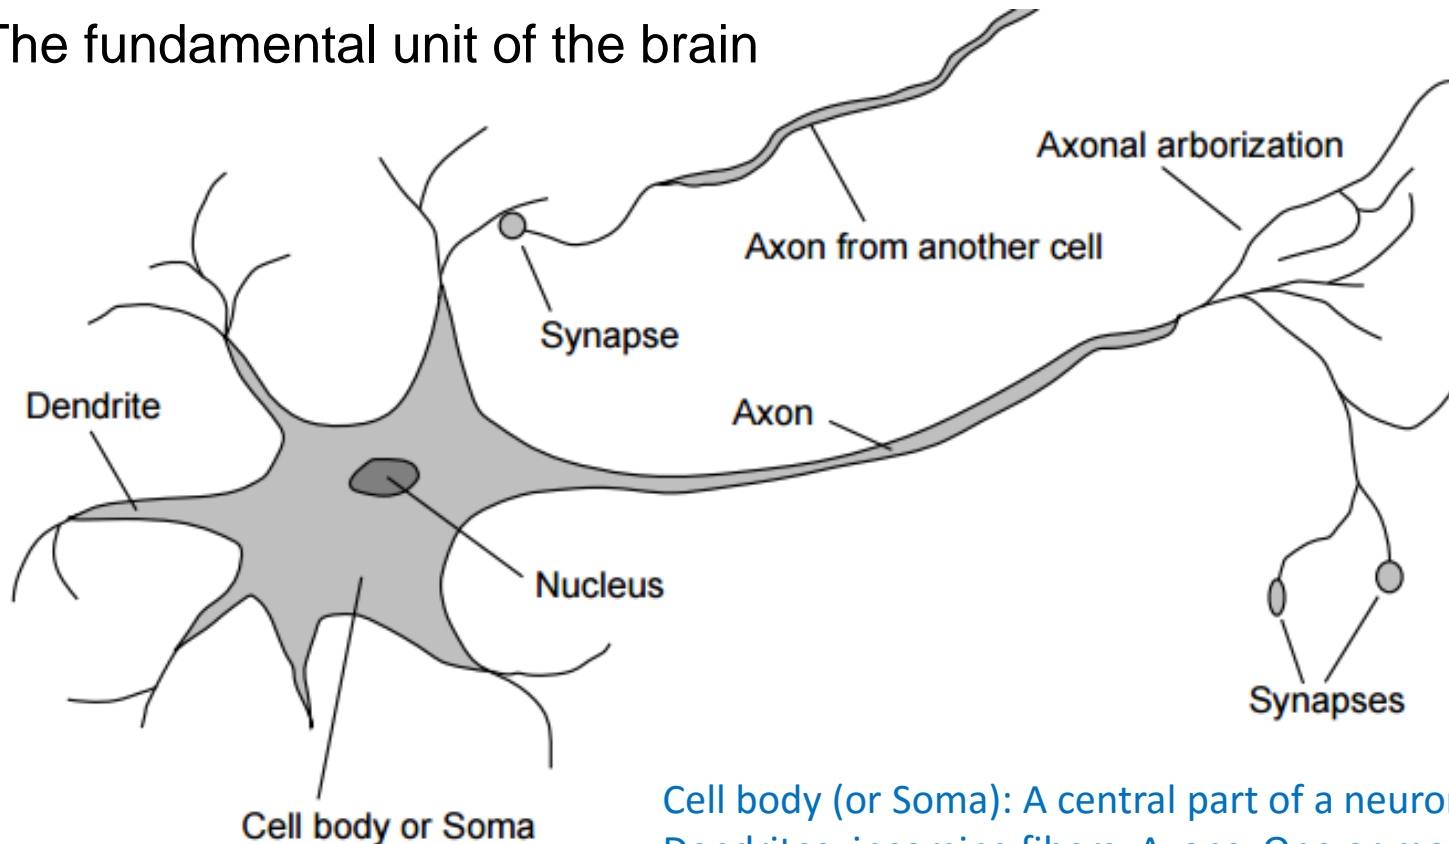

Cell body (or Soma): A central part of a neuron

Dendrites: incoming fibers, Axons: One or more outgoing fibers

Terminal buttons

The projections that the axon of one neuron has  
Come very close to one or more of the dendrites of other  
neurons

Synapse


The gap b/w the terminal button of one neuron and a  
dendrite of another. The size of the gap is about 20nm



# McCulloch-Pitts Neuron Model

## [McCulloch '43]


- Claimed that the neuron was a logic unit, with mathematical abstractions of inputs and outputs of neuron
- Neural elements are either excitatory or inhibitory
- **The sum of the excitatory inputs less the sum of inhibitory inputs is greater than a threshold, that neural element fires**

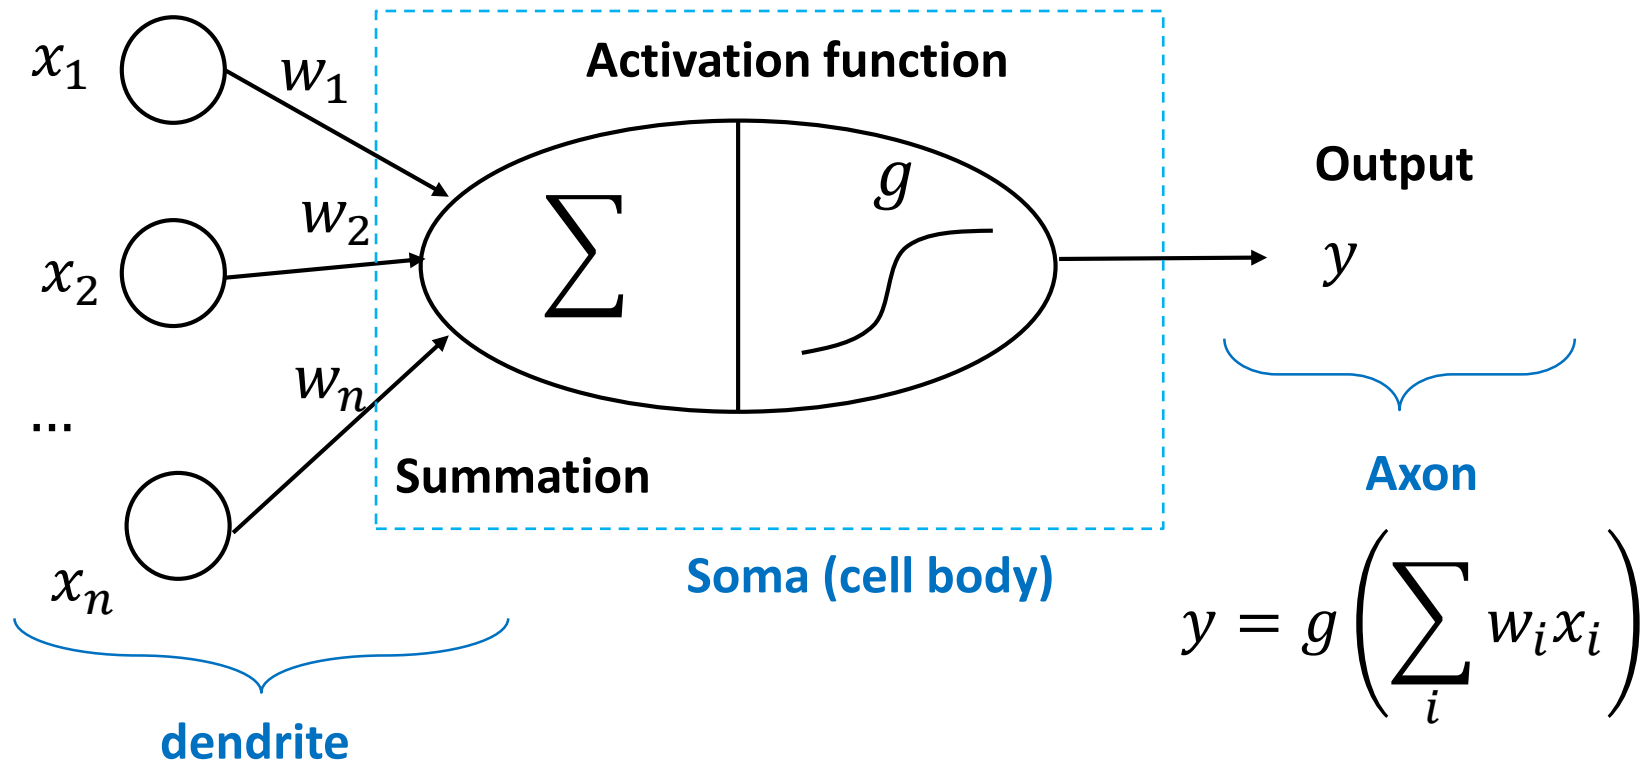


# Cybernetics: 1<sup>st</sup> Wave

## Perceptron [Rosenblatt '58]

Perceptron:

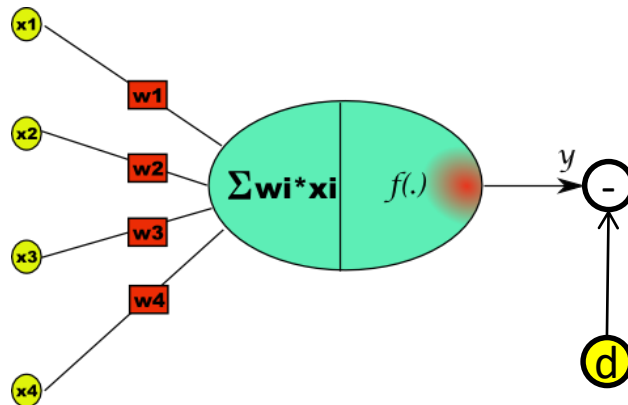


Activation functions:

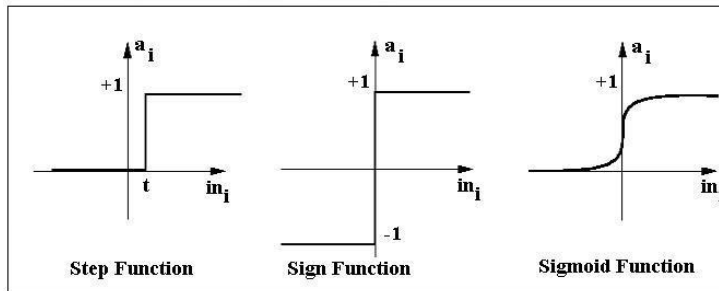

Learning:

$$y^{(t)} = f\left\{\sum_i w_i^{(t)} x_i^{(t)}\right\}$$

$$\text{Update} \begin{cases} \Delta w_i^{(t)} = \varepsilon (d^{(t)} - y^{(t)}) x_i^{(t)} \\ w_i^{(t+1)} = w_i^{(t)} + \Delta w_i^{(t)} \end{cases}$$

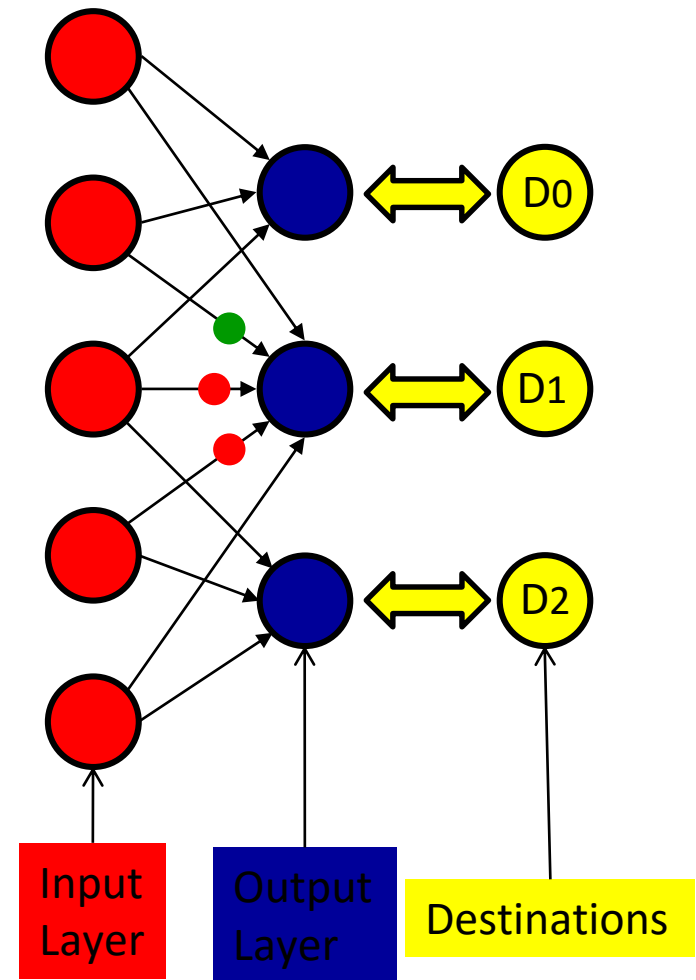


Slide credit : Geoffrey Hinton

# Perceptron [Rosenblatt '58]

- Classification is based on threshold unit of activation function
  - Threshold unit:  $g(x) = 1 \text{ if } x > 0 \text{ else } 0$
  - Classifier:  $f(x) = g(\mathbf{w} \cdot \mathbf{x} + b)$
- Perceptron learning rule
  - $\mathbf{w} \leftarrow \mathbf{w} - \mathbf{x}$  if sample  $\mathbf{x}$  is misclassified
  - Convergence proof is made [Rosenblatt '62]
- Problem: Only capable of learning linearly separable problems
  - It was impossible for these classes of network to learn non-linearly separable problems such as XOR [Minsky '69]

# ADALINE [Widrow & Hoff '60]

Adaptive linear element (ADALINE)

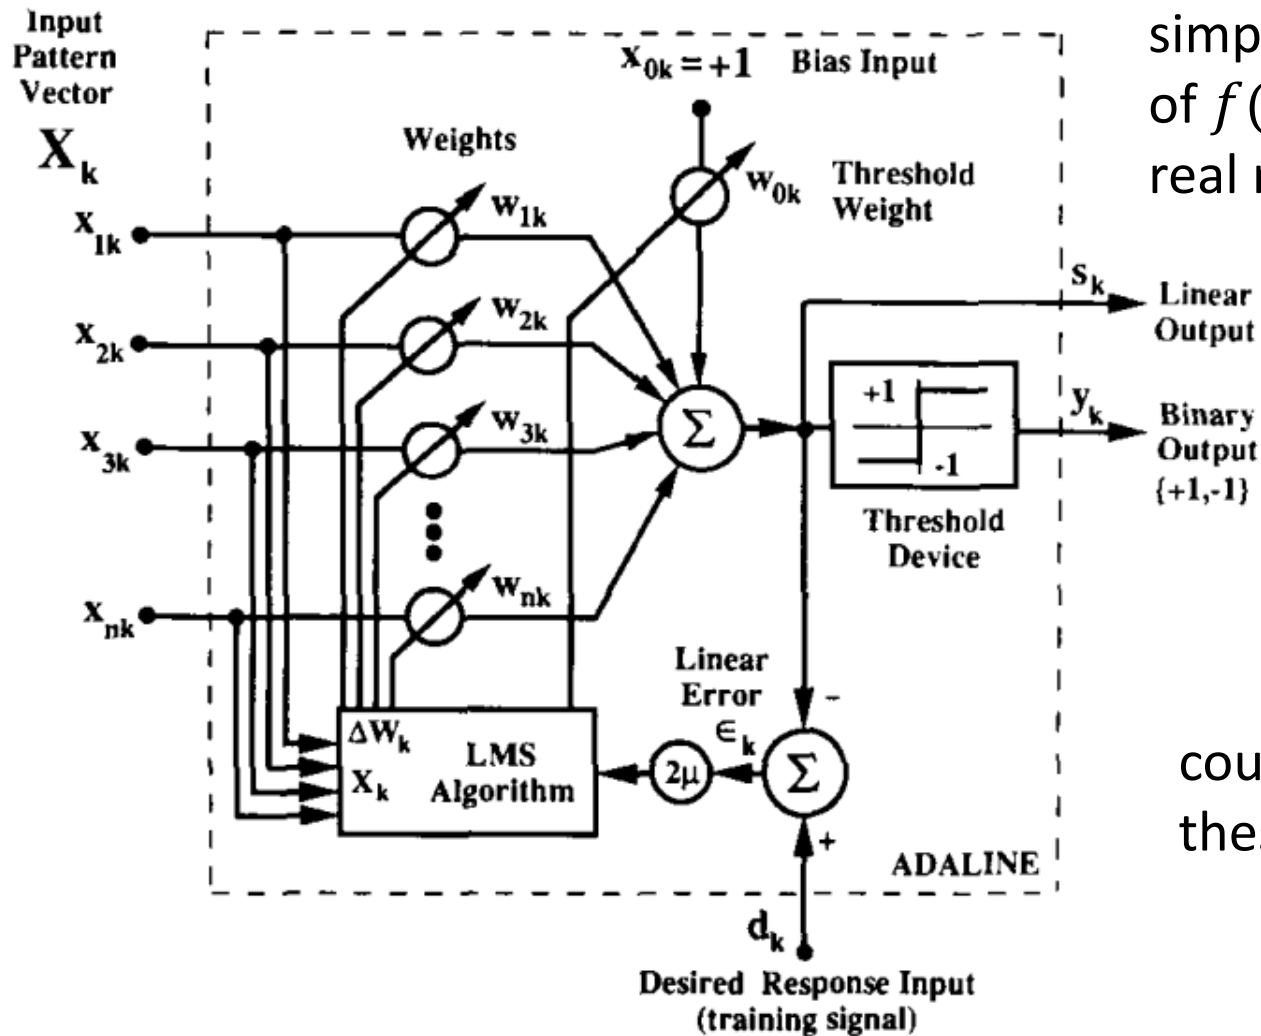

simply returned the value of  $f(x)$  itself to predict a real number

could also learn to predict these numbers from data

# Deep Learning: ML-perspective

- It now appeals to a more general principle of learning *multiple levels of composition*
  - Can be applied in machine learning frameworks that *are not necessarily neurally inspired*.

# Neuroscience for Deep Learning

- Regarded as an important source of inspiration, but it is no longer the predominant guide for the field
  - We do not have enough information about the brain to use it as a guide
  - E.g.) actual neurons compute very different functions than the *rectified linear unit*
- Has given us a reason to hope that a single deep learning algorithm can solve many different tasks
  - Much of the mammalian brain might use a single algorithm to solve most of the different tasks that the brain solves.
    - E.g.) ferrets can learn to “see” with the auditory processing region of their brain
  - Deep learning research groups pursue to study all of these application areas simultaneously

# Connectionism: 2<sup>nd</sup> Wave

- *Parallel distributed processing* [Rumelhart *et al.*, 1986c]
- Arose in Cognitive science
  - During the early 1980s, most cognitive scientists studied models of symbolic reasoning.
  - The connectionists began to study models of cognition that could actually be grounded in neural implementations
- *The idea*: a large number of simple computational units can achieve intelligent behavior when networked together.

# Connectionism Era

- *Distributed representation*
  - Each input to a system should be represented by many features
  - Each feature should be involved in the representation of many possible inputs
- E.g.) object recognition
  - Identity: (cars, trucks, and birds)
  - Color: (red, green, or blue)
  - 1) Use 9 neurons which activates for each of the nine possible combinations
  - 2) Use 6 neurons: 3 neurons for color, 3 neurons for object identity



# Connectionism Era: Advances

- The popularization of the **back-propagation algorithm** in MLP [Rumelhart *et al.*, 1986a; LeCun, 1987]
- Advances in **recurrent neural networks** for sequence modeling tasks [Hochreiter (1991), Bengio *et al.* (1994)]
- **LSTM** (Long short term memory) [Hochreiter and Schmidhuber (1997)]

# Connectionism Era

- Advances on other fields of machine learning
  - Kernel machines like support vector machines (Boser *et al.*, 1992; Cortes and Vapnik, 1995; Schölkopf *et al.*, 1999)
  - Graphical models (Jordan, 1998)
- These led to a decline in the popularity of neural networks that lasted until 2007.

# 2006


- Deep networks were generally believed to be very difficult to train
- Greedy layer-wise pretraining: Geoffrey Hinton showed that a kind of neural network called a deep belief network
- The same strategy could be used to train many other kinds of deep networks (Bengio *et al.*, 2007; Ranzato *et al.*, 2007a)
- Led **3<sup>rd</sup> wave of neural networks research** and popularized the use of the term ***deep learning***
- Deep neural networks outperformed competing AI systems based on other machine learning technologies as well as hand-designed functionality.

# Increasing Dataset Sizes


- The learning algorithms reaching human performance on complex tasks today are nearly identical to the learning algorithms in the 1980s
- But, today we can provide these algorithms with the large-scale resources they need to succeed.

# Increasing Dataset Sizes

Increasing dataset size over time

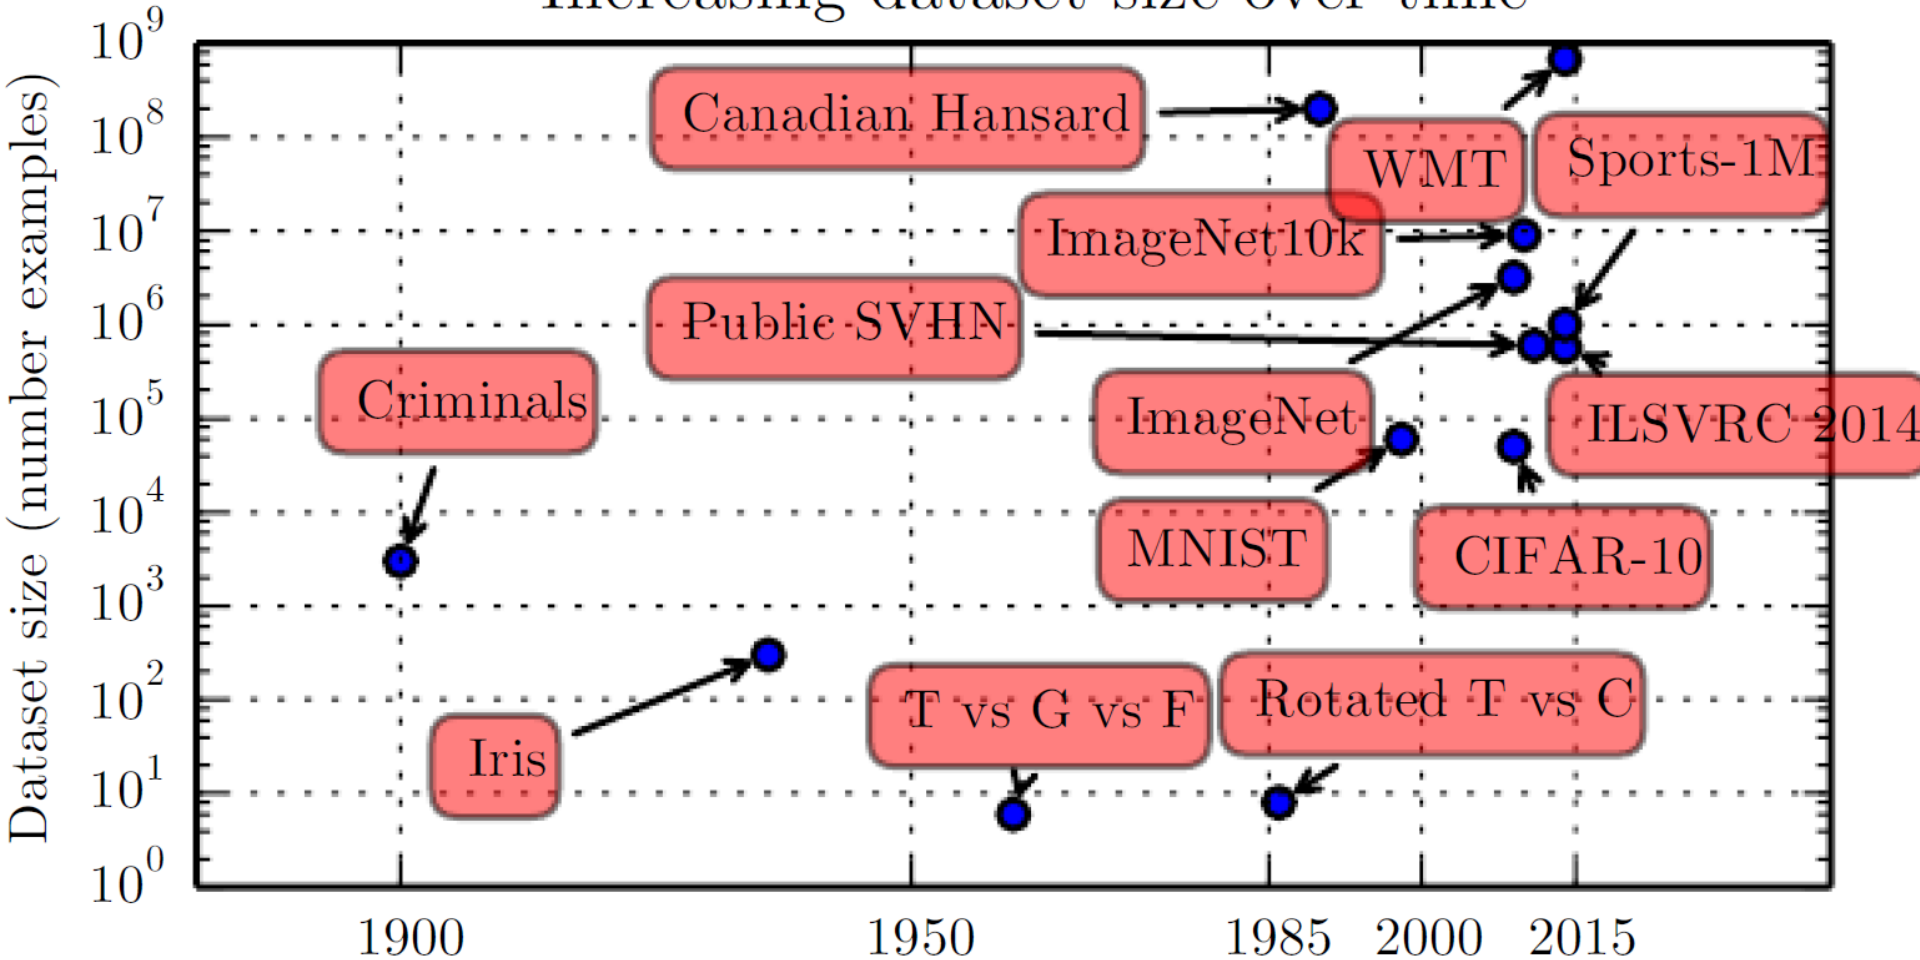


# Increasing Model Sizes

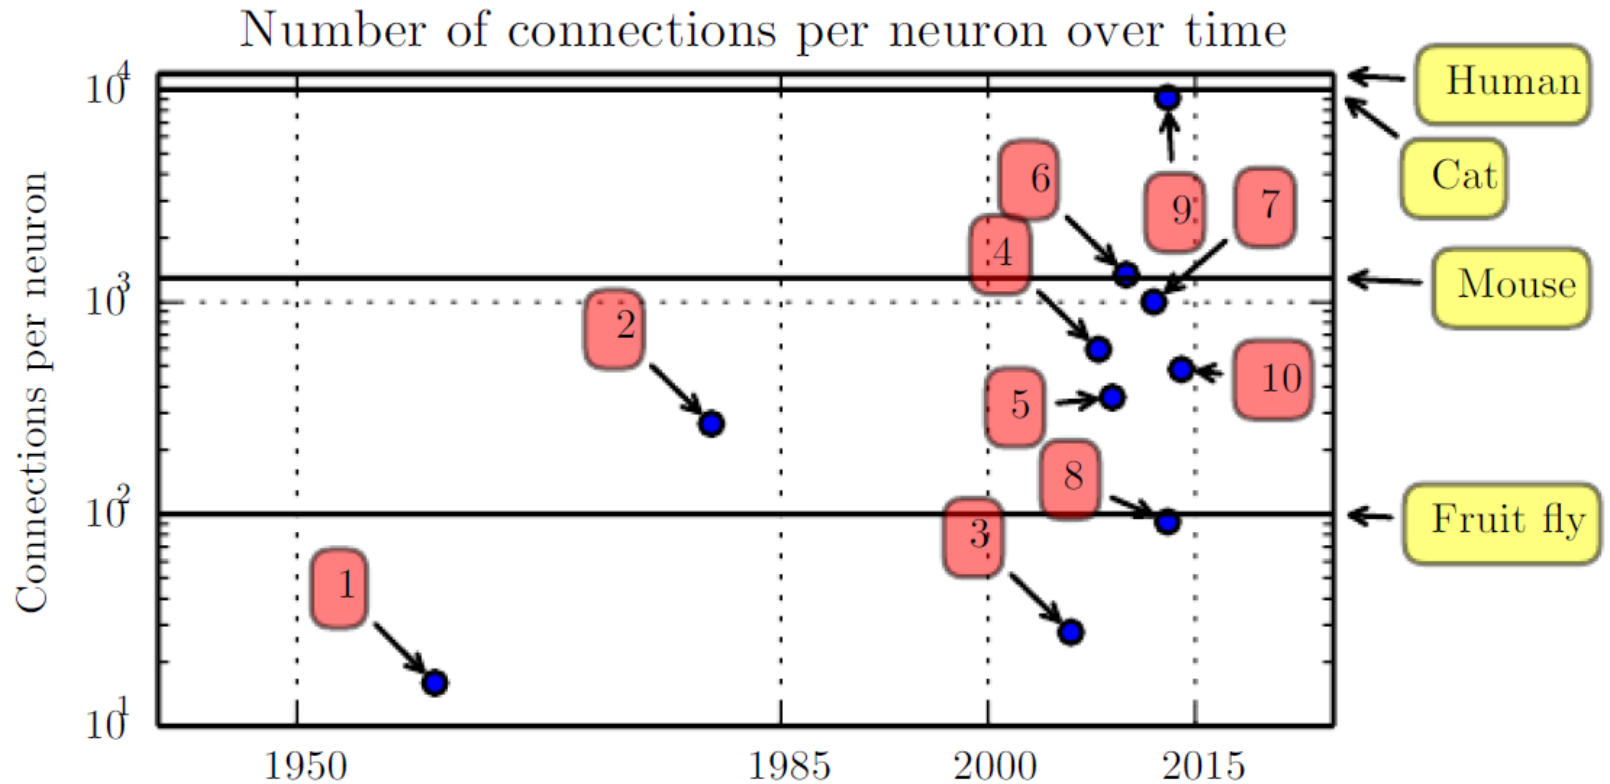

1. Adaptive linear element ([Widrow and Hoff, 1960](#))
2. Neocognitron ([Fukushima, 1980](#))
3. GPU-accelerated convolutional network ([Chellapilla \*et al.\*, 2006](#))
4. Deep Boltzmann machine ([Salakhutdinov and Hinton, 2009a](#))
5. Unsupervised convolutional network ([Jarrett \*et al.\*, 2009](#))
6. GPU-accelerated multilayer perceptron ([Ciresan \*et al.\*, 2010](#))
7. Distributed autoencoder ([Le \*et al.\*, 2012](#))
8. Multi-GPU convolutional network ([Krizhevsky \*et al.\*, 2012](#))
9. COTS HPC unsupervised convolutional network ([Coates \*et al.\*, 2013](#))
10. GoogLeNet ([Szegedy \*et al.\*, 2014a](#))

# Increasing neural network size over time

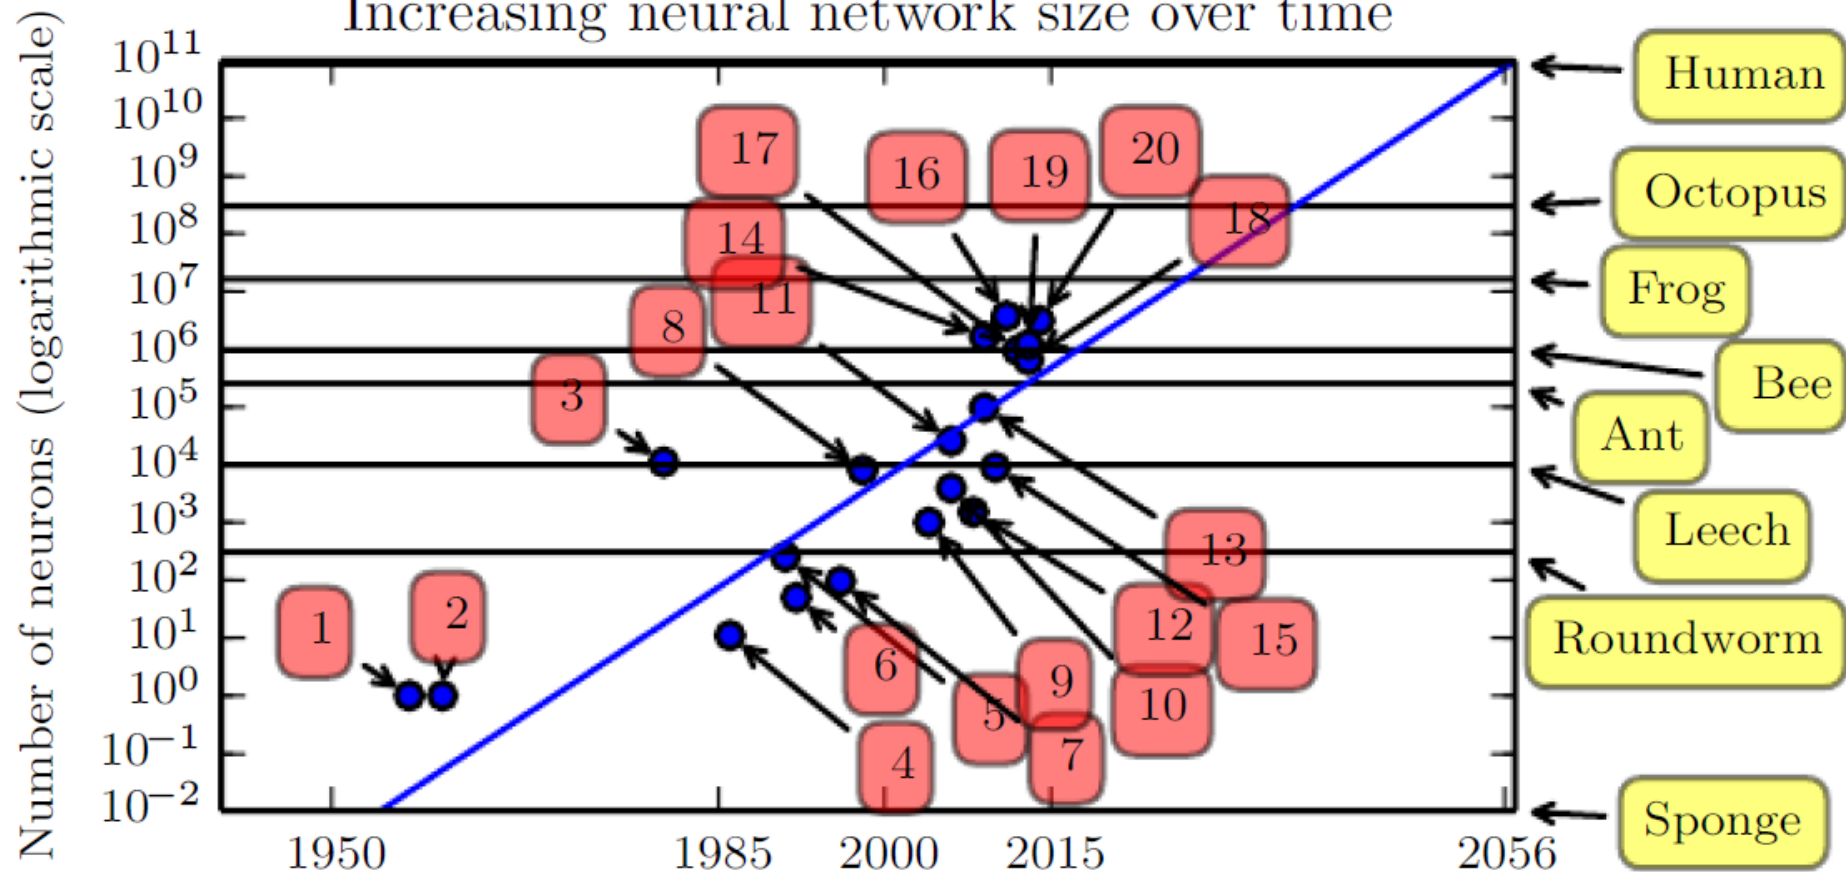

1. Perceptron ([Rosenblatt, 1958, 1962](#))
2. Adaptive linear element ([Widrow and Hoff, 1960](#))
3. Neocognitron ([Fukushima, 1980](#))
4. Early back-propagation network ([Rumelhart et al., 1986b](#))
5. Recurrent neural network for speech recognition ([Robinson and Fallside, 1991](#))
6. Multilayer perceptron for speech recognition ([Bengio et al., 1991](#))
7. Mean field sigmoid belief network ([Saul et al., 1996](#))
8. LeNet-5 ([LeCun et al., 1998b](#))
9. Echo state network ([Jaeger and Haas, 2004](#))
10. Deep belief network ([Hinton et al., 2006](#))
11. GPU-accelerated convolutional network ([Chellapilla et al., 2006](#))
12. Deep Boltzmann machine ([Salakhutdinov and Hinton, 2009a](#))
13. GPU-accelerated deep belief network ([Raina et al., 2009](#))
14. Unsupervised convolutional network ([Jarrett et al., 2009](#))
15. GPU-accelerated multilayer perceptron ([Ciresan et al., 2010](#))
16. OMP-1 network ([Coates and Ng, 2011](#))
17. Distributed autoencoder ([Le et al., 2012](#))
18. Multi-GPU convolutional network ([Krizhevsky et al., 2012](#))
19. COTS HPC unsupervised convolutional network ([Coates et al., 2013](#))
20. GoogLeNet ([Szegedy et al., 2014a](#))

# Deep Learning: Real-Word Application and Recent Advances

- CNN won ImageNet challenge for the first time and by a wide margin, bringing down the state-of-the-art top-5 error rate from 26.1% to 15.3% (Krizhevsky *et al.*, 2012)
- Speech recognition resulted in a sudden drop of error rates, with some error rates cut in half (Dahl *et al.*, 2010; Deng *et al.*, 2010b; Seide *et al.*, 2011; Hinton *et al.*, 2012a)
- Sequence-to-sequence learning (Sutskever *et al.*, 2014; Bahdanau *et al.*, 2015).
- Neural Turing machines (Graves *et al.*, 2014a)
  - Learn to read from memory cells and write arbitrary content to memory cells.
- *Deep reinforcement learning* (Mnih *et al.*, 2015).
- AlphaGo ... (DeepMind, 2016)



# Software libraries

- Theano (Bergstra *et al.*, 2010; Bastien *et al.*, 2012)
- PyLearn2 (Goodfellow *et al.*, 2013c)
- Torch (Collobert *et al.*, 2011b)
- DistBelief (Dean *et al.*, 2012)
- Caffe (Jia, 2013)
- MXNet (Chen *et al.*, 2015)
- TensorFlow (Abadi *et al.*, 2015)
- DeeplearningJ
- Keras