

Deep Feedforward Networks: Backpropagation

Seung-Hoon Na

Chonbuk National University

Back-Propagation

- Forward propagation
 - The inputs \mathbf{x} propagates up to the hidden units and finally produces $\hat{\mathbf{y}}$
 - During training, it can continue onward until it produces a scalar cost $J(\boldsymbol{\theta})$
- Back-propagation (*backprop*)
 - The information from the cost flows backwards through the network, in order to compute the gradient


Back-Propagation

- Back-propagation computes the gradient
 - **Not** the whole learning algorithm for multi-layer neural networks.
 - **Only** the method of computing the **gradient**
 - Stochastic gradient descent perform actual learning using the gradient
- Back-propagation can be used to compute derivatives of **any function**
 - Not specific to multilayer neural networks


Computational Graphs

- **Node**
 - Variable
 - Scalar, vector, matrix, tensor, or even a variable of another type
- **Operation**
 - Simple function of one or more variables
 - Functions are composed of many operations
 - Return only a single output variable without loss of generality

Computational Graphs

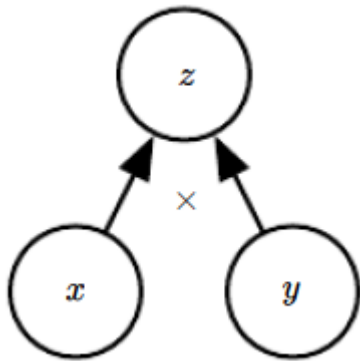


$$z = xy$$

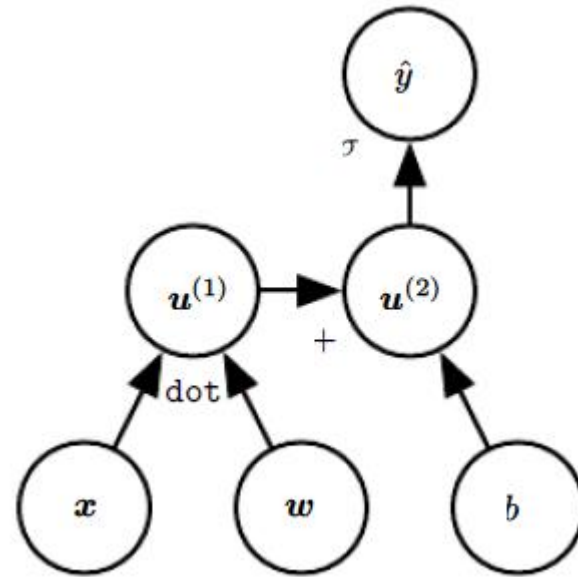


$$\hat{y} = \sigma(\mathbf{x}^T \mathbf{w} + b)$$

Computational Graphs

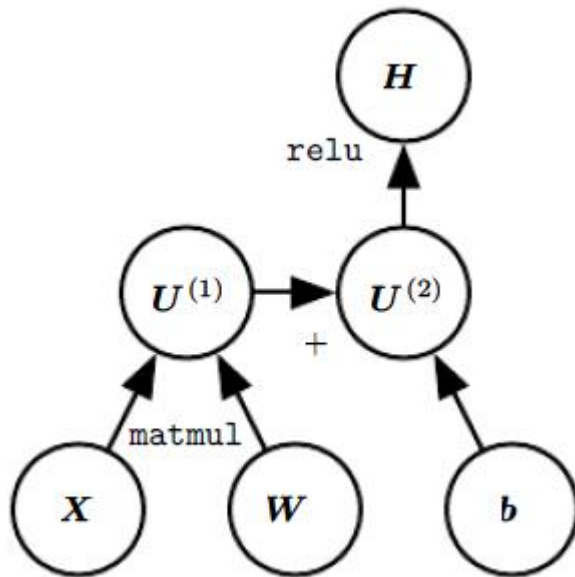

$$H = \max(0, XW + b)$$

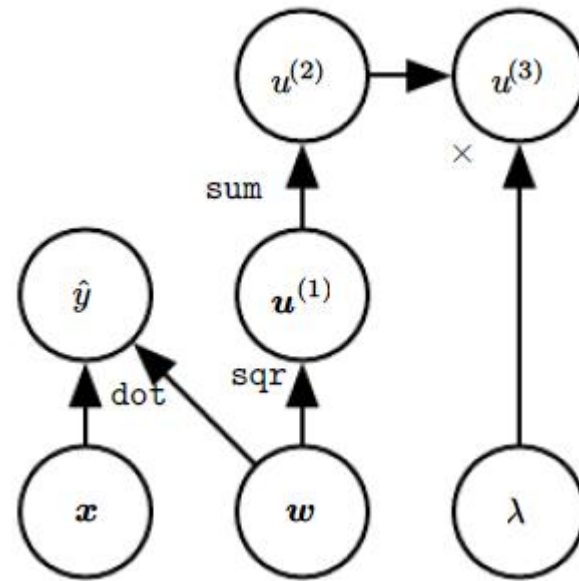

$$\hat{y} = x^T w$$

$$\lambda \sum_i w_i^2$$

applies more than one operation to the weights w

Chain Rule of Calculus

Scalar

$$y = g(x), \quad z = f(g(x)) = f(y)$$

$$\frac{dz}{dx} = \frac{dz}{dy} \frac{dy}{dx}$$

Vector

$$\mathbf{y} = g(\mathbf{x}), \quad z = f(\mathbf{y})$$

$$\frac{\partial z}{\partial x_i} = \sum_j \frac{\partial z}{\partial y_j} \frac{\partial y_j}{\partial x_i}$$

$$\nabla_{\mathbf{x}} z = \left(\frac{\partial \mathbf{y}}{\partial \mathbf{x}} \right)^{\top} \nabla_{\mathbf{y}} z$$

Jacobian matrix

Tensor

$$\mathbf{Y} = g(\mathbf{X}), \quad z = f(\mathbf{Y})$$


The indices into \mathbf{X} have multiple coordinates
e.g.) 3-D tensor is indexed by three coordinates

$$(\nabla_{\mathbf{X}} z)_i \text{ denotes } \frac{\partial z}{\partial X_i}$$

$$\nabla_{\mathbf{X}} z = \sum_j (\nabla_{\mathbf{X}} Y_j) \frac{\partial z}{\partial Y_j}$$

Backprop: Recursively Applying the Chain Rule

- Apply straightforwardly Chain rule
- Implementation issue: Handle **repeated** subexpressions

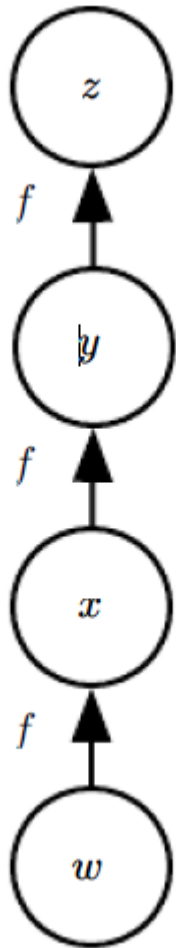

$$\begin{aligned}\frac{\partial z}{\partial w} &= \frac{\partial z}{\partial y} \frac{\partial y}{\partial x} \frac{\partial x}{\partial w} \\ &= f'(y) f'(x) f'(w) \\ &= f'(f(f(w))) f'(f(w)) f'(w)\end{aligned}$$

- $f'(y) f'(x) f'(w)$ is preferable because of its reduced runtime when the memory is sufficient
- $f'(f(f(w))) f'(f(w)) f'(w)$: useful when the memory is limited

Simple back-prop algorithm: Compute the gradient directly

- Inputs: n_i inputs $u^{(1)}$ to $u^{(n_i)}$ \rightarrow Output: $u^{(n)}$

Goal: computes $\frac{\partial u^{(n)}}{\partial u^{(i)}}$ for all $i \in \{1, \dots, n\}$

Algorithm (forward propagation) $\longrightarrow u^{(i)} = f(\mathbb{A}^{(i)})$

```
for  $i = 1, \dots, n_i$  do  
     $u^{(i)} \leftarrow x_i$   
end for  
for  $i = n_i + 1, \dots, n$  do  
     $\mathbb{A}^{(i)} \leftarrow \{u^{(j)} \mid j \in Pa(u^{(i)})\}$   
     $u^{(i)} \leftarrow f^{(i)}(\mathbb{A}^{(i)})$   
end for  
return  $u^{(n)}$ 
```

Simple back-prop algorithm: Compute the gradient directly

– The goal is to compute:

$$\frac{\partial u^{(n)}}{\partial u^{(j)}} = \sum_{i: j \in Pa(u^{(i)})} \frac{\partial u^{(n)}}{\partial u^{(i)}} \frac{\partial u^{(i)}}{\partial u^{(j)}}$$

Algorithm (back-prop propagation)

Run first forward propagation

`grad_table`[$\partial u^{(n)}$] \leftarrow 1  Initialize `grad_table`

for $j = n - 1$ down to 1 **do**

The next line computes $\frac{\partial u^{(n)}}{\partial u^{(j)}} = \sum_{i: j \in Pa(u^{(i)})} \frac{\partial u^{(n)}}{\partial u^{(i)}} \frac{\partial u^{(i)}}{\partial u^{(j)}}$ using stored values:

`grad_table`[$u^{(j)}$] $\leftarrow \sum_{i: j \in Pa(u^{(i)})} \text{grad_table}[u^{(i)}] \frac{\partial u^{(i)}}{\partial u^{(j)}}$

end for

return {`grad_table`[$u^{(i)}$] | $i = 1, \dots, n_i$ }

Backprop in Fully-connected MLP

- Forward propagation: take inputs and compute the cost value

Require: Network depth, l

Require: $\mathbf{W}^{(i)}, i \in \{1, \dots, l\}$, the weight matrices of the model

Require: $\mathbf{b}^{(i)}, i \in \{1, \dots, l\}$, the bias parameters of the model

Require: \mathbf{x} , the input to process

Require: \mathbf{y} , the target output

$$\mathbf{h}^{(0)} = \mathbf{x}$$

for $k = 1, \dots, l$ do

$$\mathbf{a}^{(k)} = \mathbf{b}^{(k)} + \mathbf{W}^{(k)} \mathbf{h}^{(k-1)}$$

$$\mathbf{h}^{(k)} = f(\mathbf{a}^{(k)})$$

end for

$$\hat{\mathbf{y}} = \mathbf{h}^{(l)}$$

$$J = L(\hat{\mathbf{y}}, \mathbf{y}) + \lambda \Omega(\theta)$$

The loss $L(\hat{\mathbf{y}}, \mathbf{y})$ depends on the output $\hat{\mathbf{y}}$ and on the target \mathbf{y}

Backprop in Fully-connected MLP

- **Backward** computation
 - Computes the gradients on the activations $a^{(k)}$ for each layer k , starting from the output layer and going backwards to the first hidden layer

After the forward computation, compute the gradient on the output layer:

$$g \leftarrow \nabla_{\hat{y}} J = \nabla_{\hat{y}} L(\hat{y}, y)$$

for $k = l, l-1, \dots, 1$ do

Convert the gradient on the layer's output into a gradient into the pre-nonlinearity activation (element-wise multiplication if f is element-wise):

$$g \leftarrow \nabla_{a^{(k)}} J = g \odot f'(a^{(k)})$$

Compute gradients on weights and biases (including the regularization term, where needed):

$$\nabla_{b^{(k)}} J = g + \lambda \nabla_{b^{(k)}} \Omega(\theta)$$

$$\nabla_{W^{(k)}} J = g h^{(k-1)\top} + \lambda \nabla_{W^{(k)}} \Omega(\theta)$$

Propagate the gradients w.r.t. the next lower-level hidden layer's activations:


$$g \leftarrow \nabla_{h^{(k-1)}} J = W^{(k)\top} g$$

end for

Symbol-to-Symbol Derivatives

- Symbol-to-symbol approach
 - Provide a computational graph for computing derivatives, given original graph
 - Advantage: differentiating the derivatives in order to obtain higher derivatives
 - Libraries: **Theano** and **TensorFlow**
- C.f.) Symbol-to-number approach
 - When numerical values are provided for input on computational graph, it returns numerical values for the gradient
 - Libraries: Torch and Caffe

Symbol-to-Symbol Derivatives

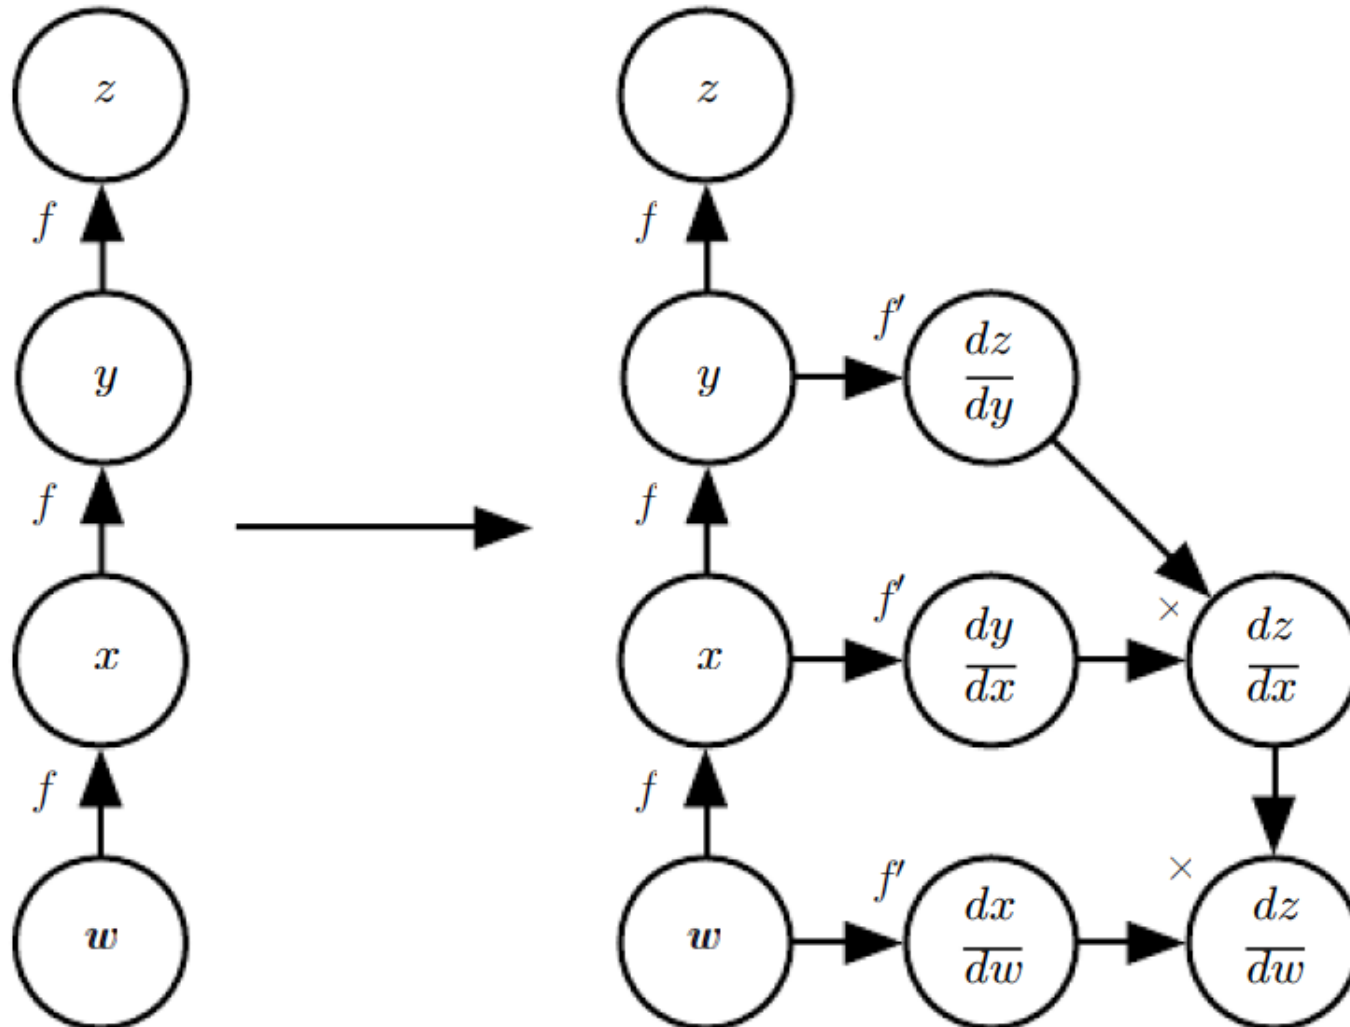


General Back-prop

- Variable: Tensor \mathbf{V}
 - scalars, vectors, and matrices.
- Subroutines for each variable \mathbf{V}
 - `get_operation(\mathbf{V})`: returns operation that computes \mathbf{V} , represented by the edges into \mathbf{V}
 - E.g.) $\mathbf{V}: \mathbf{C} = \mathbf{AB} \rightarrow$ `get_operation(\mathbf{V})` returns a pointer to an instance of the corresponding C++ class.
 - `get_consumers(\mathbf{V}, G)`: returns the list of variables that are children of \mathbf{V} in G
 - `get_inputs(\mathbf{V}, G)`: returns the list of variables that are parents of \mathbf{V} in G

Operation: `op.bprop`


- Each operation `op` is associated with `bprop` operation
 - E.g.) $C = AB$
 - G : the gradient with respect to C
 - `op.bprop(A)` $\rightarrow GB^T$
 - `op.bprop(B)` $\rightarrow A^T G$

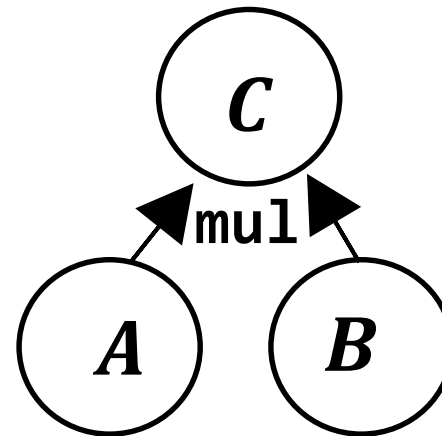

Operation: `op.bprop`

$$\begin{aligned} \text{op.bprop}(\text{inputs}, \mathbf{X}, \mathbf{G}) \\ = \sum_i (\nabla_{\mathbf{X}} \text{op.f}(\text{inputs})_i) G_i \end{aligned}$$

- Inputs: a list of inputs that are supplied to the operation
- `op.f`: the mathematical function that the operation implements
- **X**: the input whose gradient we wish to compute
- **G**: the gradient on the output of the operations

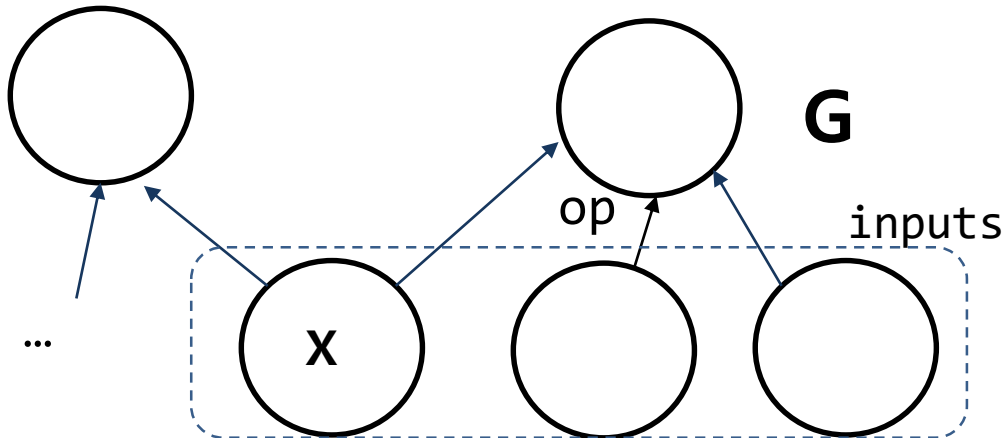

General Back-prop: Implementation issue

- Usually provide both the operations and their bprop methods → users of deep learning software libraries are able to back-propagate through graphs built using common operations like matrix multiplication, exponents, logarithms, and so on.
- When adding our own operation to an existing library, we must usually derive the `op.bprop` method for any new operations manually

General Back-prop: for symbol-to-symbol derivatives

Require: \mathbb{T} , the target set of variables whose gradients must be computed.

Require: \mathcal{G} , the computational graph

Require: z , the variable to be differentiated

Let \mathcal{G}' be \mathcal{G} pruned to contain only nodes that are ancestors of z and descendants of nodes in \mathbb{T} .

Initialize `grad_table`, a data structure associating tensors to their gradients

`grad_table[z] \leftarrow 1`

for \mathbf{V} in \mathbb{T} **do**

`build_grad(\mathbf{V} , \mathcal{G} , \mathcal{G}' , grad_table)`

end for

Return `grad_table` restricted to \mathbb{T}

General Back-prop

`build_grad(V, \mathcal{G} , \mathcal{G}' , grad_table)`

Require: **V**, the variable whose gradient should be added to \mathcal{G} and grad_table.

Require: \mathcal{G} , the graph to modify.

Require: \mathcal{G}' , the restriction of \mathcal{G} to nodes that participate in the gradient.

Require: grad_table, a data structure mapping nodes to their gradients

if **V** is in grad_table **then**

 Return grad_table[**V**]

end if

$i \leftarrow 1$

for **C** in get_consumers(**V**, \mathcal{G}') **do**

 op \leftarrow get_operation(**C**)

D \leftarrow build_grad(**C**, \mathcal{G} , \mathcal{G}' , grad_table)

$\mathbf{G}^{(i)} \leftarrow$ op.bprop(get_inputs(**C**, \mathcal{G}'), **V**, **D**)

$i \leftarrow i + 1$

end for

G $\leftarrow \sum_i \mathbf{G}^{(i)}$

 grad_table[**V**] = **G**

 Insert **G** and the operations creating it into \mathcal{G}

 Return **G**

Example: Back-prop for MLP

- MLP with single hidden layer
 - Design matrix: \mathbf{X}
 - Hidden layer: $\mathbf{H} = \max\{0, \mathbf{W}\mathbf{X}^{(1)}\}$
 - Unnormalized output scores: $\mathbf{H}\mathbf{W}^{(2)}$
- Cost function
 - Cross-entropy between targets \mathbf{y} and predicted values
 - Add regularization terms

$$J = J_{\text{MLE}} + \lambda \left(\sum_{i,j} \left(W_{i,j}^{(1)} \right)^2 + \sum_{i,j} \left(W_{i,j}^{(2)} \right)^2 \right)$$

Example: Back-prop for MLP

