


Recurrent/Recursive Networks

Seung-Hoon Na

Chonbuk National University

Recurrent neural networks

- A family of neural networks for processing sequential data
- Specialized for processing a sequence of values – $\mathbf{x}^{(1)}, \mathbf{x}^{(2)}, \dots, \mathbf{x}^{(\tau)}$
- Use **parameter sharing** across time steps
 - “I went to Nepal in 2009”
 - “In 2009, I went to Nepal”



Traditional nets need to learn all of the rules of the language **separately at each position** in the sentence

Convolutional Approach for Processing Sequence


- Apply convolution across a 1-D temporal sequence → **time-delay neural networks**
- The output of convolution is again a **sequence**
- Parameter sharing in convolutional approach
 - Each member of the output is a function of a small number of neighboring members of the input
- Parameter sharing in RNN
 - Recurrently sharing: Each member of the output is a function of the previous members of the output.
 - Results in parameter sharing through a **deep network**

RNN as a Dynamical System

- The classical form of a dynamical system takes:

$$\mathbf{s}^{(t)} = f(\mathbf{s}^{(t-1)}; \boldsymbol{\theta})$$

- $\mathbf{s}^{(t)}$: the state of the system
- Unfolding the equation \rightarrow Directed acyclic computational graph
 - $\mathbf{s}^{(2)} = f(\mathbf{s}^{(2)}; \boldsymbol{\theta}) = f(f(\mathbf{s}^{(1)}; \boldsymbol{\theta}); \boldsymbol{\theta})$

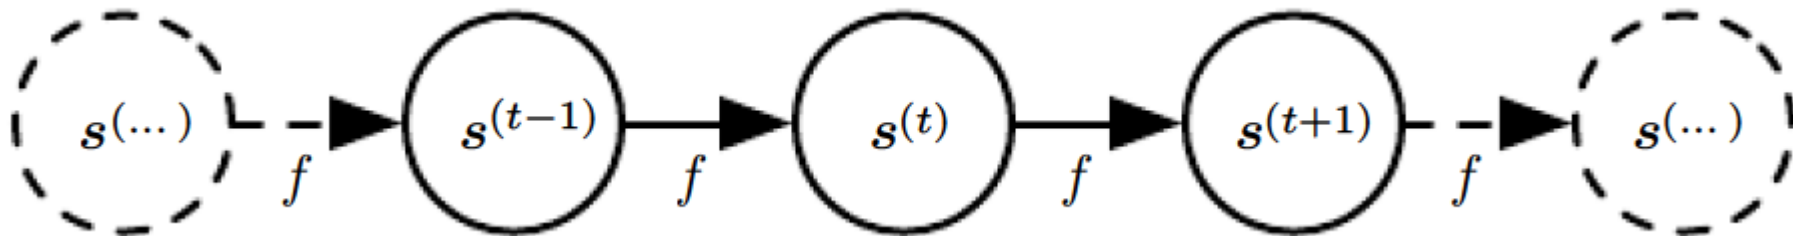

RNN as a Dynamical System


- RNN can be considered as a dynamic system to take an external signal $\mathbf{x}^{(t)}$ at time t

$$\mathbf{h}^{(t)} = f(\mathbf{h}^{(t-1)}, \mathbf{x}^{(t)}, \theta)$$

- Using the recurrence, RNNs maps an arbitrary length sequence $(\mathbf{x}^{(t)}, \mathbf{x}^{(t-1)}, \mathbf{x}^{(t-2)}, \dots, \mathbf{x}^{(2)}, \mathbf{x}^{(1)})$ to a fixed length vector \mathbf{h}

Computational Graph of RNN

- **Unfolding:** The process that maps a circuit-style graph to a computational graph with repeated units
- Unfolded graph has a size that depends on the sequence length

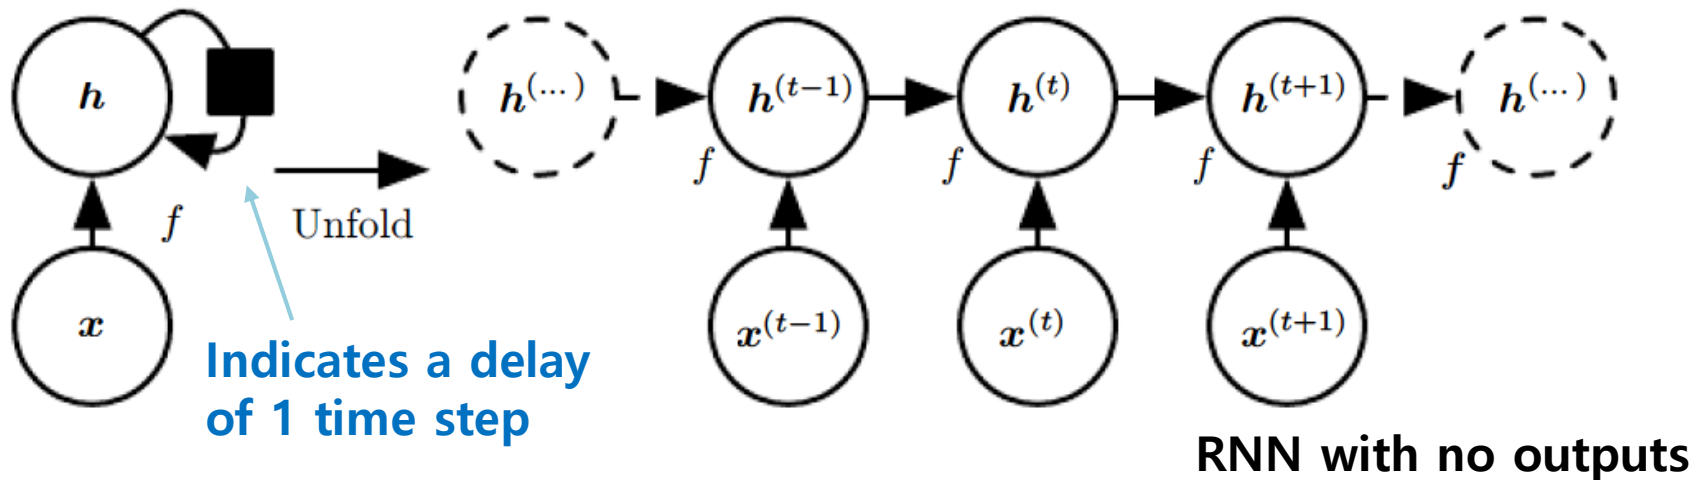

Unfolding


- The unfolded graph has a size that depends on the sequence length.
- Represent the unfolded recurrence after t steps
 - $\mathbf{h}^{(t)} = g^{(t)}(\mathbf{x}^{(t)}, \dots, \mathbf{x}^{(1)}, \boldsymbol{\theta}^{(t)}) = f(\mathbf{h}^{(t-1)}, \mathbf{x}^{(t)}, \boldsymbol{\theta})$
- The unfolding process introduces two advantages
 - Regardless of the sequence length, the learned model always has the same input size
 - It is possible to use **the same transition function f** with the same parameters at every time step



It enables us to learn a **single model f** that operates on all time steps and all sequence lengths, rather than needing to learn a separate model $g(t)$ for all possible time steps

RNNs with Classical Setting

- RNNs that produce an output at each time step and have recurrent connections between hidden units

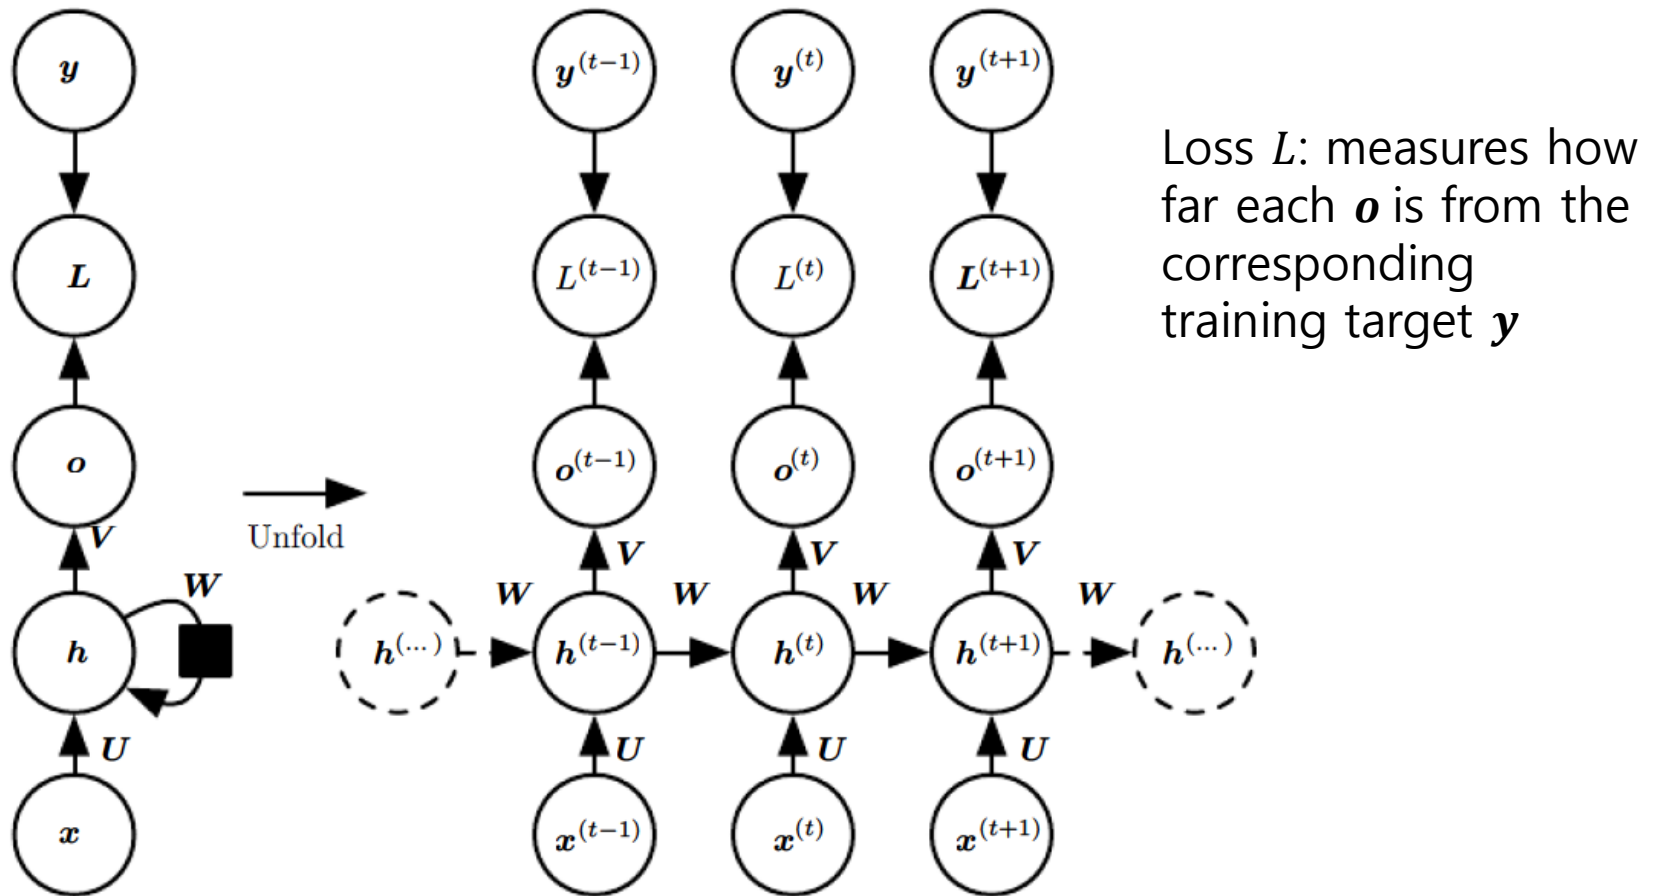

Classical RNNs: Computational Power

- Classical RNNs are **universal** in the sense that any function computable by a Turing machine can be computed by RNN [Siegelmann '91,'95], where the update formula is given as
 - $\mathbf{a}^{(t)} = \mathbf{b} + \mathbf{W}\mathbf{h}^{(t-1)} + \mathbf{U}\mathbf{x}^{(t)},$
 - $\mathbf{h}^{(t)} = \tanh(\mathbf{a}^{(t)})$
 - $\mathbf{o}^{(t)} = \mathbf{c} + \mathbf{V}\mathbf{h}^{(t)}$
 - $\hat{\mathbf{y}}^{(t)} = \textit{softmax}(\mathbf{o}^{(t)})$

Classical RNNs: Computational Power

Theorem 1. *Let $L \subseteq \{0, 1\}^+$ be some language. Then L is decidable by some $RNN[\mathbb{Q}]$ if and only if L is decidable by some TM (i.e., iff L is recursive).*

- Theorems:
- Classical **rational-weighted** RNNs are computationally equivalent to Turing machines
- Classical **real-weighted** RNNs are strictly more powerful than RNNs and Turing machines → Super-Turing Machine


Classical RNNs: Loss function

- The total loss for a given sequence of \mathbf{x} values paired with a sequence of \mathbf{y} :
 - the sum of the losses over all the time steps.
- $L^{(t)}$: the negative log-likelihood of $y^{(t)}$ given $\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(t)}$

$$L(\{\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(\tau)}\}, \{\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(\tau)}\})$$


$$= \sum_t L^{(t)} = \sum_t \log p_{model}(y^{(t)} | \{\mathbf{x}^{(1)}, \dots, \mathbf{x}^t\})$$

Backpropagation through Time (BPTT)

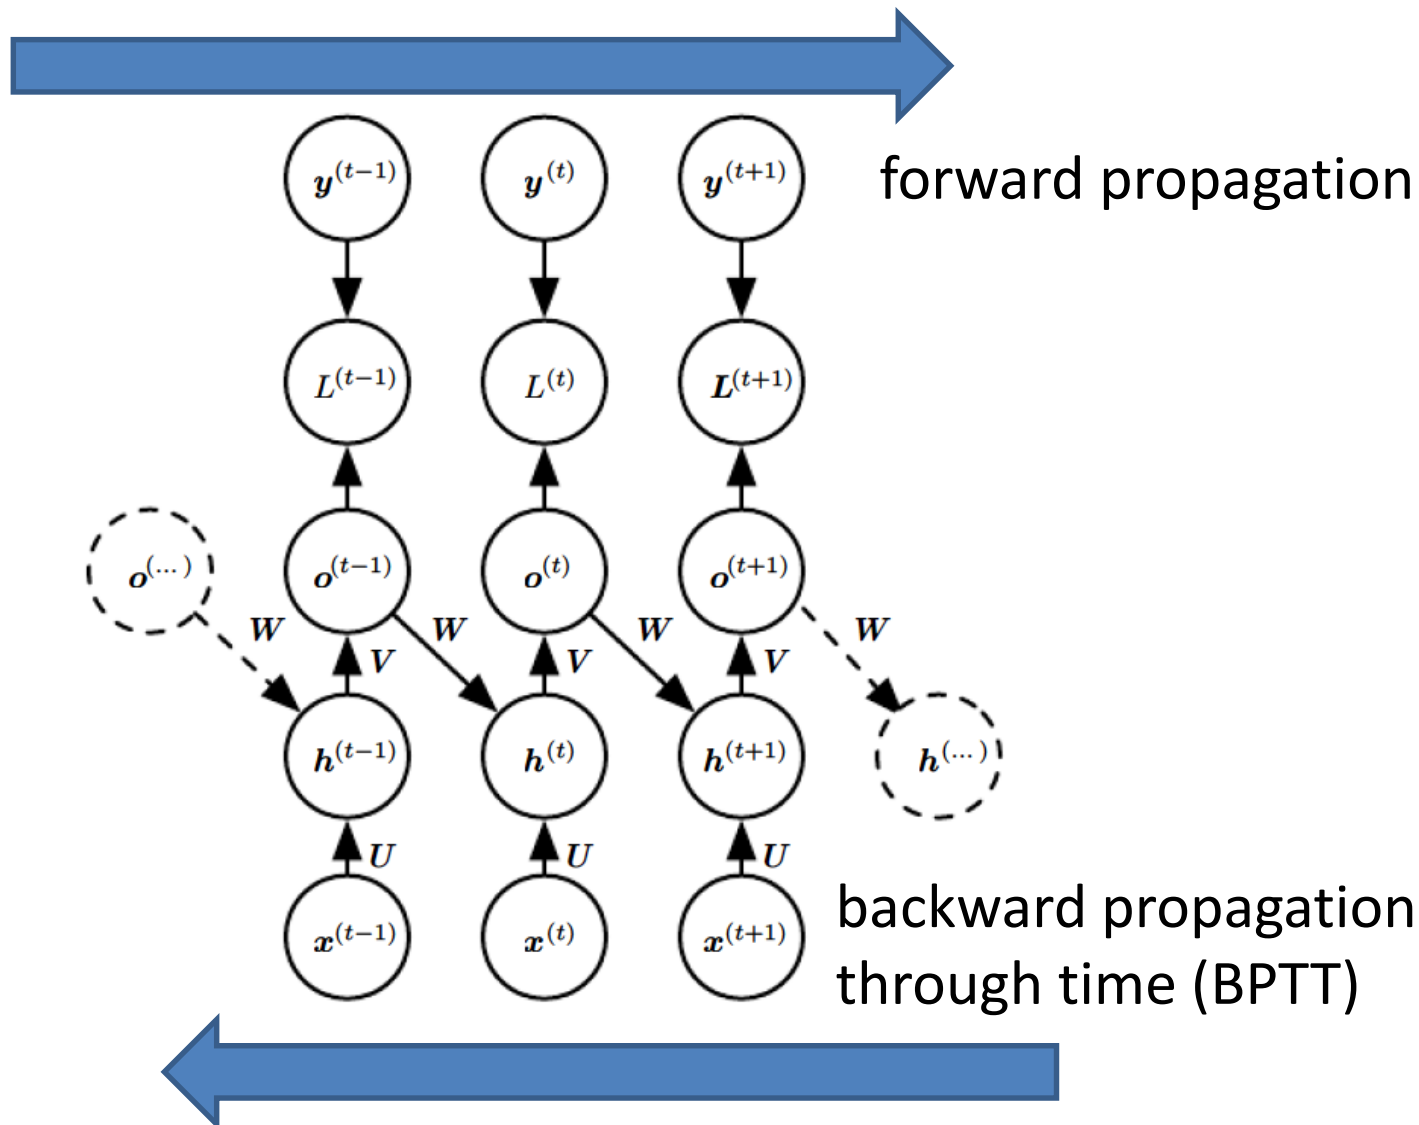

Backpropagation through Time (BPTT)

- Objective function:
$$L = \sum_t L^{(t)}$$

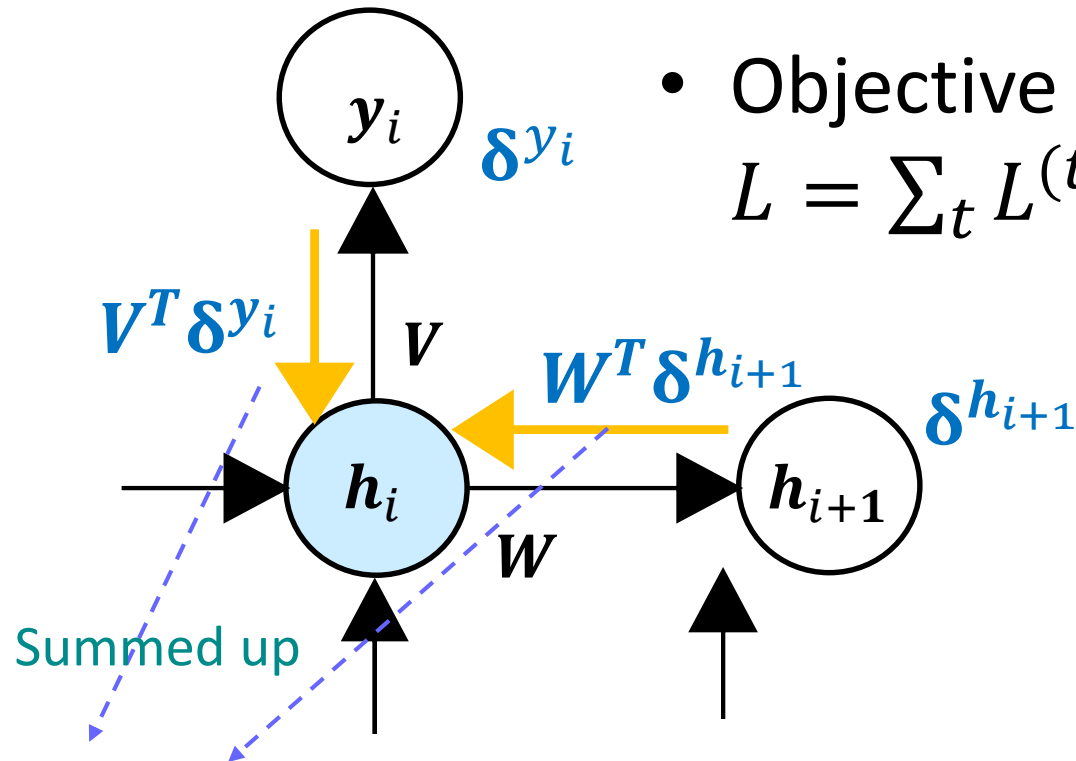


$$\delta^{h_i} = g(z_i) (V^T \delta y_i + W^T \delta h_{i+1})$$

Matrix form

$$\delta^{h_i} = g(z_i) * \begin{bmatrix} V \\ W \end{bmatrix}^T \begin{bmatrix} \delta y_i \\ \delta h_{i+1} \end{bmatrix}$$


RNN with Output Recurrence

- Lack hidden-to-hidden connections
 - Less powerful than classical RNNs
 - This type of RNN cannot simulate a universal TM

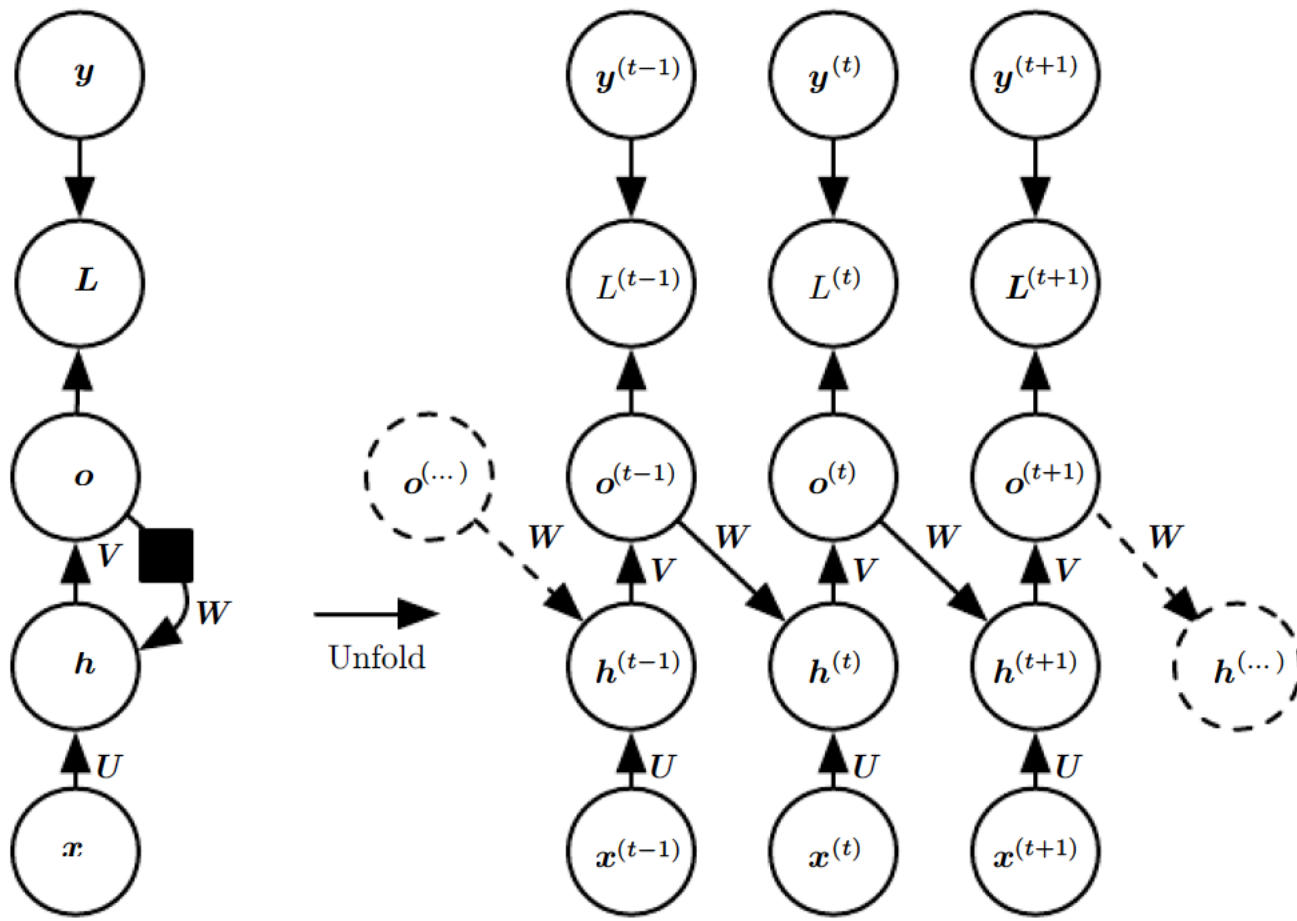


Teacher Forcing

- At training time, the teacher forcing feeds the correct output $y^{(t)}$ from the training set.
- At test time, because the true output is not available, **the correct output is approximated by the model's output**

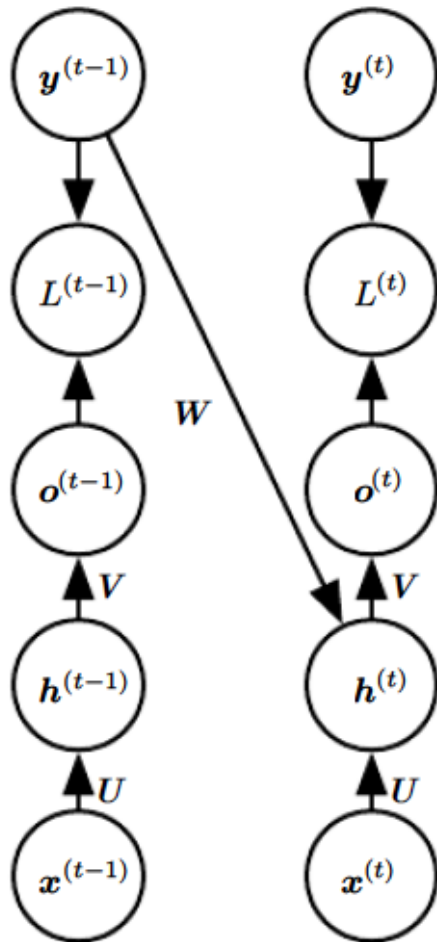


Train time

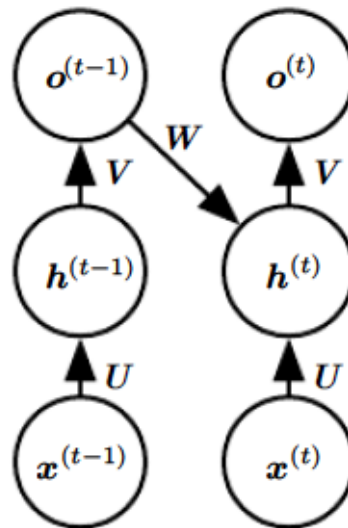

Test time


RNN with Single Output

- At the end of the sequence, network obtains a representation for entire input sequence and produces a single output

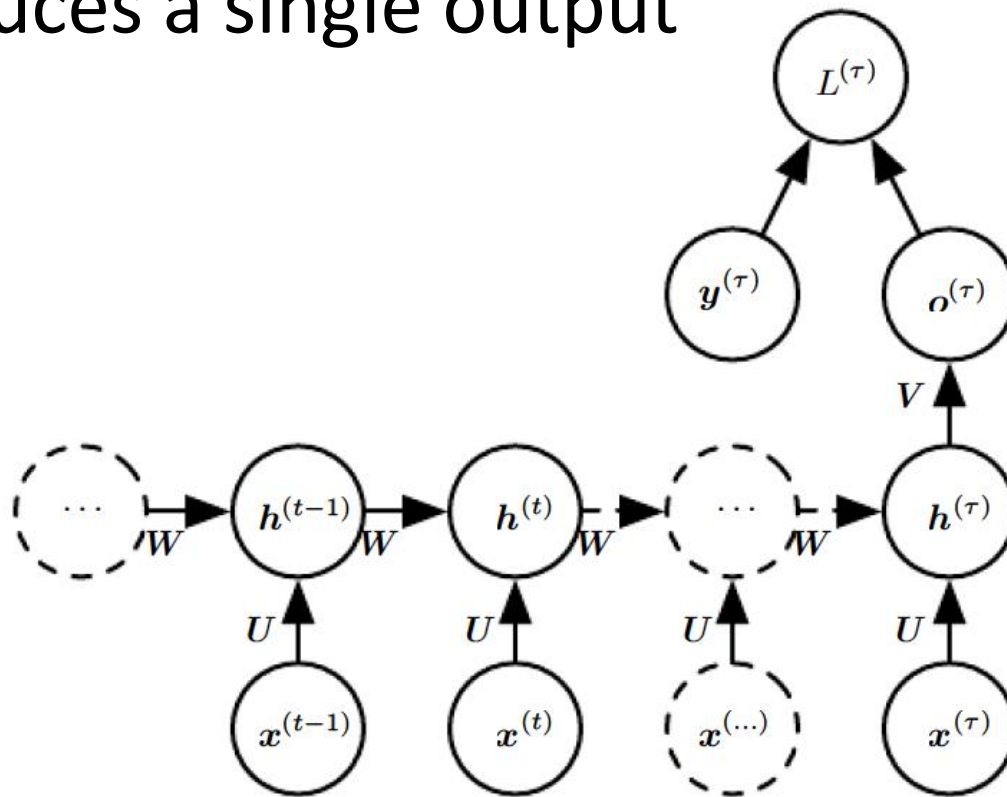

RNN with Output Dependency

- The output layer of RNN takes a directed graphical model that contains edges from some $y^{(i)}$ in the past to the current output
 - This model is able to perform a CRF-style of tagging

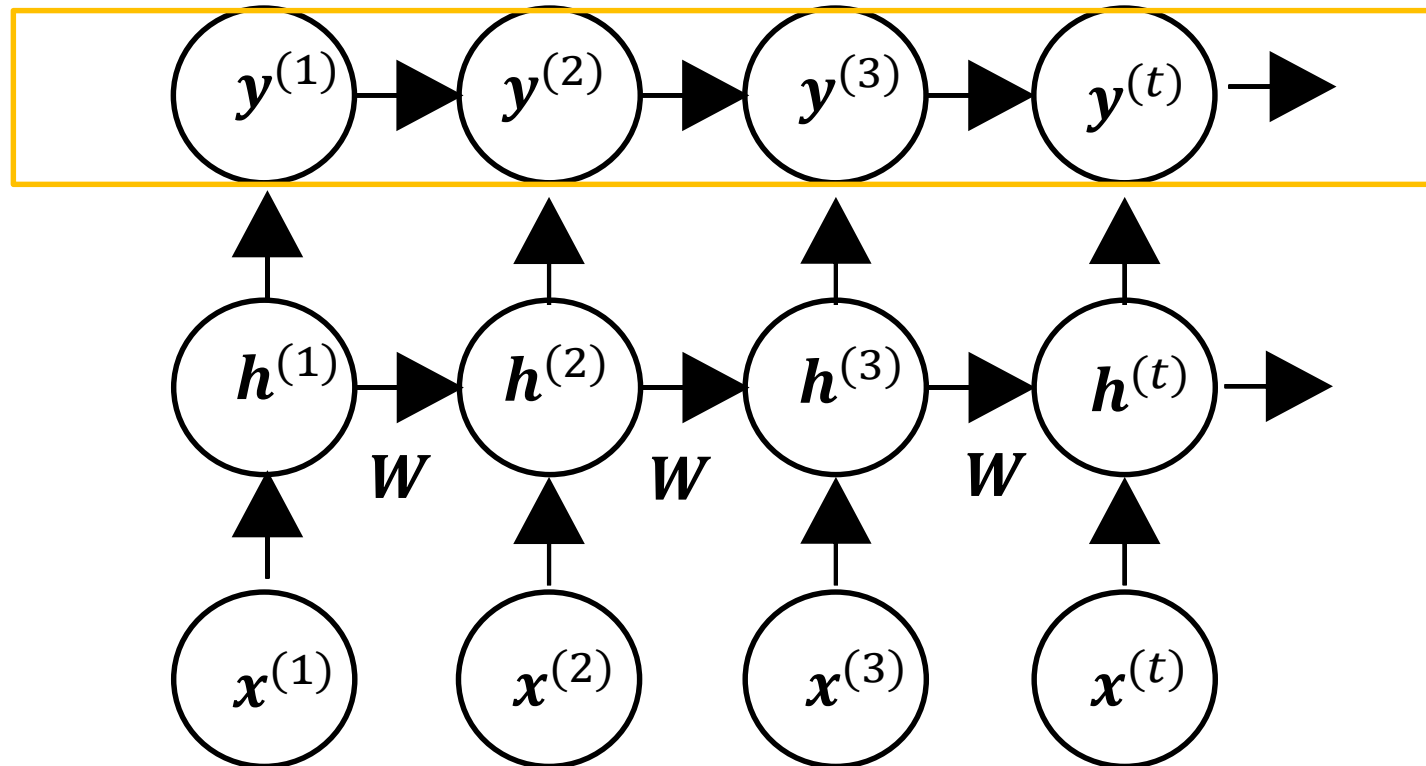


RNN as Directed Graphical Models

$$P(\mathbb{Y}) = P(\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(\tau)}) = \prod_{t=1}^{\tau} P(\mathbf{y}^{(t)} \mid \mathbf{y}^{(t-1)}, \mathbf{y}^{(t-2)}, \dots, \mathbf{y}^{(1)})$$

↓

$$\log P(\mathbf{y}^{(t)} \mid \mathbf{x}^{(1)} \dots, \mathbf{x}^{(t)}, \mathbf{y}^{(1)}, \dots, \mathbf{y}^{(t-1)})$$

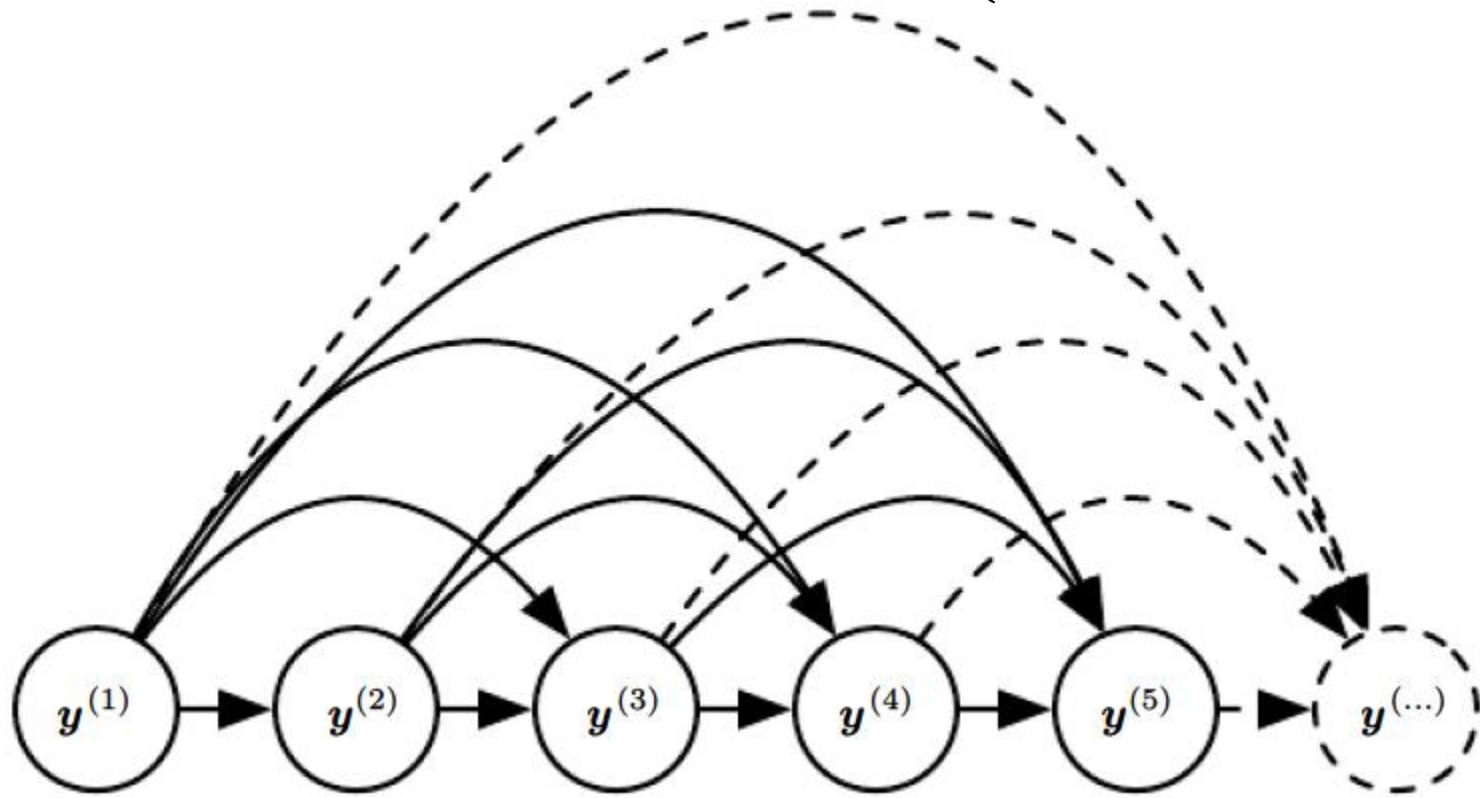


Fully connected graphical model for a sequence $\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(t)}, \dots$: every past observation $\mathbf{y}^{(i)}$ may influence the conditional distribution of some $\mathbf{y}^{(t)}$ (for $t > i$)

RNN as Directed Graphical Models

$$P(\mathbb{Y}) = P(\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(\tau)}) = \prod_{t=1}^{\tau} P(\mathbf{y}^{(t)} \mid \mathbf{y}^{(t-1)}, \mathbf{y}^{(t-2)}, \dots, \mathbf{y}^{(1)})$$


- Introducing the state variable in the graphical model of the RNN

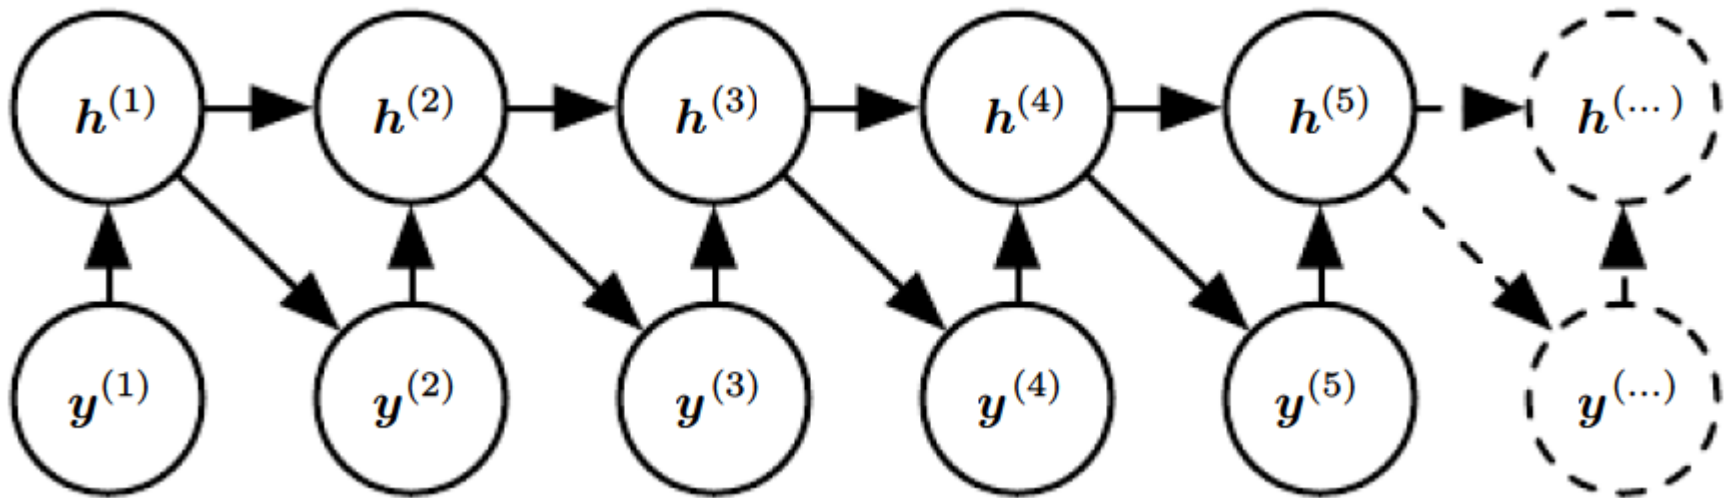

Modeling Sequences Conditioned on Context with RNNs

- Generating sequences given a fixed vector x
 - Context: a fixed vector x
 - **Take only a single vector x** as input and generates the y sequence
- Some common ways
 - 1. as an extra input at each time step, or
 - 2. as the initial state $\mathbf{h}^{(0)}$, or
 - 3. both.


Modeling Sequences Conditioned on Context with RNNs

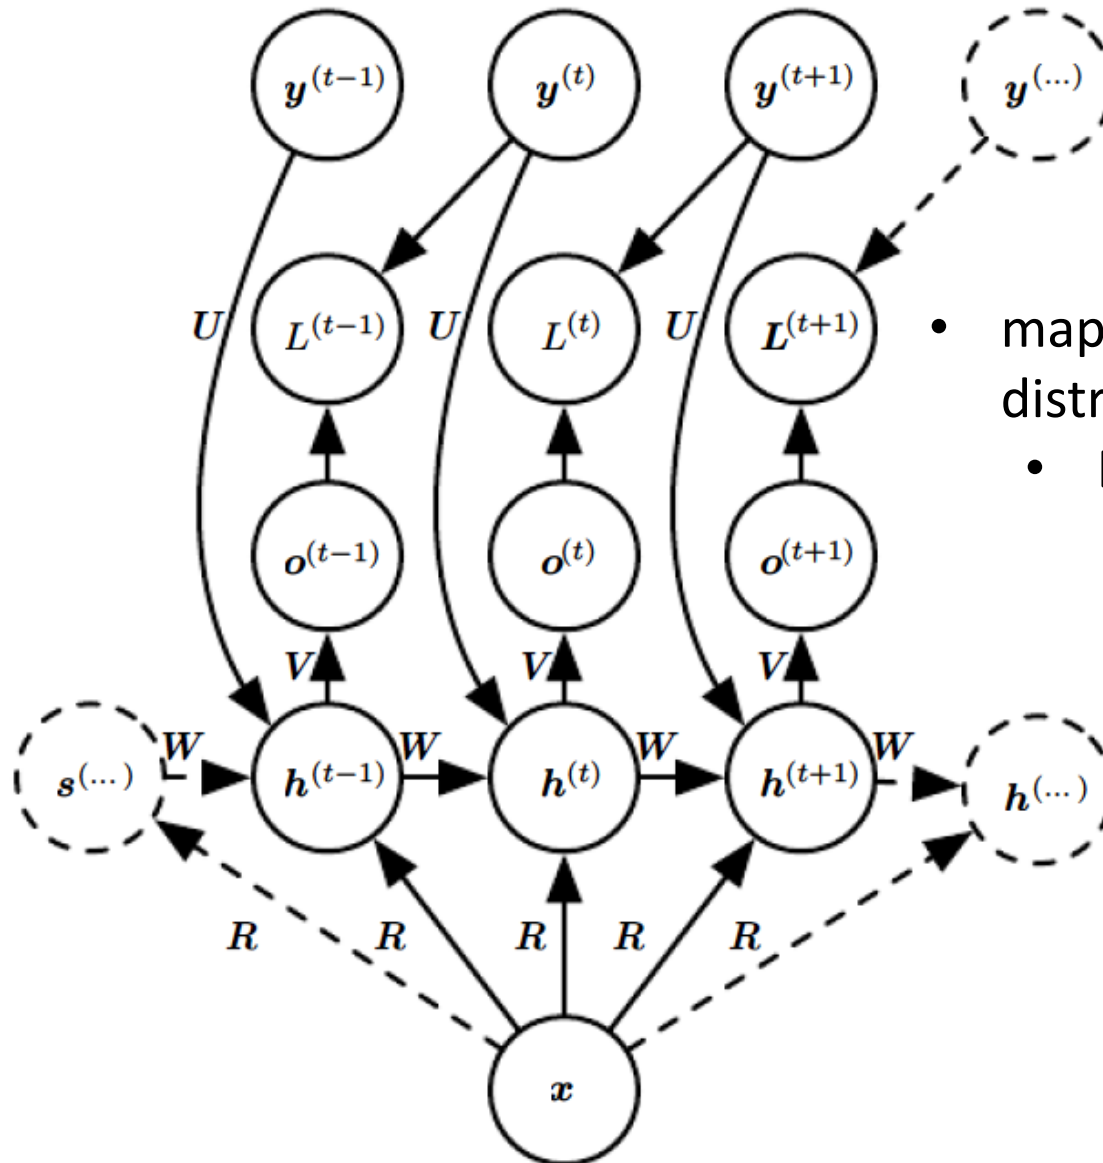


- maps a fixed-length vector x into a distribution over sequences Y
 - E.g.) image labelling

Modeling Sequences Conditioned on Context with RNNs

- Input: sequence of vectors $\mathbf{x}^{(t)}$
- Output: sequence with **the same length** as input

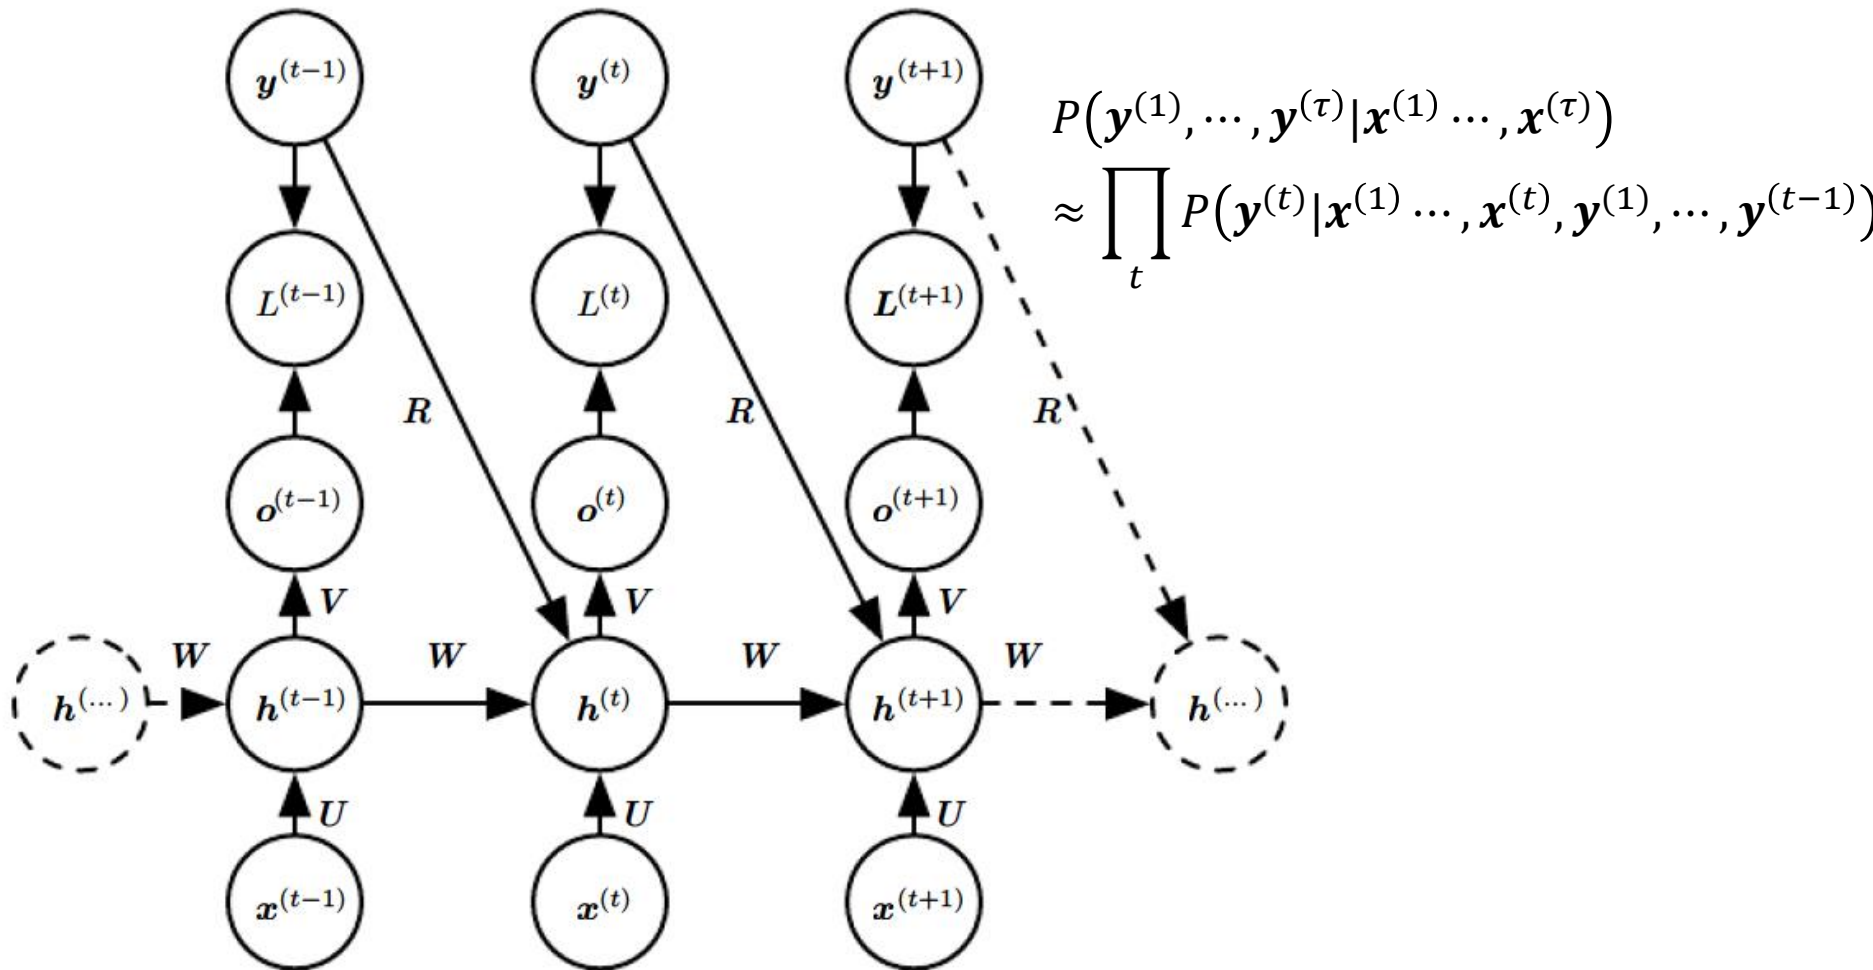


Bidirectional RNN

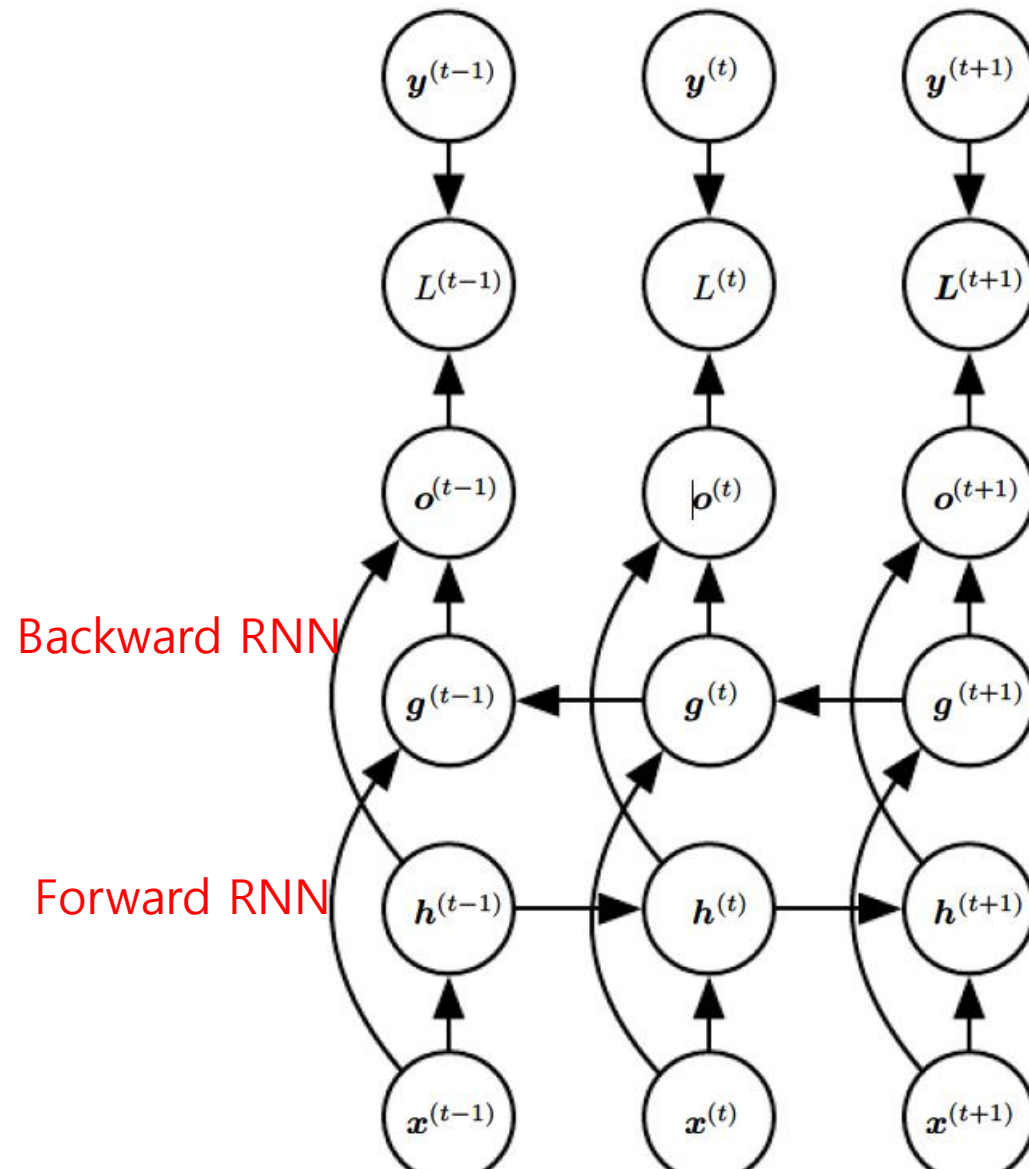

- Combine two RNNs
 - **Forward RNN**: an RNN that moves forward beginning from the start of the sequence
 - **Backward RNN**: an RNN that moves backward beginning from the end of the sequence
 - It can make a prediction of $y(t)$ depend on the **whole input sequence**.

Encoder-Decoder Sequence-to-Sequence

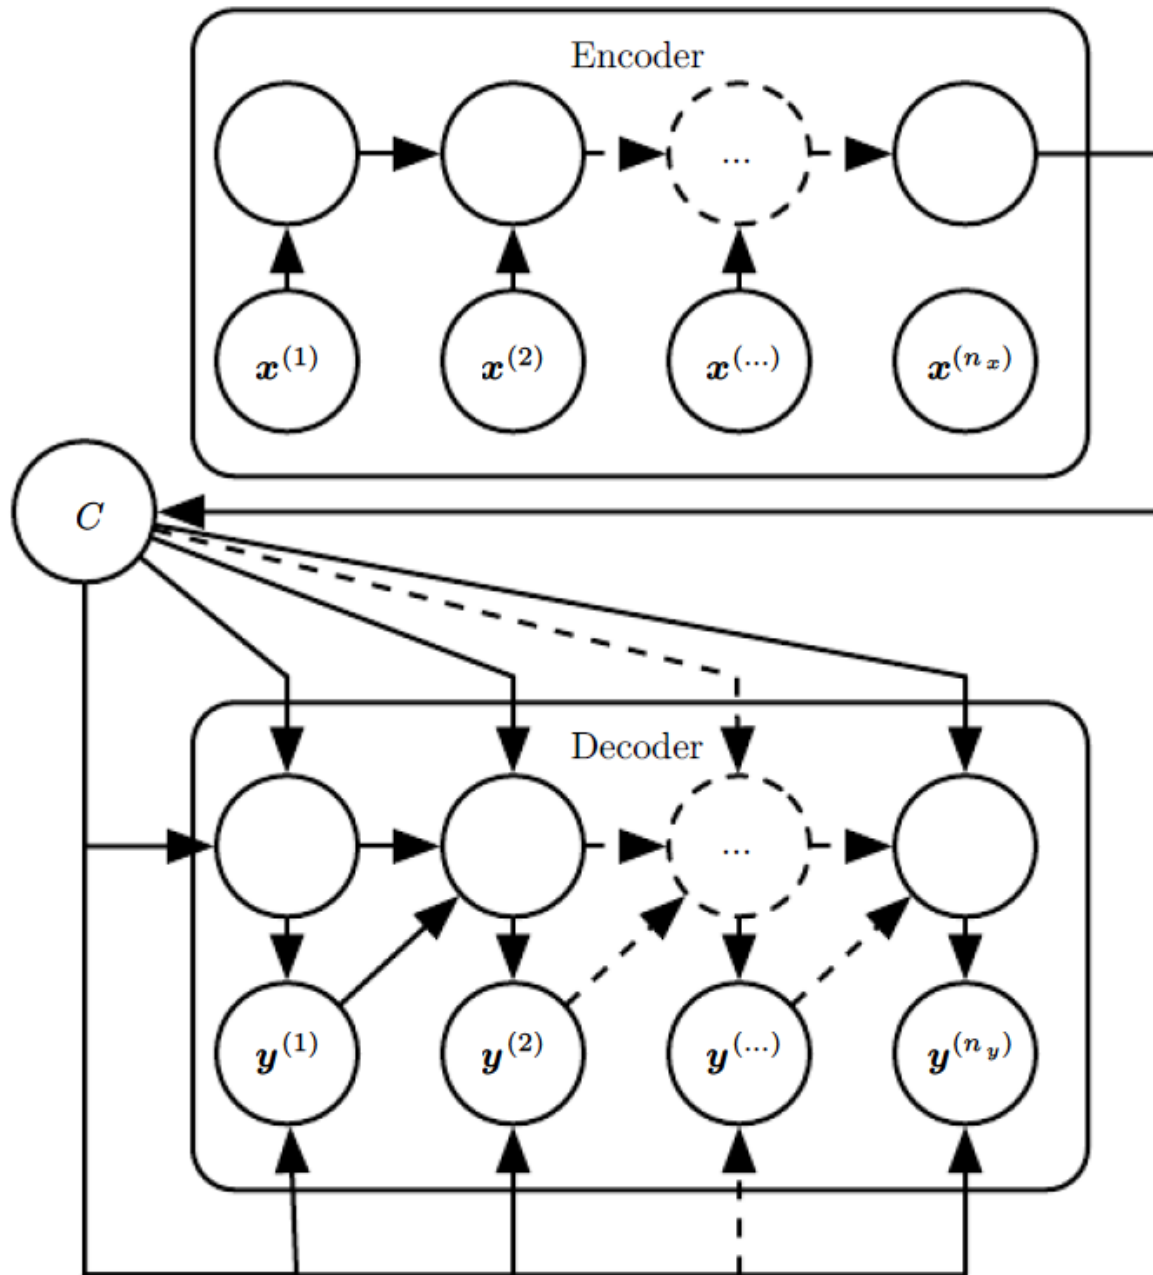

- Input: sequence
- Output: sequence (but with a different length)

➔ Machine translation

generate an output sequence $(\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(n_y)})$ given an input sequence $(\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(n_x)})$


RNN Search: Sequence to Sequence with Attention Mechanism

- **RNN Search**: Extended architecture of RNN Encoder-Decoder
 - Encodes the input sentence into a seq of vectors using a **bidirectional RNN**
 - Context vector **c**
 - Previously, the last hidden state (Cho et al '14)
 - **Now, mixture of hidden states of input sentence at generating each target word**
 - During decoding, chooses a subset of these vectors adaptively

RNN Search: Components


- $p(y_i | y_1, \dots, y_{i-1}) = g(y_{i-1}, s_i, c_i)$
- $s_i = f(s_{i-1}, y_{i-1}, c_i)$:
 - An RNN hidden state

- $c_i = \sum_j \alpha_{ij} h_j$
- $\alpha_{ij} = \frac{\exp(e_{ij})}{\sum_k \exp(e_{ik})}$
- $e_{ij} = a(s_{i-1}, h_j)$
 - Alignment model

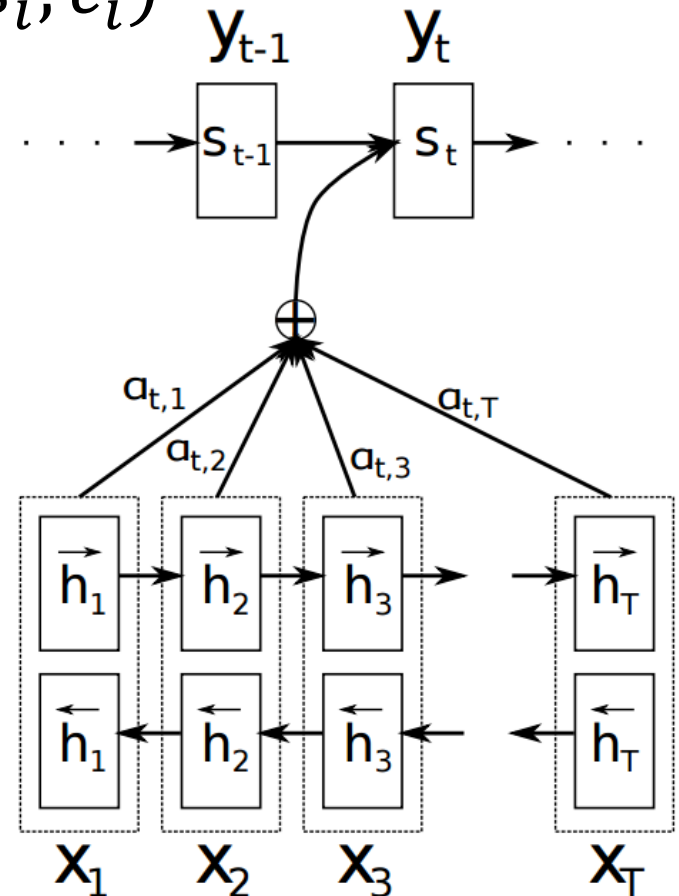

RNN Search: Decoder


- Steps
 - 1) compute alignment
 - 2) compute context
 - 3) generate new output
 - 4) compute new decoder state

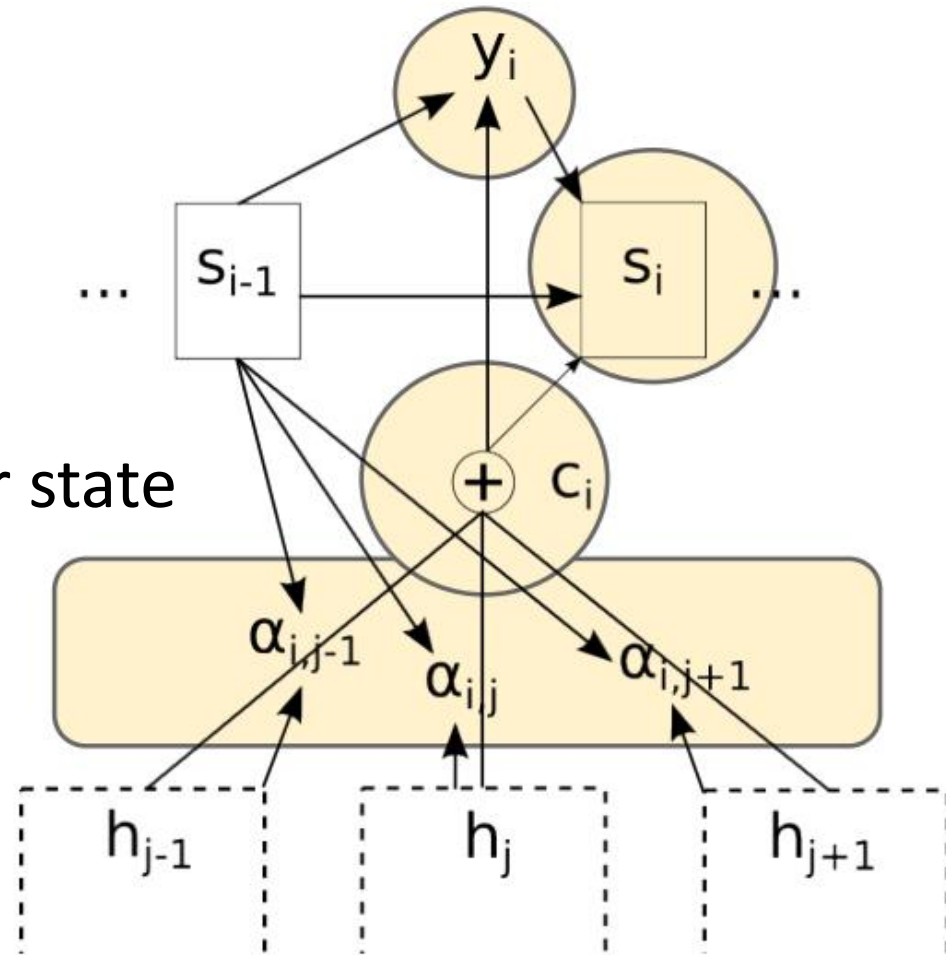

RNN Search: Alignment model



- $e_{ij} = v^T \tanh(Ws_{i-1} + Vh_j)$
 - Directly computes a soft alignment
- $\alpha_{ij} = \frac{\exp(e_{ij})}{\sum_k \exp(e_{ik})}$
 - Expected annotation

Alignment model is **jointly trained** with all other components

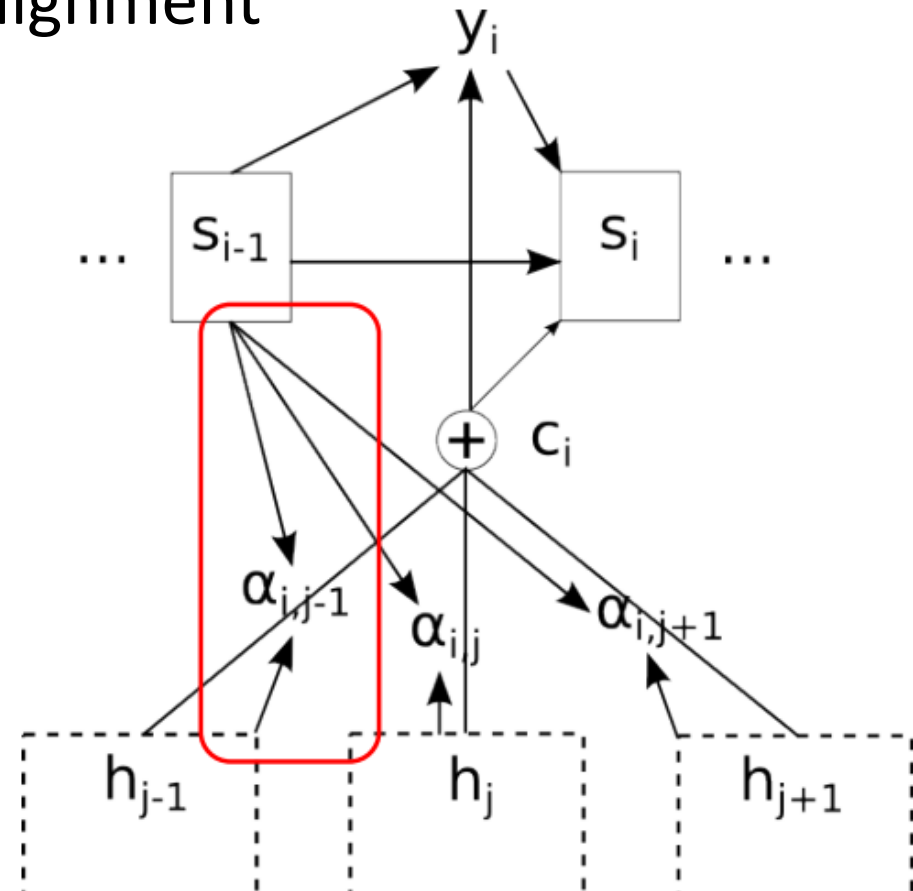


Grammar as Translation [Vinyals et al '15]


- Simply using seq2seq for parsing by linearizing parse tree
 - Extended seq2seq model is used
 - Two LSTMs + Attention mechanism [Bahdanau et al '15]
- Depth-first traversal is used for linearizing parse trees
- The resulting linearized parse trees are taken as output

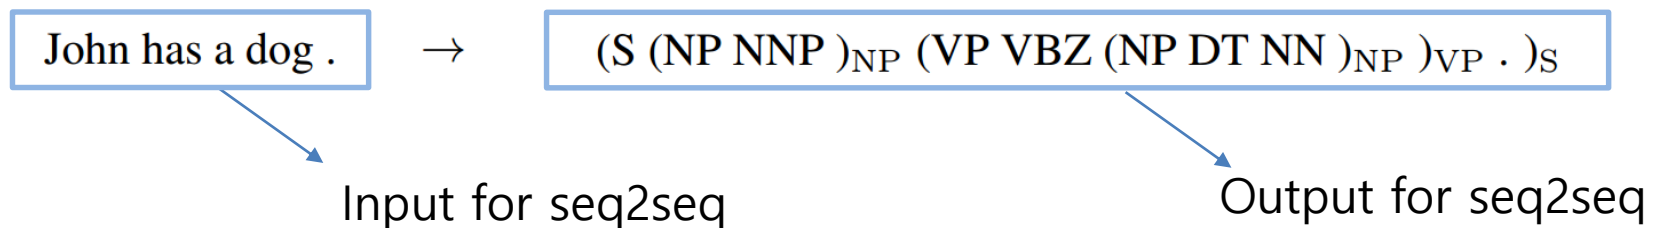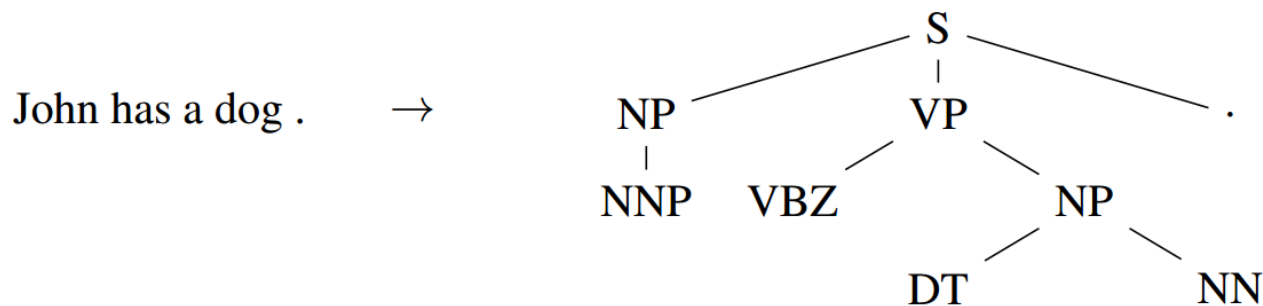


Deep Recurrent Networks

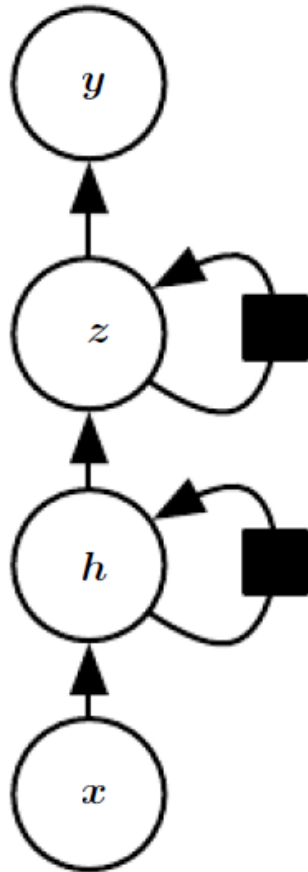

Hierarchical

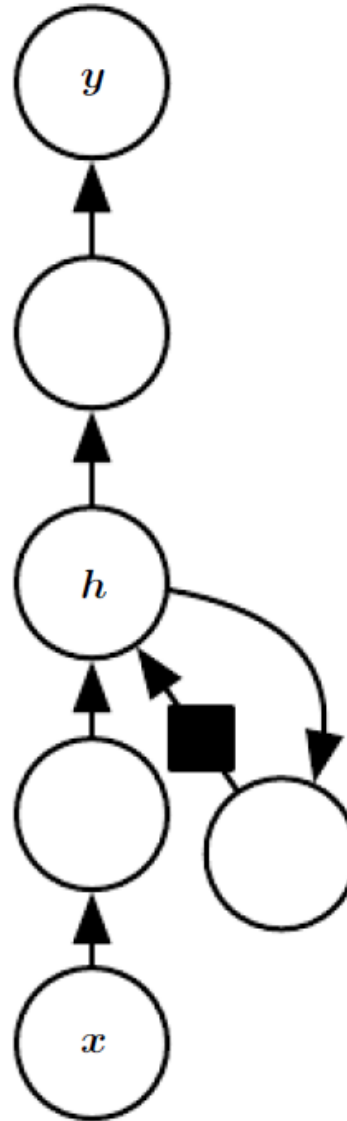

Deep computation

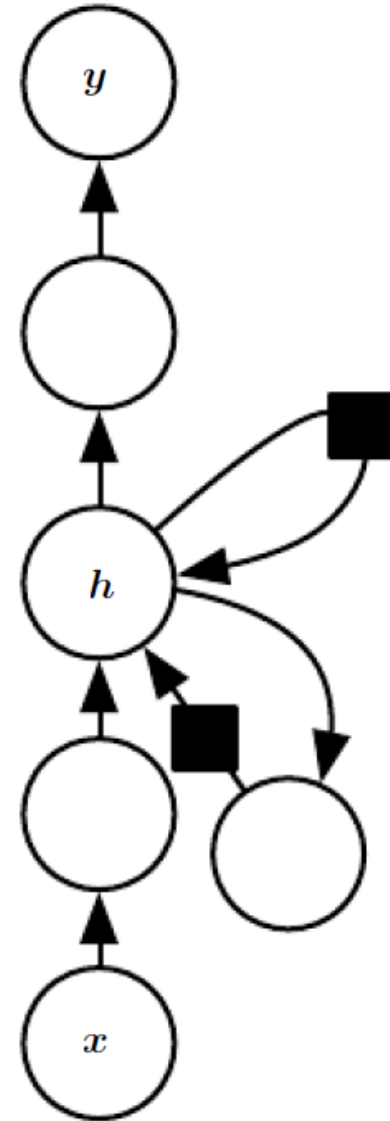


Skip connection

Recursive Neural Network

- Another generalization of recurrent networks, with a different kind of computational graph, which is structured as a deep tree, rather than the chain-like structure of RNNs.
- One clear advantage of recursive nets over recurrent nets:
 - the depth (measured as the number of compositions of nonlinear operations) can be drastically reduced from τ to $O(\log \tau)$

Recursive Neural Network

- Recursive neural network
 - Generalized architecture of Recurrent neural network


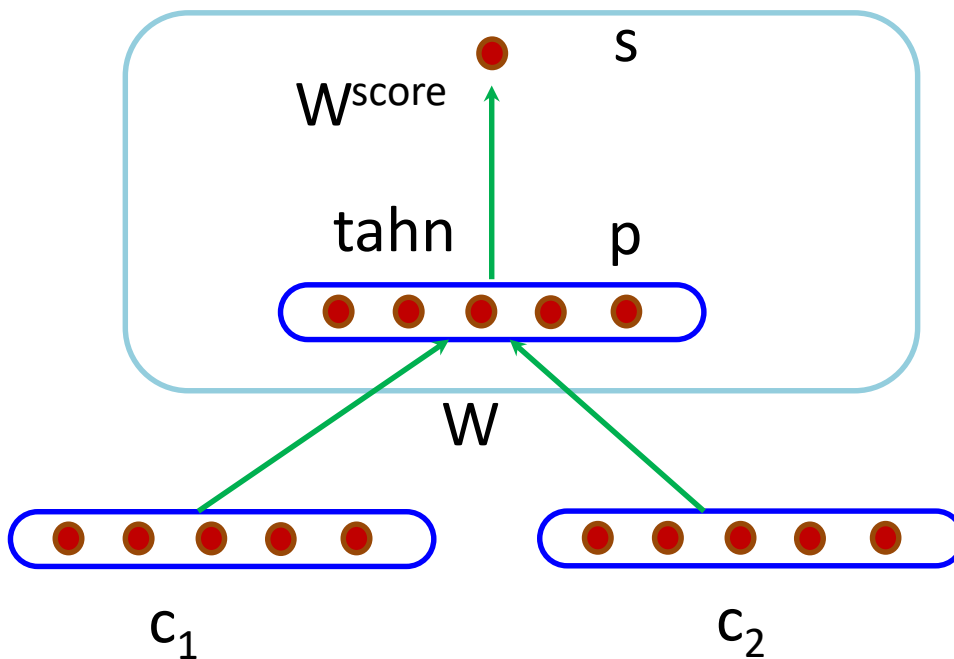


$$s = W^{score} p$$

$$p = \tanh\left(W \begin{bmatrix} c_1 \\ c_2 \end{bmatrix} + b\right)$$

compositional vector
representation of c_1 and c_2

Recursive Neural Network

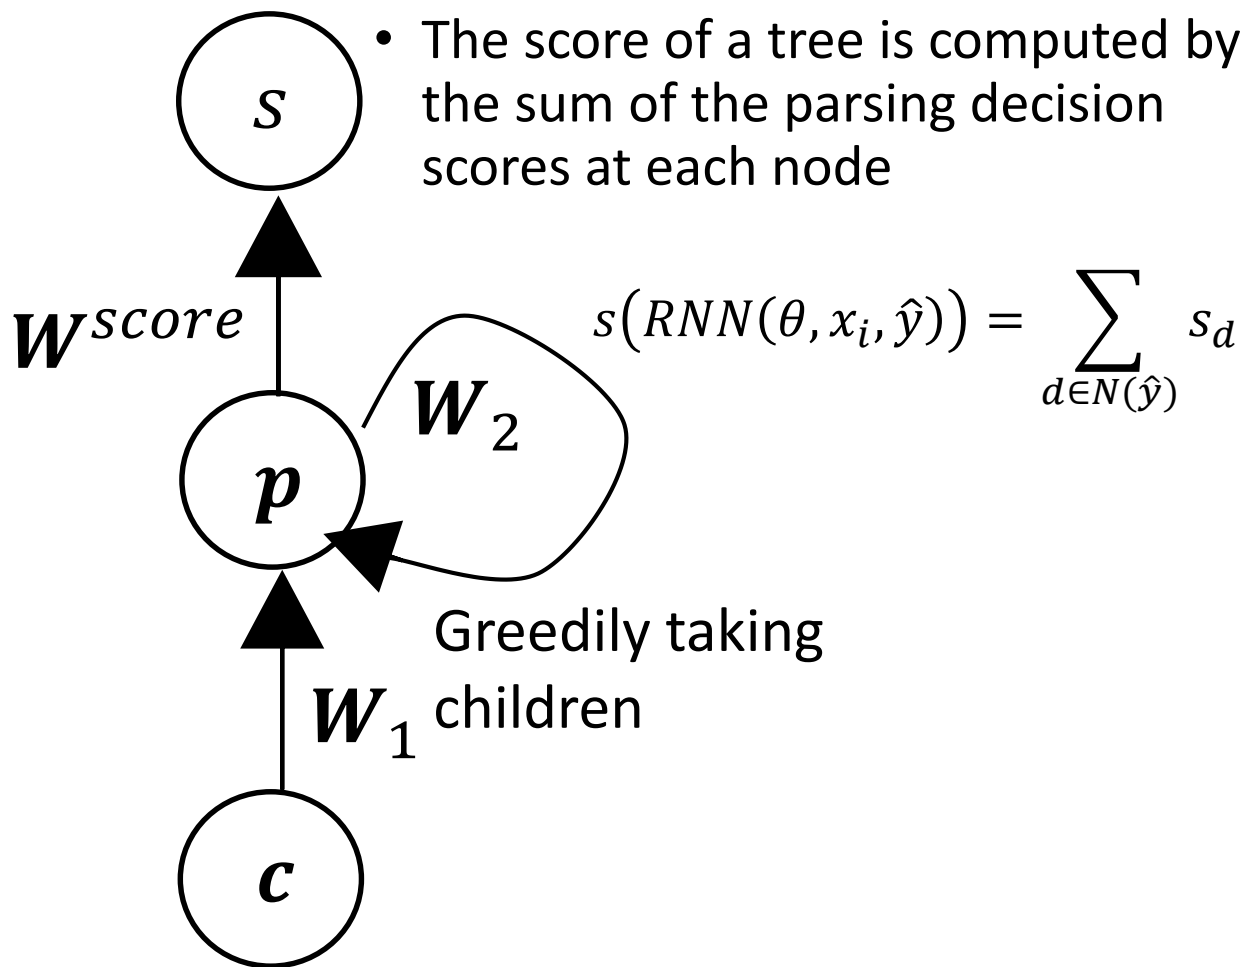
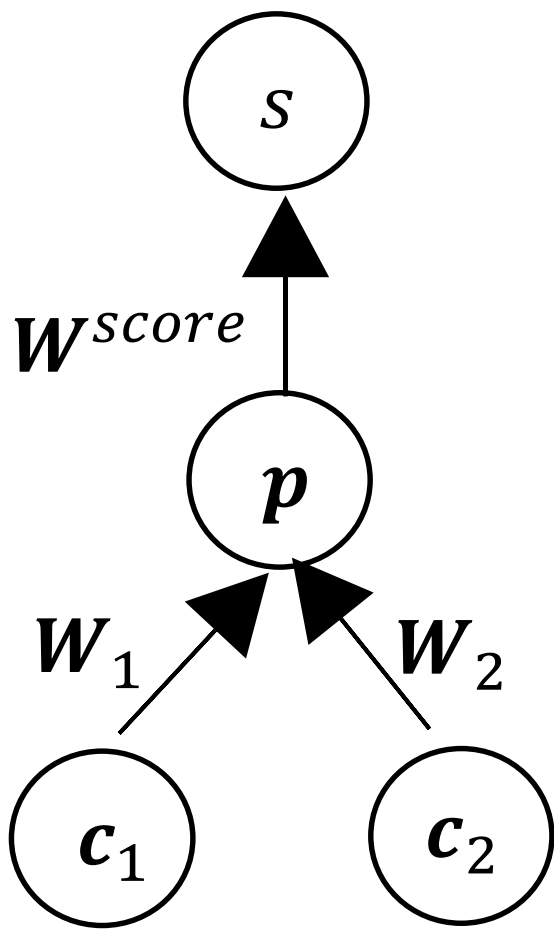


Recursive Neural Network for Phrase Embedding

Use principle of compositionality

The meaning (vector) of a sentence is determined by

- (1) the meanings of its words and
- (2) the rules that combine them.

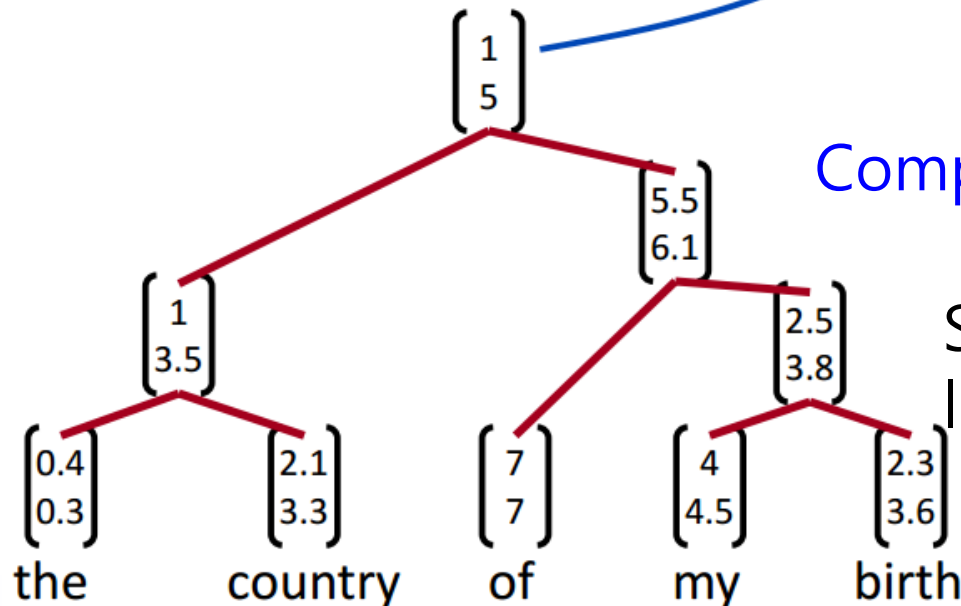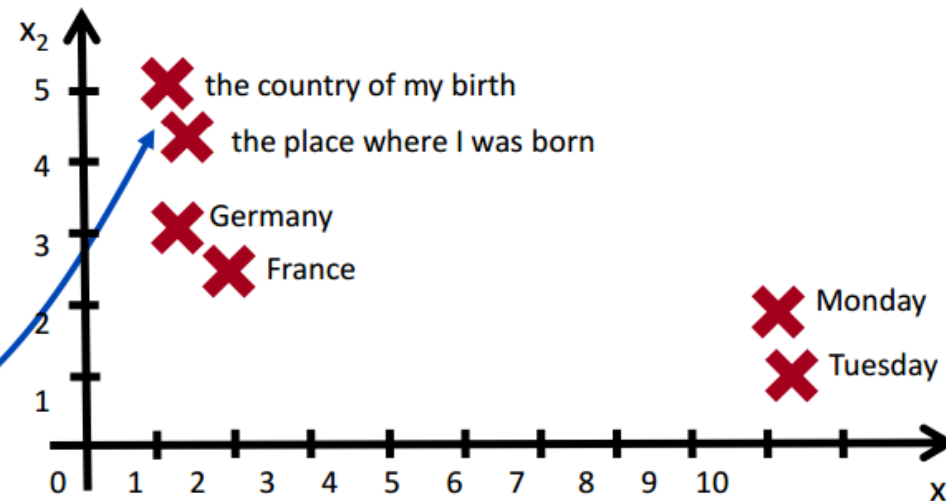


Compositional Vector Representation


Semantically similar phrases are located closely in vector space

Slide Credit: Socher

Parsing Using Recursive Neural Network

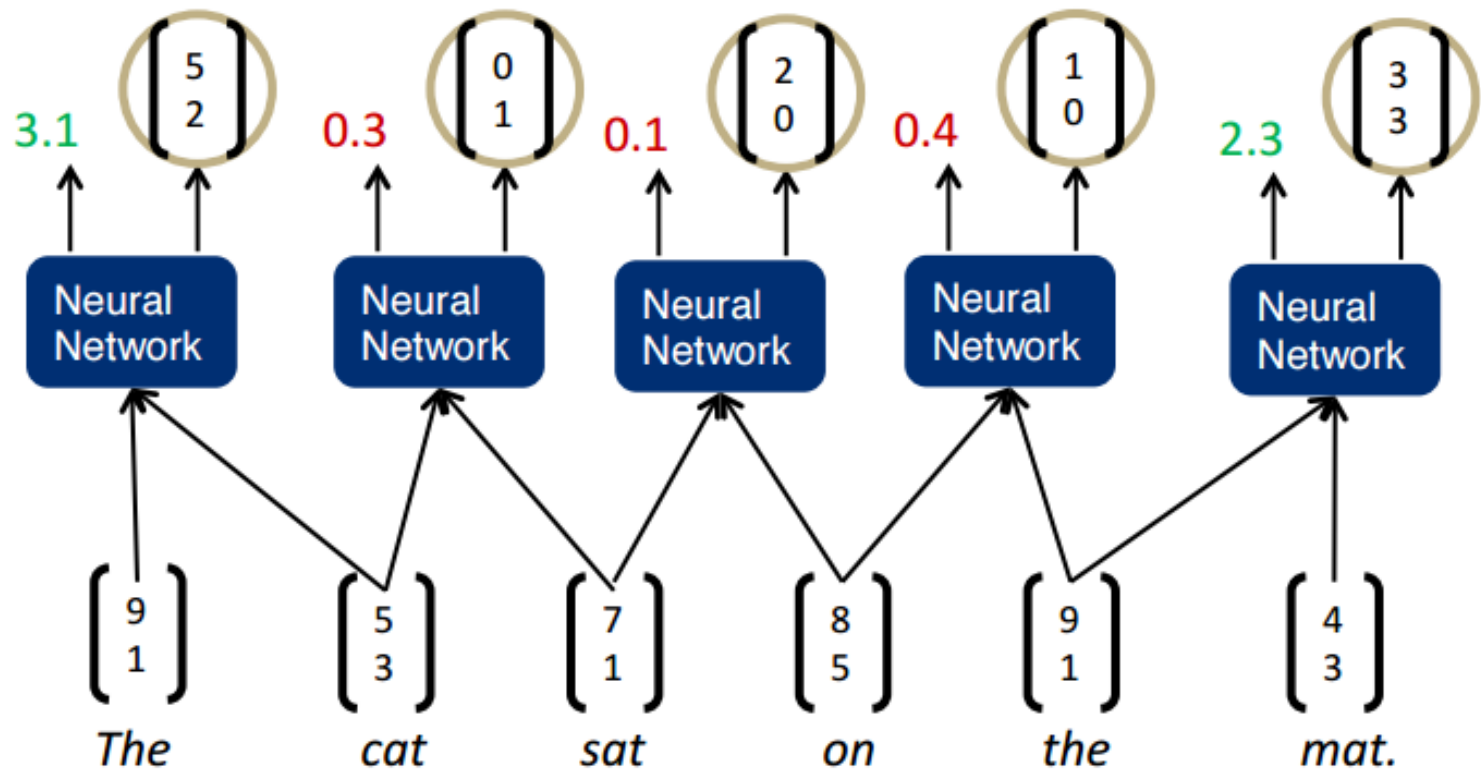


Parsing Using Recursive Neural Network

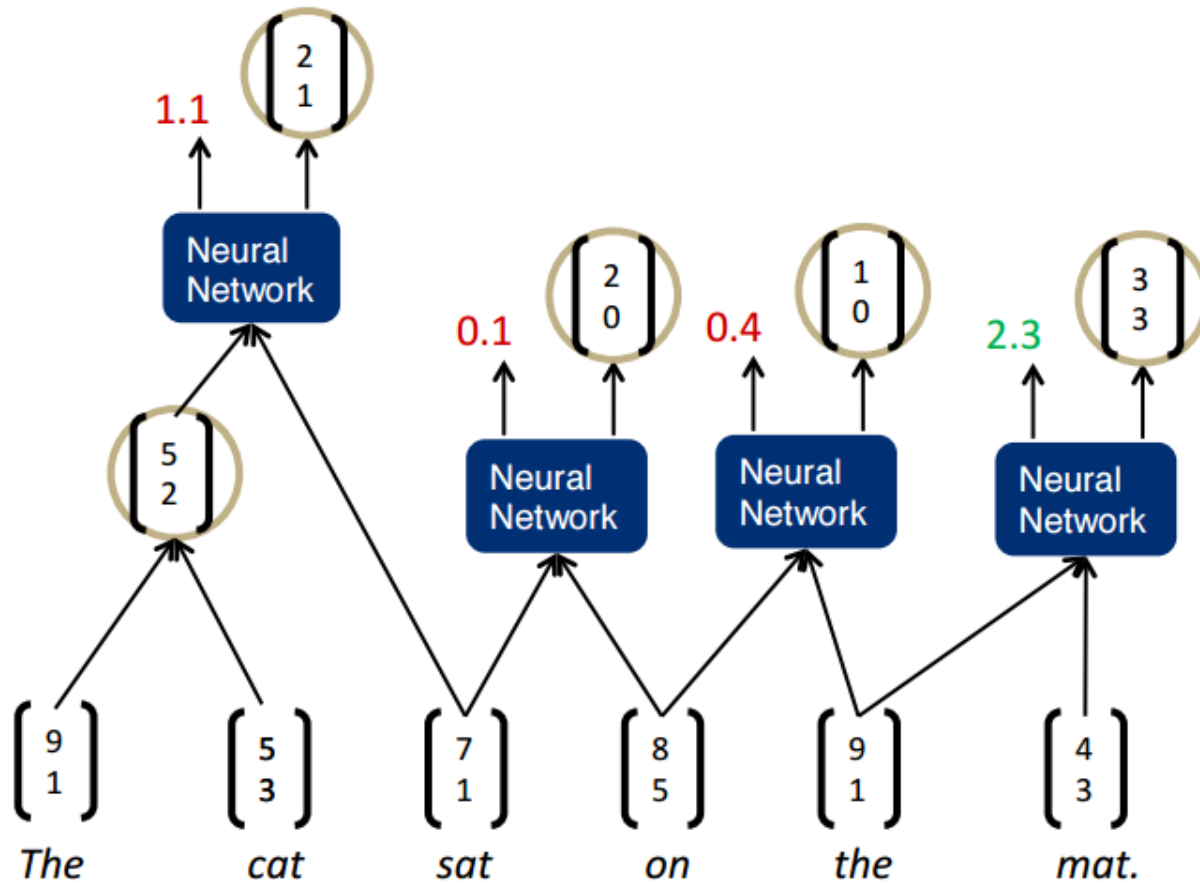


Compositional Vector Grammars

- Compositional Vector Grammars: CVG = PCFG + Syntactically Untied Recursive NN
- **Syntactically Untied Recursive** NN: Untie weights, such that they are dependent on **the syntactic categories**

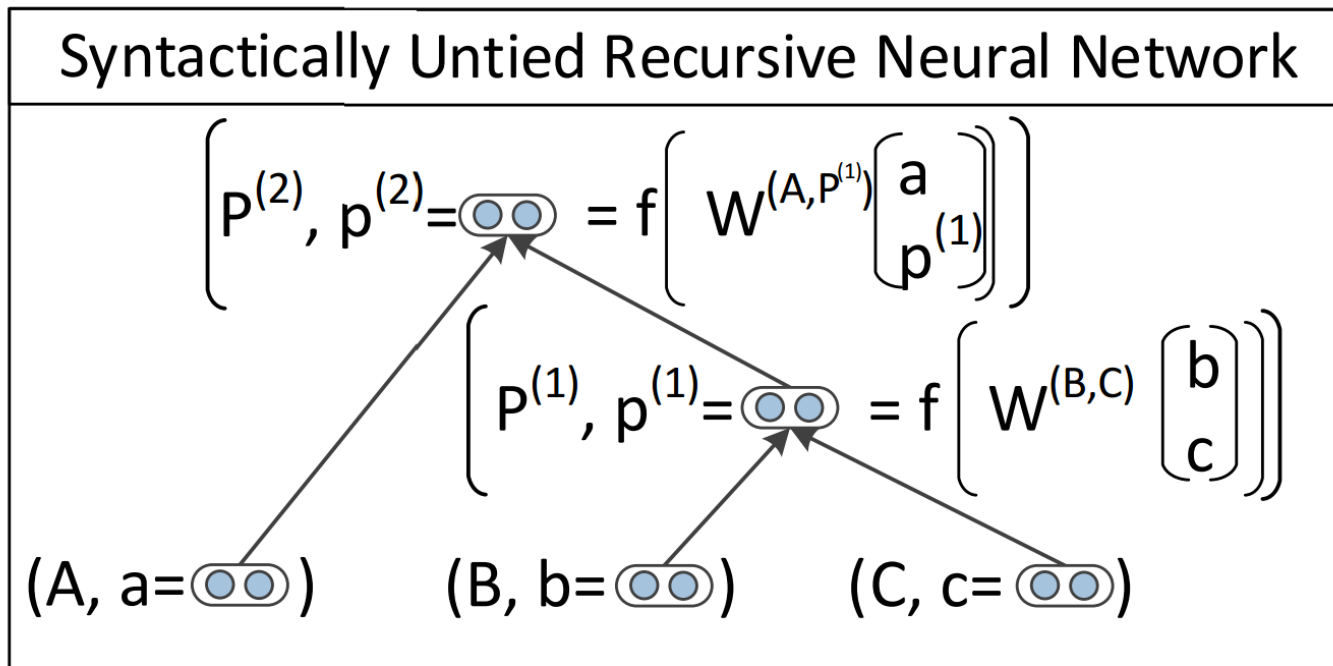

Recursive Neural Network

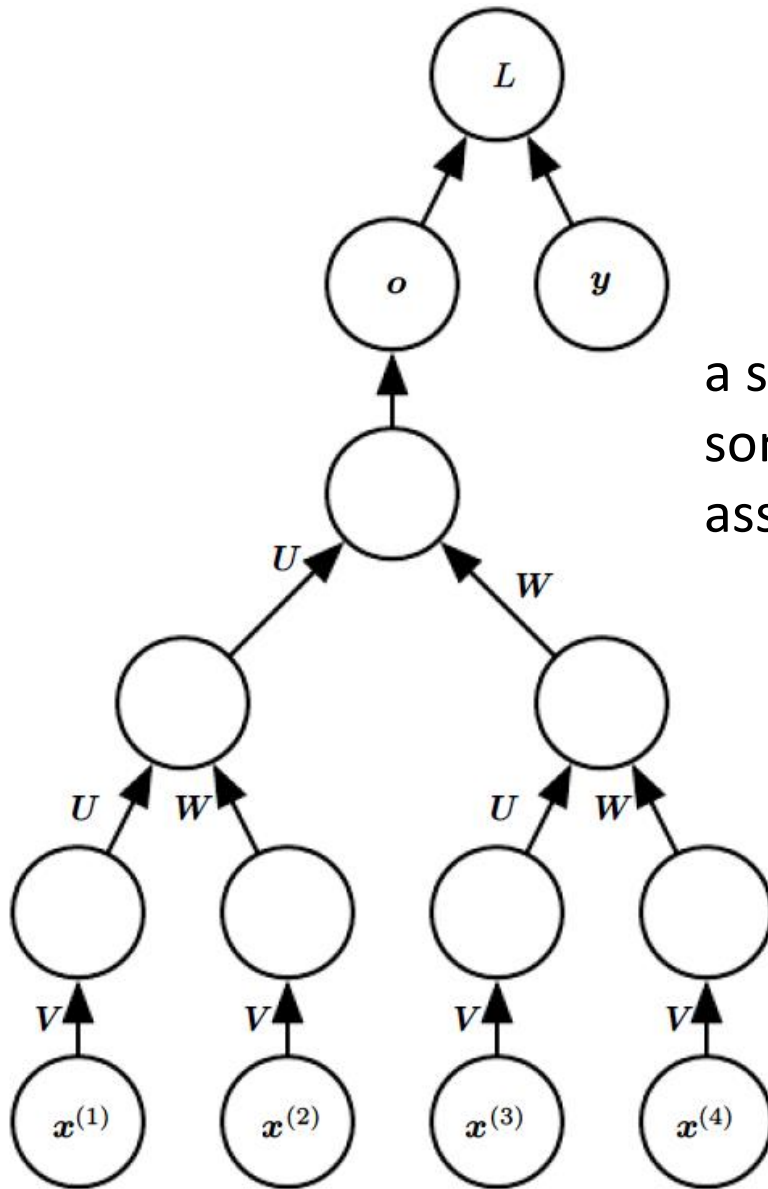

a supervised learning case in which some target y is provided which is associated with the whole sequence.

The Challenge of Long-Term Dependencies


- Gradients are vanished or exploded in deep models
- BPTT for recurrent neural networks is a typical example

$$g'(z_1)g'(z_2)g'(z_3) * (W^3)^T \delta_t$$

Delta is obtained by the repeated multiplication of W


$$W = V \text{diag}(\lambda) V^{-1}$$

$$W^k = V \text{diag}(\lambda)^k V^{-1}$$



Explode if $|\lambda_i| > 1$


Vanish if $|\lambda_i| < 1$

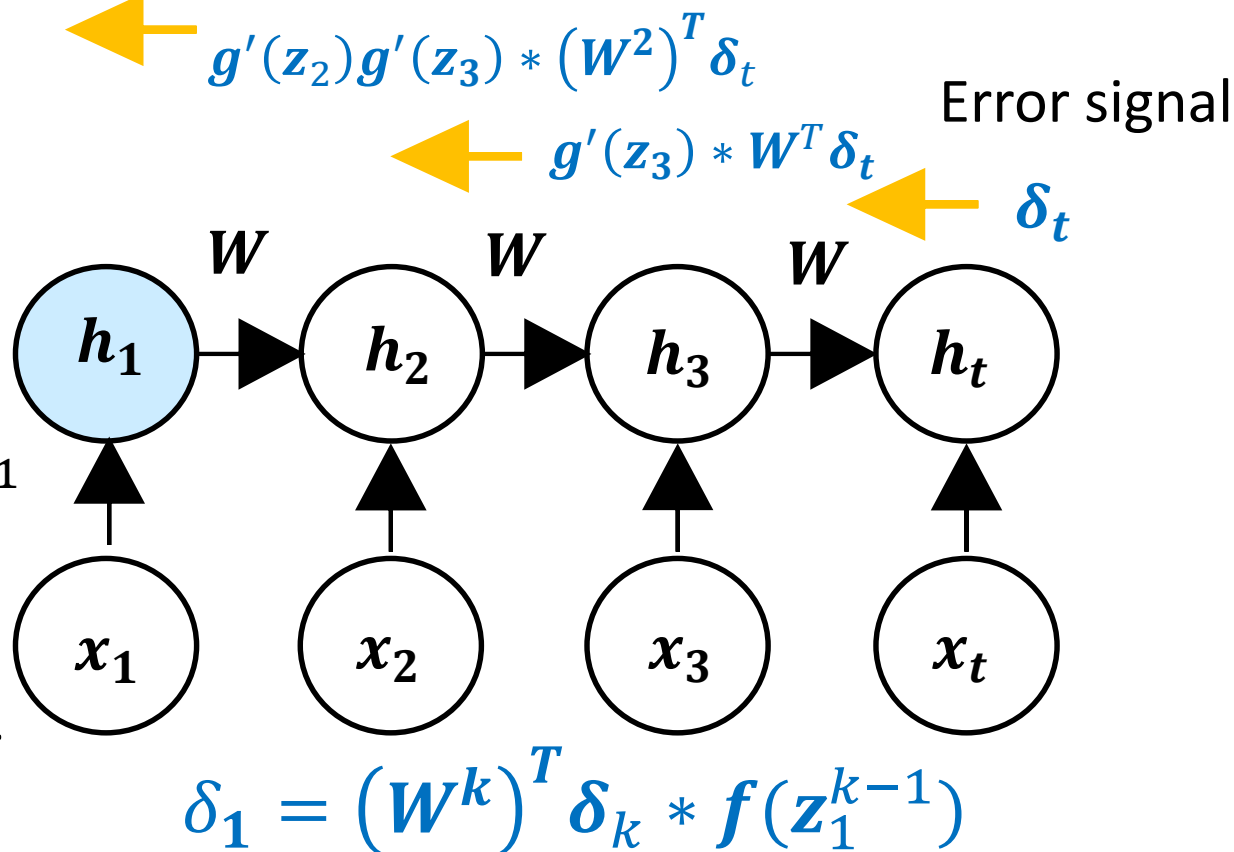

Long Short Term Memory (LSTM)


- **LSTM**: makes it easier for RNNs to capture **long-term dependencies** → Using **gated units**
 - Basic LSTM [Hochreiter and Schmidhuer, 98]
 - Introduces input gate & output gate
 - Problem: The output is close to zero as long as the output gate is closed.
 - Modern LSTM: Uses **forget** gate [Gers et al '00]
 - Variants of LSTM
 - Add **peephole connections** [Gers et al '02]
 - Allow all gates to inspect the current cell state even when the output gate is closed.

LSTM: Update Formula

$$h^{(t)} = f(x^{(t)}, h^{(t-1)})$$


- $i^{(t)} = \sigma(W^{(i)}x^{(t)} + U^{(i)}h^{(t-1)})$ (Input gate)
- $f^{(t)} = \sigma(W^{(f)}x^{(t)} + U^{(f)}h^{(t-1)})$ (Forget gate)
- $o^{(t)} = \sigma(W^{(o)}x^{(t)} + U^{(o)}h^{(t-1)})$ (Output/Exposure gate)
- $\tilde{c}^{(t)} = \tanh(W^{(c)}x^{(t)} + U^{(c)}h^{(t-1)})$ (New memory cell)
- $c^{(t)} = f^{(t)} \circ c^{(t-1)} + i^{(t)} \circ \tilde{c}^{(t)}$ (Final memory cell)
- $h^{(t)} = o^{(t)} \circ \tanh(c^{(t)})$

LSTM: Memory Cell

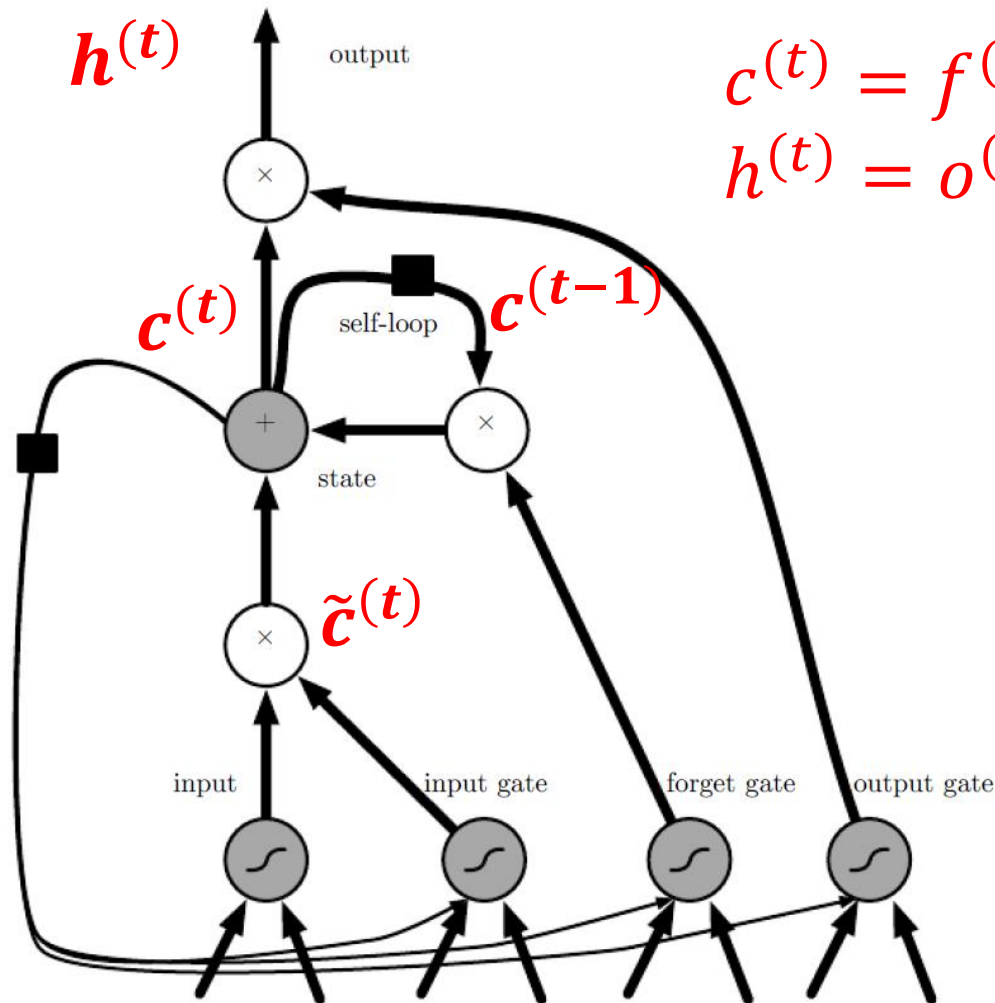

$$c^{(t)} = f^{(t)} \circ c^{(t-1)} + i^{(t)} \circ \tilde{c}^{(t)}$$
$$h^{(t)} = o^{(t)} \circ \tanh(c^{(t)})$$

LSTM: Memory Cell

- $c^{(t)}$: behaves like a memory = MEMORY
 - $c^{(t)} = f^{(t)} \circ c^{(t-1)} + i^{(t)} \circ \tilde{c}^{(t)}$
- $M(t) = \text{FORGET} * M(t-1) + \text{INPUT} * \text{NEW_INPUT}$
- $H(t) = \text{OUTPUT} * M(t)$
- FORGET: **Erase** operation (or memory reset)
- INPUT: **Write** operation
- OUTPUT: **Read** operation

Memory Cell - Example

$M[t]$ **0 0.5 0 1**



0 0 1 1

Forget gate

0 0 0 1

New memory

$M[t+1]$ **0 0.5 1 2**

-1 0.5 1 -1

New input




0 1 1 1

Input gate

0 0.5 1 1

tanh

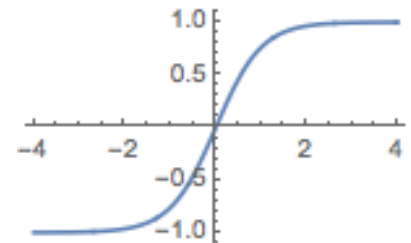

Output gate


0 0 1 1

$H[t]$

0 0 0.76 0.96

Explicit Memory

- Extend the capabilities of neural networks **by coupling them to external memory resources**, which they can interact with by **attentional** processes
 - Writing & Reading mechanisms are added

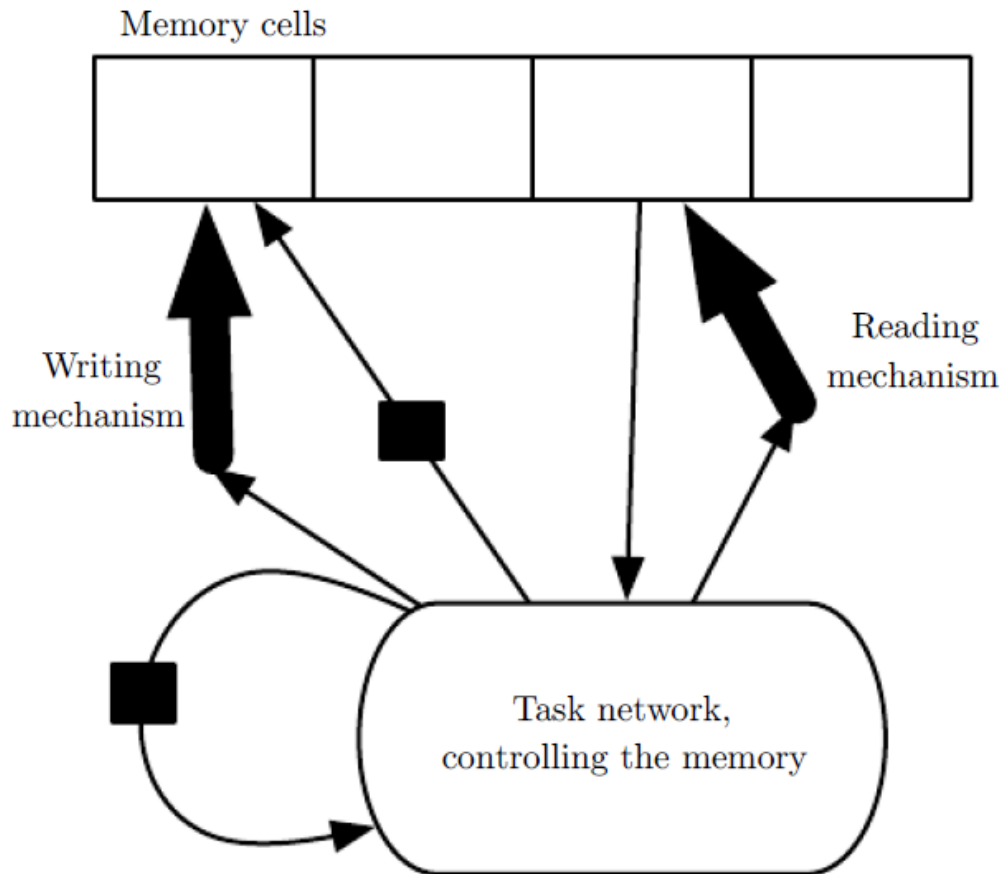

- Examples
 - Neural Turing Machine
 - Differentiable Neural Computer