

# Confronting the Partition Function

Seung-Hoon Na

Chonbuk National University

# Partition function

- Normalized probability

$$p(\mathbf{x}; \boldsymbol{\theta}) = \frac{1}{Z(\boldsymbol{\theta})} \tilde{p}(\mathbf{x}; \boldsymbol{\theta})$$

Partition function

- Partition function

$$\int \tilde{p}(\mathbf{x}) d\mathbf{x} \qquad \sum_{\mathbf{x}} \tilde{p}(\mathbf{x})$$

# Log-Likelihood Gradient

$$\nabla_{\boldsymbol{\theta}} \log p(\mathbf{x}; \boldsymbol{\theta}) = \underbrace{\nabla_{\boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}; \boldsymbol{\theta})}_{\text{Positive phrase}} - \underbrace{\nabla_{\boldsymbol{\theta}} \log Z(\boldsymbol{\theta})}_{\text{Negative phrase}}$$

$$\nabla_{\boldsymbol{\theta}} \log Z = \mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\mathbf{x})$$

$$\begin{aligned} \frac{\partial}{\partial \boldsymbol{\theta}} \log Z &= \frac{\frac{\partial}{\partial \boldsymbol{\theta}} Z}{Z} \\ &= \frac{\frac{\partial}{\partial \boldsymbol{\theta}} \sum_{\mathbf{x}} \tilde{p}(\mathbf{x})}{Z} \\ &= \frac{\sum_{\mathbf{x}} \frac{\partial}{\partial \boldsymbol{\theta}} \tilde{p}(\mathbf{x})}{Z} \end{aligned} \quad \Rightarrow \quad \begin{aligned} &\frac{\frac{\sum_{\mathbf{x}} \frac{\partial}{\partial \boldsymbol{\theta}} \exp(\log \tilde{p}(\mathbf{x}))}{Z}}{Z} \\ &= \frac{\sum_{\mathbf{x}} \exp(\log \tilde{p}(\mathbf{x})) \frac{\partial}{\partial \boldsymbol{\theta}} \log \tilde{p}(\mathbf{x})}{Z} \\ &= \frac{\sum_{\mathbf{x}} \tilde{p}(\mathbf{x}) \frac{\partial}{\partial \boldsymbol{\theta}} \log \tilde{p}(\mathbf{x})}{Z} \\ &= \sum_{\mathbf{x}} p(\mathbf{x}) \frac{\partial}{\partial \boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}) \\ &= \mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} \frac{\partial}{\partial \boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}) \end{aligned}$$

# MCMC Algorithm: Basic

- Burning in a set of Markov chains from a random initialization every time the gradient is needed

---

**Algorithm 18.1** A naive MCMC algorithm for maximizing the log-likelihood with an intractable partition function using gradient ascent.

---

Set  $\epsilon$ , the step size, to a small positive number.

Set  $k$ , the number of Gibbs steps, high enough to allow burn in. Perhaps 100 to train an RBM on a small image patch.

**while** not converged **do**

    Sample a minibatch of  $m$  examples  $\{\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(m)}\}$  from the training set.

$\mathbf{g} \leftarrow \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}^{(i)}; \boldsymbol{\theta})$ .

    Initialize a set of  $m$  samples  $\{\tilde{\mathbf{x}}^{(1)}, \dots, \tilde{\mathbf{x}}^{(m)}\}$  to random values (e.g., from a uniform or normal distribution, or possibly a distribution with marginals matched to the model's marginals).

**for**  $i = 1$  to  $k$  **do**

**for**  $j = 1$  to  $m$  **do**

$\tilde{\mathbf{x}}^{(j)} \leftarrow \text{gibbs\_update}(\tilde{\mathbf{x}}^{(j)})$ .

**end for**

**end for**

$\mathbf{g} \leftarrow \mathbf{g} - \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\tilde{\mathbf{x}}^{(i)}; \boldsymbol{\theta})$ .


$\boldsymbol{\theta} \leftarrow \boldsymbol{\theta} + \epsilon \mathbf{g}$ .

**end while**


---

# MCMC Algorithm

The positive phase

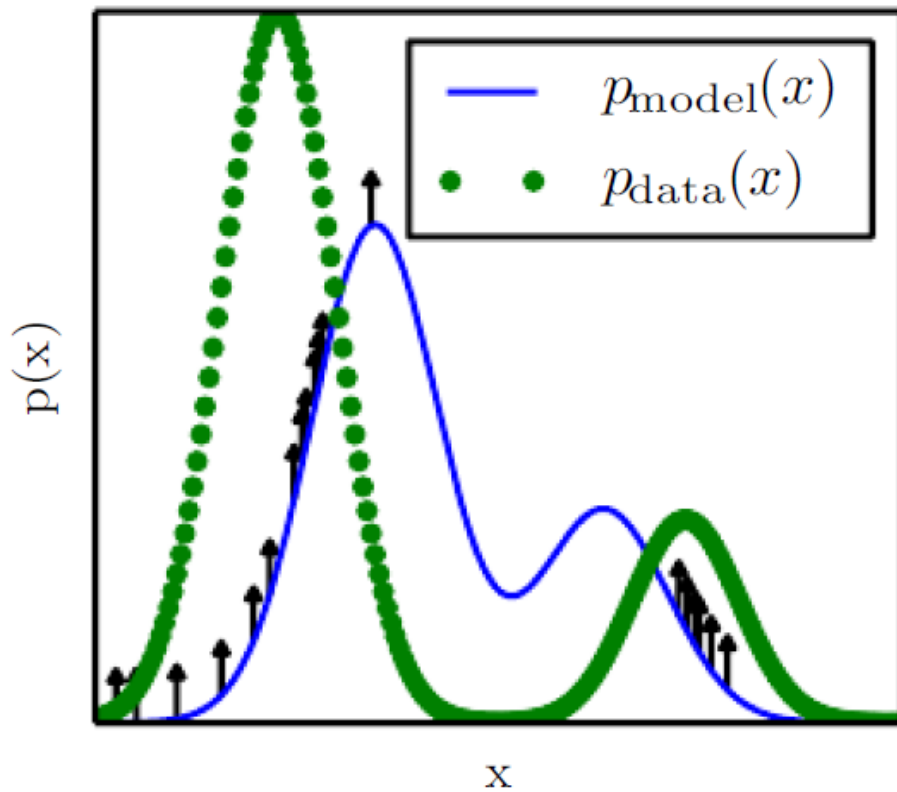

The negative phase

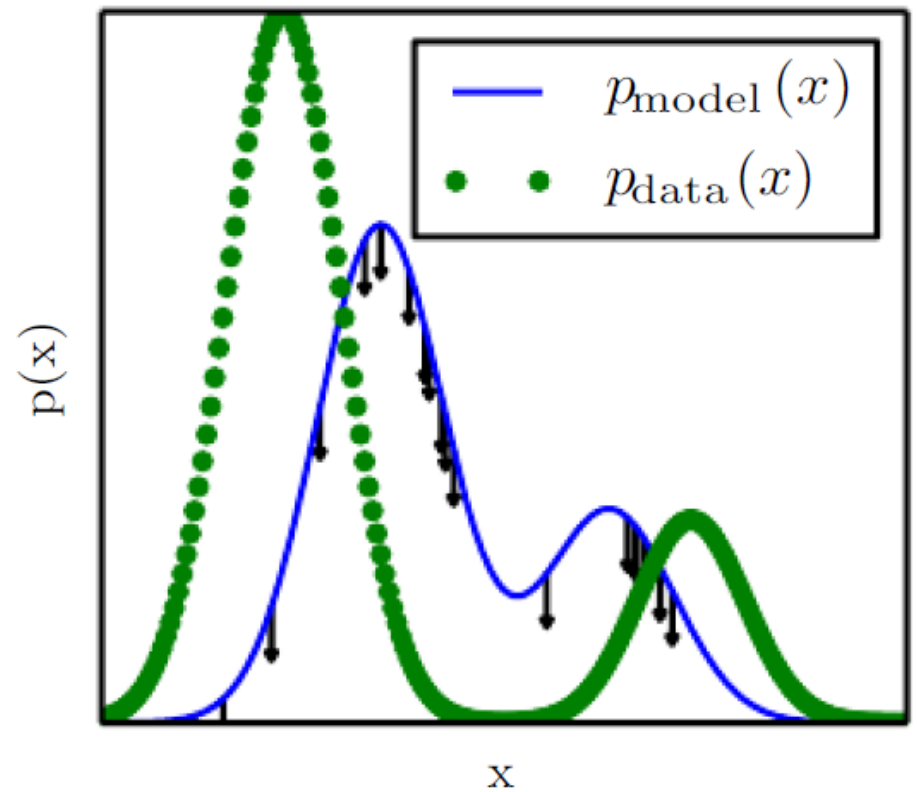

# Contrastive Divergence [Hinton '00]

- Initializes the Markov chain at each step with samples from the data distribution

---

**Algorithm 18.2** The contrastive divergence algorithm, using gradient ascent as the optimization procedure.

---

Set  $\epsilon$ , the step size, to a small positive number.

Set  $k$ , the number of Gibbs steps, high enough to allow a Markov chain sampling from  $p(\mathbf{x}; \boldsymbol{\theta})$  to mix when initialized from  $p_{\text{data}}$ . Perhaps 1-20 to train an RBM on a small image patch.

**while** not converged **do**

    Sample a minibatch of  $m$  examples  $\{\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(m)}\}$  from the training set.

$\mathbf{g} \leftarrow \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}^{(i)}; \boldsymbol{\theta})$ .

**for**  $i = 1$  to  $m$  **do**

$\tilde{\mathbf{x}}^{(i)} \leftarrow \mathbf{x}^{(i)}$ .

**end for**

**for**  $i = 1$  to  $k$  **do**

**for**  $j = 1$  to  $m$  **do**

$\tilde{\mathbf{x}}^{(j)} \leftarrow \text{gibbs\_update}(\tilde{\mathbf{x}}^{(j)})$ .

**end for**

**end for**

$\mathbf{g} \leftarrow \mathbf{g} - \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\tilde{\mathbf{x}}^{(i)}; \boldsymbol{\theta})$ .

$\boldsymbol{\theta} \leftarrow \boldsymbol{\theta} + \epsilon \mathbf{g}$ .


**end while**

---

# Contrastive Divergence

- The negative phase of CD can fail to suppress spurious modes

A spurious mode

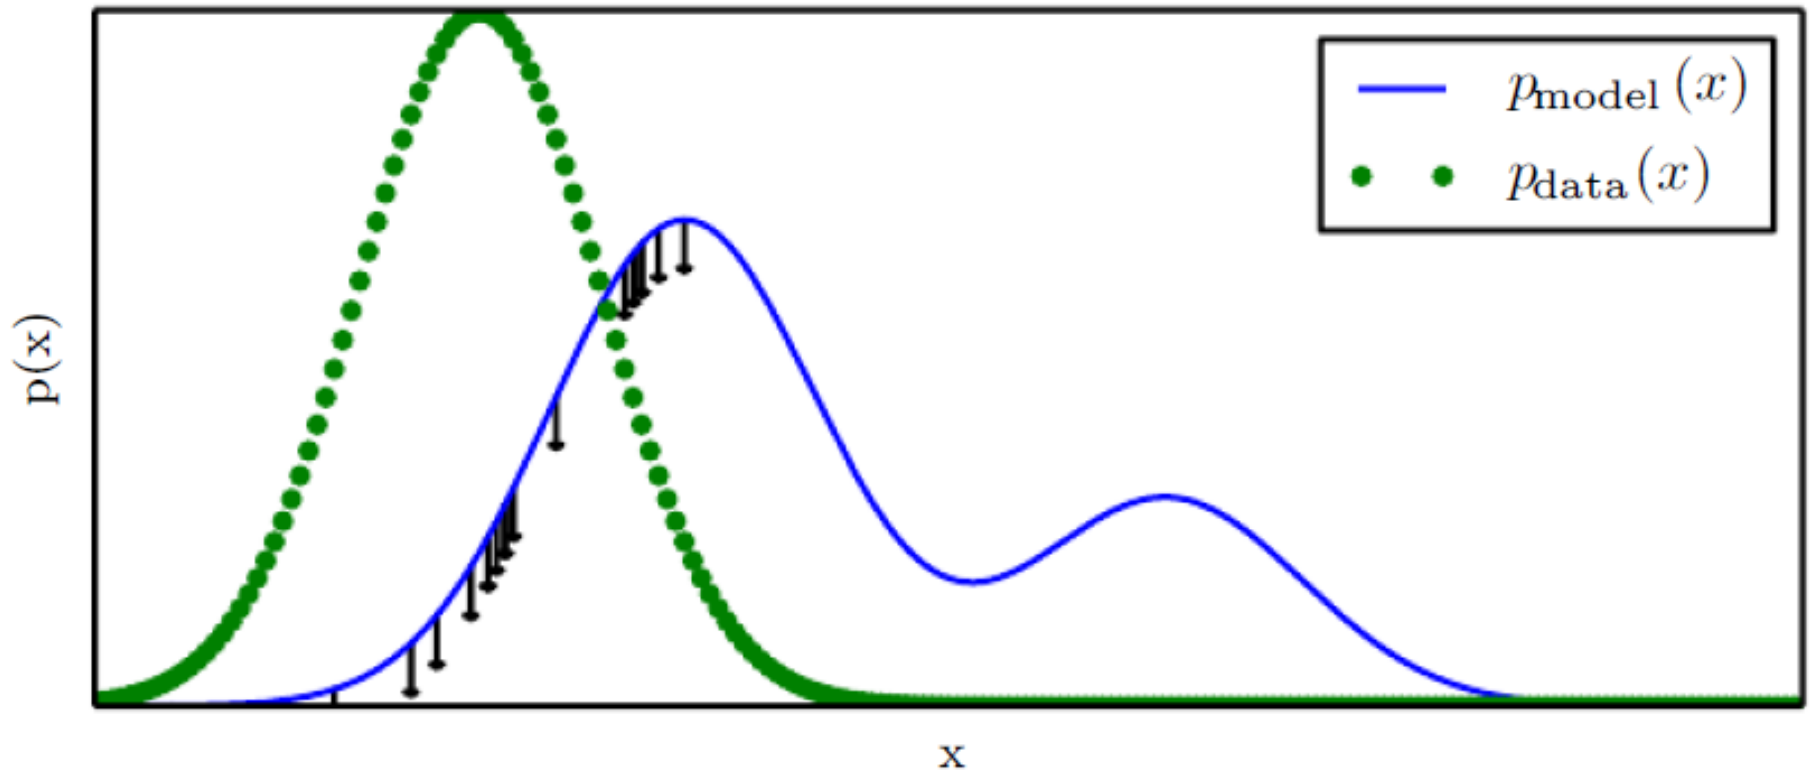

# Persistent Contrastive Divergence

- PCD, or PCD- $k$  to indicate the use of  $k$  Gibbs steps per update
- As long as the steps taken by the stochastic gradient algorithm are small, then the model from the previous step will be similar to the model from the current step.
- It follows that the samples from the previous model's
- distribution will be very close to being fair samples from the current model's distribution, so a Markov chain initialized with these samples will not require much time to mix.



# Persistent Contrastive Divergence

---

**Algorithm 18.3** The stochastic maximum likelihood / persistent contrastive divergence algorithm using gradient ascent as the optimization procedure.

---

Set  $\epsilon$ , the step size, to a small positive number.

Set  $k$ , the number of Gibbs steps, high enough to allow a Markov chain sampling from  $p(\mathbf{x}; \boldsymbol{\theta} + \epsilon \mathbf{g})$  to burn in, starting from samples from  $p(\mathbf{x}; \boldsymbol{\theta})$ . Perhaps 1 for RBM on a small image patch, or 5-50 for a more complicated model like a DBM.

Initialize a set of  $m$  samples  $\{\tilde{\mathbf{x}}^{(1)}, \dots, \tilde{\mathbf{x}}^{(m)}\}$  to random values (e.g., from a uniform or normal distribution, or possibly a distribution with marginals matched to the model's marginals).

**while** not converged **do**

    Sample a minibatch of  $m$  examples  $\{\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(m)}\}$  from the training set.

$\mathbf{g} \leftarrow \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\mathbf{x}^{(i)}; \boldsymbol{\theta})$ .

**for**  $i = 1$  to  $k$  **do**

**for**  $j = 1$  to  $m$  **do**

$\tilde{\mathbf{x}}^{(j)} \leftarrow \text{gibbs\_update}(\tilde{\mathbf{x}}^{(j)})$ .

**end for**

**end for**

$\mathbf{g} \leftarrow \mathbf{g} - \frac{1}{m} \sum_{i=1}^m \nabla_{\boldsymbol{\theta}} \log \tilde{p}(\tilde{\mathbf{x}}^{(i)}; \boldsymbol{\theta})$ .

$\boldsymbol{\theta} \leftarrow \boldsymbol{\theta} + \epsilon \mathbf{g}$ .

**end while**

---

# Noise-Contrastive Estimation (NCE) (Gutmann and Hyvarinen, 2010)

- The probability distribution estimated by the model is represented explicitly as

$$\log p_{\text{model}}(\mathbf{x}) = \log \tilde{p}_{\text{model}}(\mathbf{x}; \boldsymbol{\theta}) + c$$

explicitly introduced as an  
approximation of  $-\log Z(\theta)$ .

- Introduce noise distribution

$$\begin{aligned} p_{\text{joint}}(\mathbf{x} \mid y = 1) &= p_{\text{model}}(\mathbf{x}) \\ p_{\text{joint}}(\mathbf{x} \mid y = 0) &= p_{\text{noise}}(\mathbf{x}) \end{aligned} \quad p_{\text{joint}}(y = 1) = \frac{1}{2}$$

# Noise-Contrastive Estimation (NCE)

$$\theta, c = \arg \max_{\theta, c} \mathbb{E}_{\mathbf{x}, y \sim p_{\text{train}}} \log p_{\text{joint}}(y \mid \mathbf{x})$$

$$p_{\text{joint}}(y = 1 \mid \mathbf{x}) = \frac{p_{\text{model}}(\mathbf{x})}{p_{\text{model}}(\mathbf{x}) + p_{\text{noise}}(\mathbf{x})}$$

$$= \frac{1}{1 + \frac{p_{\text{noise}}(\mathbf{x})}{p_{\text{model}}(\mathbf{x})}}$$

$$= \frac{1}{1 + \exp \left( \log \frac{p_{\text{noise}}(\mathbf{x})}{p_{\text{model}}(\mathbf{x})} \right)}$$

$$= \sigma \left( -\log \frac{p_{\text{noise}}(\mathbf{x})}{p_{\text{model}}(\mathbf{x})} \right)$$

$$= \sigma (\log p_{\text{model}}(\mathbf{x}) - \log p_{\text{noise}}(\mathbf{x}))$$