


# Lecture 15: Deep Generative Models I

Speaker: Phillip Isola



# Deep generative models

- Lecture 15: fundamentals, a tour of popular models
- Lecture 16: generative modeling meets representation learning
- Lecture 17: conditional models, data prediction

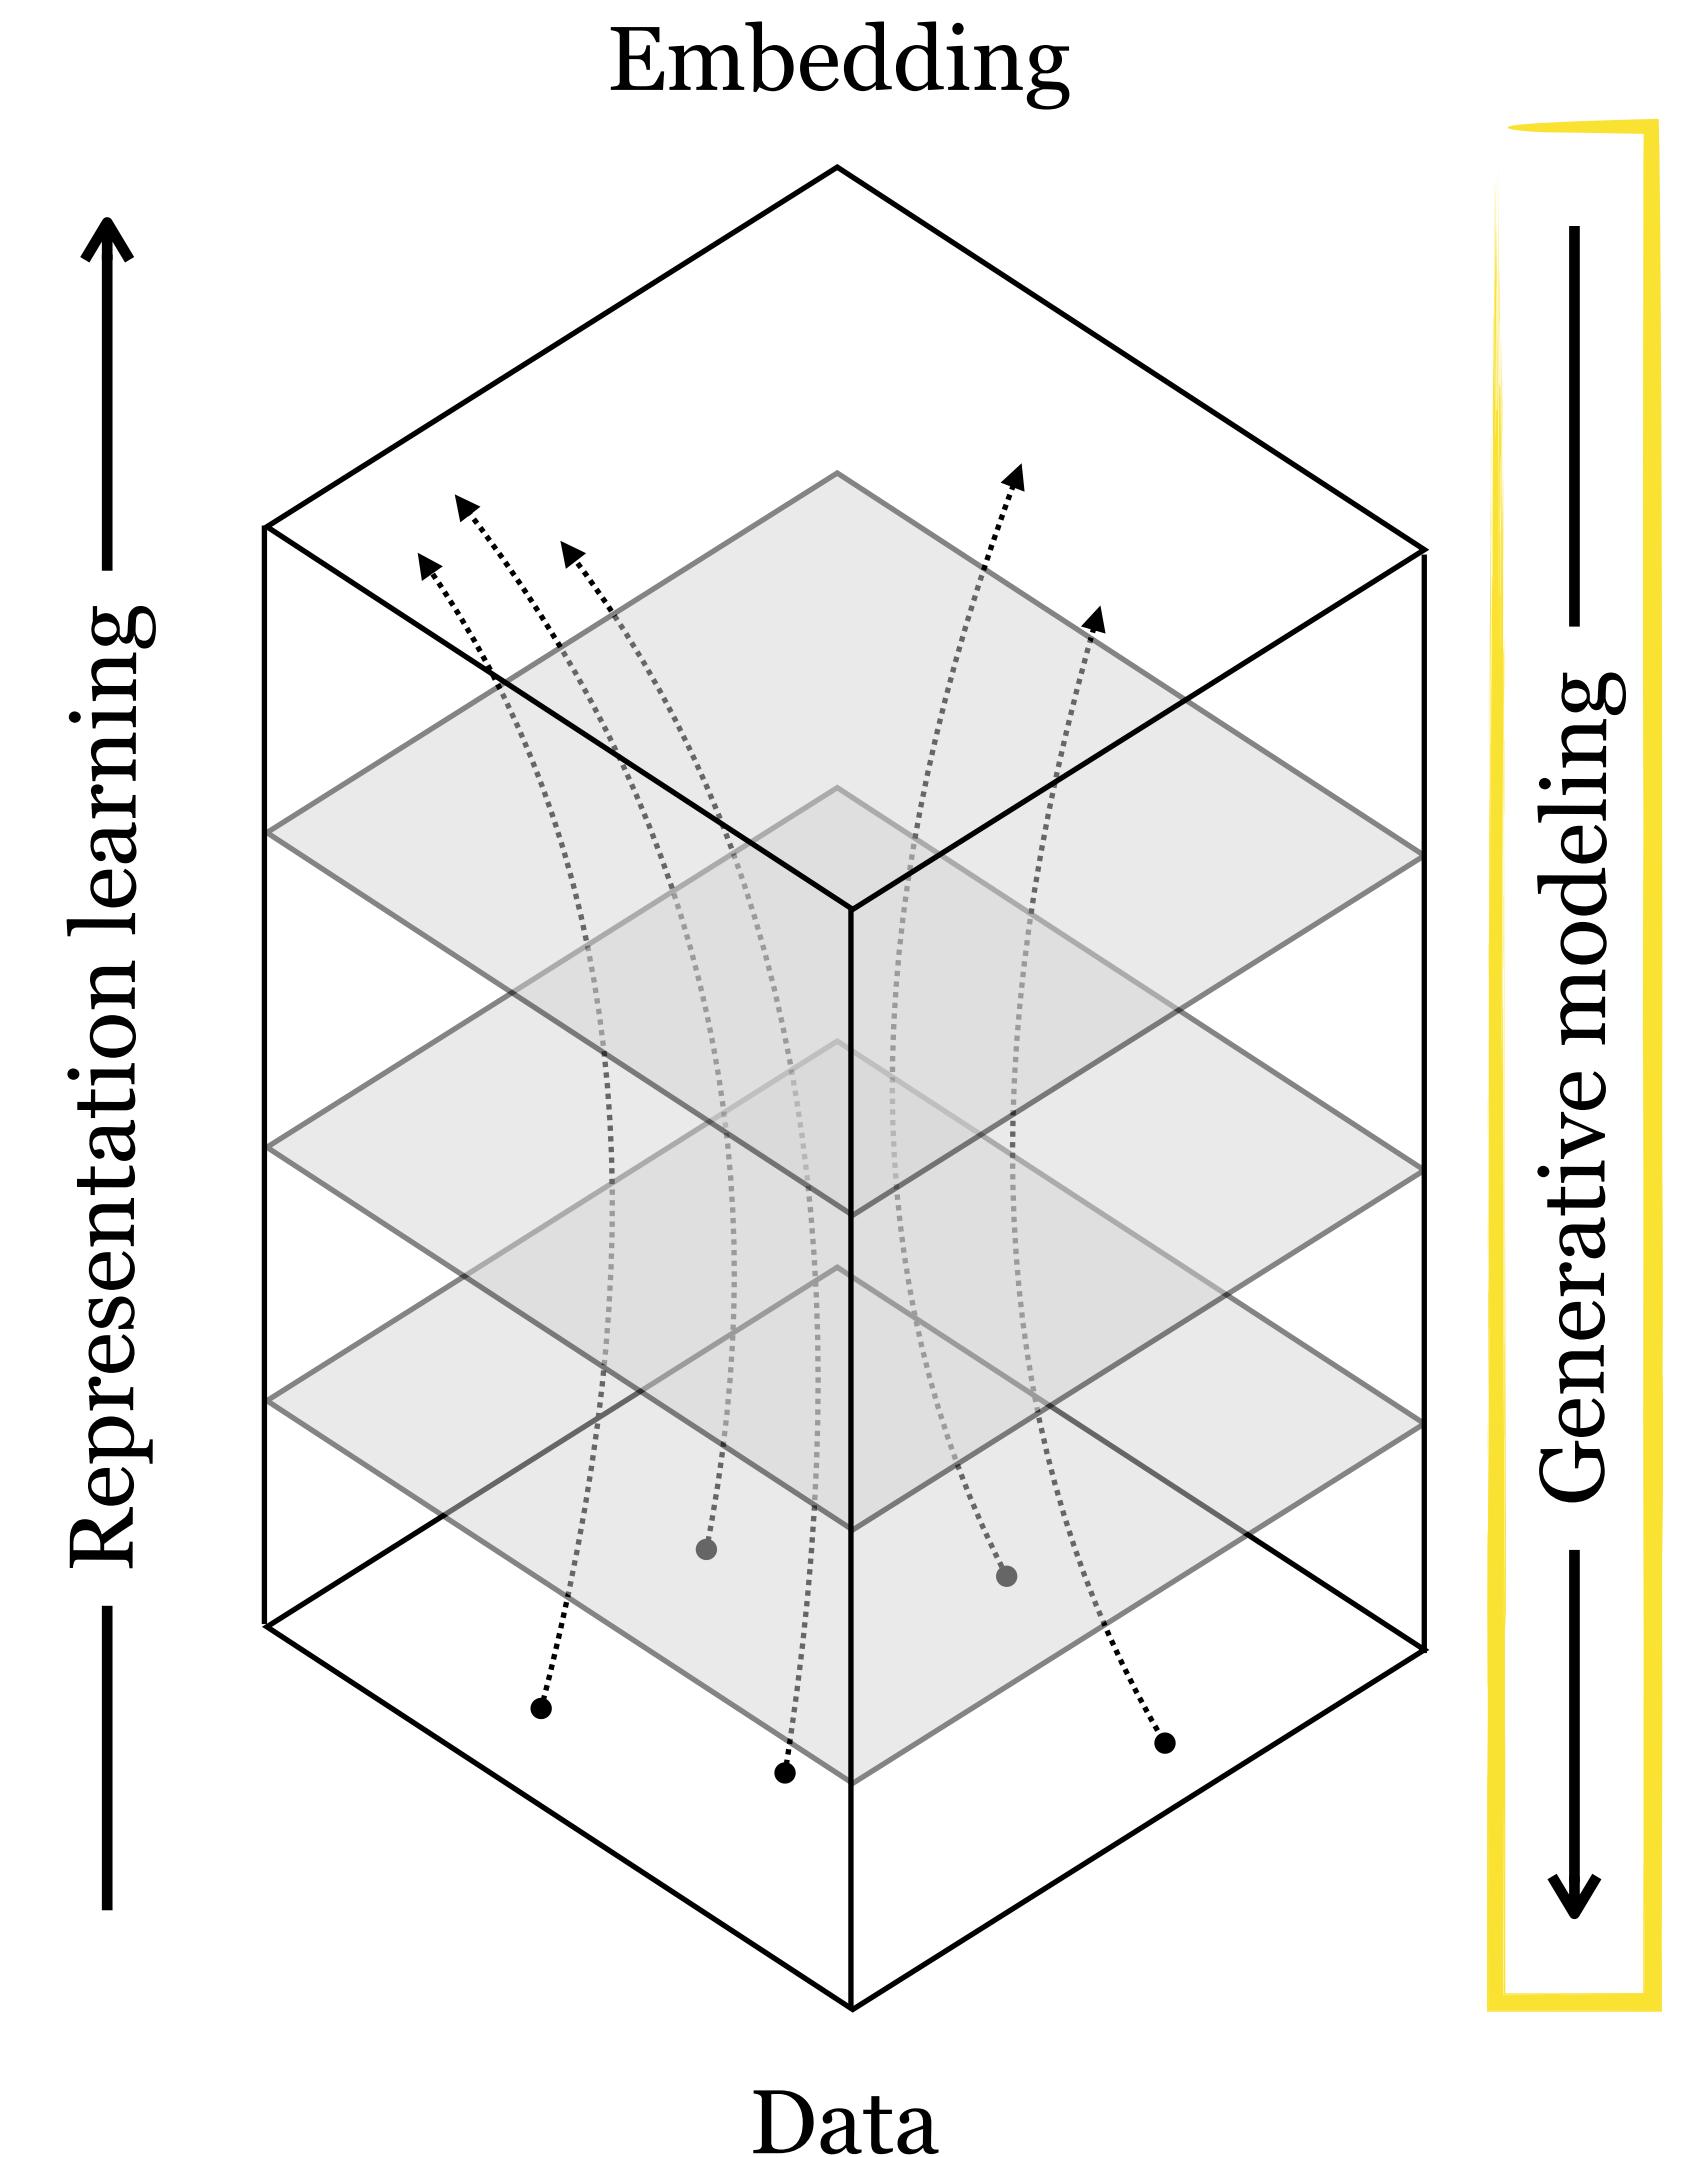

# Deep generative models I



- Fundamentals of generative modeling
- Density functions, energy functions, and samplers
- Gaussian models
- Autoregressive models
- Diffusion models
- Generative adversarial networks

# What is a generative model?


1. An algorithm that generates data
2. A statistical model of the joint distribution of some data,  $p(x,y,\dots)$

A photo of a group of robots building the Stata Center

<https://openai.com/dall-e-2/>

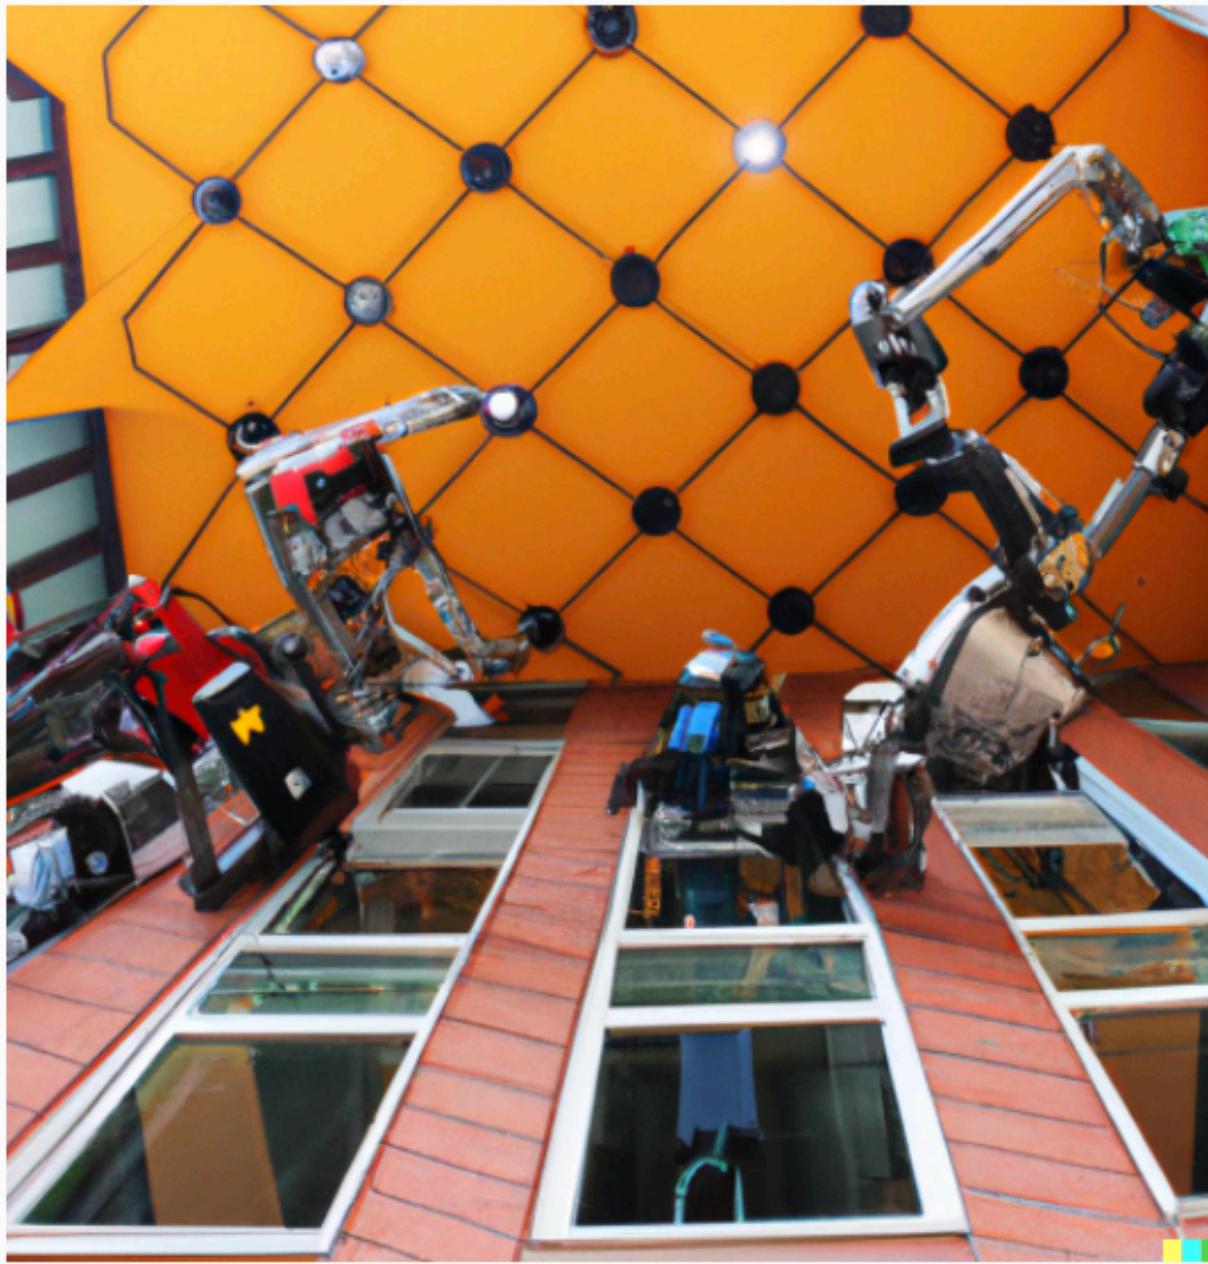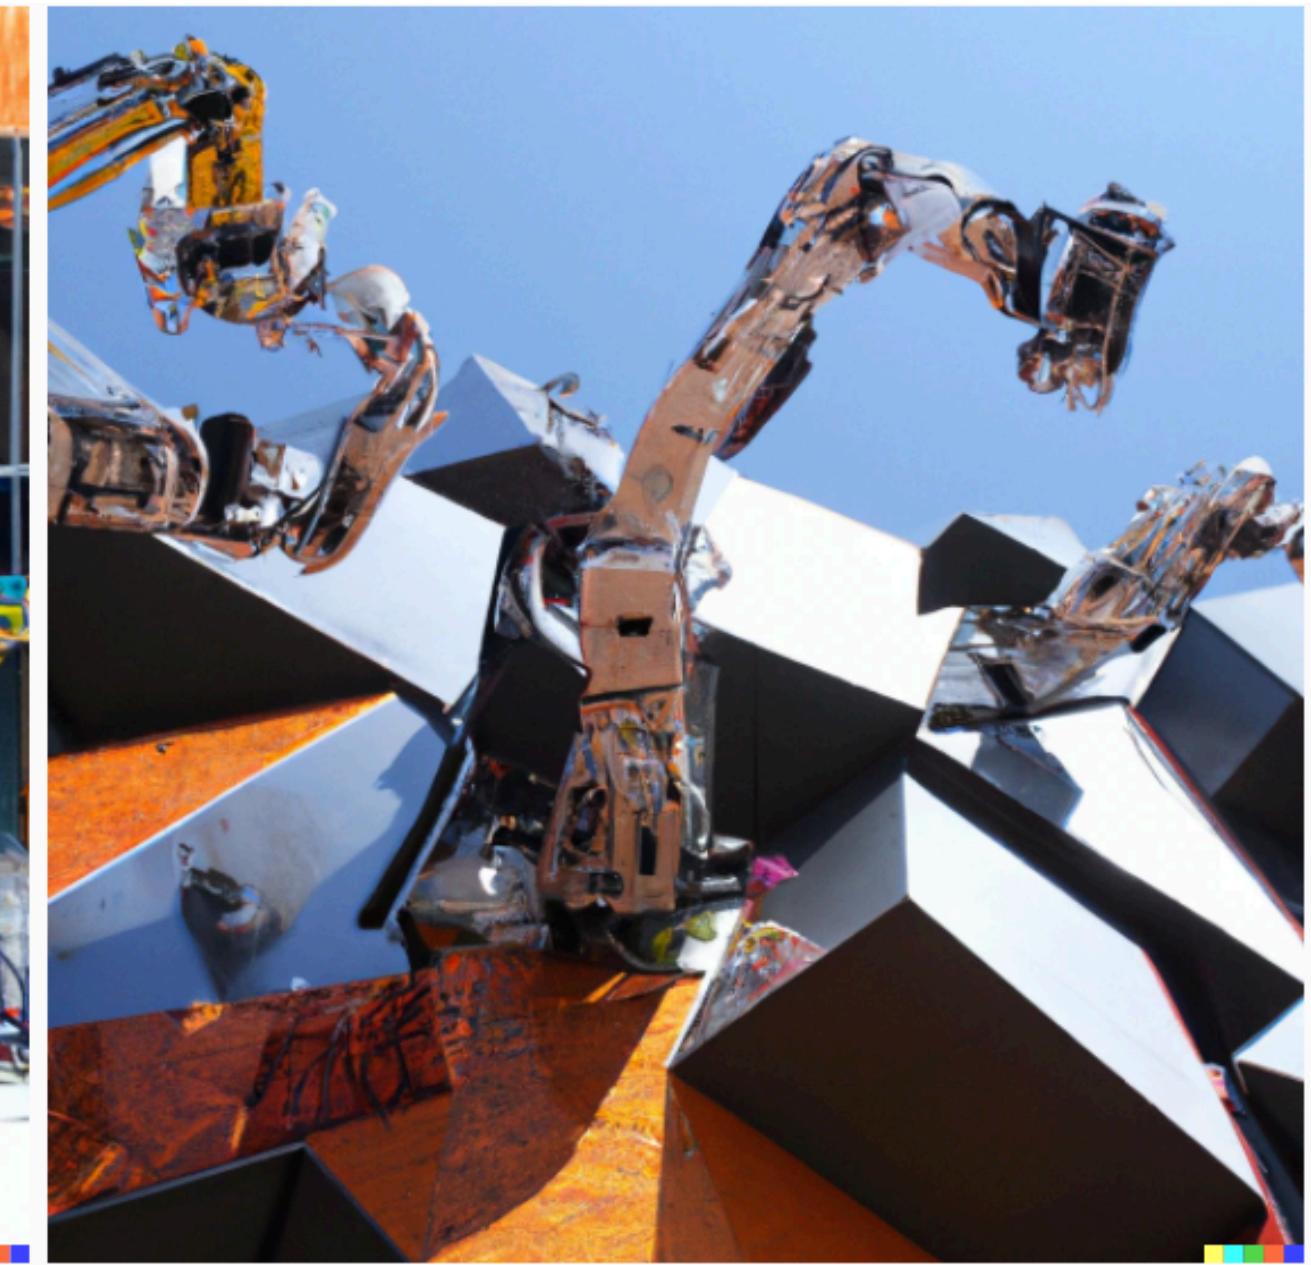

ligand &  
protein

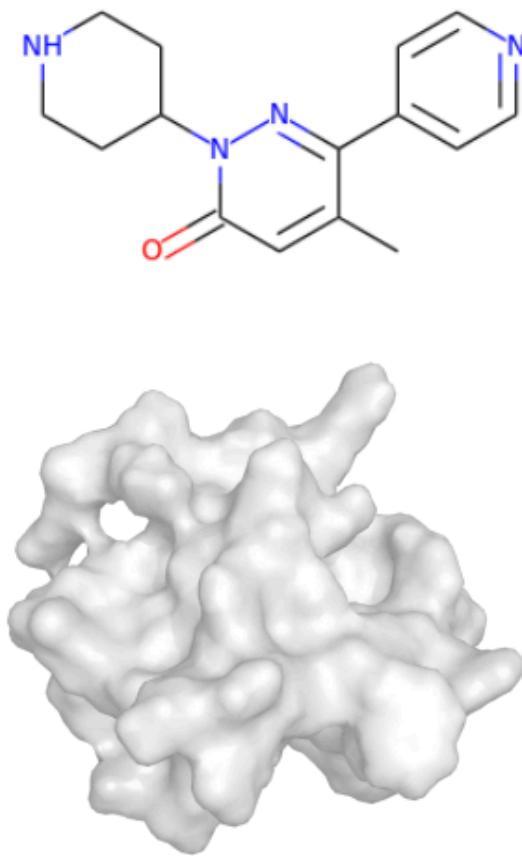


## DIFFDOCK


reverse diffusion over  
translations, rotations and torsions

$t=T$

$t=0$

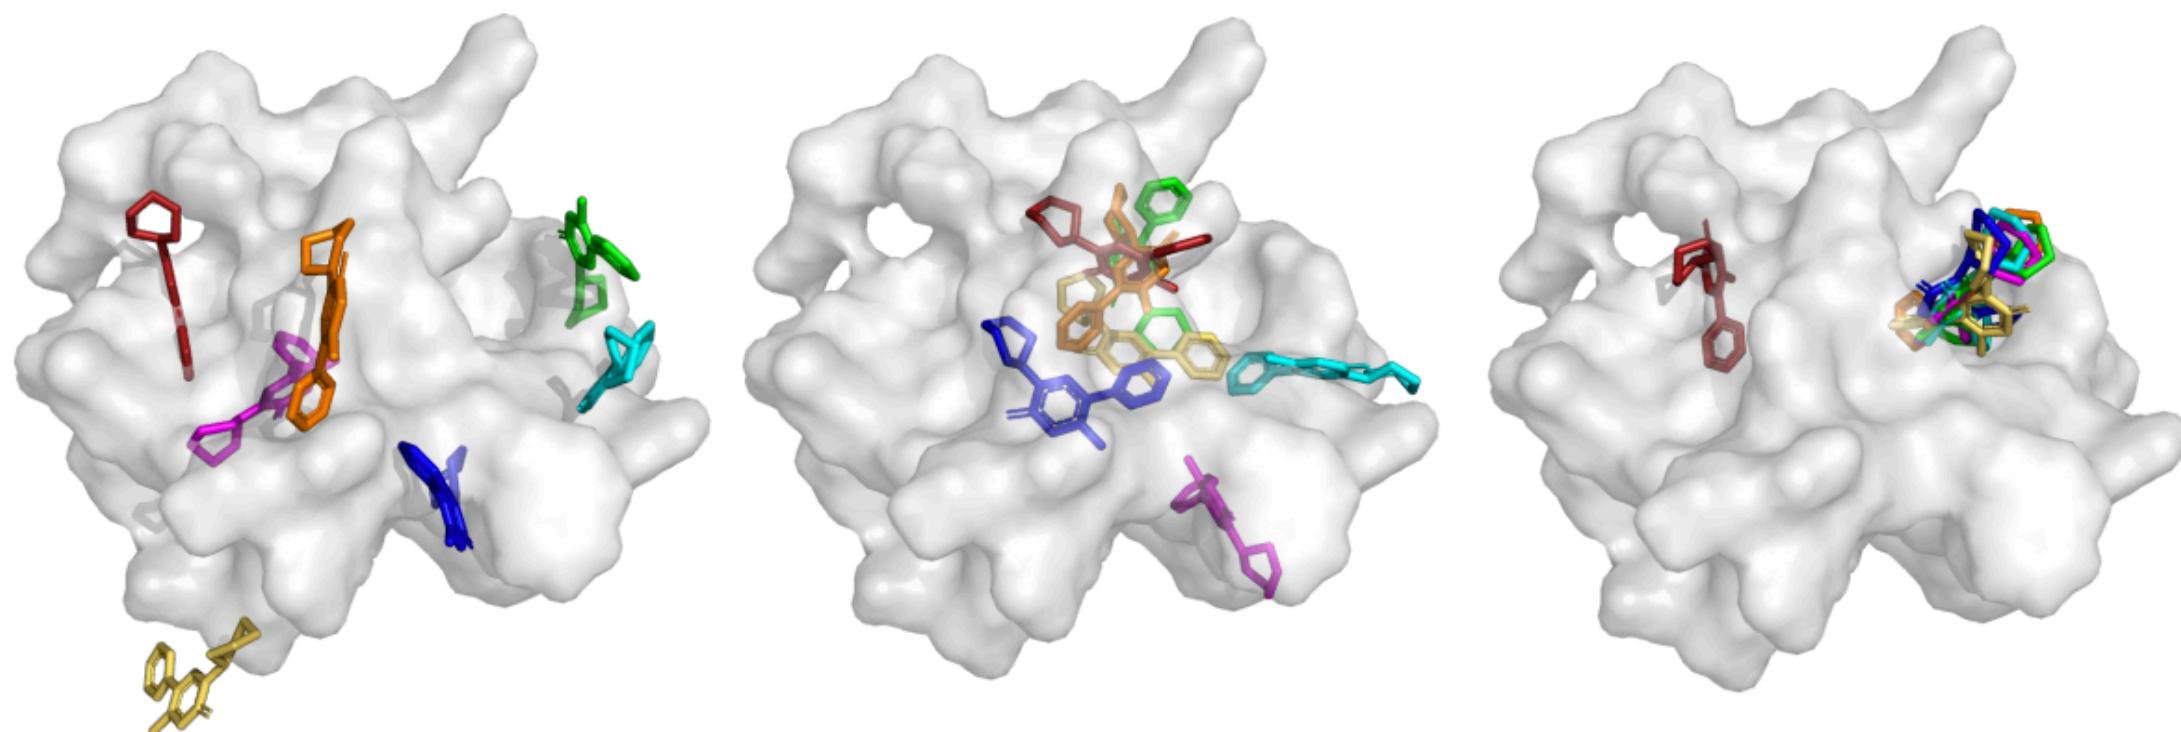


ranked poses &  
confidence score

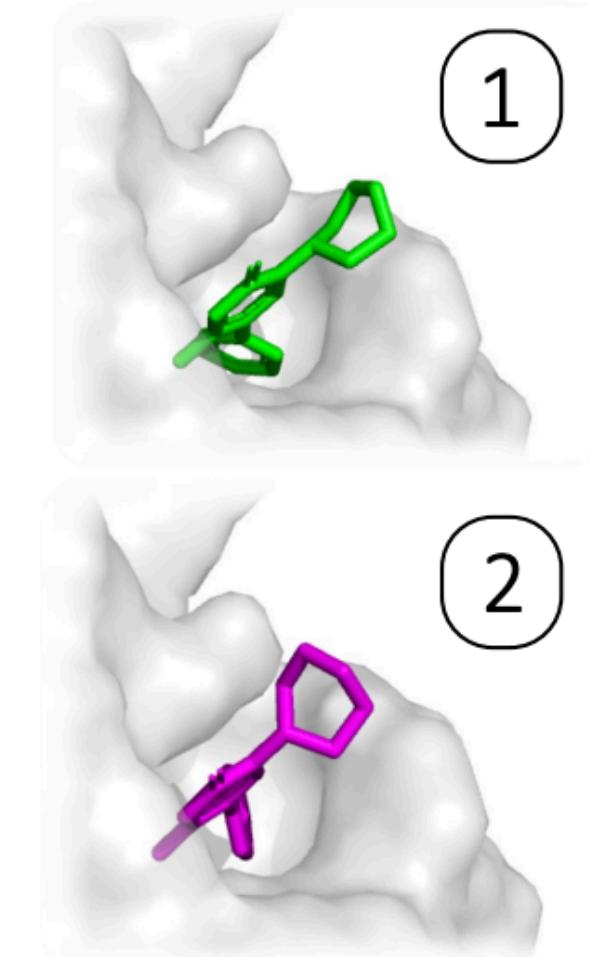

[Corso\*, Stark\*, Jing\*, Barzilay, Jaakkola, 2022]


MRI

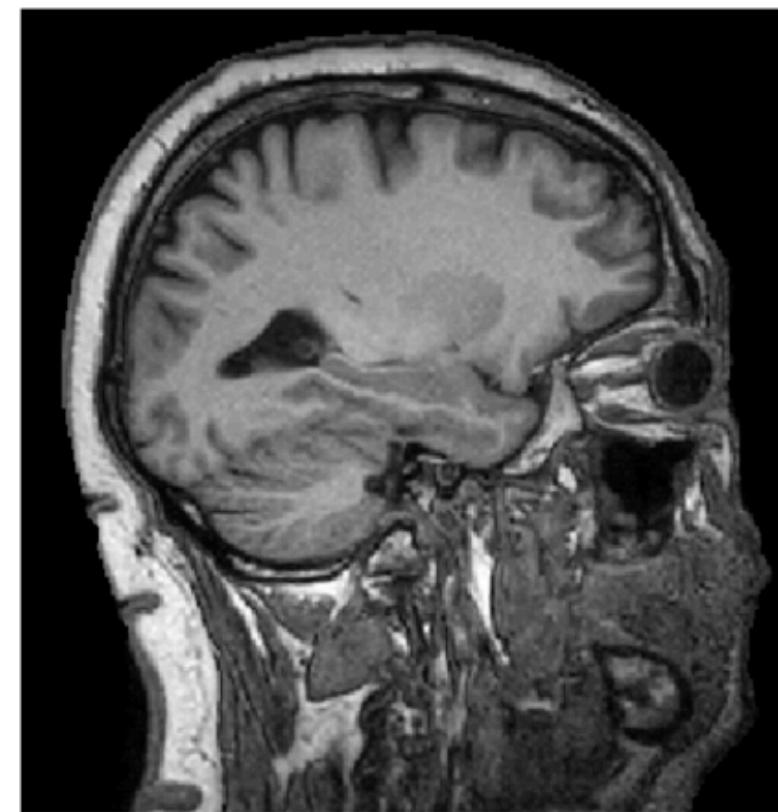



CT





[Wolterink, Dinkla, Savenije et al., 2017]

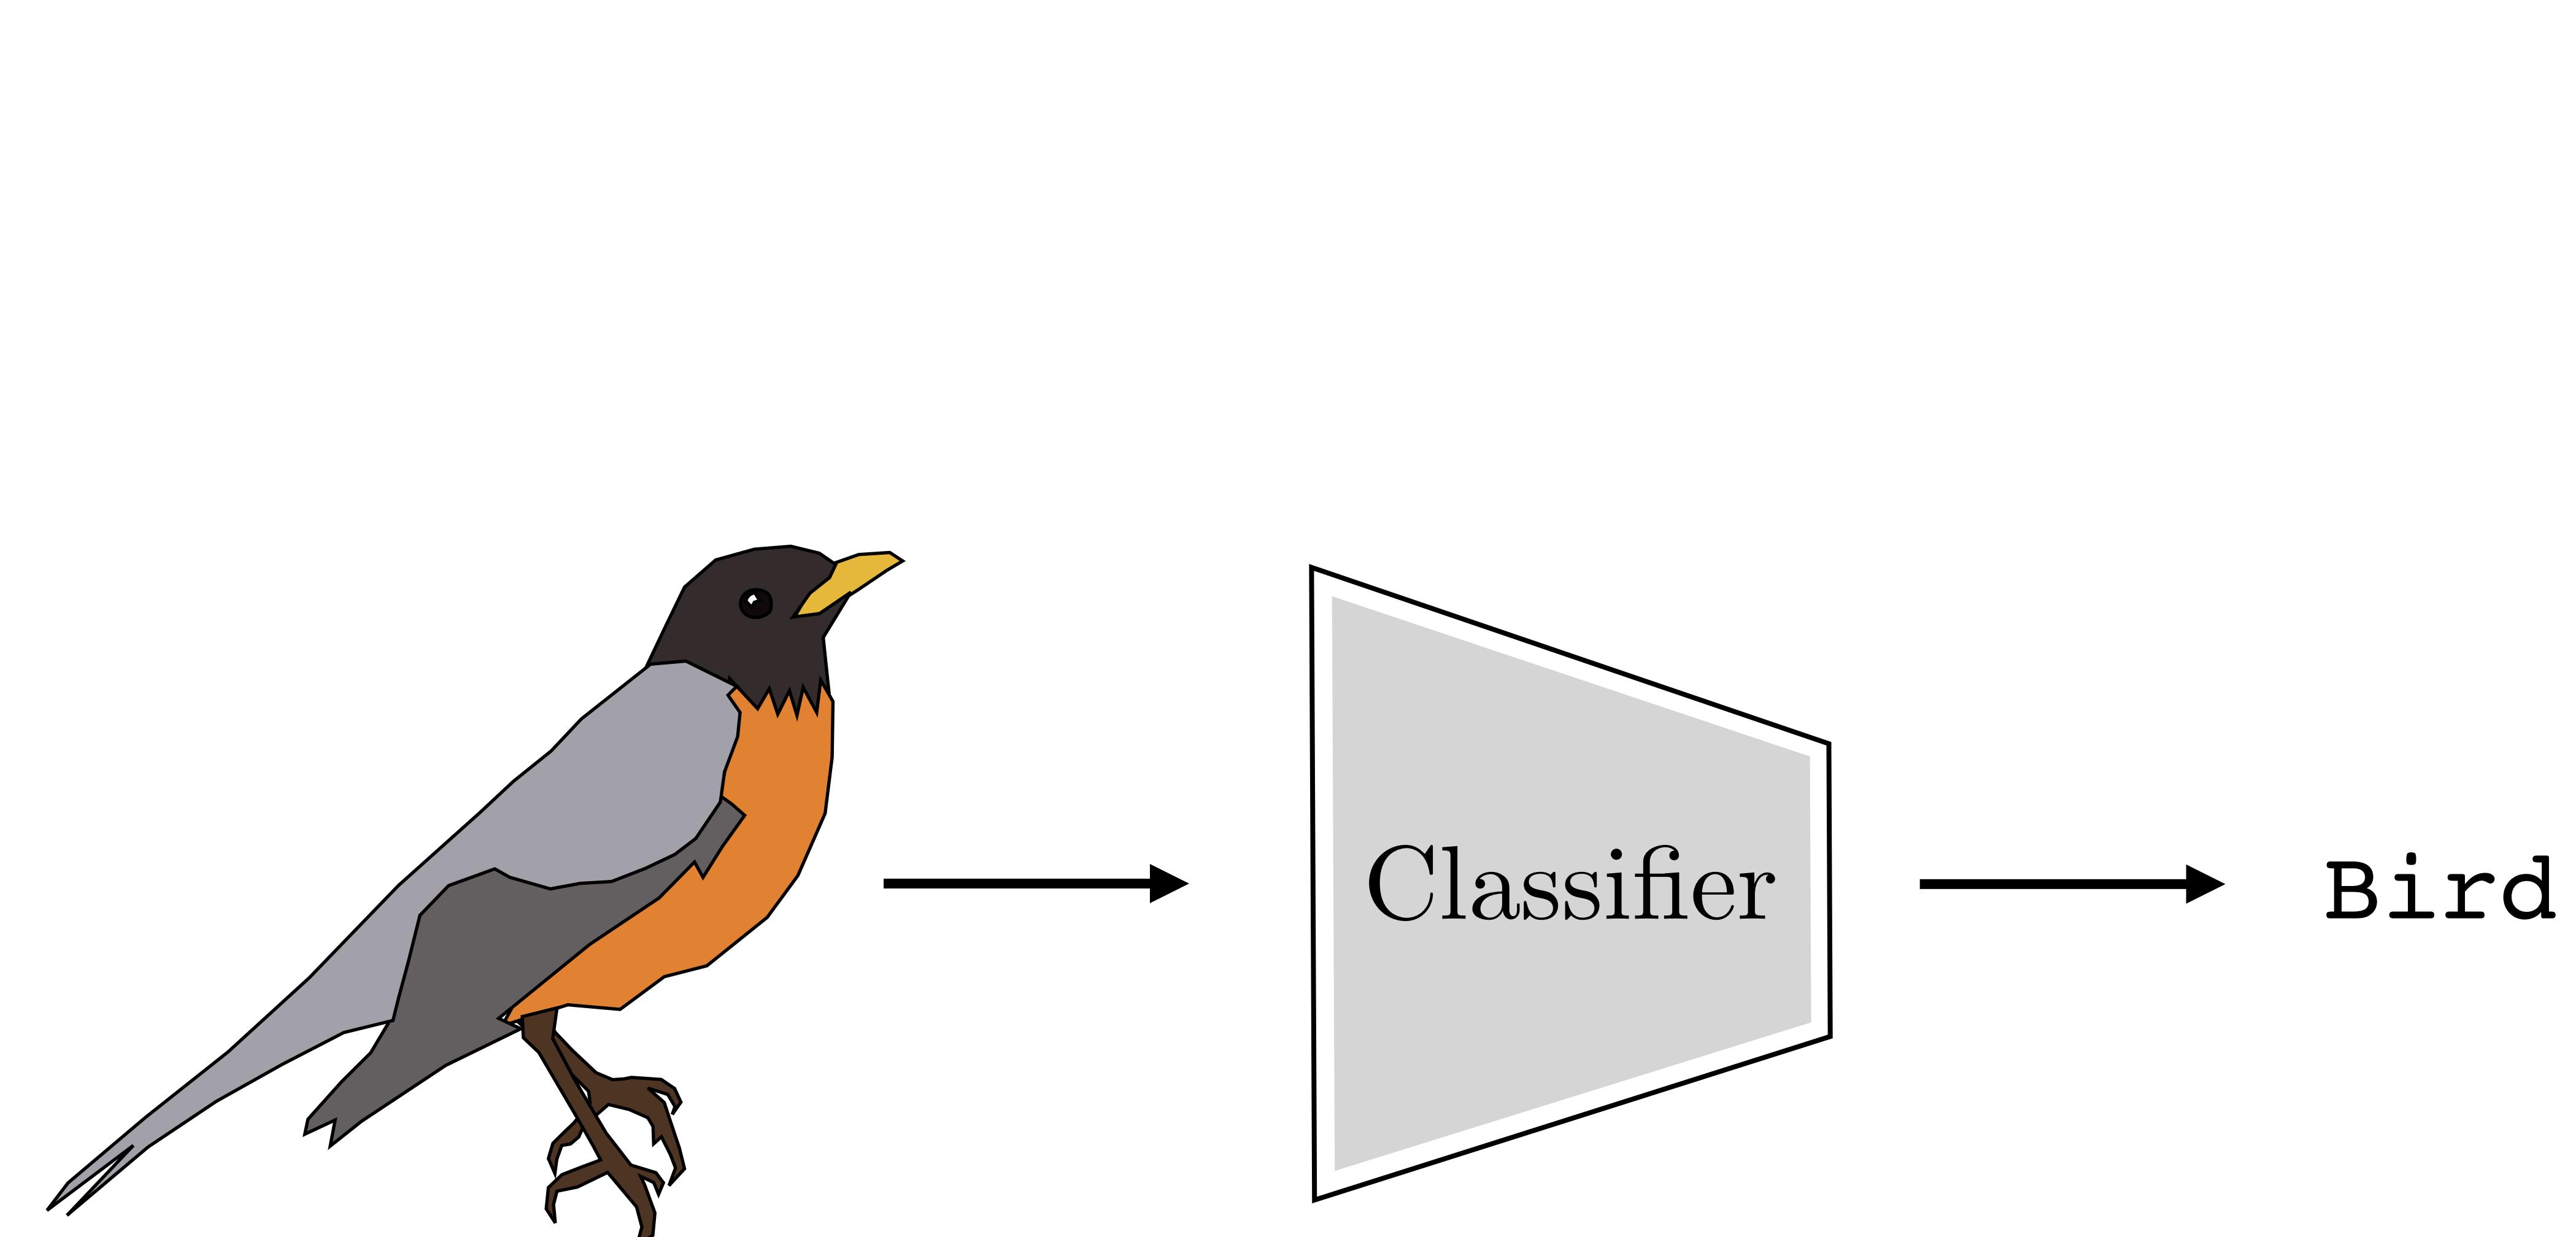

Bird

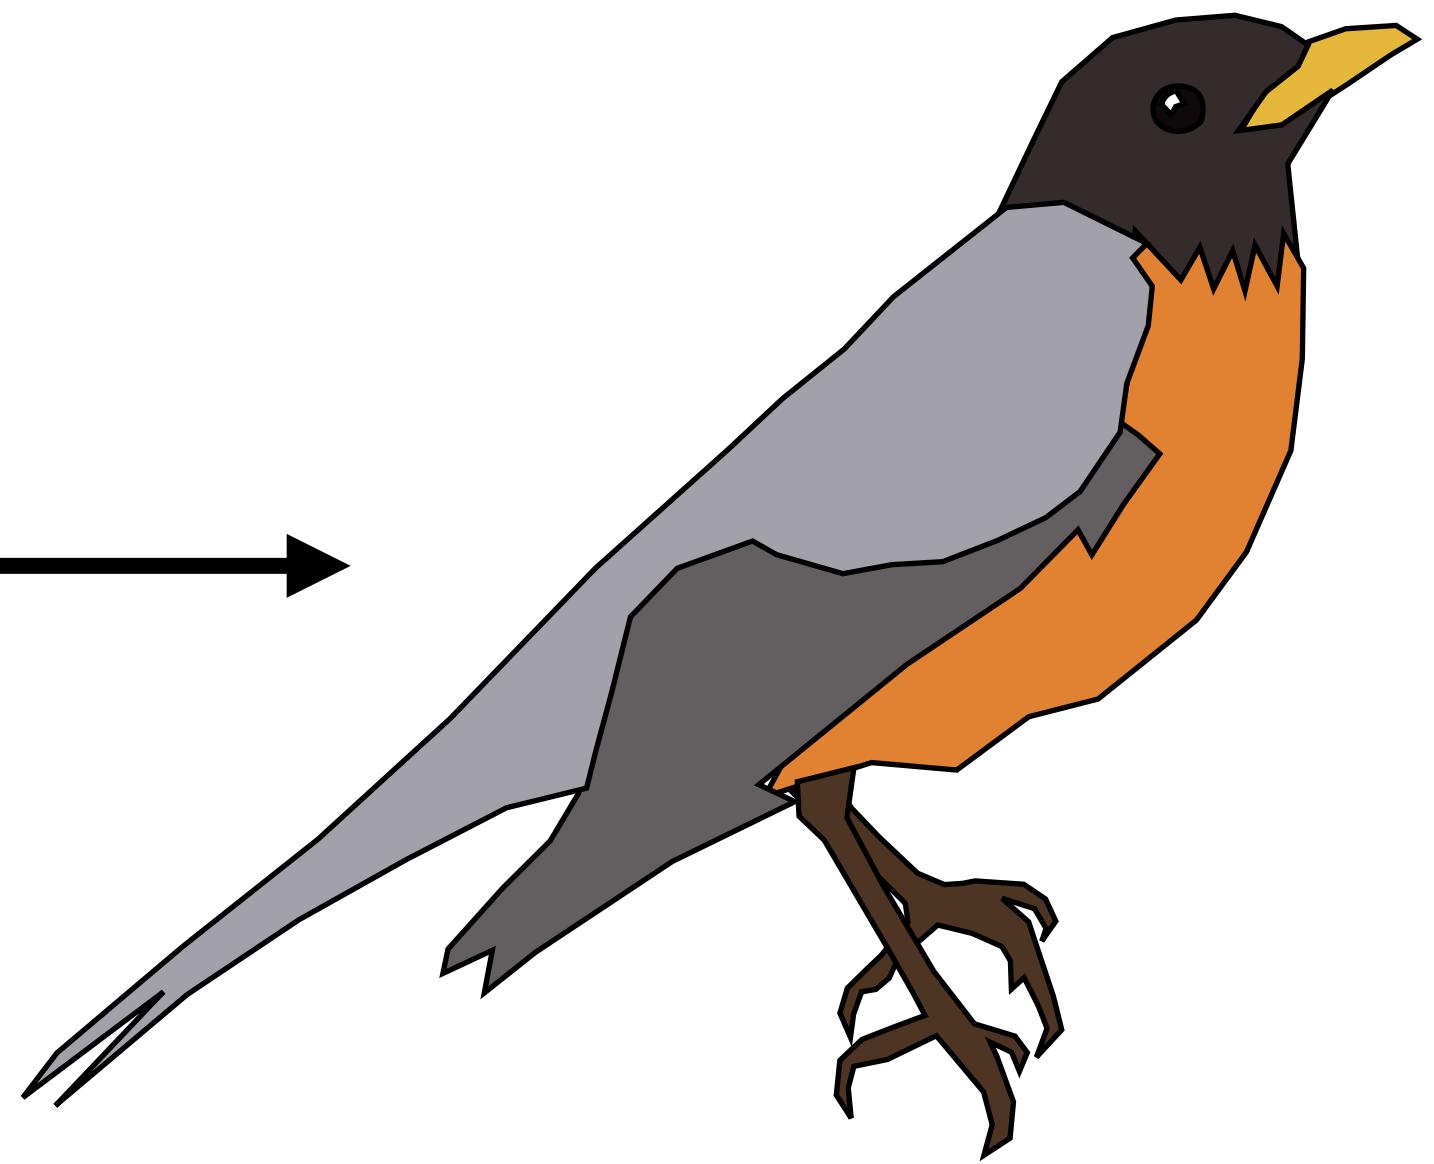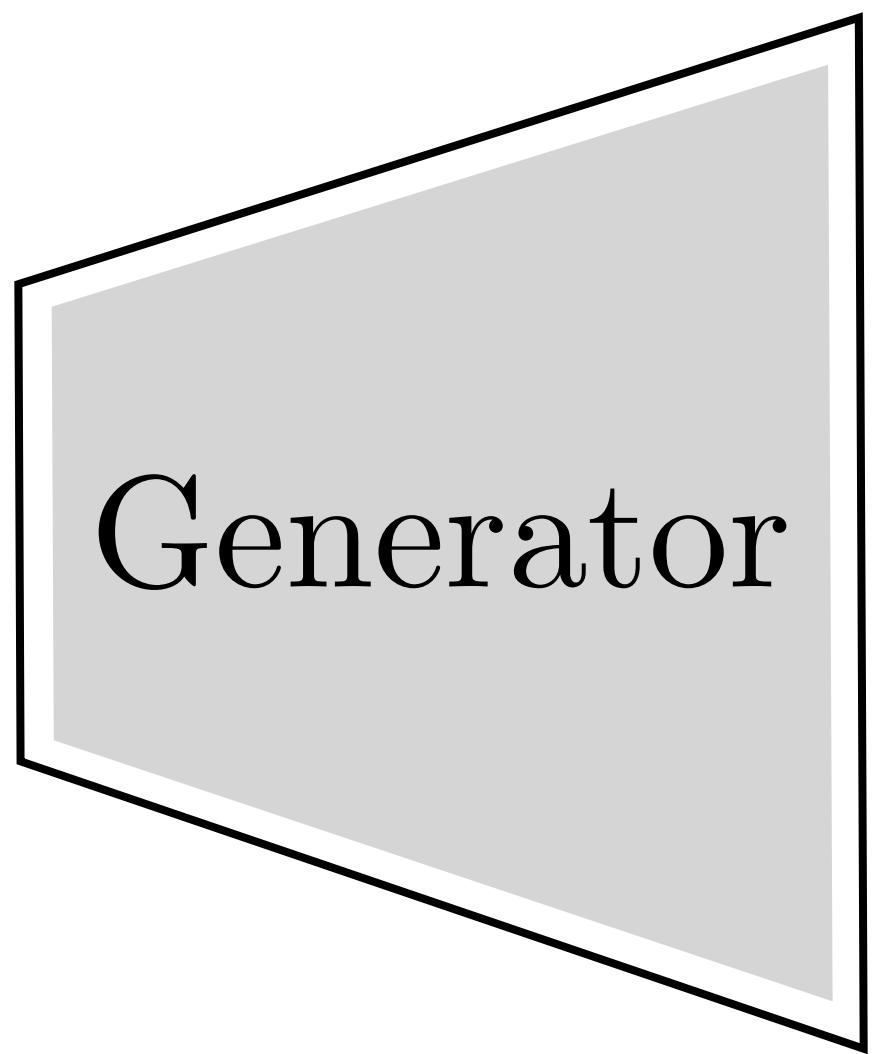

Bird

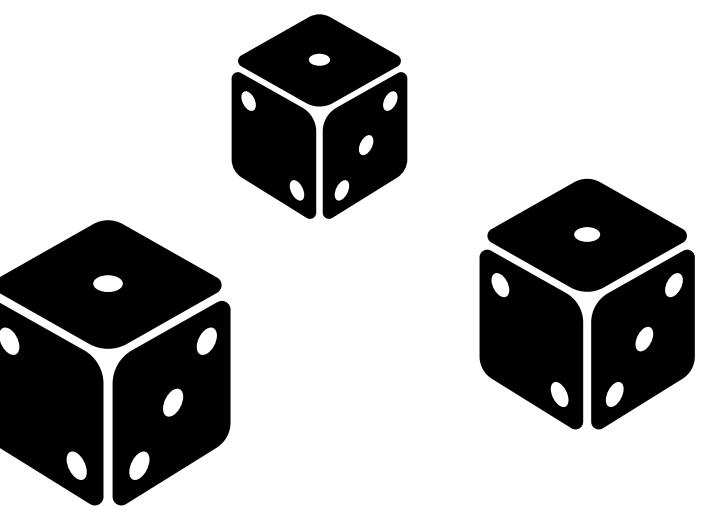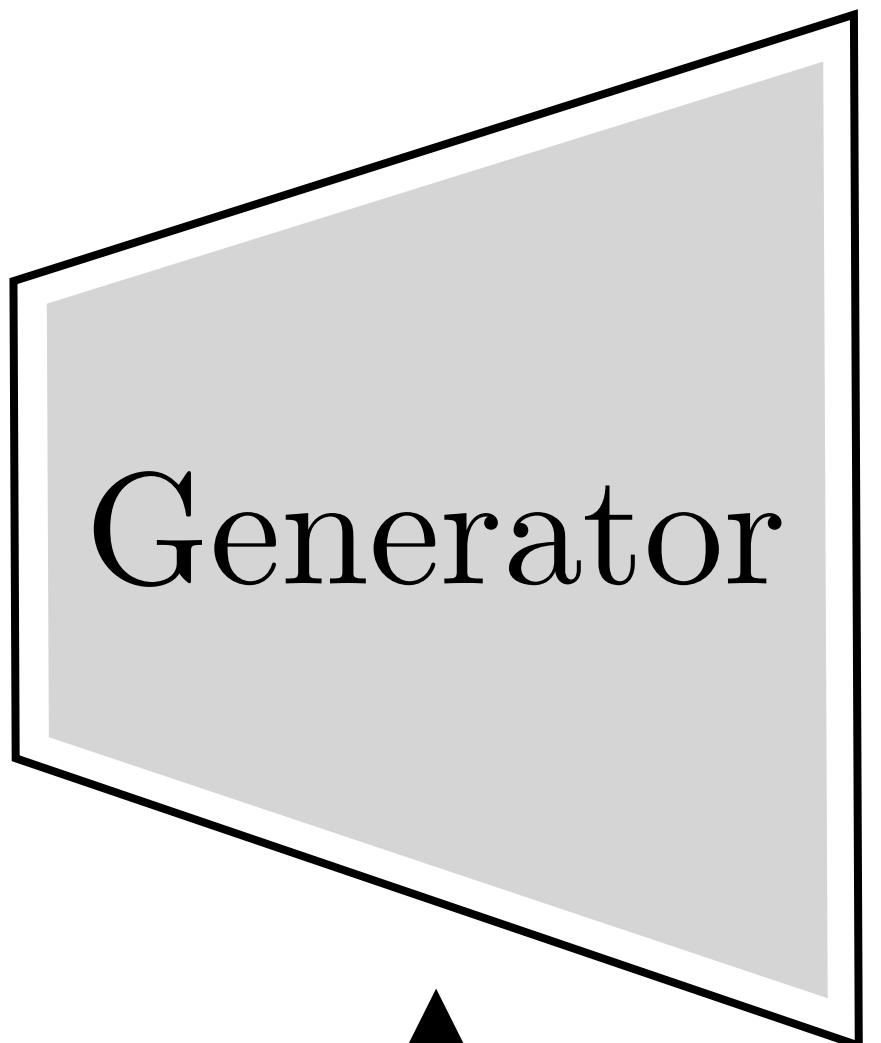


which color?



what angle?



what size?

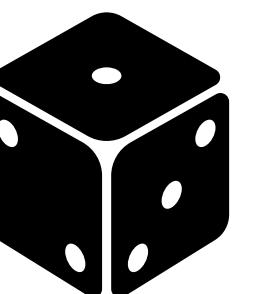




⋮

⋮

⋮



which color?

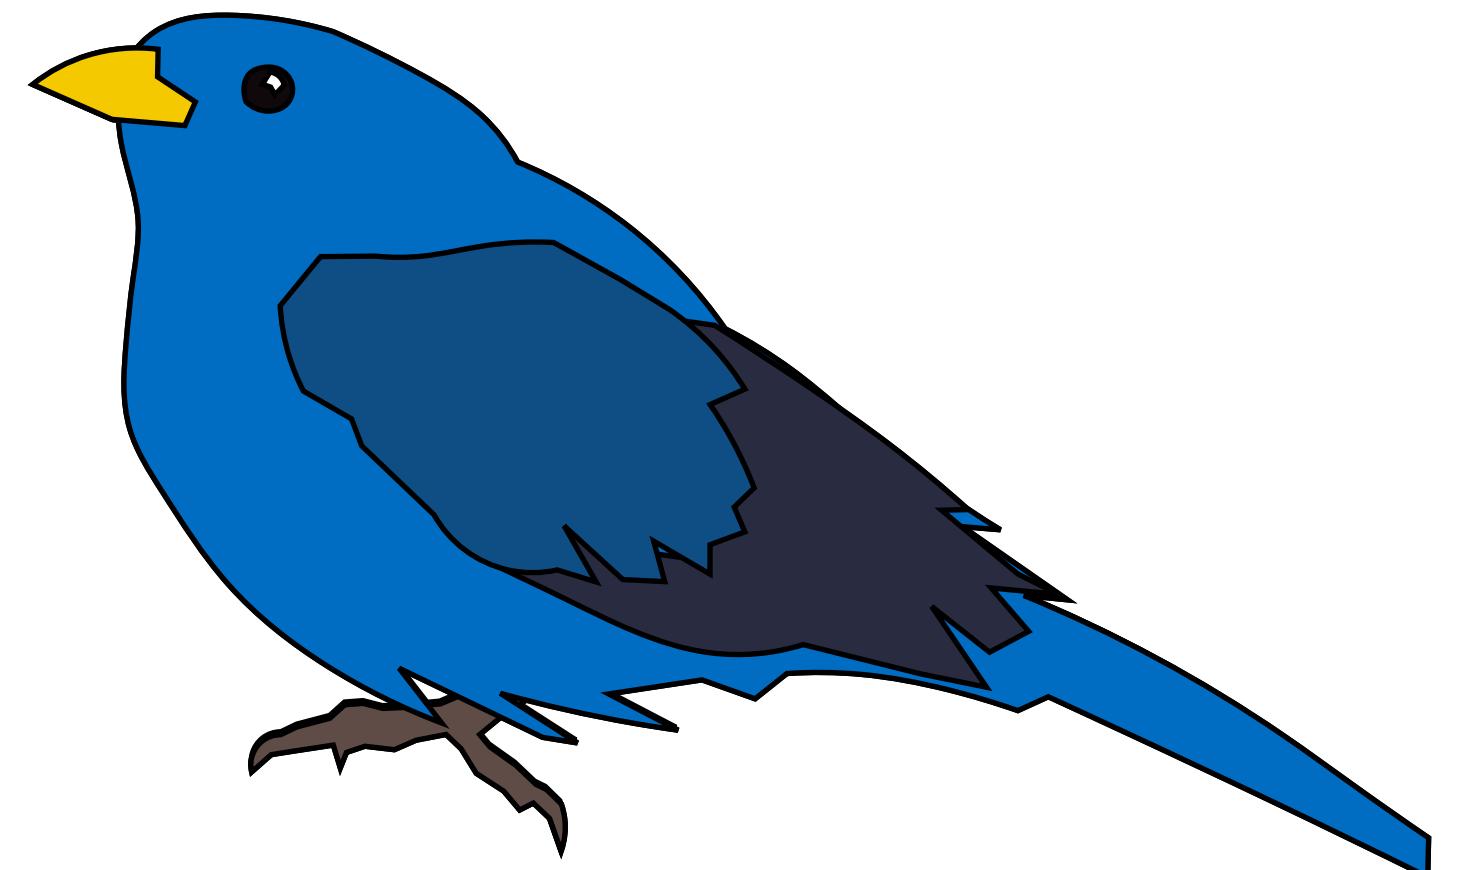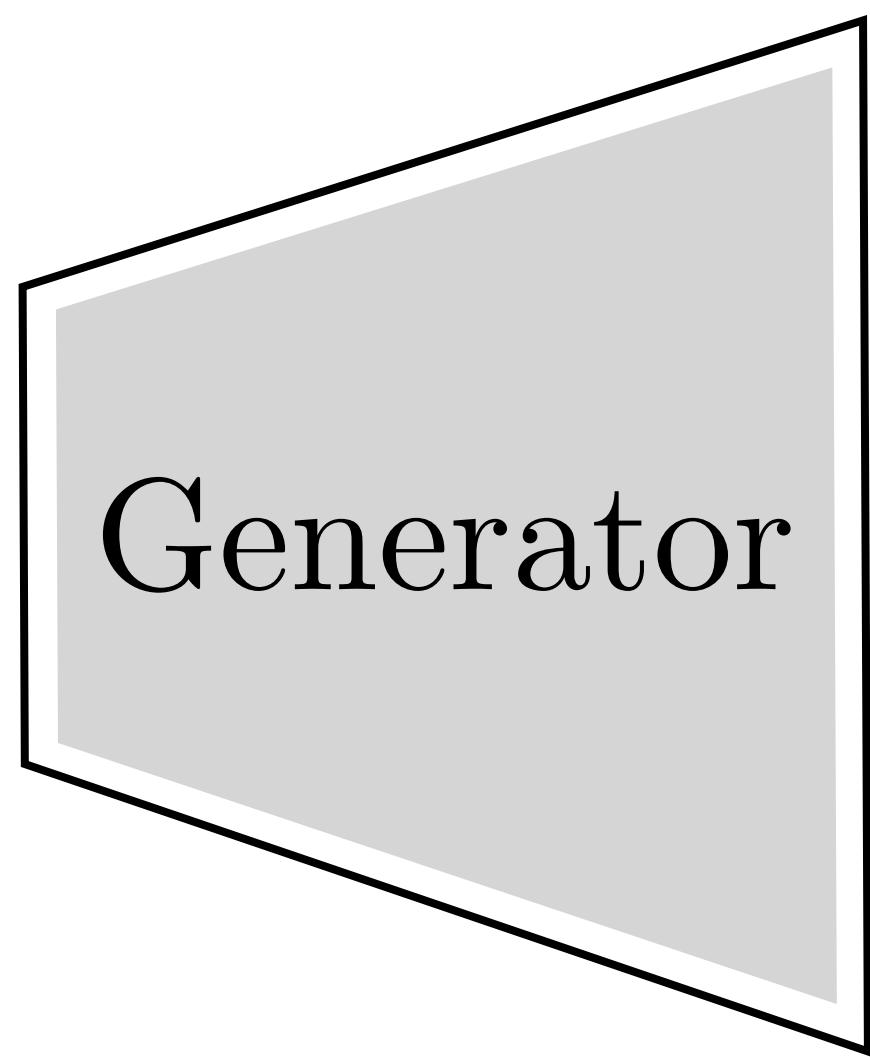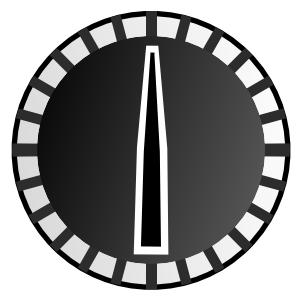

$\mathbf{z} \sim \text{Bernoulli}(0.5)$

**for**  $i = 1, \dots, N$  **do**


  | extend line 1 unit in current heading direction


  | **if**  $z_i == 1$  **then**

    | | rotate heading  $10^\circ$  to the right

  | **else**

    | | rotate heading  $10^\circ$  to the left

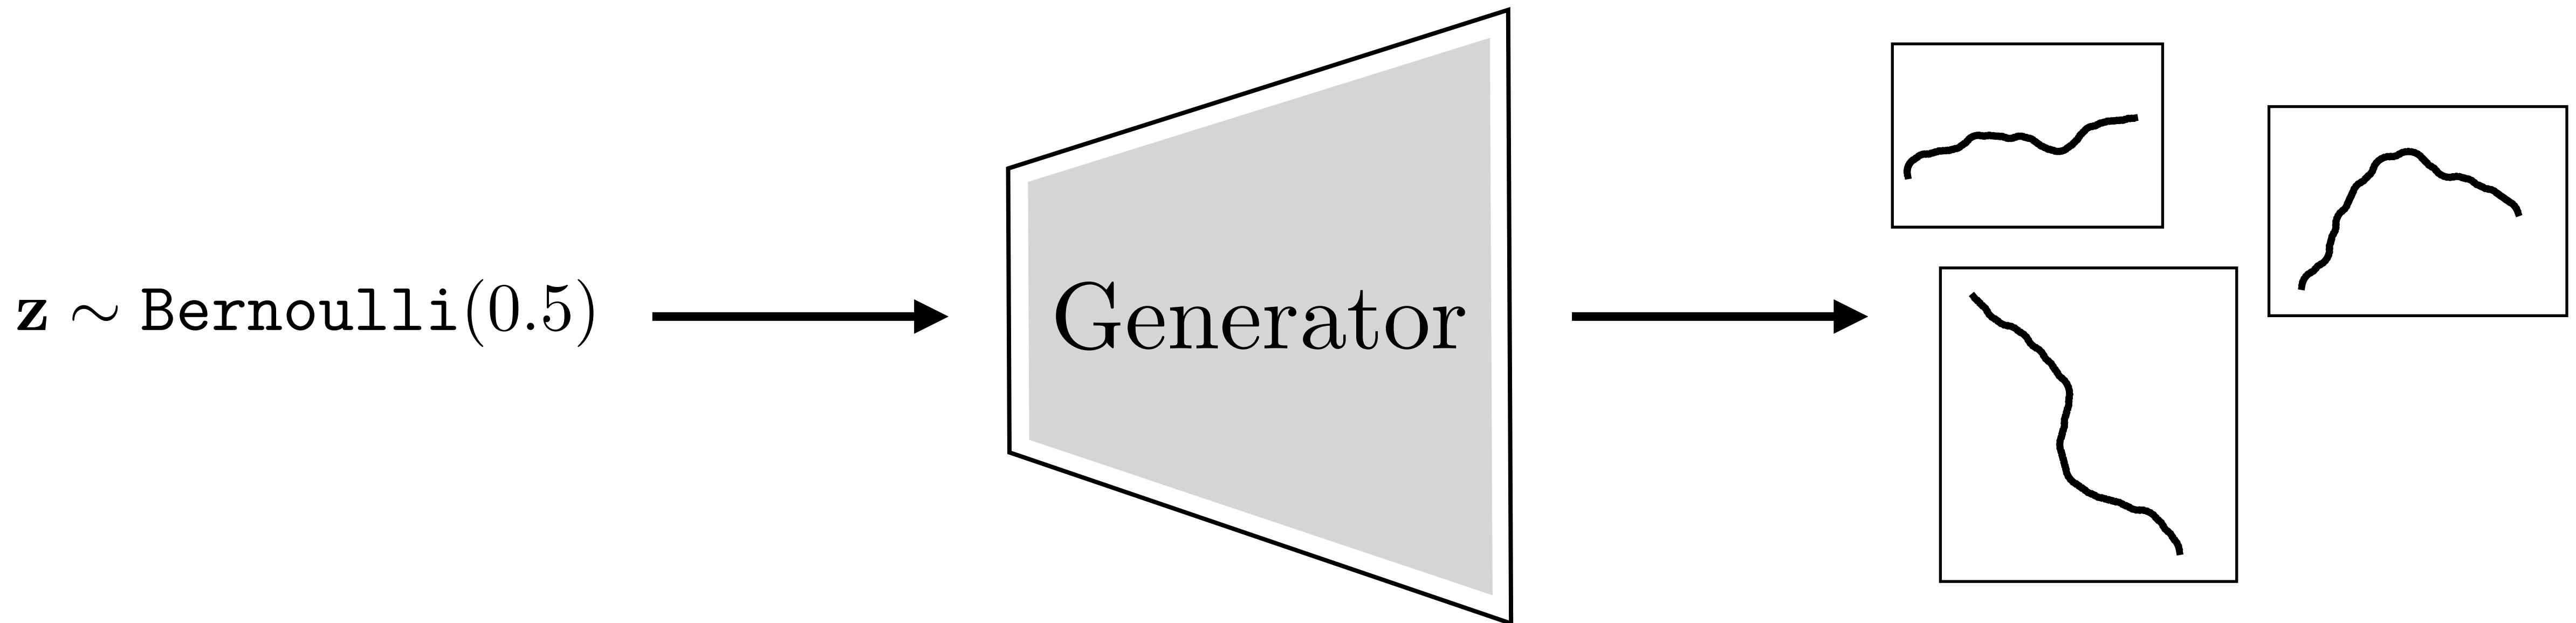

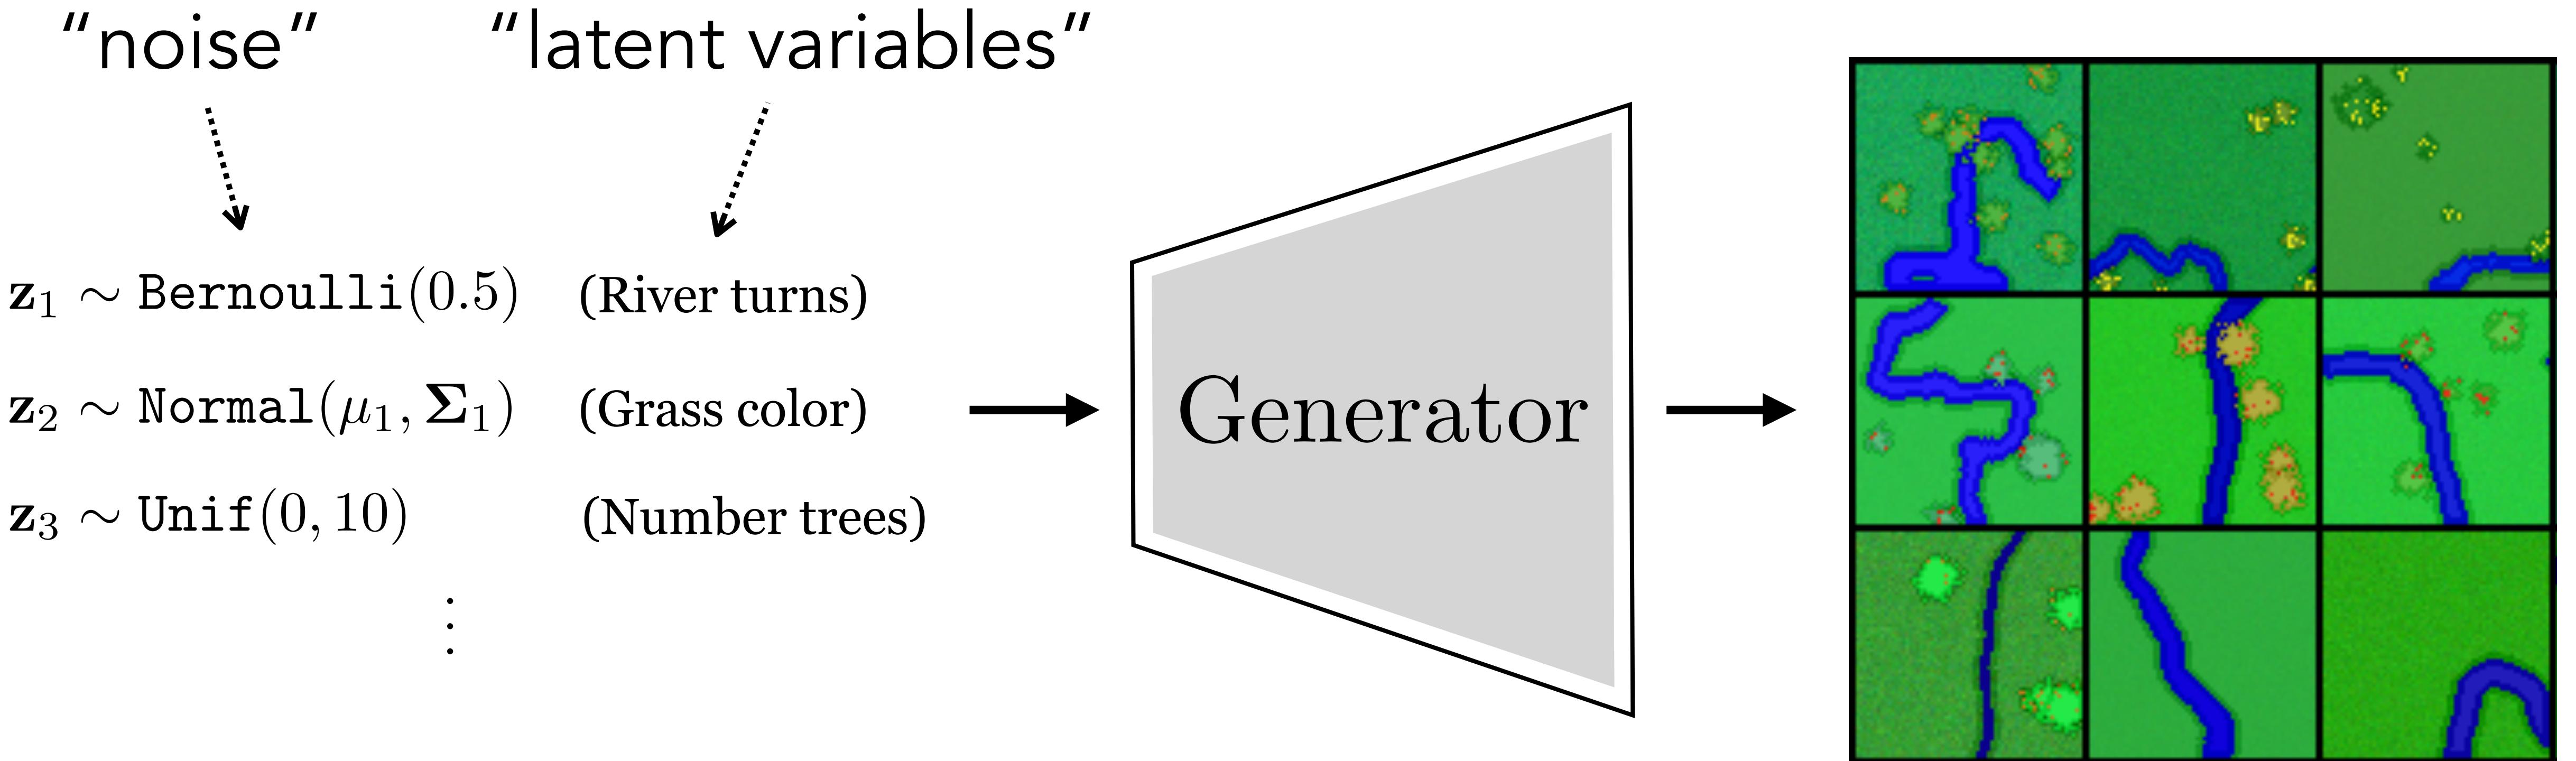

Concept #1: **noise is latent variables**

# Learning data generators

Two approaches:

confusingly, sometimes called an “implicit generative model”



1. **Direct approach:** learn a function that generates data directly

$$G : \mathcal{Z} \rightarrow \mathcal{X}$$



2. **Indirect approach:** learn a function that scores data; generate data by finding points that score highly under this function

$$E : \mathcal{X} \rightarrow \mathbb{R}$$

Training


Data

Direct Approach

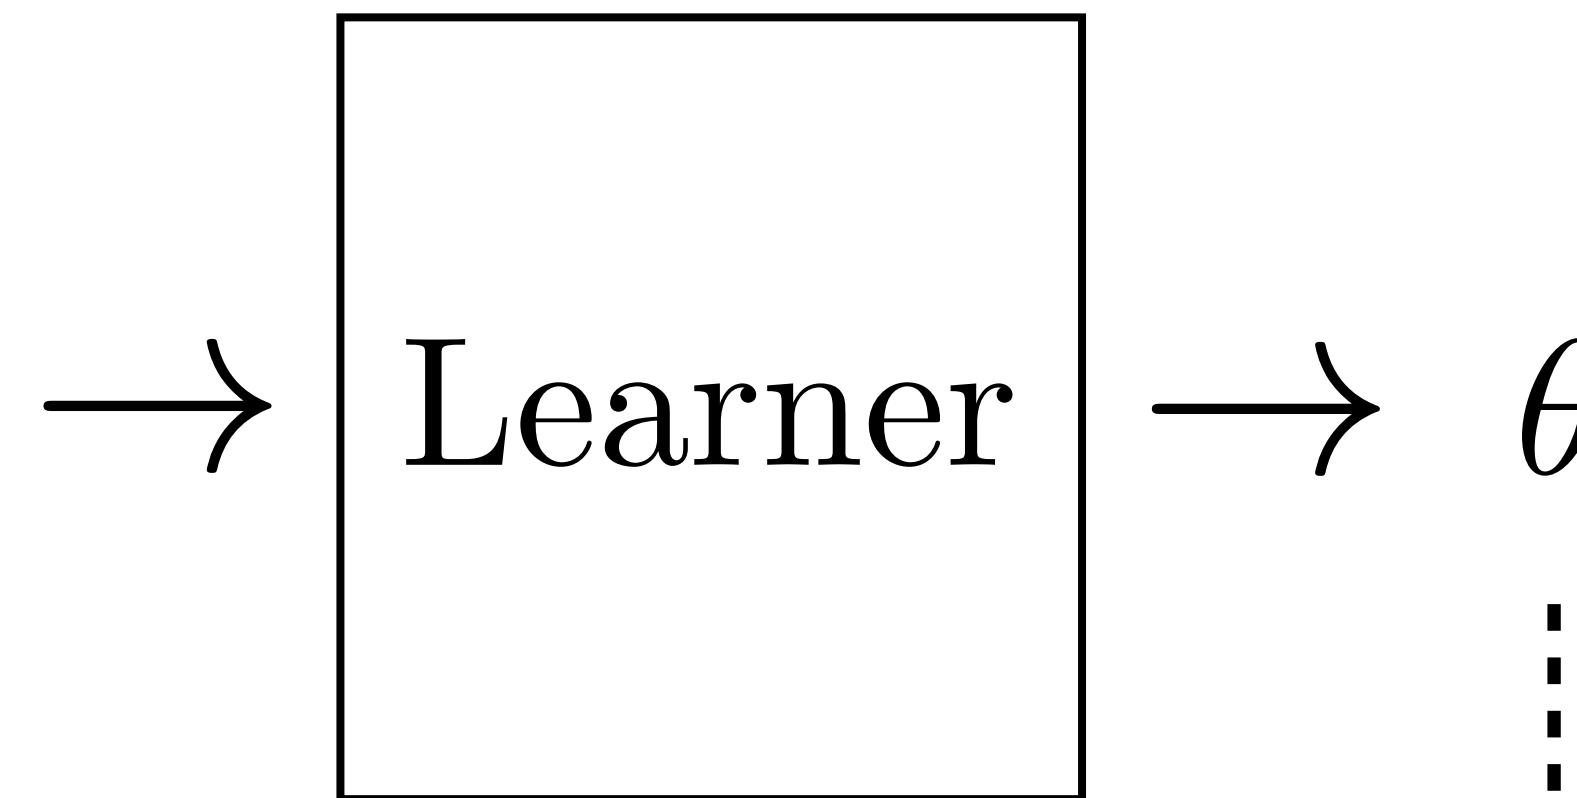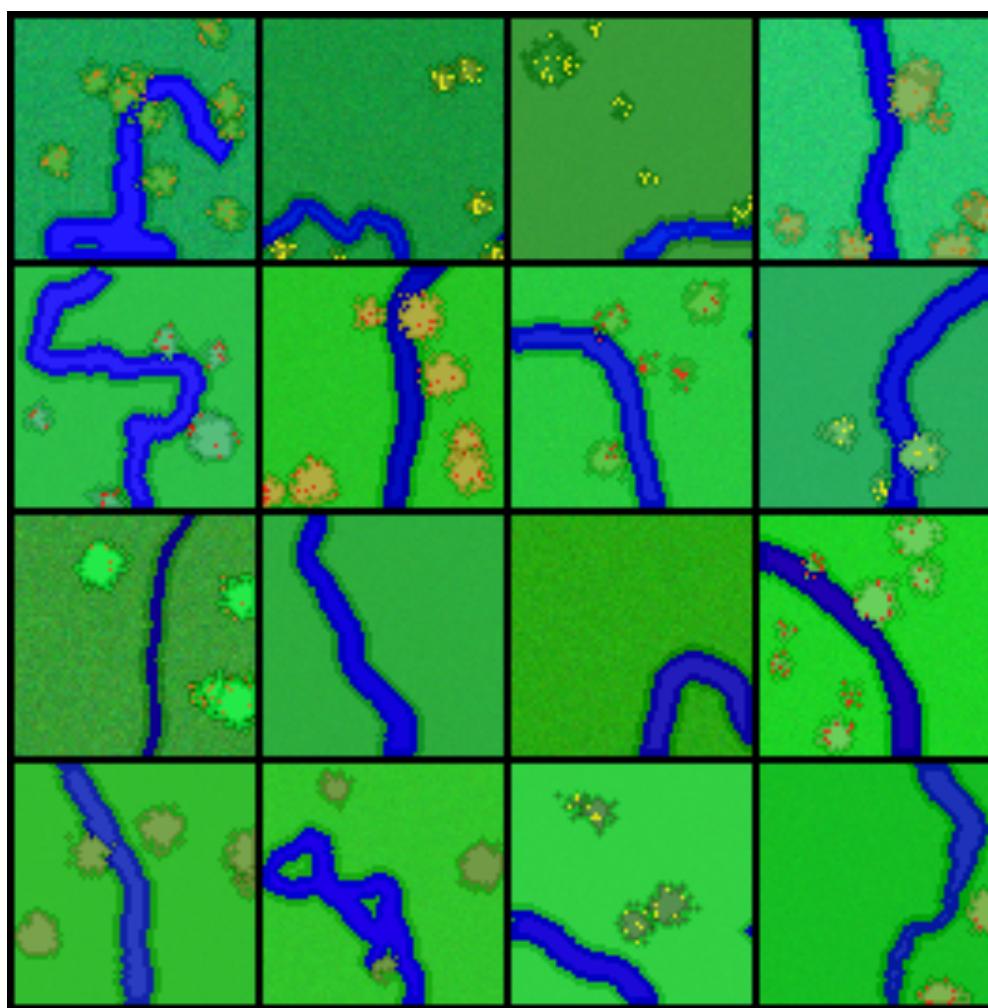

Sampling


Samples

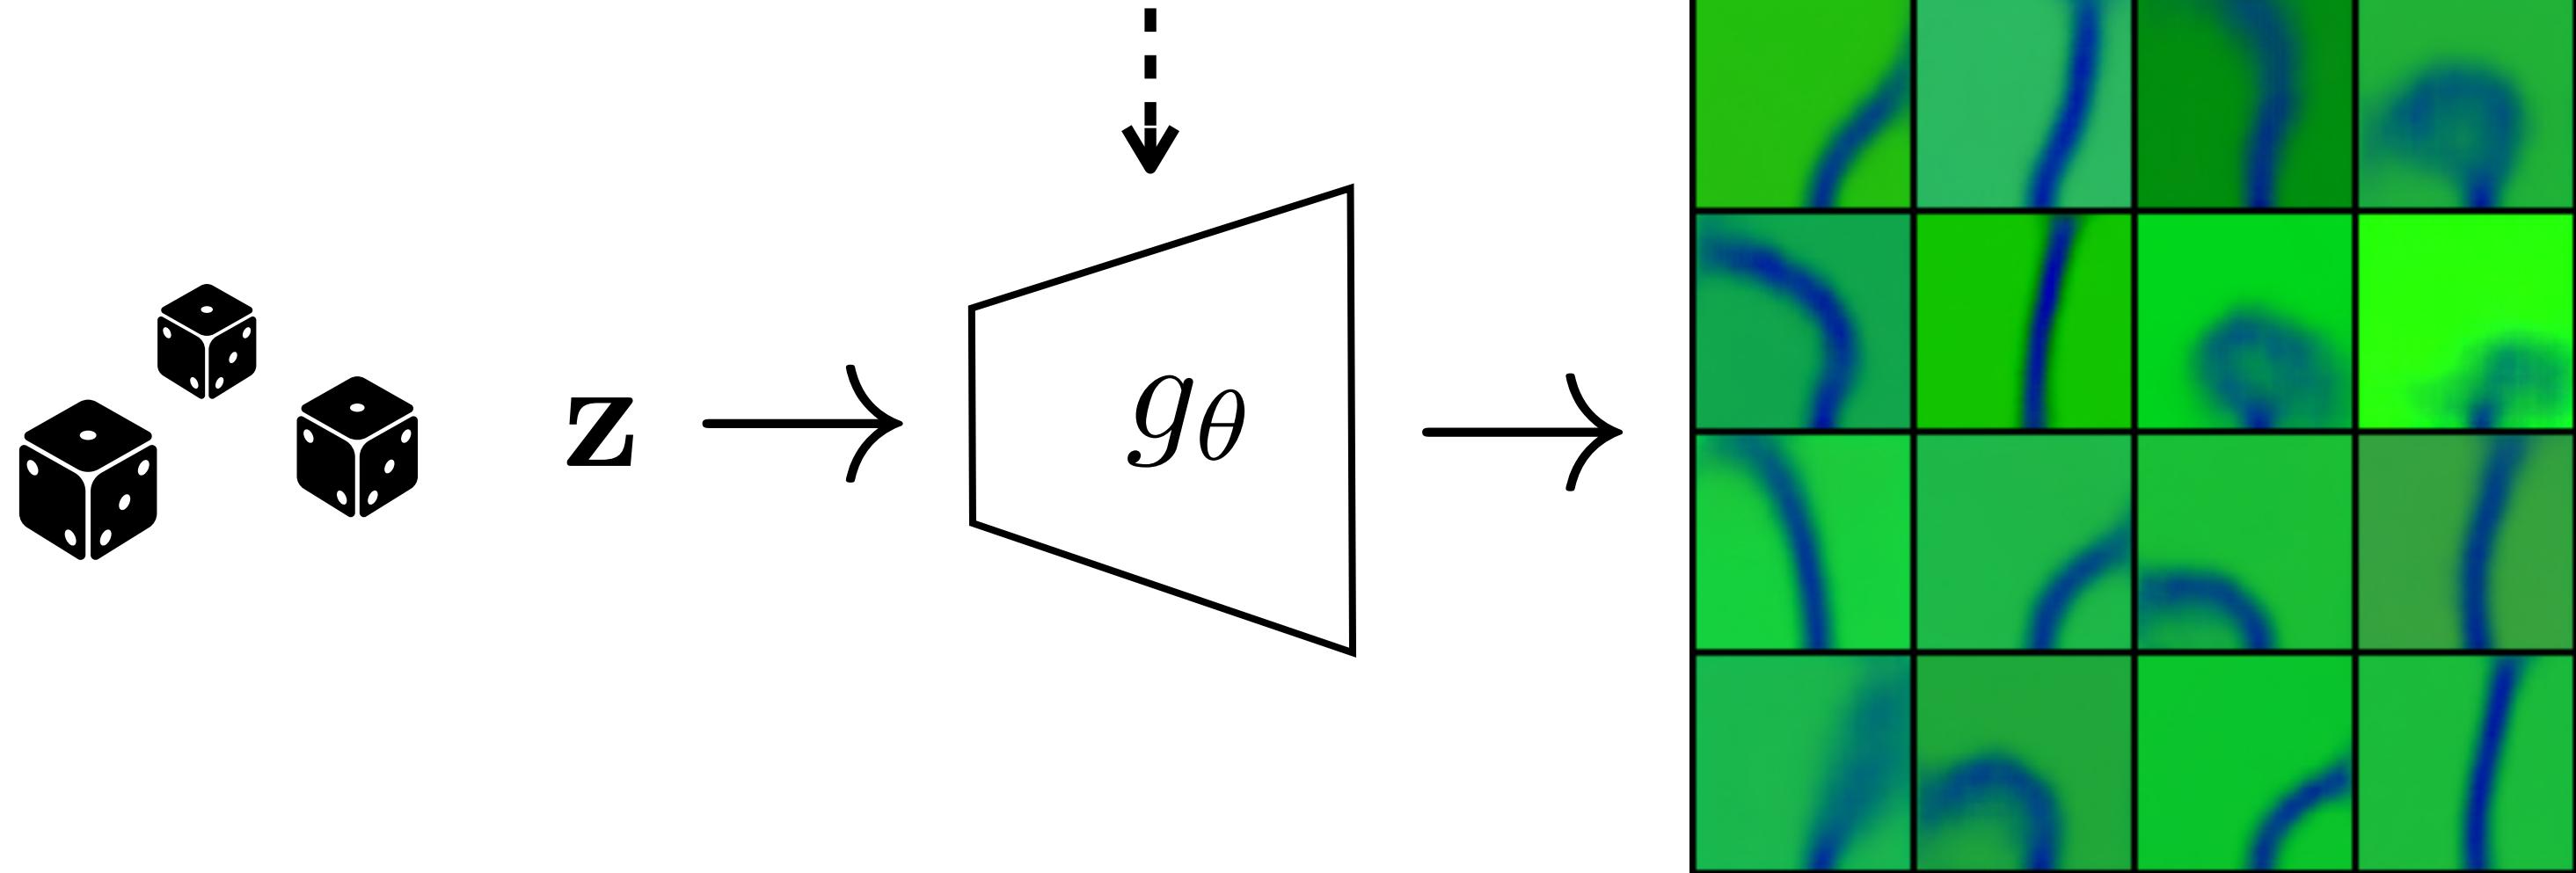


## Training

Data


$$\{\mathbf{x}^{(i)}\}_{i=1}^N$$

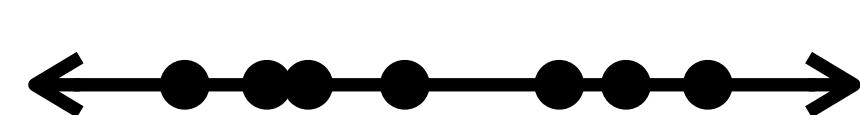

Indirect approach

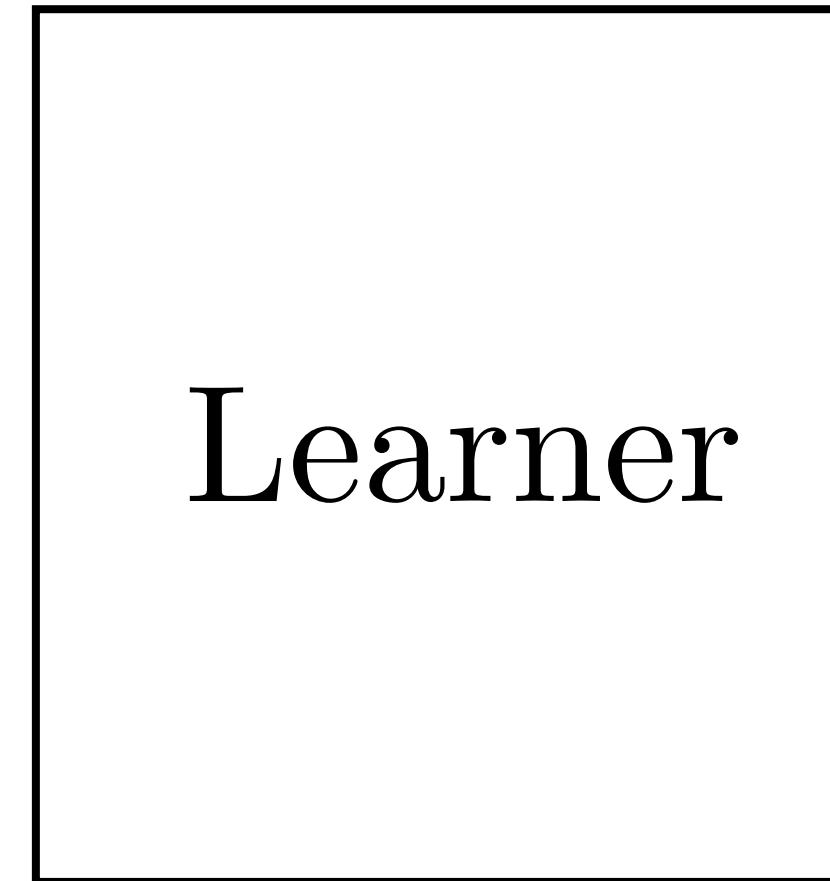



Scoring function

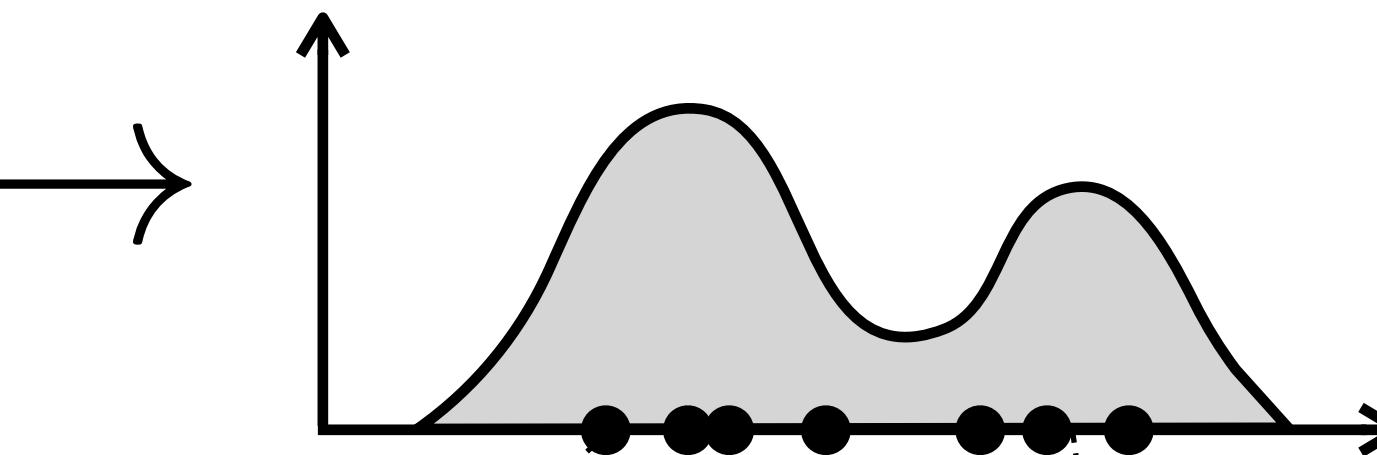

e.g., likelihood, energy,  
"score function"

## Sampling

Sampling algorithm  
(e.g., MCMC)

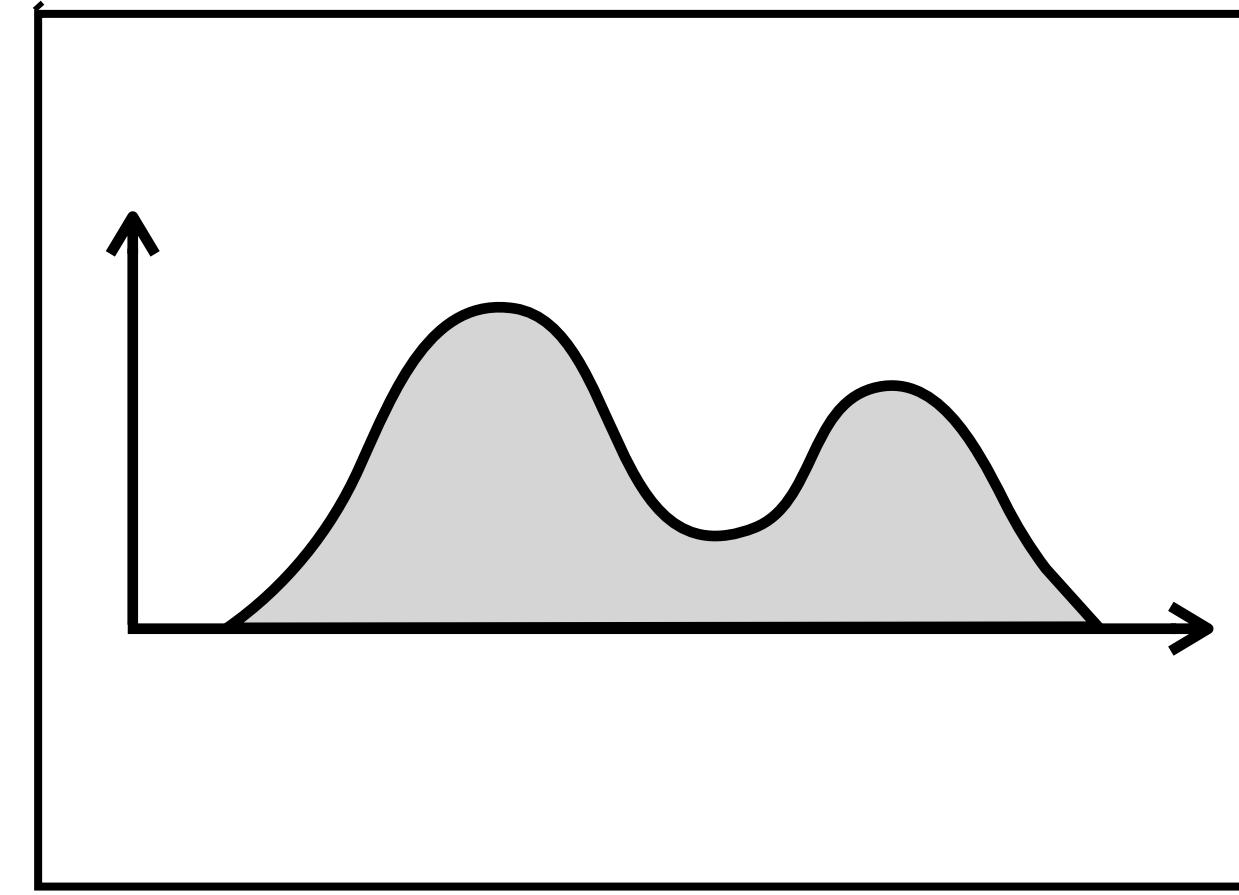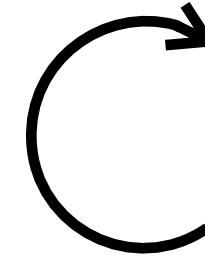

Samples

$$\{\hat{\mathbf{x}}^{(i)}\}_{i=1}^N$$



# What's the goal of generative modeling?

Make synthetic data that “looks like” real data.

How to measure “looks like”?

The main answer in deep generative models is: “has high probability under a density model fit to real data.”


# What's the goal of generative modeling?

The goal is not to replicate the training data but to make **new** data that is ***realistic*** (captures the essential properties of real data)

(A model that memorizes the training data is overfit in exactly the same sense as a classifier can be overfit)


# Density models

$$p_\theta : \mathcal{X} \rightarrow [0, \infty)$$

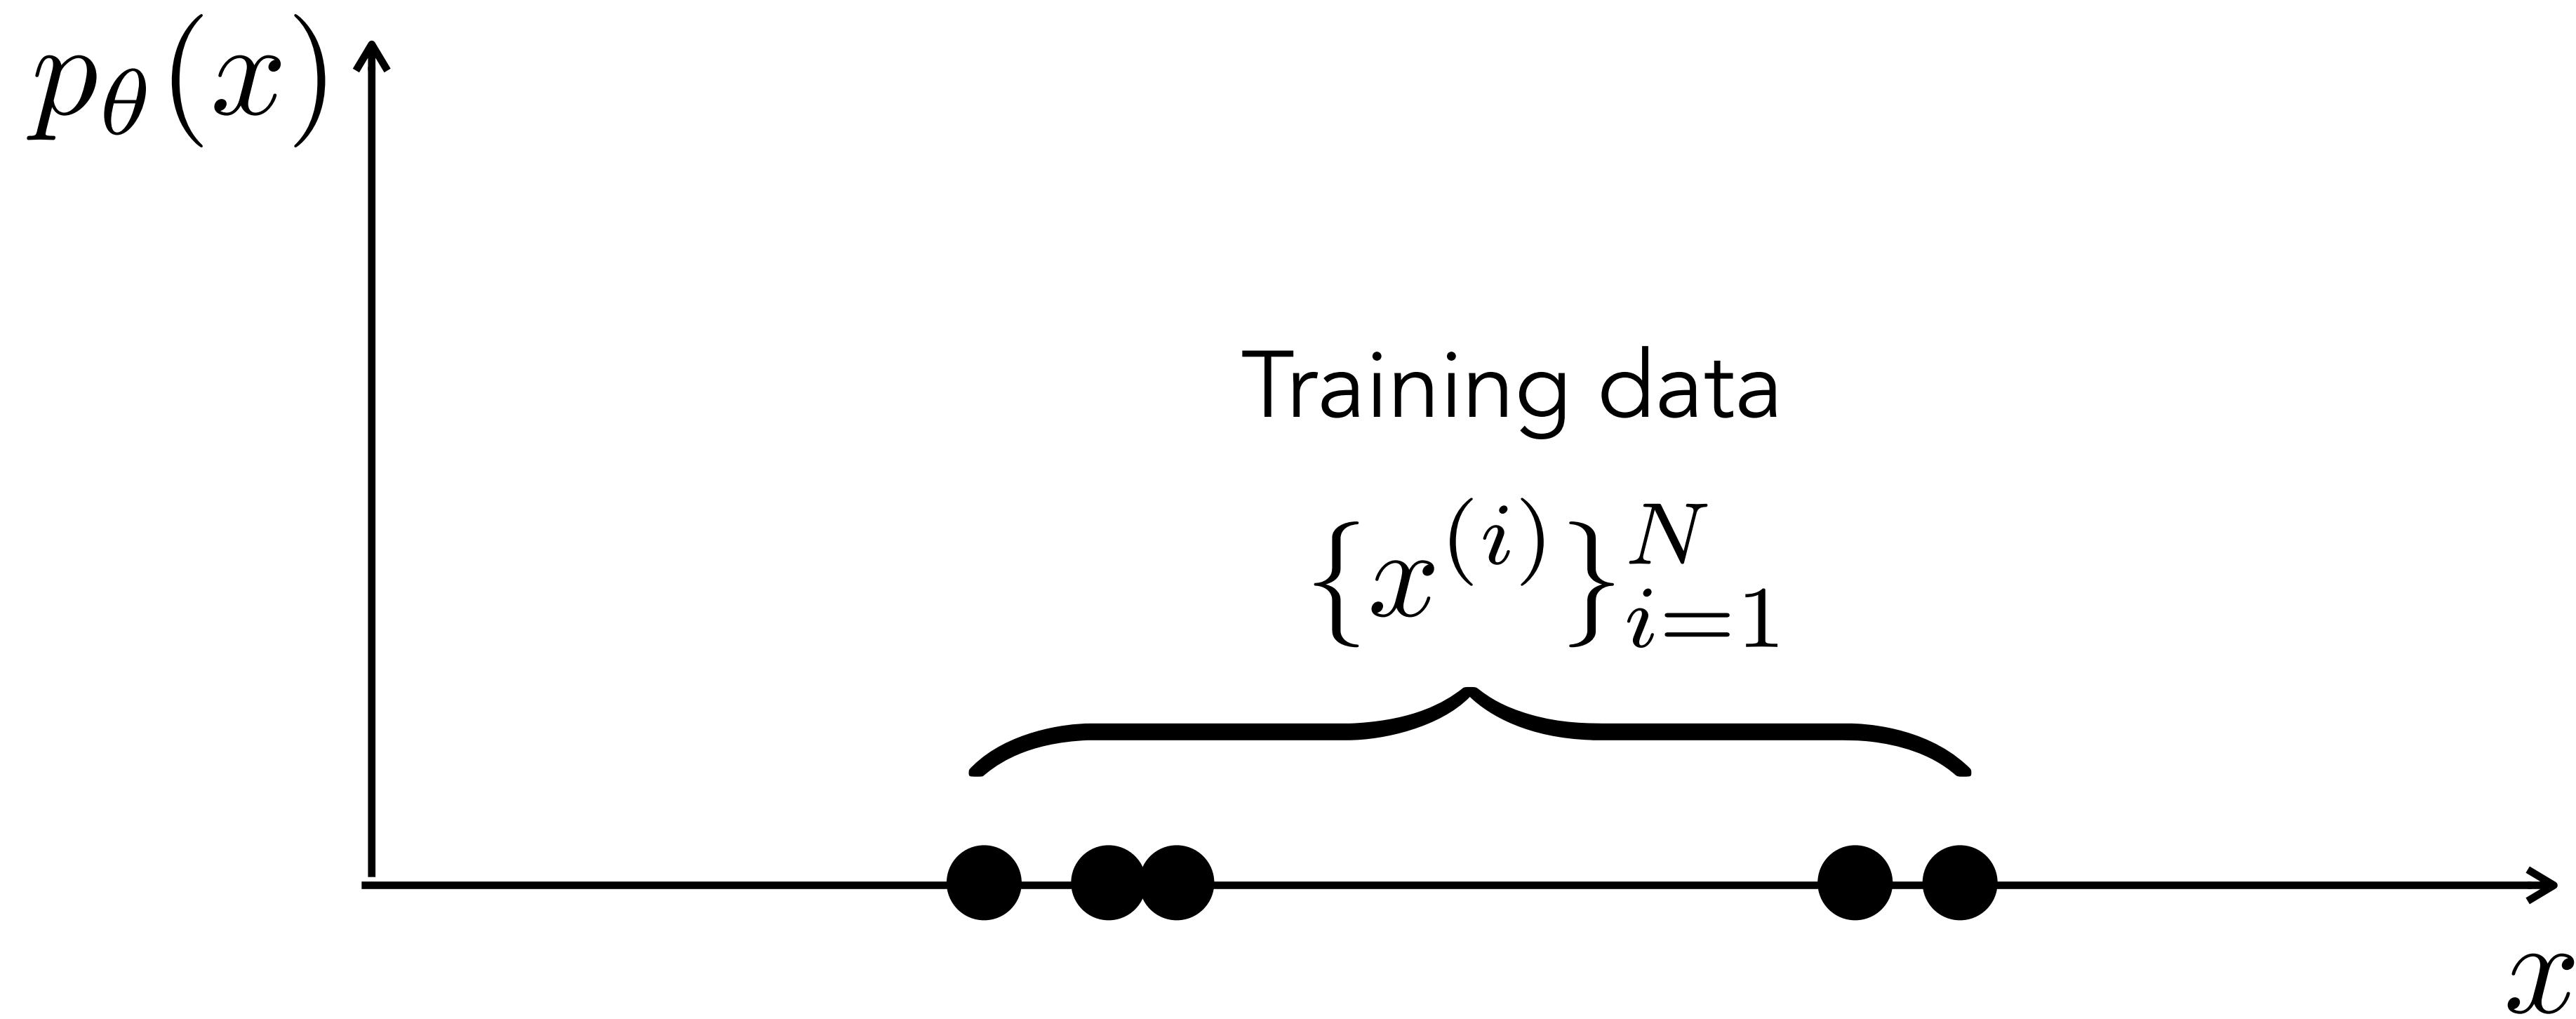


# Density models

$$p_\theta : \mathcal{X} \rightarrow [0, \infty)$$


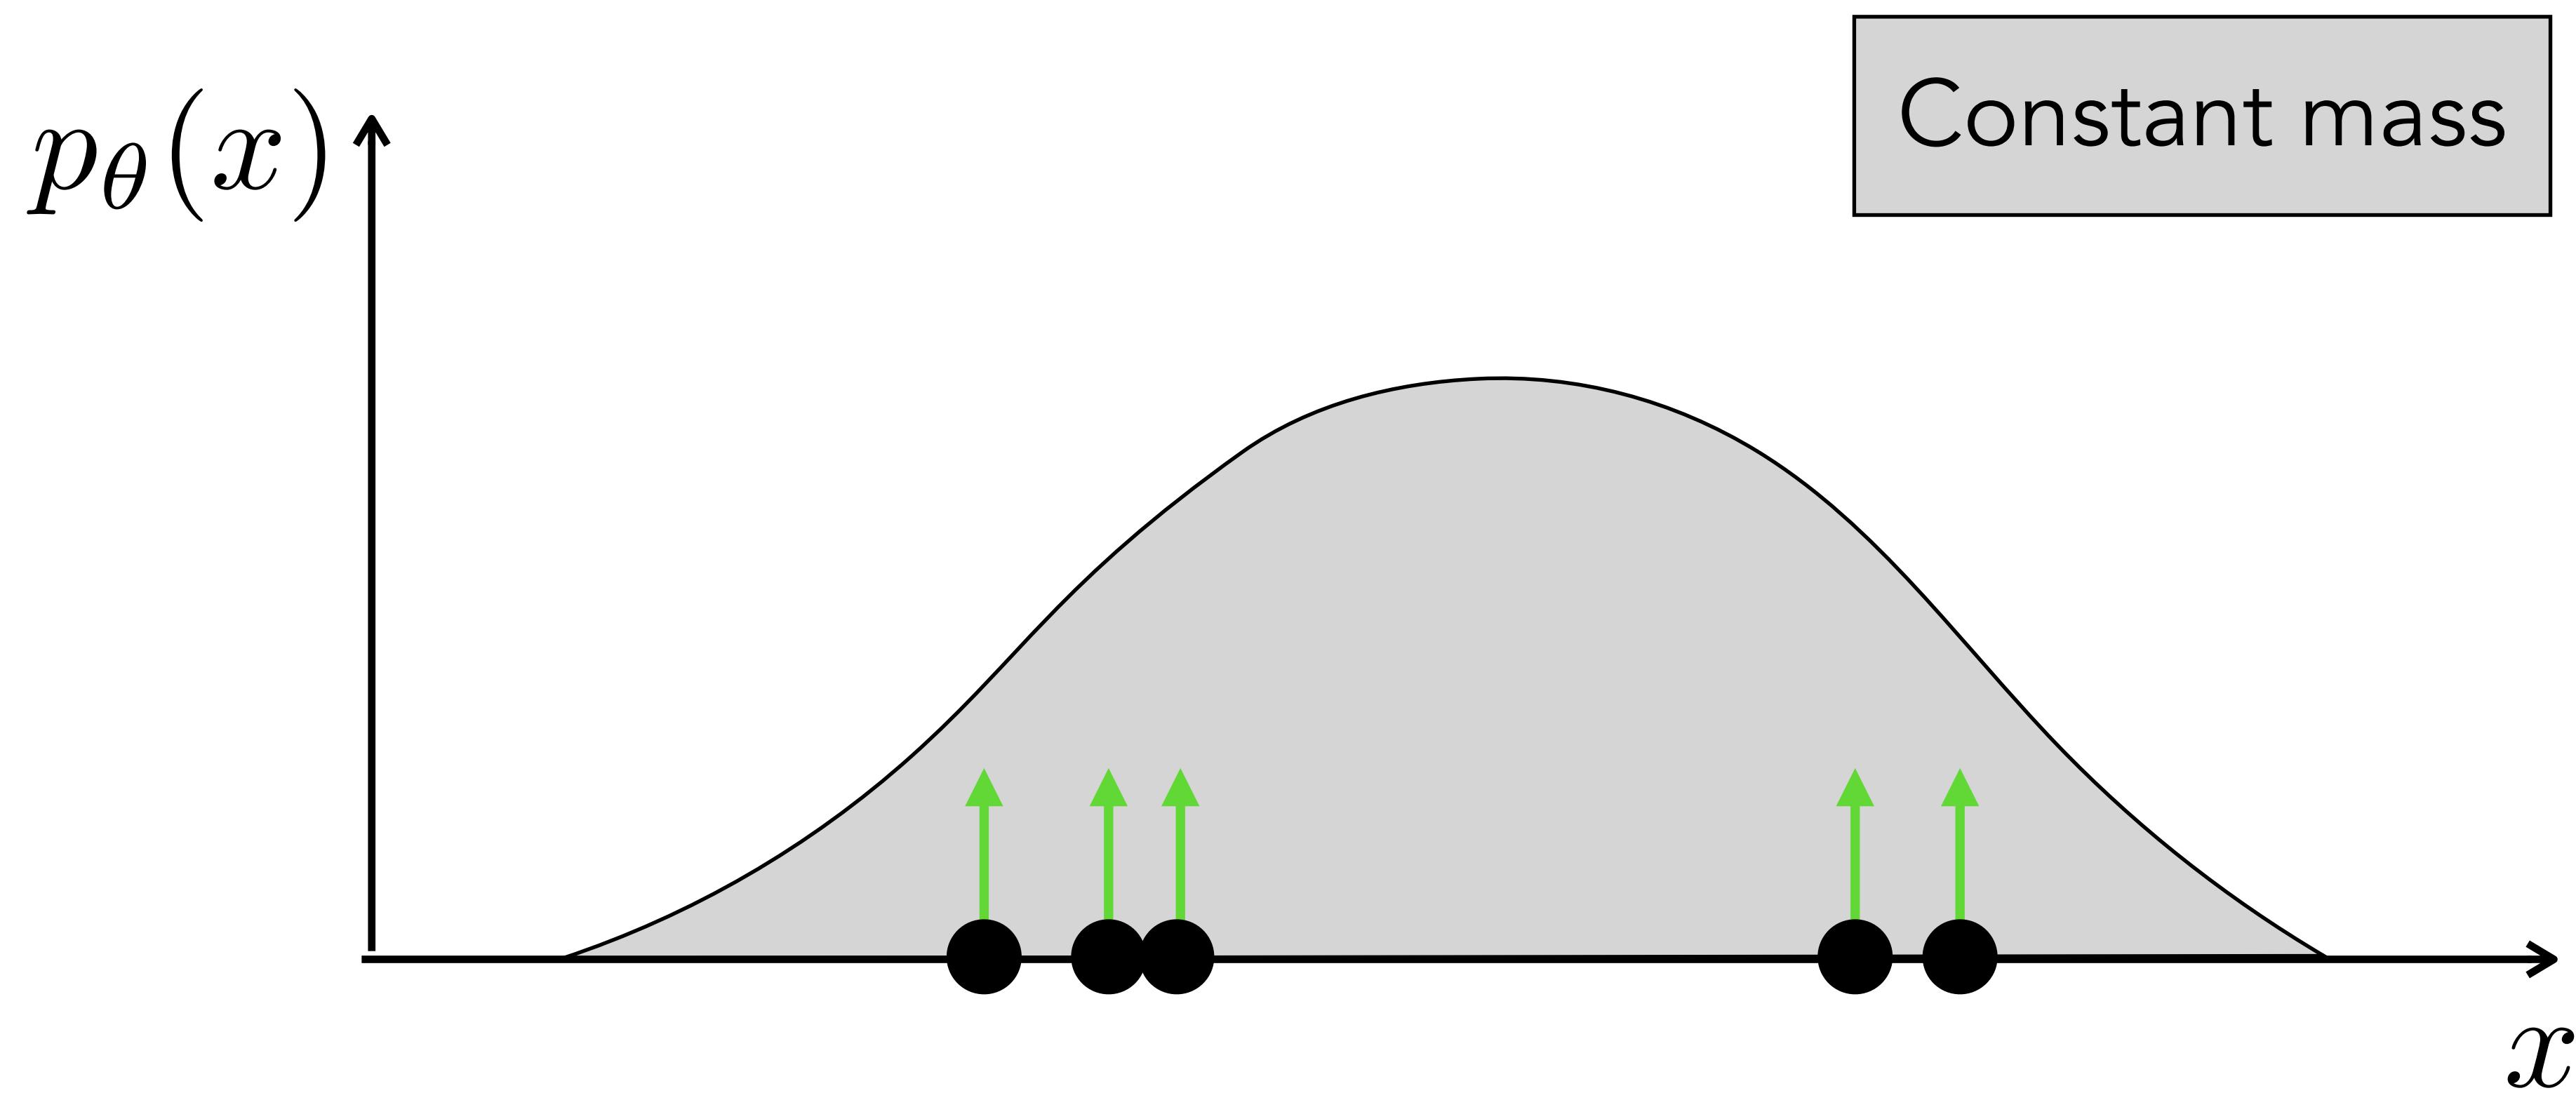


# Density models

$$p_\theta : \mathcal{X} \rightarrow [0, \infty)$$

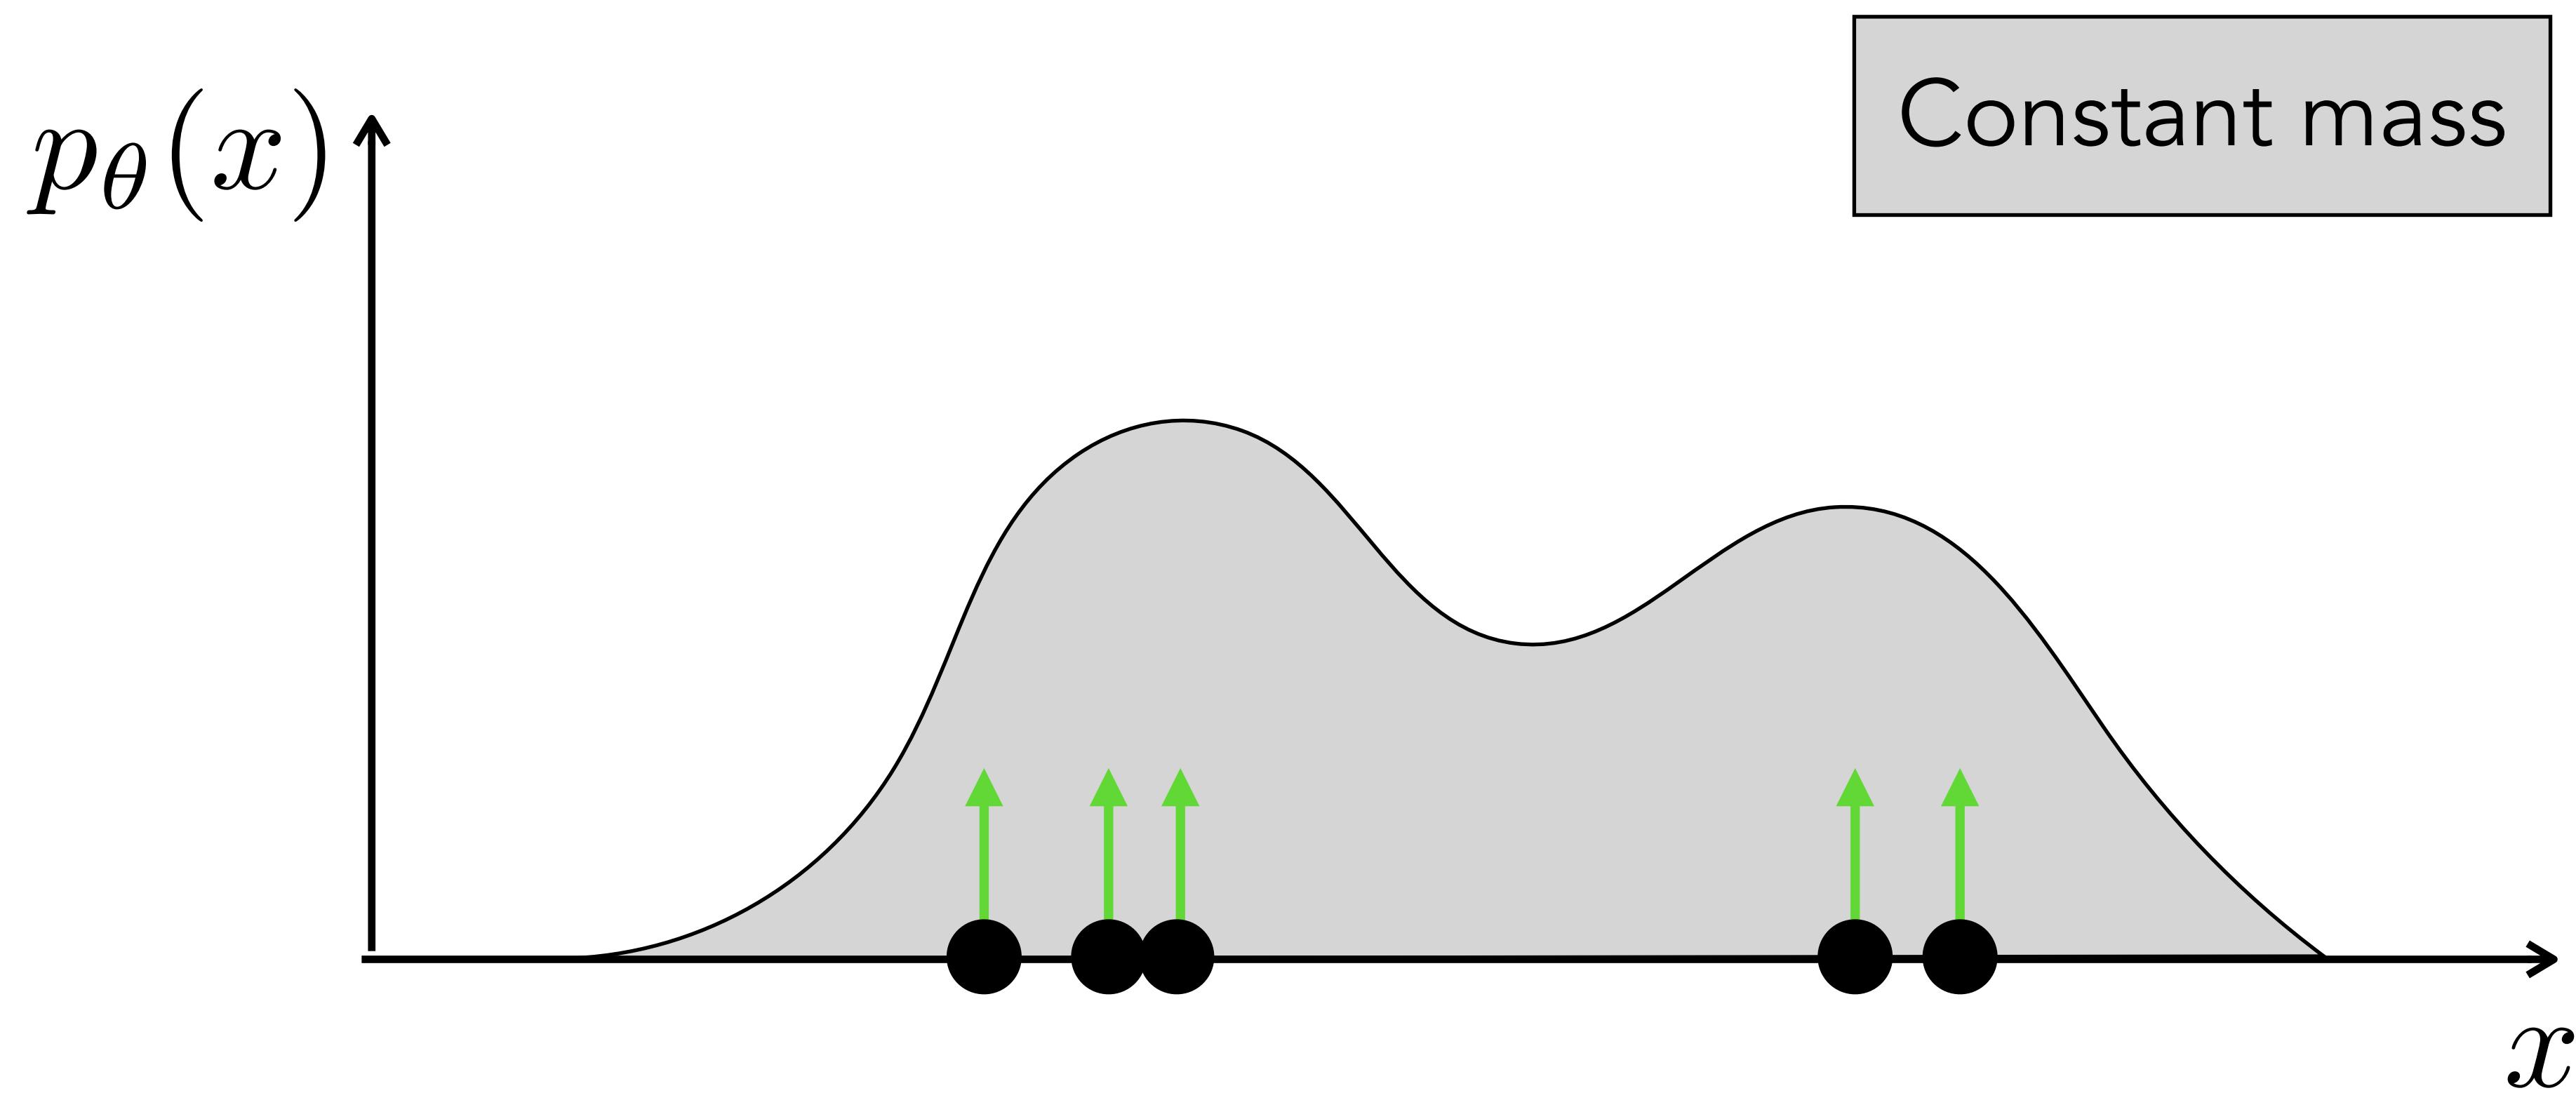

# Density models

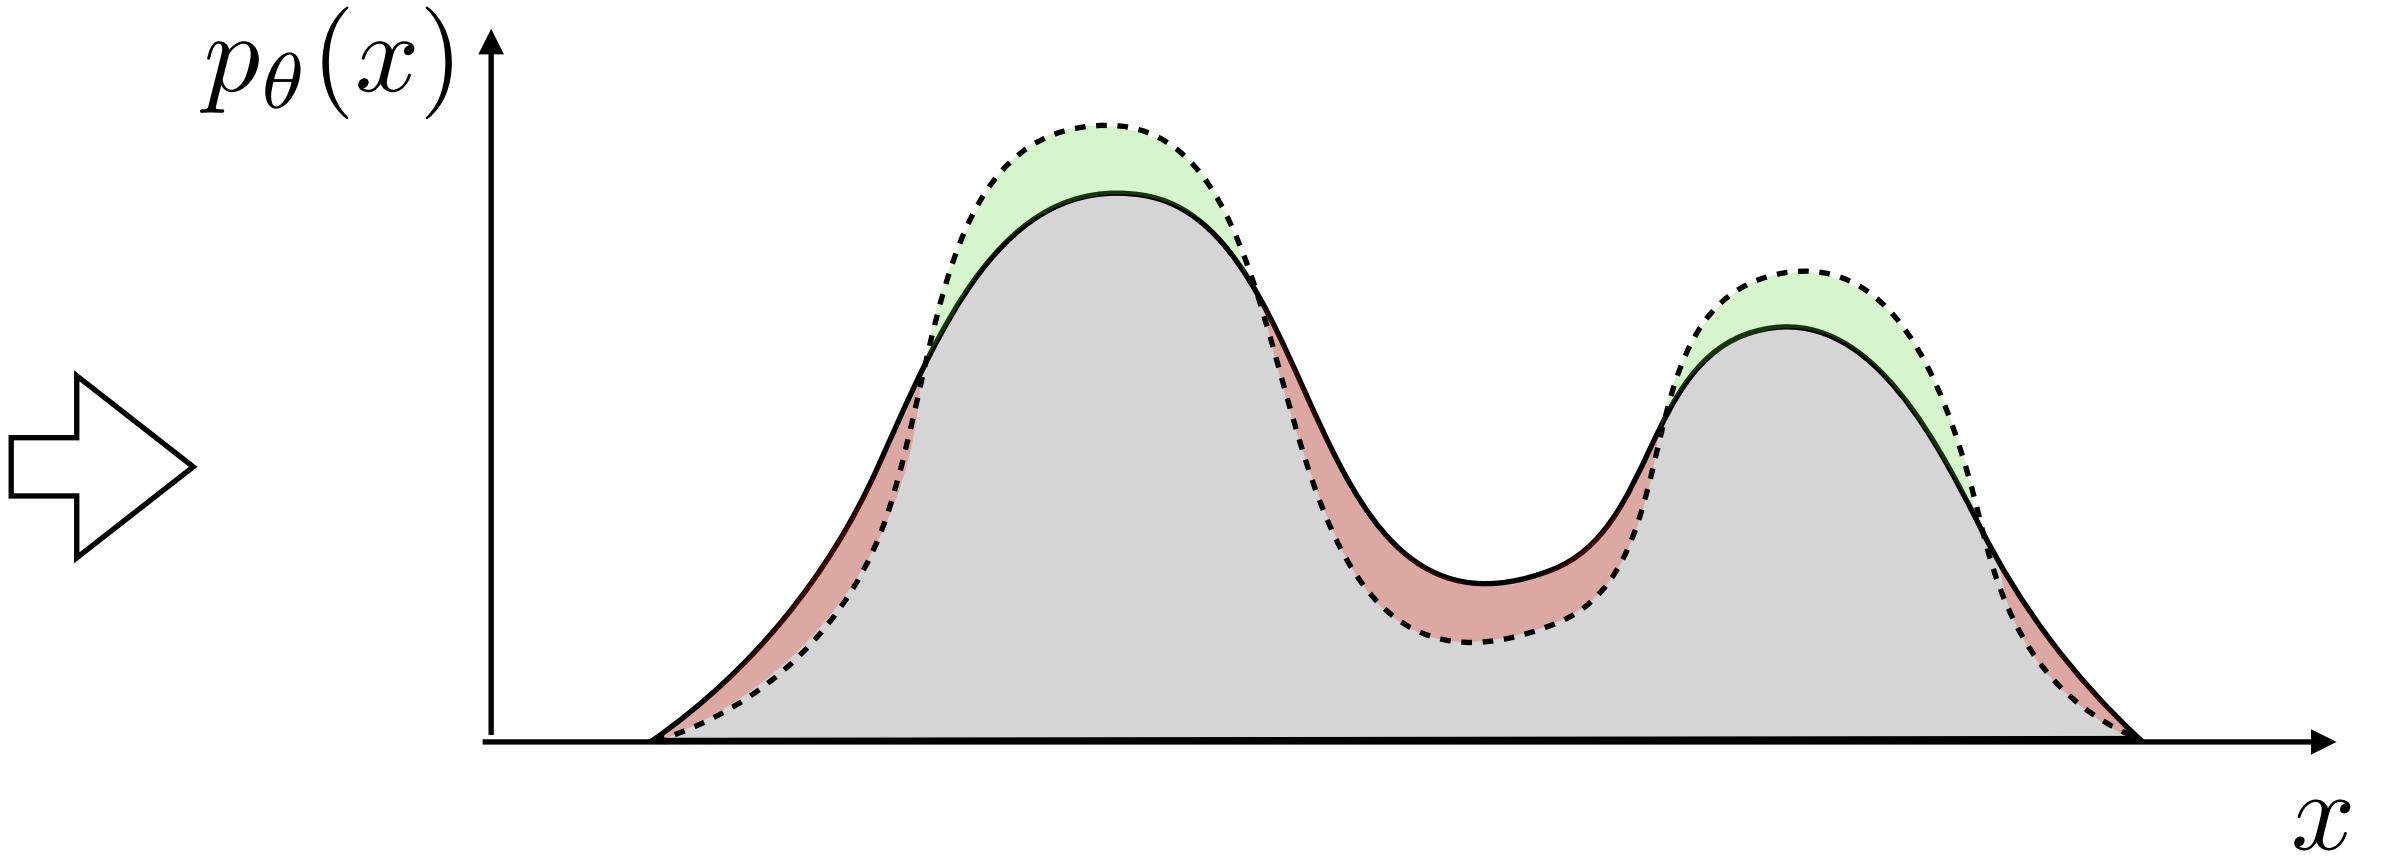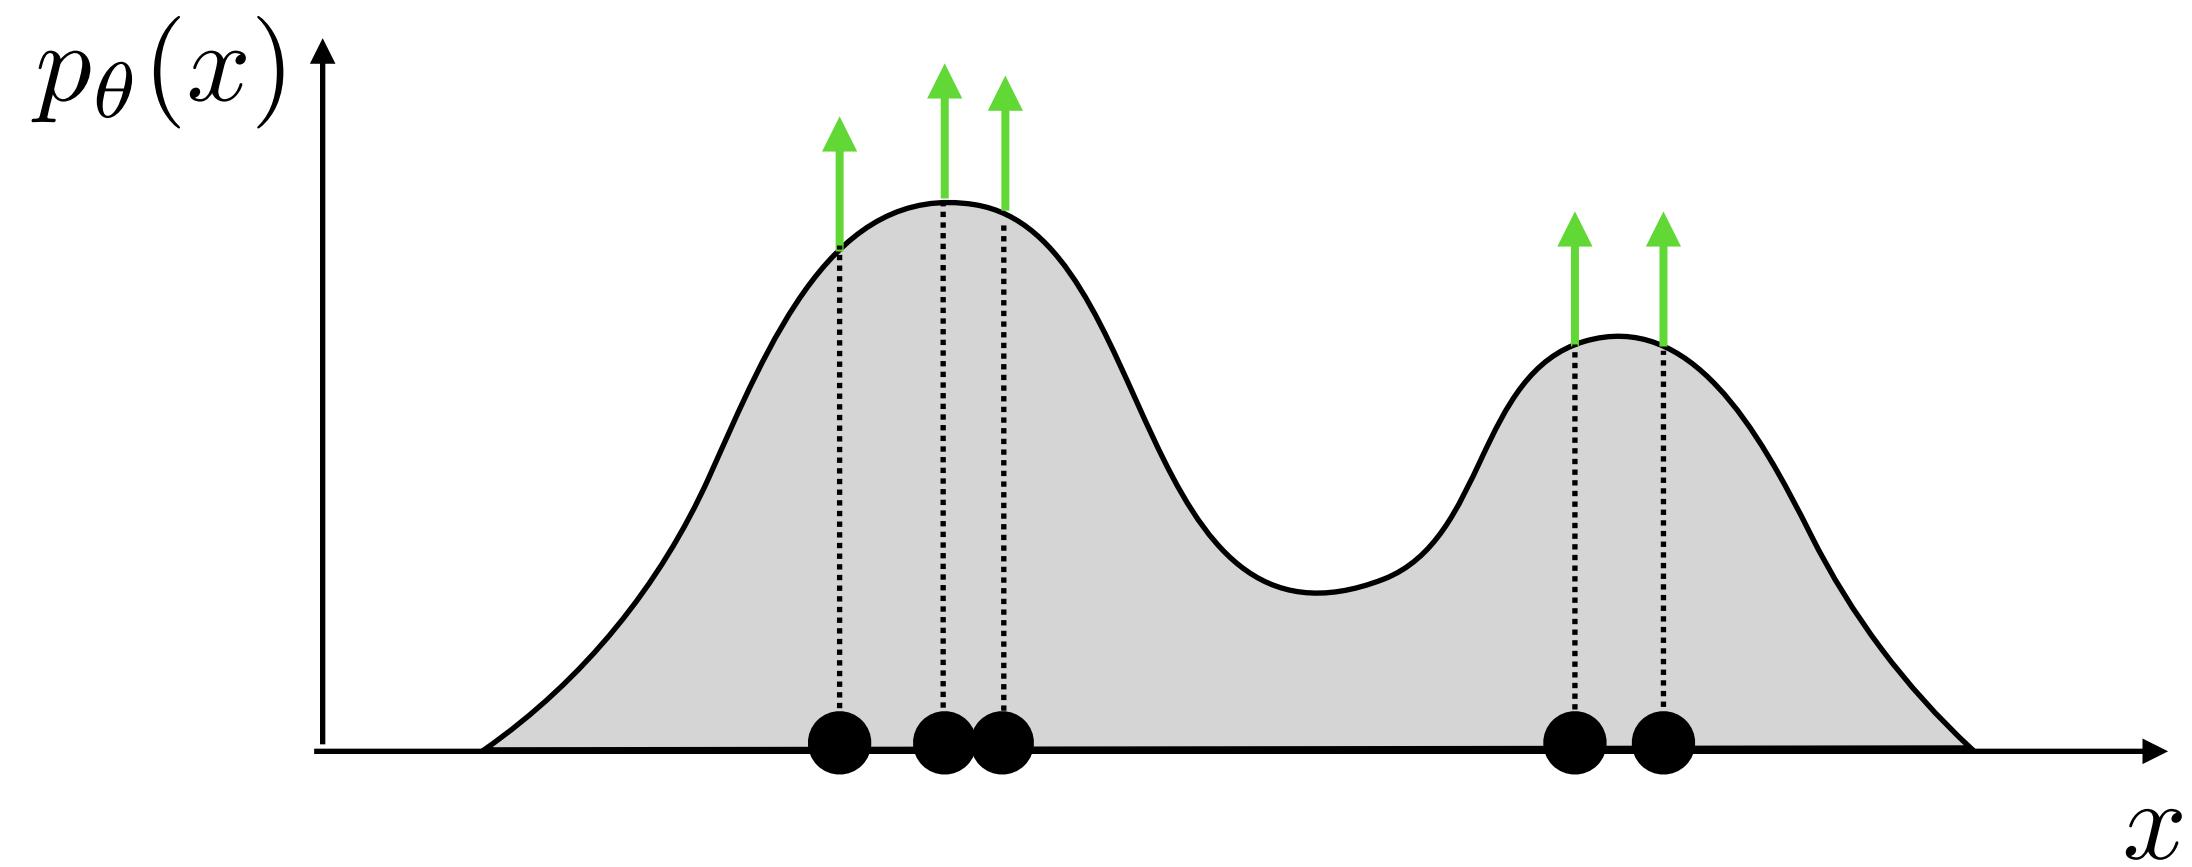

$$p_\theta^* = \arg \min_{p_\theta} \text{KL}(p_{\text{data}}, p_\theta)$$

$$= \arg \min_{p_\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} \left[ -\log \frac{p_\theta(\mathbf{x})}{p_{\text{data}}(\mathbf{x})} \right]$$

$$= \arg \max_{p_\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log p_\theta(\mathbf{x})] - \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log p_{\text{data}}(\mathbf{x})]$$

$$= \arg \max_{p_\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log p_\theta(\mathbf{x})] \quad \triangleleft \quad \text{dropped second term since no dependence on } p_\theta$$

$$\approx \arg \max_{p_\theta} \frac{1}{N} \sum_{i=1}^N \log p_\theta(\mathbf{x}^{(i)})$$

**max likelihood**

# Energy-based models

$$\int_{\mathbf{x}} p_{\theta}(\mathbf{x}) d\mathbf{x} = 1$$

i.e. unnormalized  
probability models


$$p_{\theta} = \frac{e^{-E_{\theta}}}{Z(\theta)} \quad Z(\theta) = \int_{\mathbf{x}} e^{-E_{\theta}(\mathbf{x})} d\mathbf{x}$$

$$\frac{p_{\theta}(\mathbf{x}_1)}{p_{\theta}(\mathbf{x}_2)} = \frac{e^{-E_{\theta}(\mathbf{x}_1)}/Z(\theta)}{e^{-E_{\theta}(\mathbf{x}_2)}/Z(\theta)} = \frac{e^{-E_{\theta}(\mathbf{x}_1)}}{e^{-E_{\theta}(\mathbf{x}_2)}}$$

<— Relative  
probabilities are often  
all you need (e.g., for  
sampling)

# Energy-based models

At convergence, green (data) and red (model) samples  
are identical and model update (green-red) cancels out

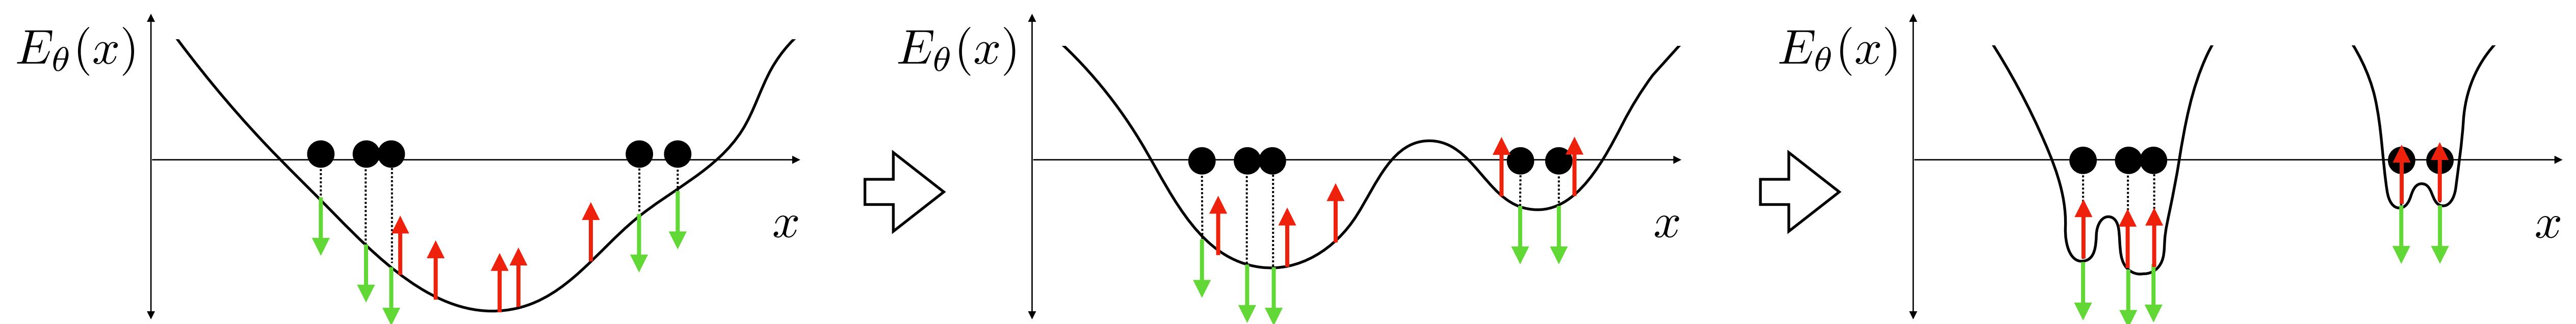

Contrastive divergence

# Energy-based models — learning model parameters

$$\begin{aligned}\nabla_{\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log p_{\theta}(\mathbf{x})] &= \nabla_{\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log \frac{e^{-E_{\theta}(\mathbf{x})}}{Z(\theta)}] \\ &= \boxed{-\mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\nabla_{\theta} E_{\theta}(\mathbf{x})]} - \boxed{\nabla_{\theta} \log Z(\theta)}\end{aligned}$$


How to measure this?

# Energy-based models — learning model parameters

$$\begin{aligned} -\nabla_{\theta} \log Z(\theta) &= \frac{1}{Z(\theta)} \nabla_{\theta} Z(\theta) && \triangleleft \quad \nabla_x \log f(x) = \frac{1}{f(x)} \nabla_x f(x) \\ &= \frac{1}{Z(\theta)} \nabla_{\theta} \int_x e^{-E_{\theta}(\mathbf{x})} d\mathbf{x} && \triangleleft \quad \text{definition of } Z \\ &= \frac{1}{Z(\theta)} \int_x \nabla_{\theta} e^{-E_{\theta}(\mathbf{x})} d\mathbf{x} && \triangleleft \quad \text{exchange sum and grad} \\ &= \frac{1}{Z(\theta)} - \int_x e^{-E_{\theta}(\mathbf{x})} \nabla_{\theta} E_{\theta}(\mathbf{x}) d\mathbf{x} \\ &= - \int_x \frac{e^{-E_{\theta}(\mathbf{x})}}{Z(\theta)} \nabla_{\theta} E_{\theta}(\mathbf{x}) d\mathbf{x} \\ &= - \int_x p_{\theta}(\mathbf{x}) \nabla_{\theta} E_{\theta}(\mathbf{x}) d\mathbf{x} && \triangleleft \quad \text{definition of } p_{\theta} \\ &= -\mathbb{E}_{\mathbf{x} \sim p_{\theta}} [\nabla_{\theta} E_{\theta}(\mathbf{x})] && \triangleleft \quad \text{definition of expectation} \end{aligned}$$

# Energy-based models — learning model parameters

$$\nabla_{\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log p_{\theta}(\mathbf{x})] = \nabla_{\theta} \mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\log \frac{e^{-E_{\theta}(\mathbf{x})}}{Z(\theta)}]$$

$$= -\mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\nabla_{\theta} E_{\theta}(\mathbf{x})] - \boxed{\nabla_{\theta} \log Z(\theta)}$$

$$= -\mathbb{E}_{\mathbf{x} \sim p_{\text{data}}} [\nabla_{\theta} E_{\theta}(\mathbf{x})] + \boxed{\mathbb{E}_{\mathbf{x} \sim p_{\theta}} [\nabla_{\theta} E_{\theta}(\mathbf{x})]}$$


$$\approx -\frac{1}{N} \sum_{i=1}^N \nabla_{\theta} E_{\theta}(\mathbf{x}^{(i)}) + \boxed{\frac{1}{N} \sum_{i=1}^N \nabla_{\theta} E_{\theta}(\hat{\mathbf{x}}^{(i)})}$$

$$\mathbf{x}^{(i)} \sim p_{\text{data}}$$


$$\hat{\mathbf{x}}^{(i)} \sim p_{\theta}$$

# Energy-based models

At convergence, green (data) and red (model) samples  
are identical and model update (green-red) cancels out

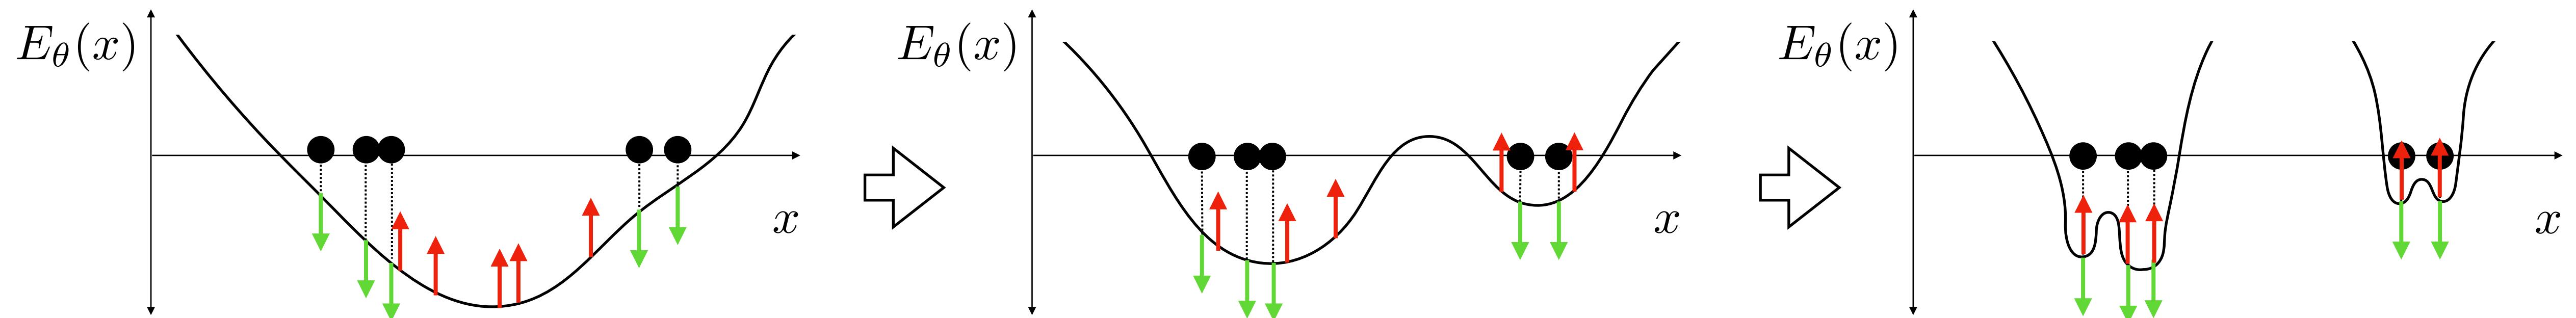

**Contrastive divergence**

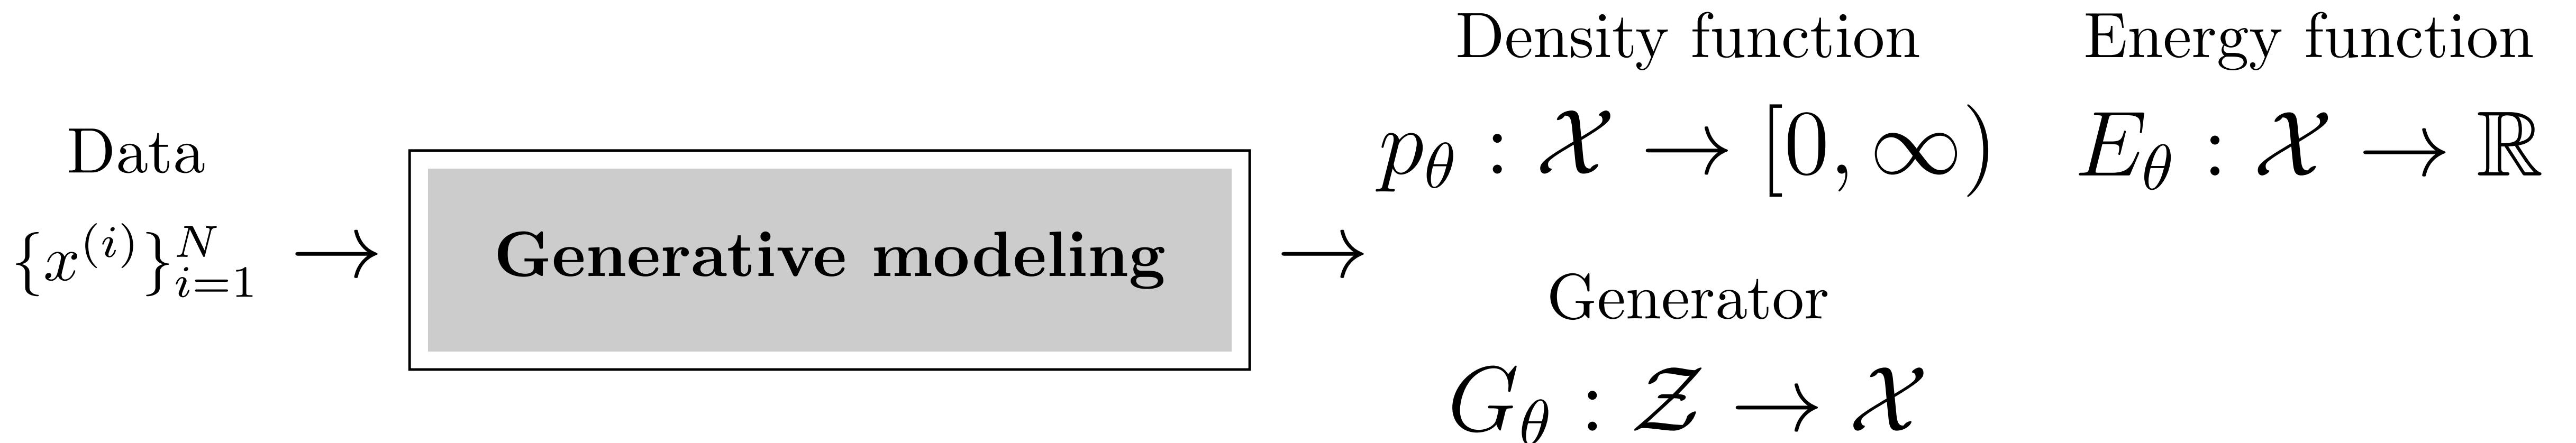

**Concept #2: you can represent the data generating process directly or indirectly**

# Gaussian models

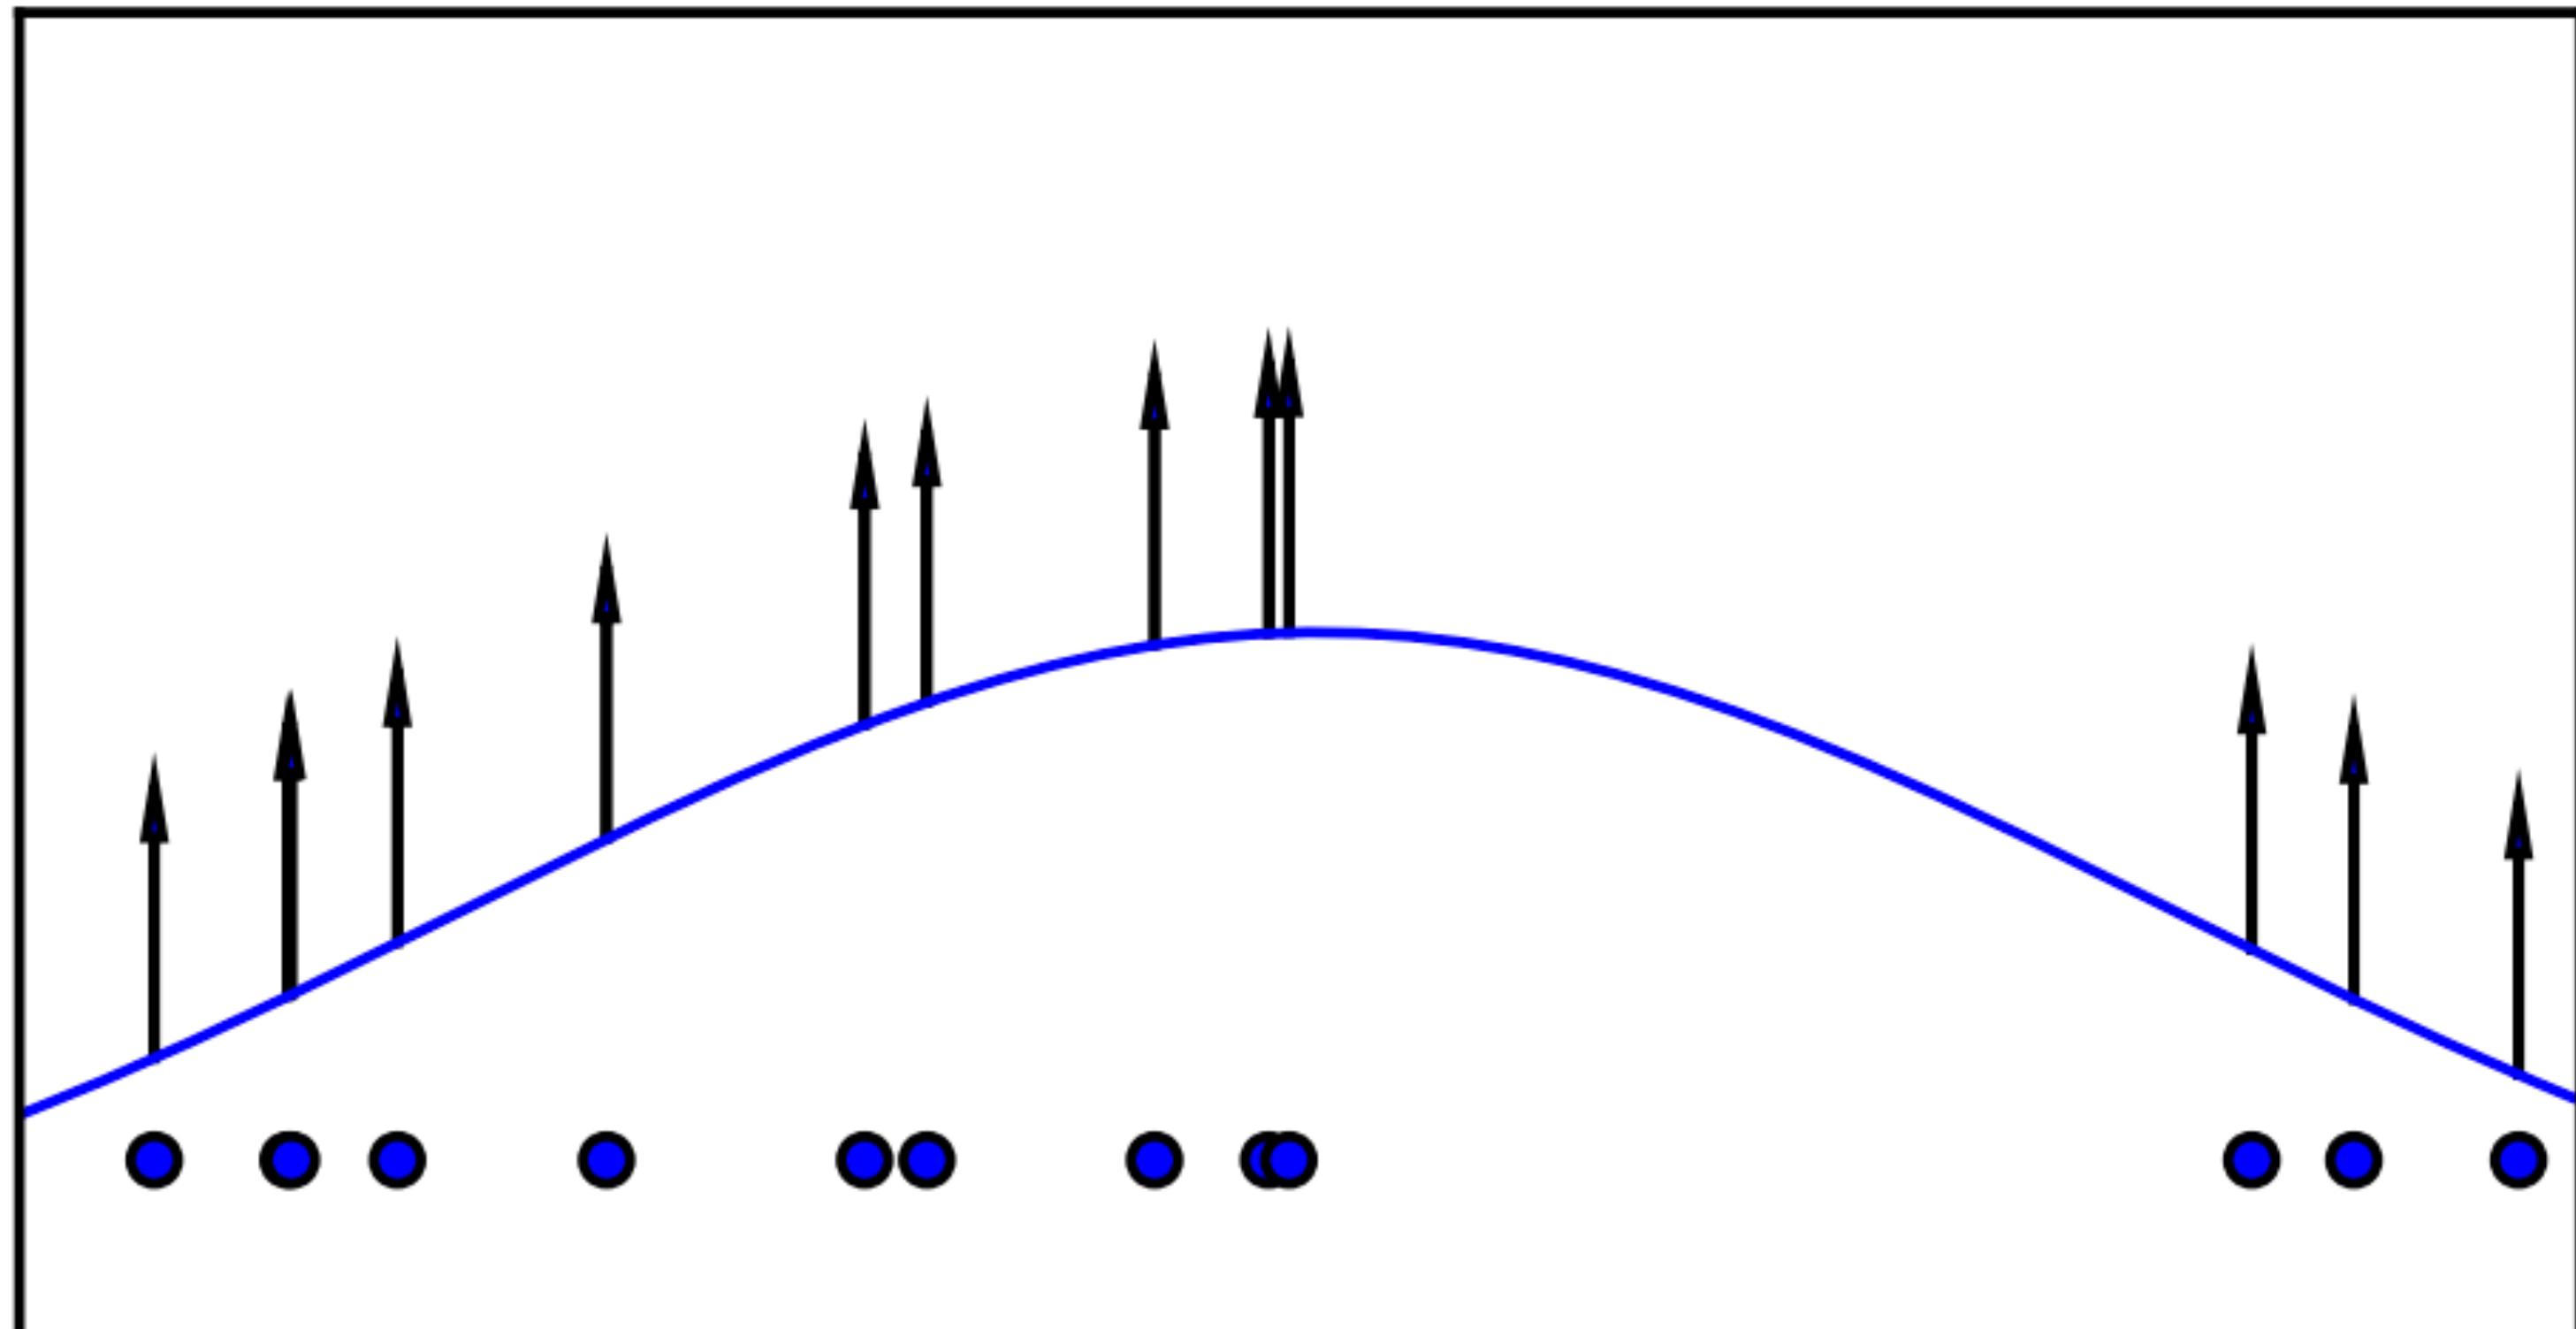


fig from [Goodfellow, 2016]

Max likelihood objective

$$\max_{\theta} \mathbb{E}_{x \sim p_{\text{data}}} [\log p_{\theta}(x)]$$


Considering only Gaussian fits

$$p_{\theta}(x) = \mathcal{N}(x; \mu, \sigma)$$


$$\theta = [\mu, \sigma]$$

Closed form optimum:



$$\mu = \frac{1}{N} \sum_{i=1}^N x_i \quad \sigma^2 = \frac{1}{N} \sum_{i=1}^N (x_i - \mu)^2$$

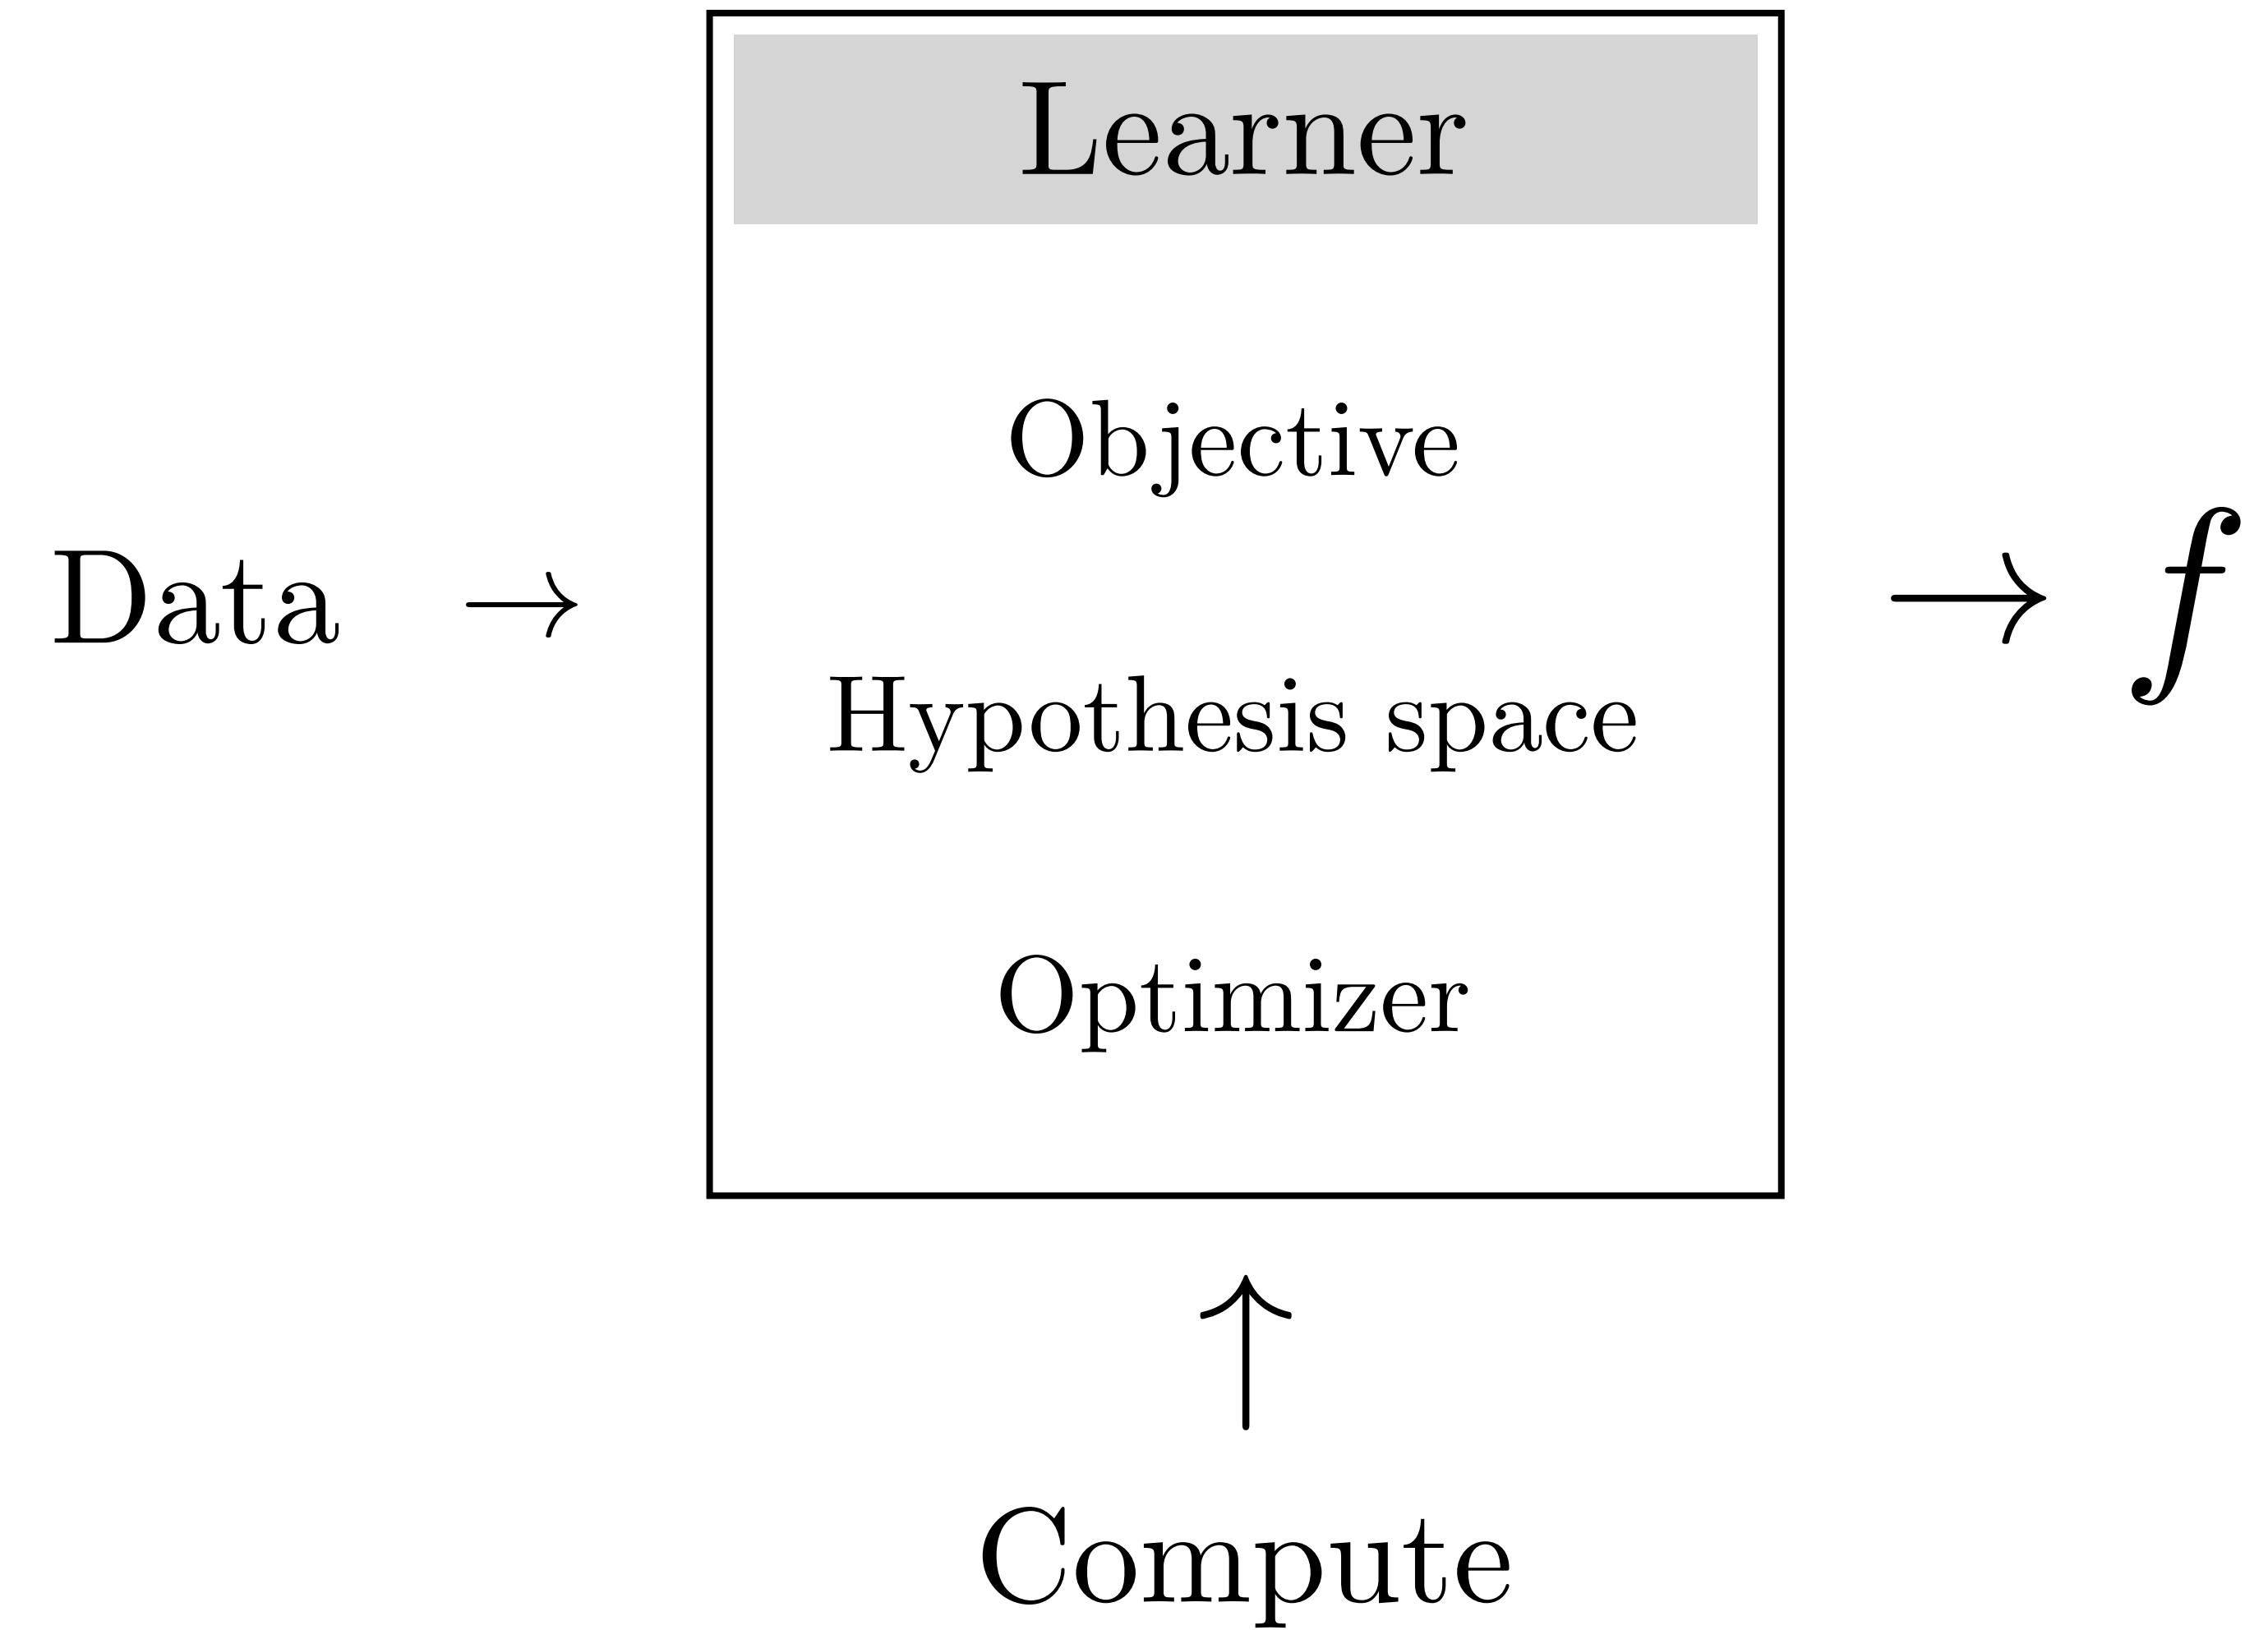

# Gaussian models

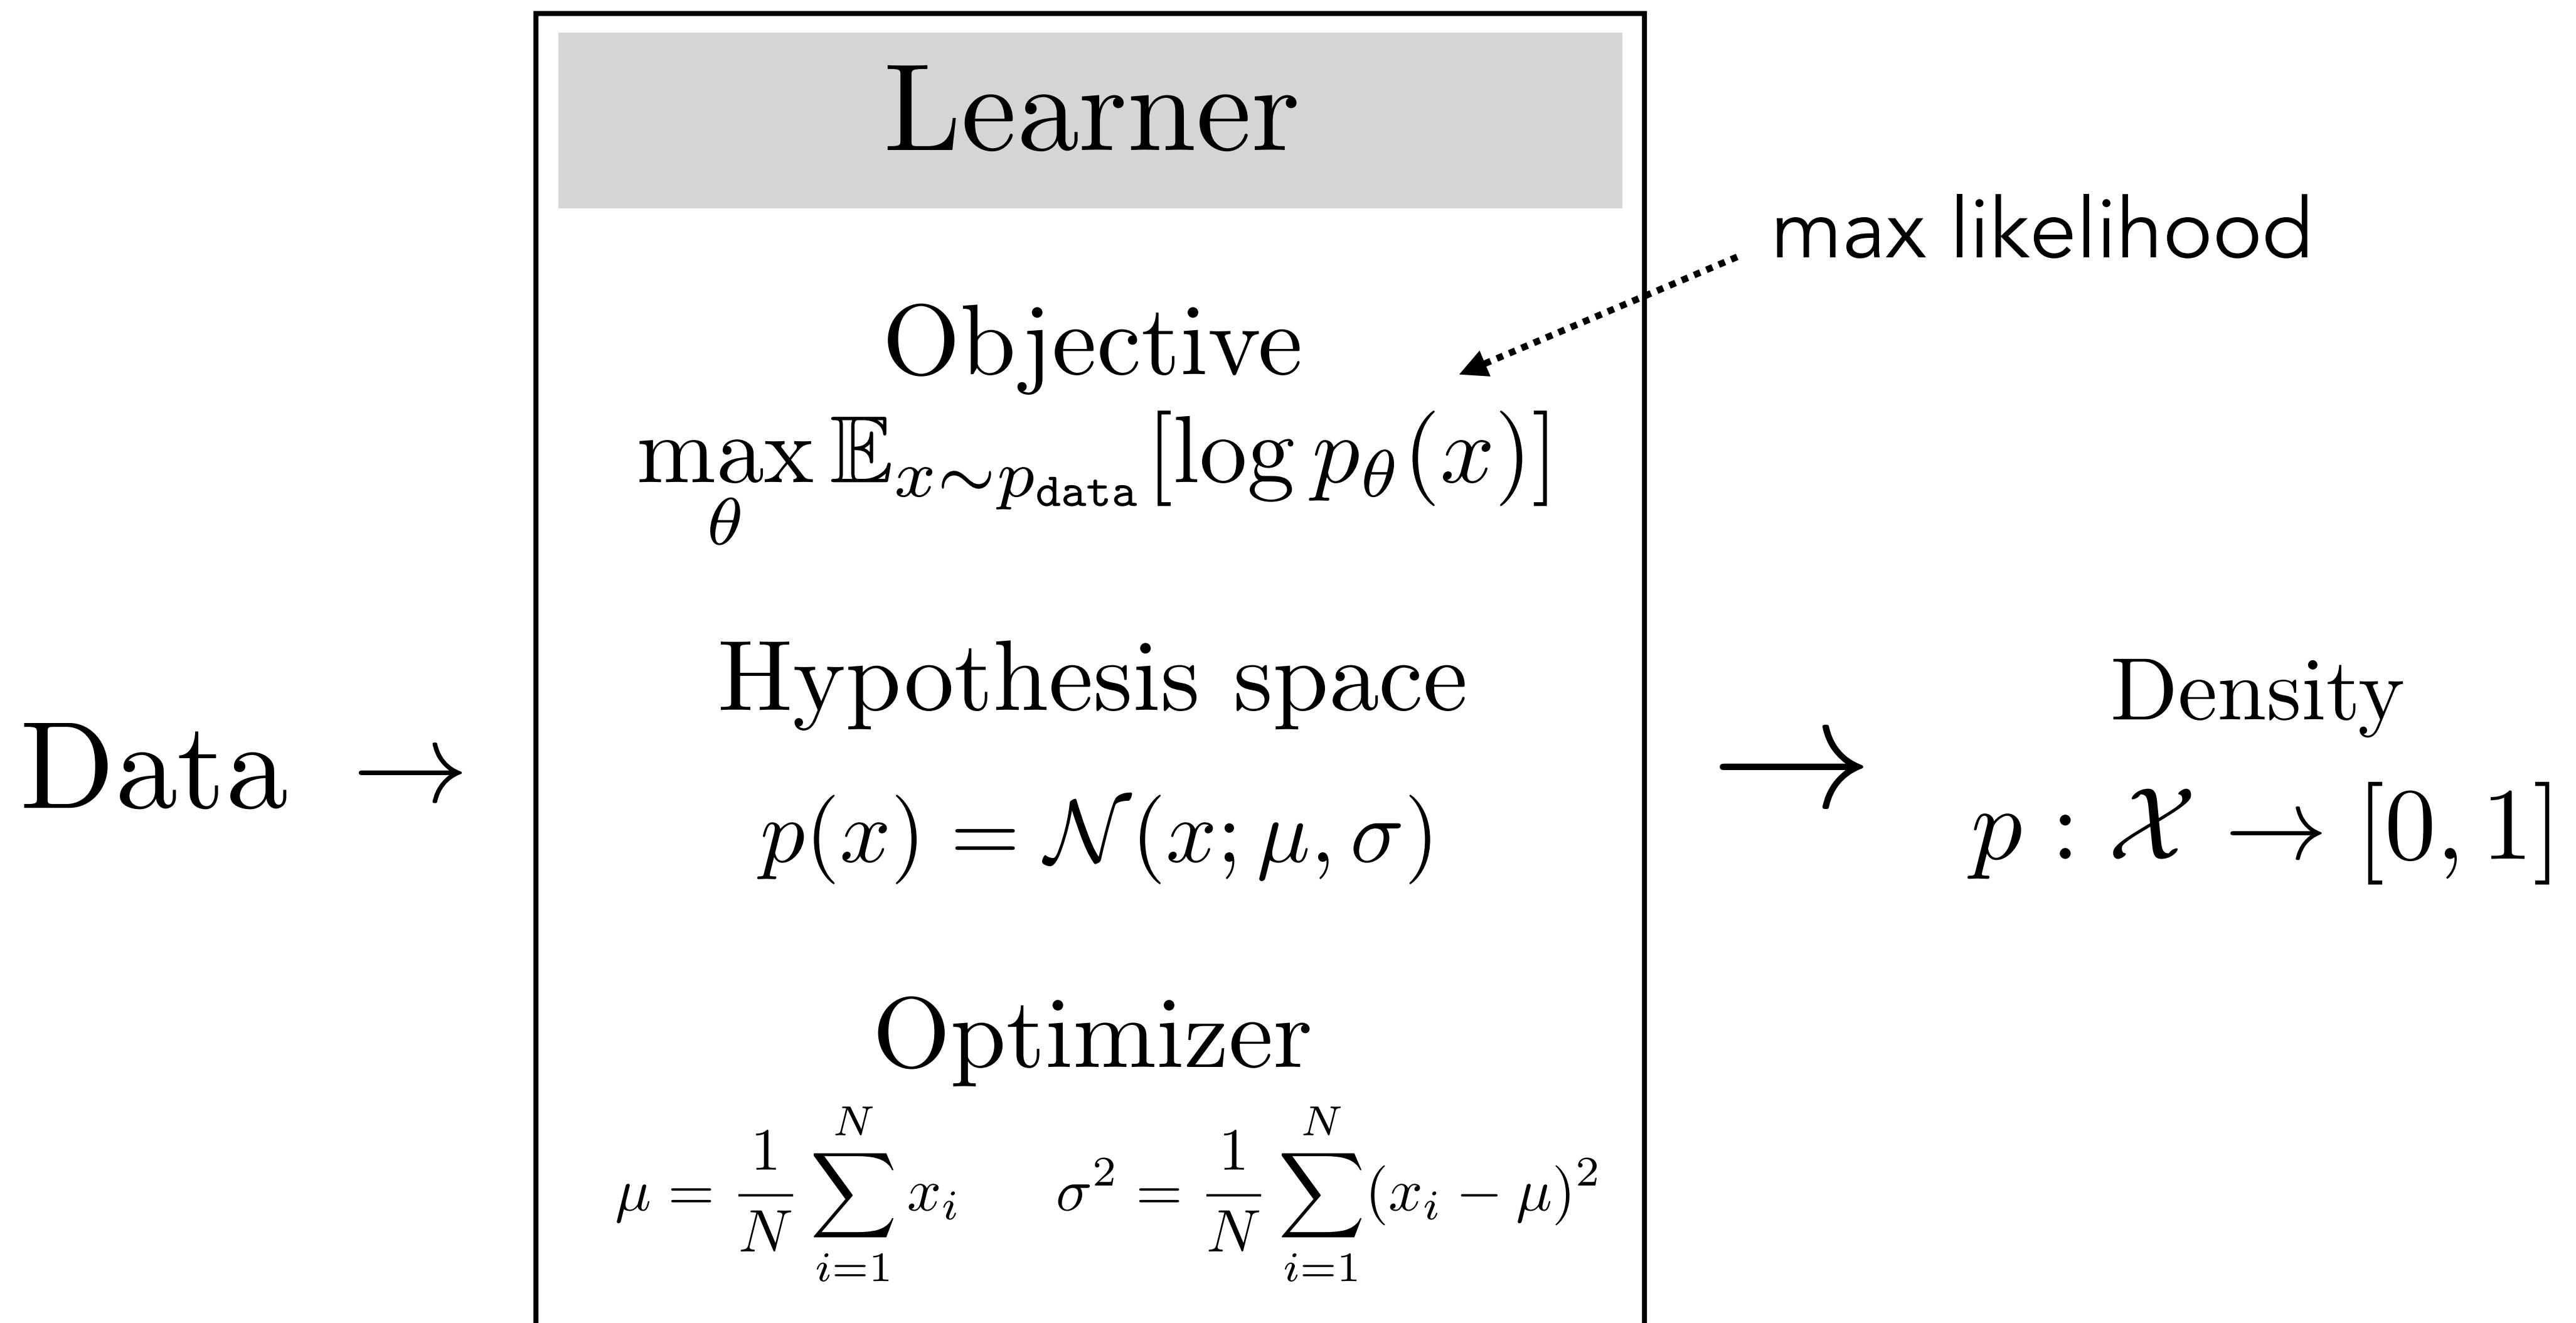


# Autoregressive models

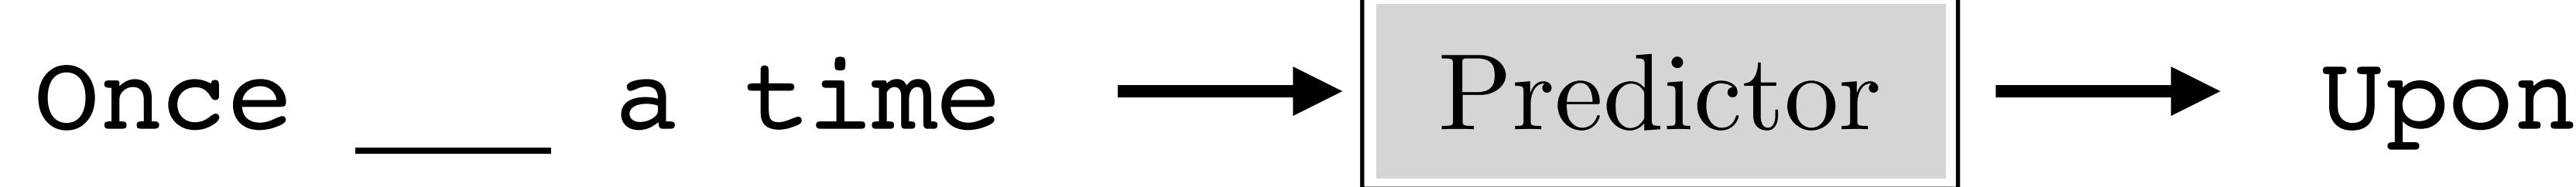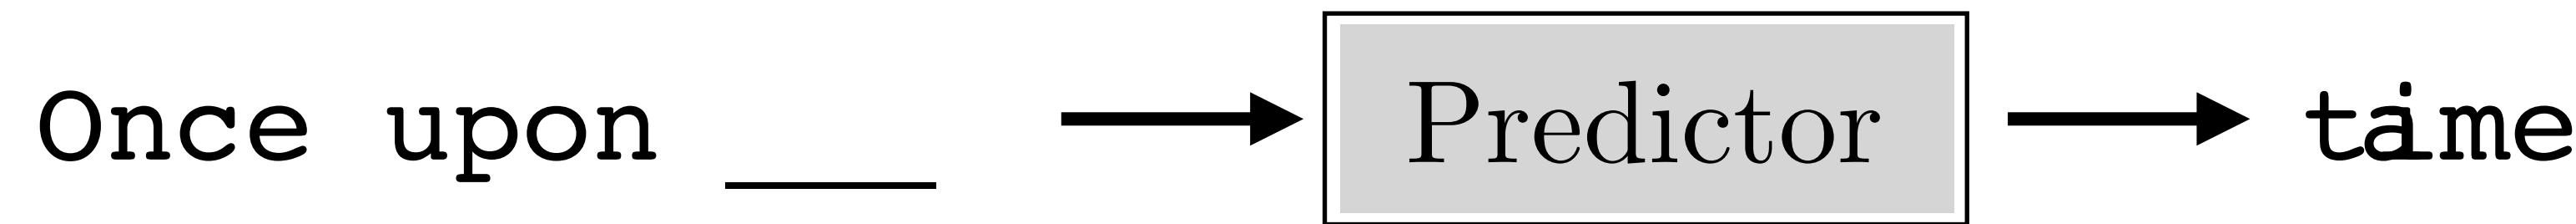

## Sampling

$\underline{x_1, \dots, x_{n-1}}$   
Colorless green ideas sleep → Predictor →  $\hat{x}_n$   
 $\underline{\hspace{10cm}}$   
furiously

## Training

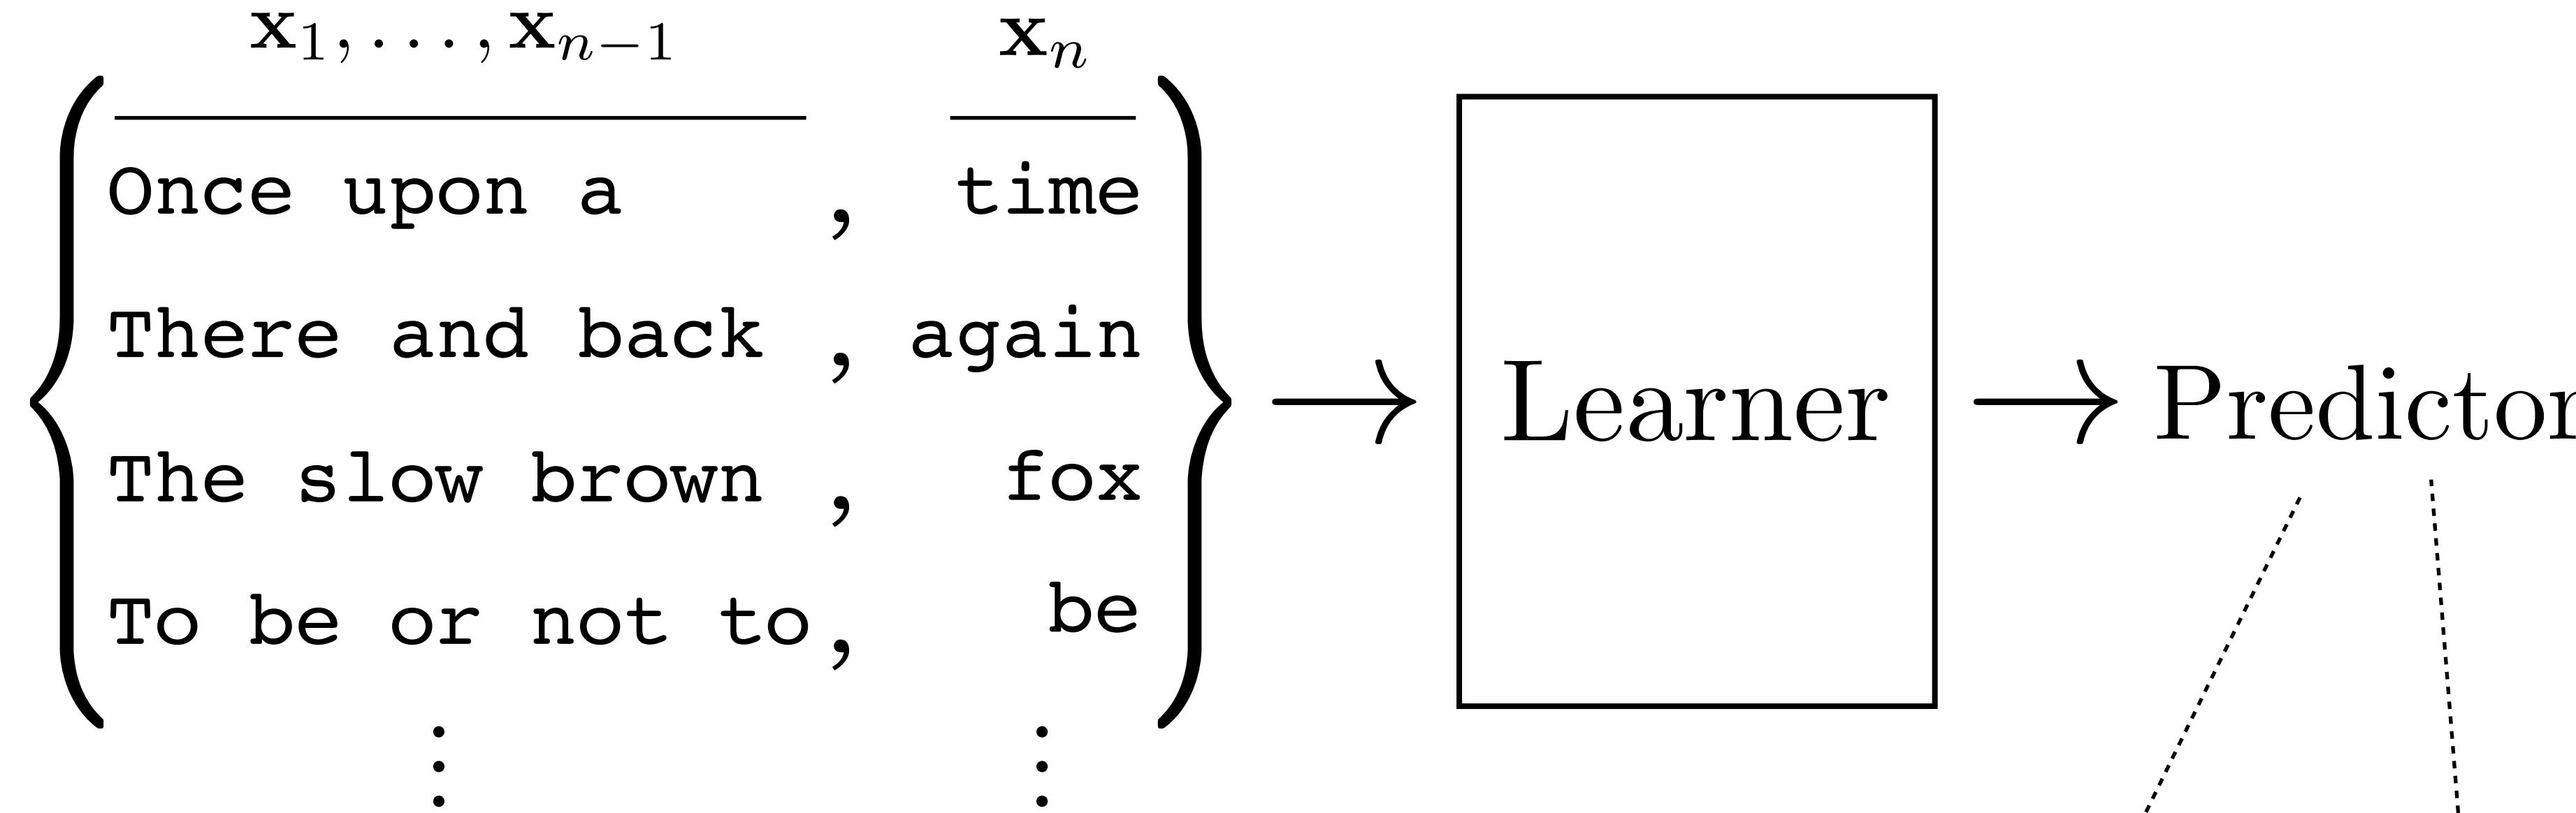

# Autoregressive probability model

$$p(\mathbf{X}) = p(\mathbf{x}_n | \mathbf{x}_1, \dots, \mathbf{x}_{n-1}) p(\mathbf{x}_{n-1} | \mathbf{x}_1, \dots, \mathbf{x}_{n-2}) \dots p(\mathbf{x}_2 | \mathbf{x}_1) p(\mathbf{x}_1)$$


$$p(\mathbf{X}) = \prod_{i=1}^n p(\mathbf{x}_i | \mathbf{x}_1, \dots, \mathbf{x}_{i-1})$$

$p(\text{time} | \text{Once, upon, a})$   
 $p(\text{a} | \text{Once, upon})$   
 $p(\text{Once upon a time})$   
 $p(\text{Once})$   
 $p(\text{upon} | \text{Once})$



# Modeling a sequence of words

How to model  $p(\text{time}|\text{Once, upon, a})$  ?


Just treat it as a next word classifier!

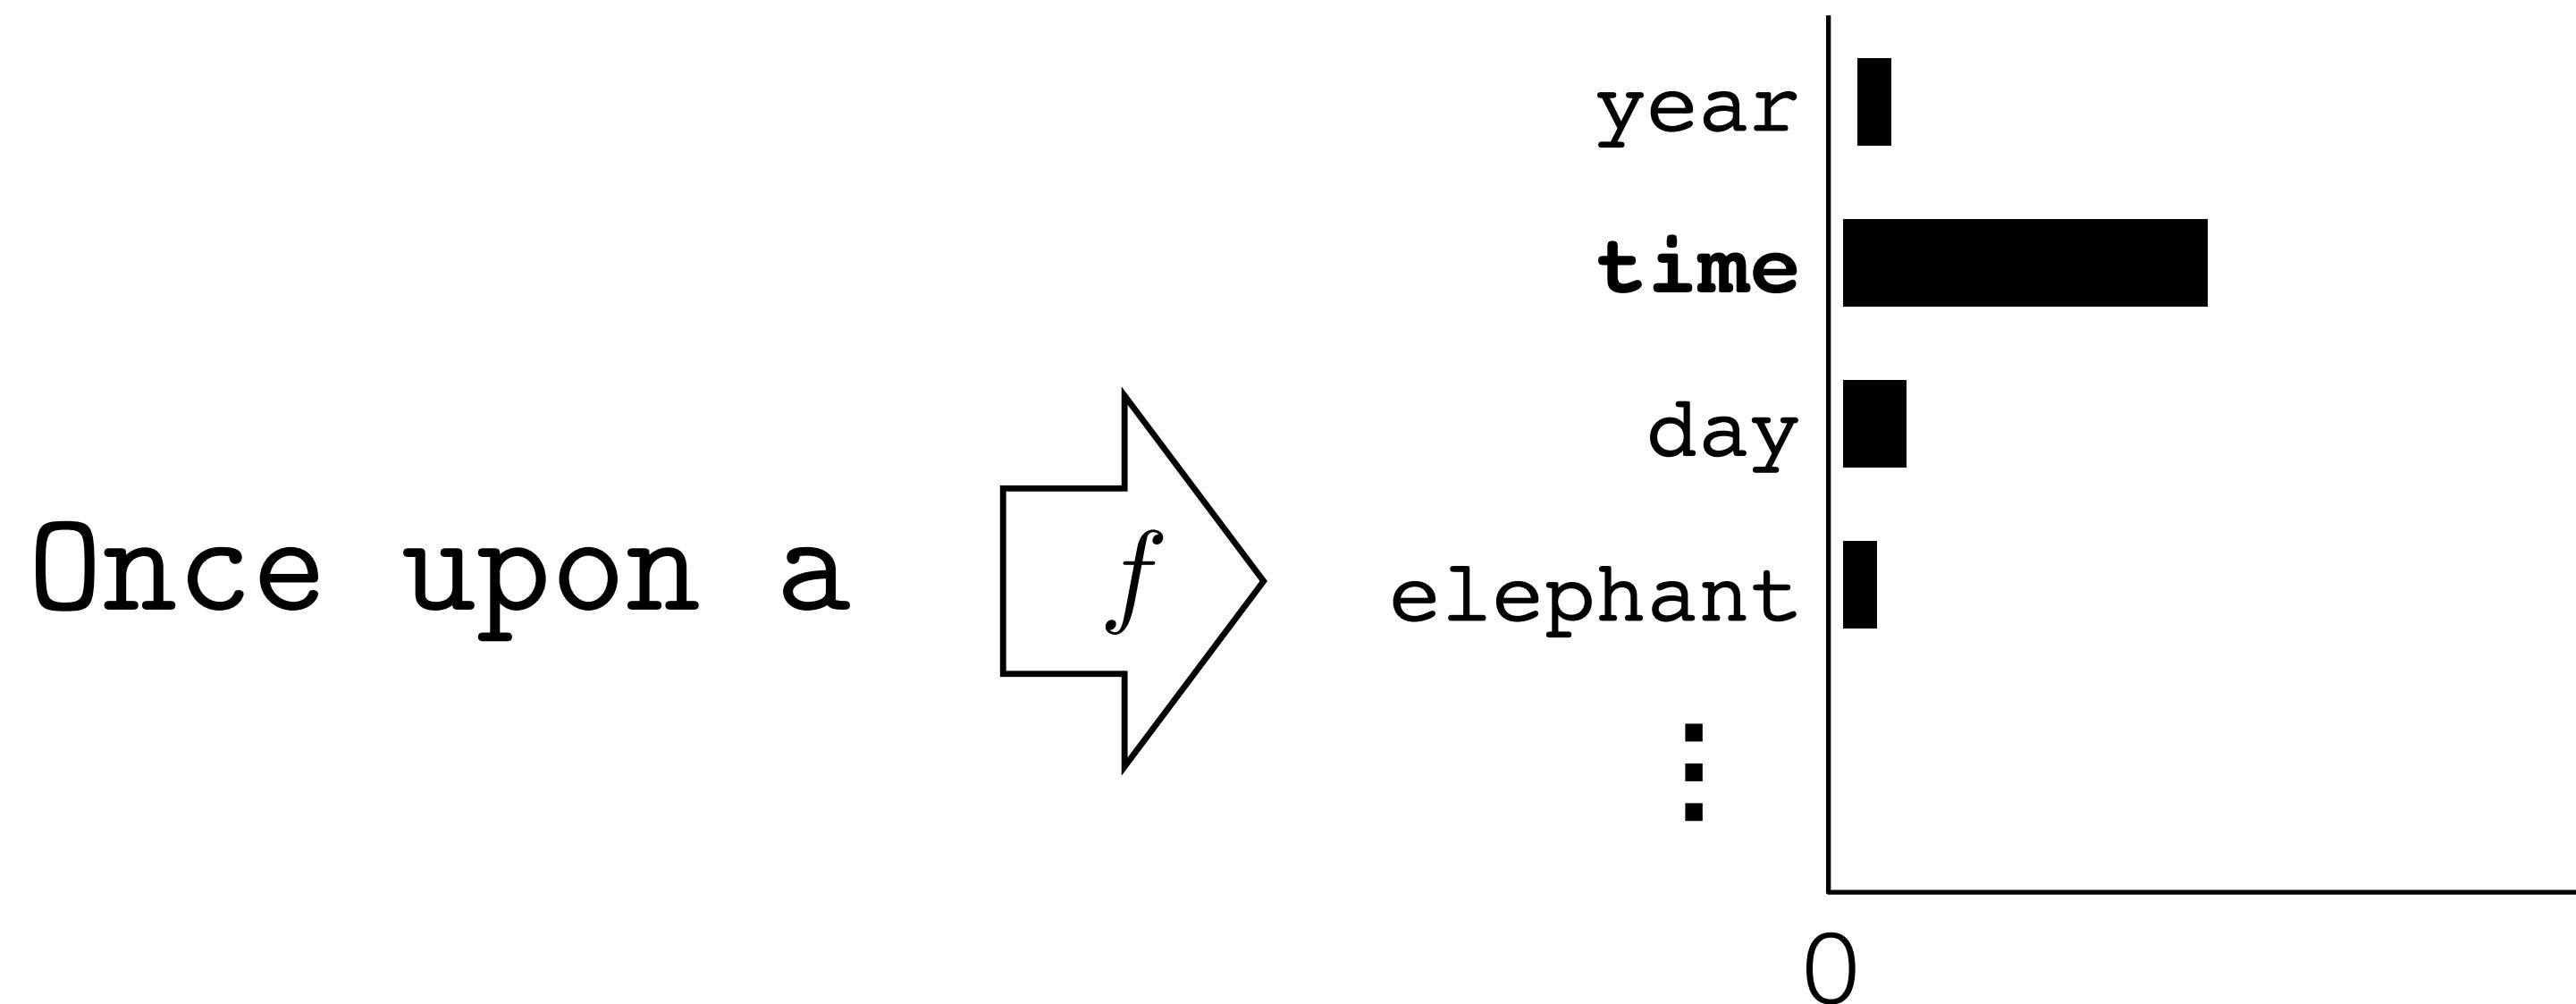

# Autoregressive model of pixels

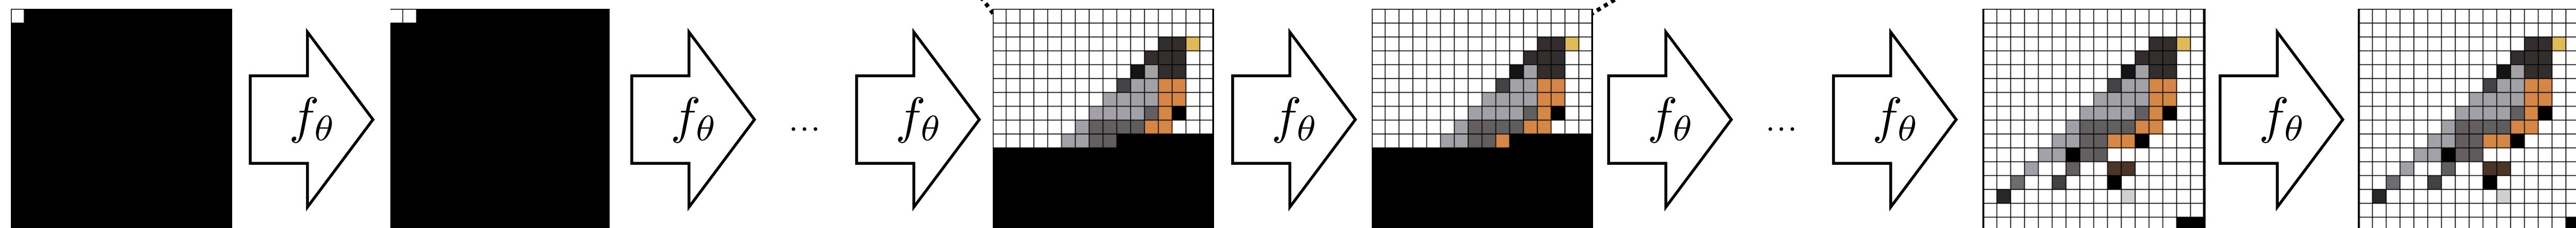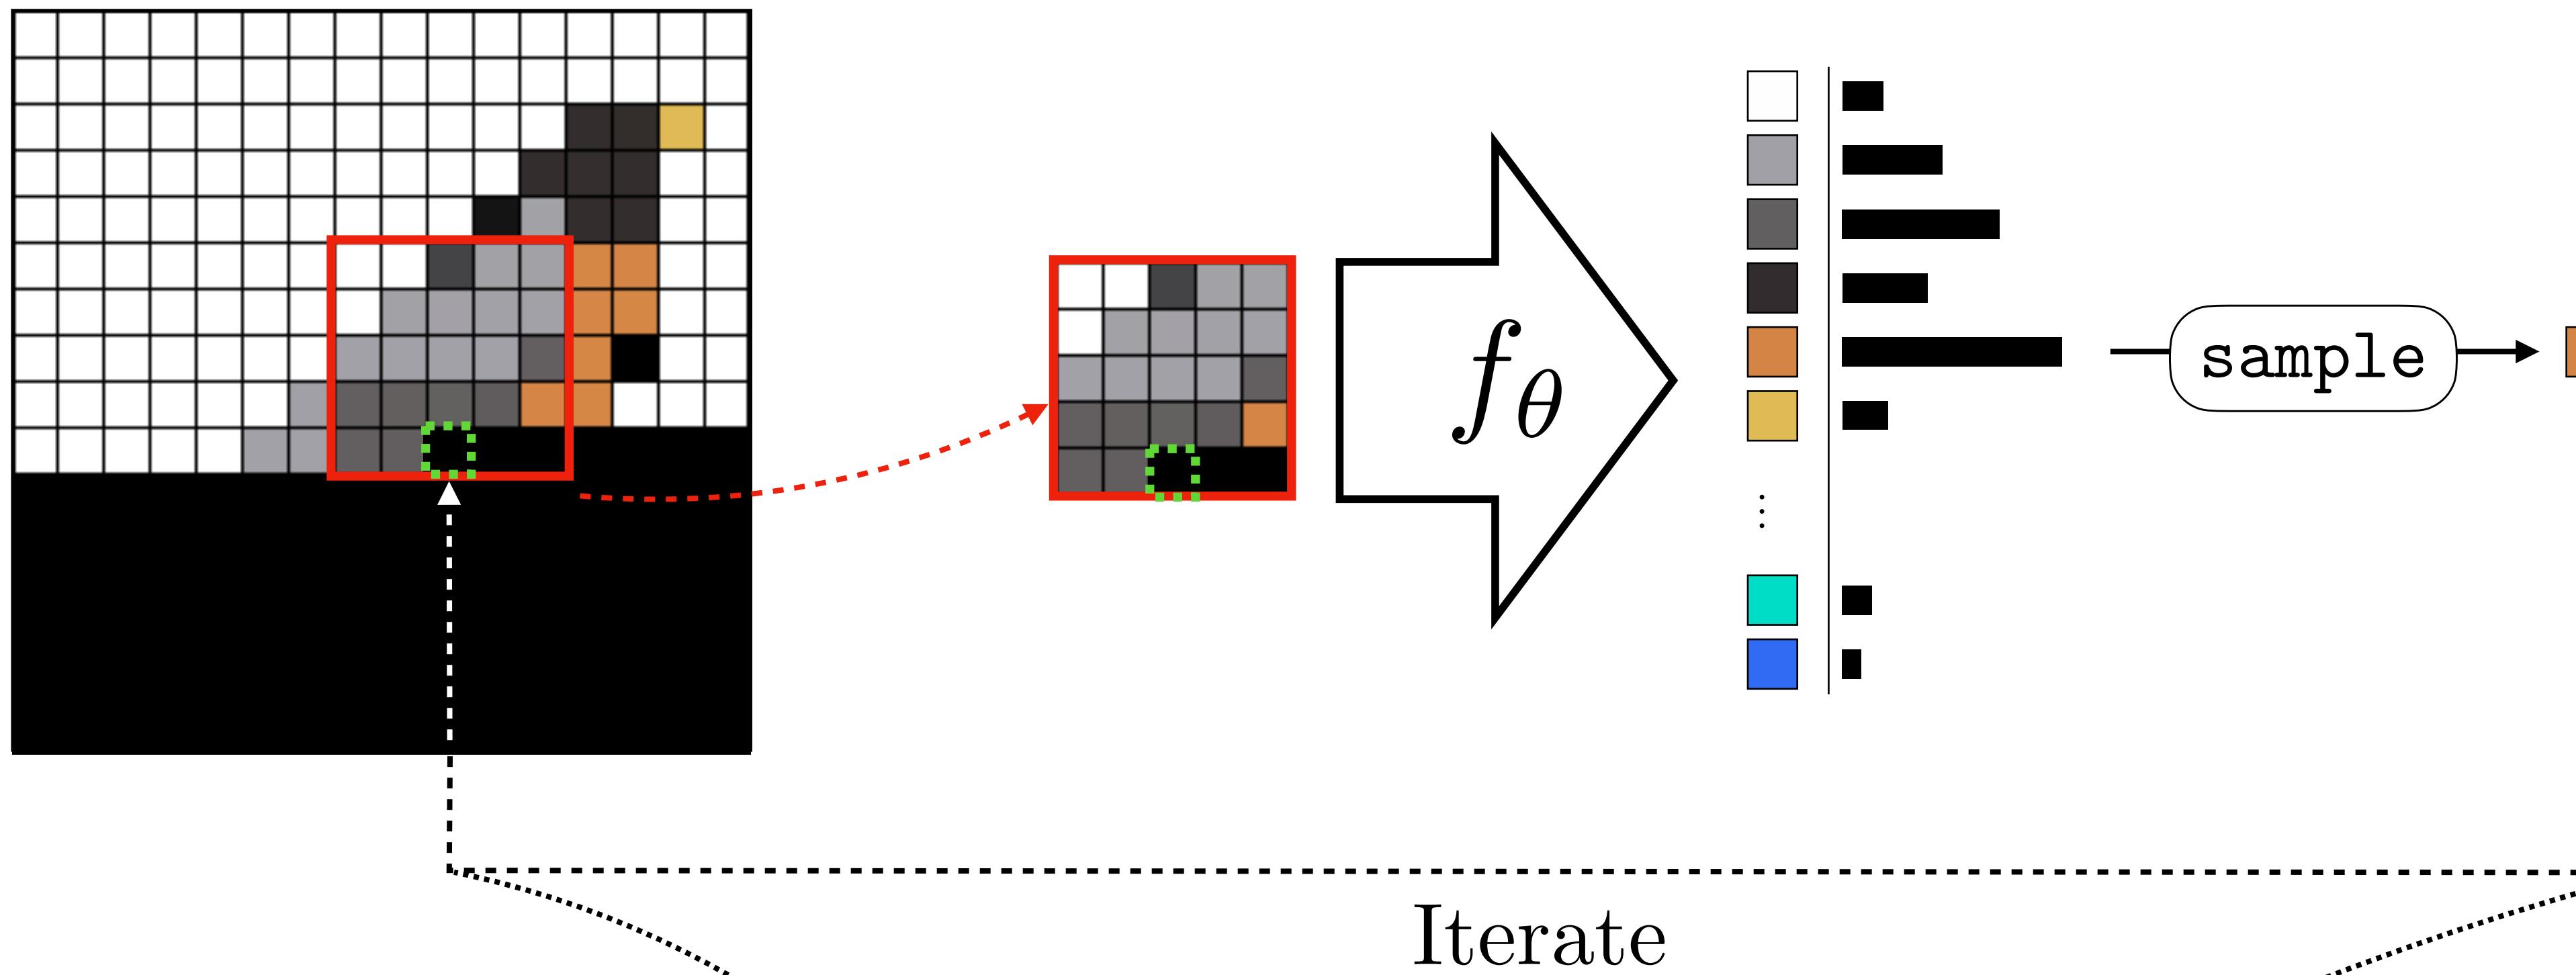

$\mathbf{x}_1, \dots, \mathbf{x}_{n-1}$

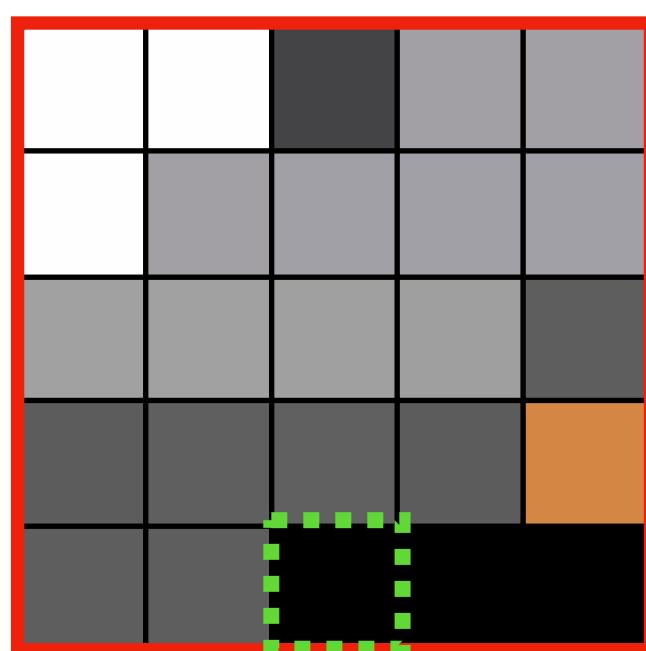


$f_\theta$


Prediction  
 $\hat{\mathbf{x}}_n$




Ground truth label  
 $\mathbf{x}_n$

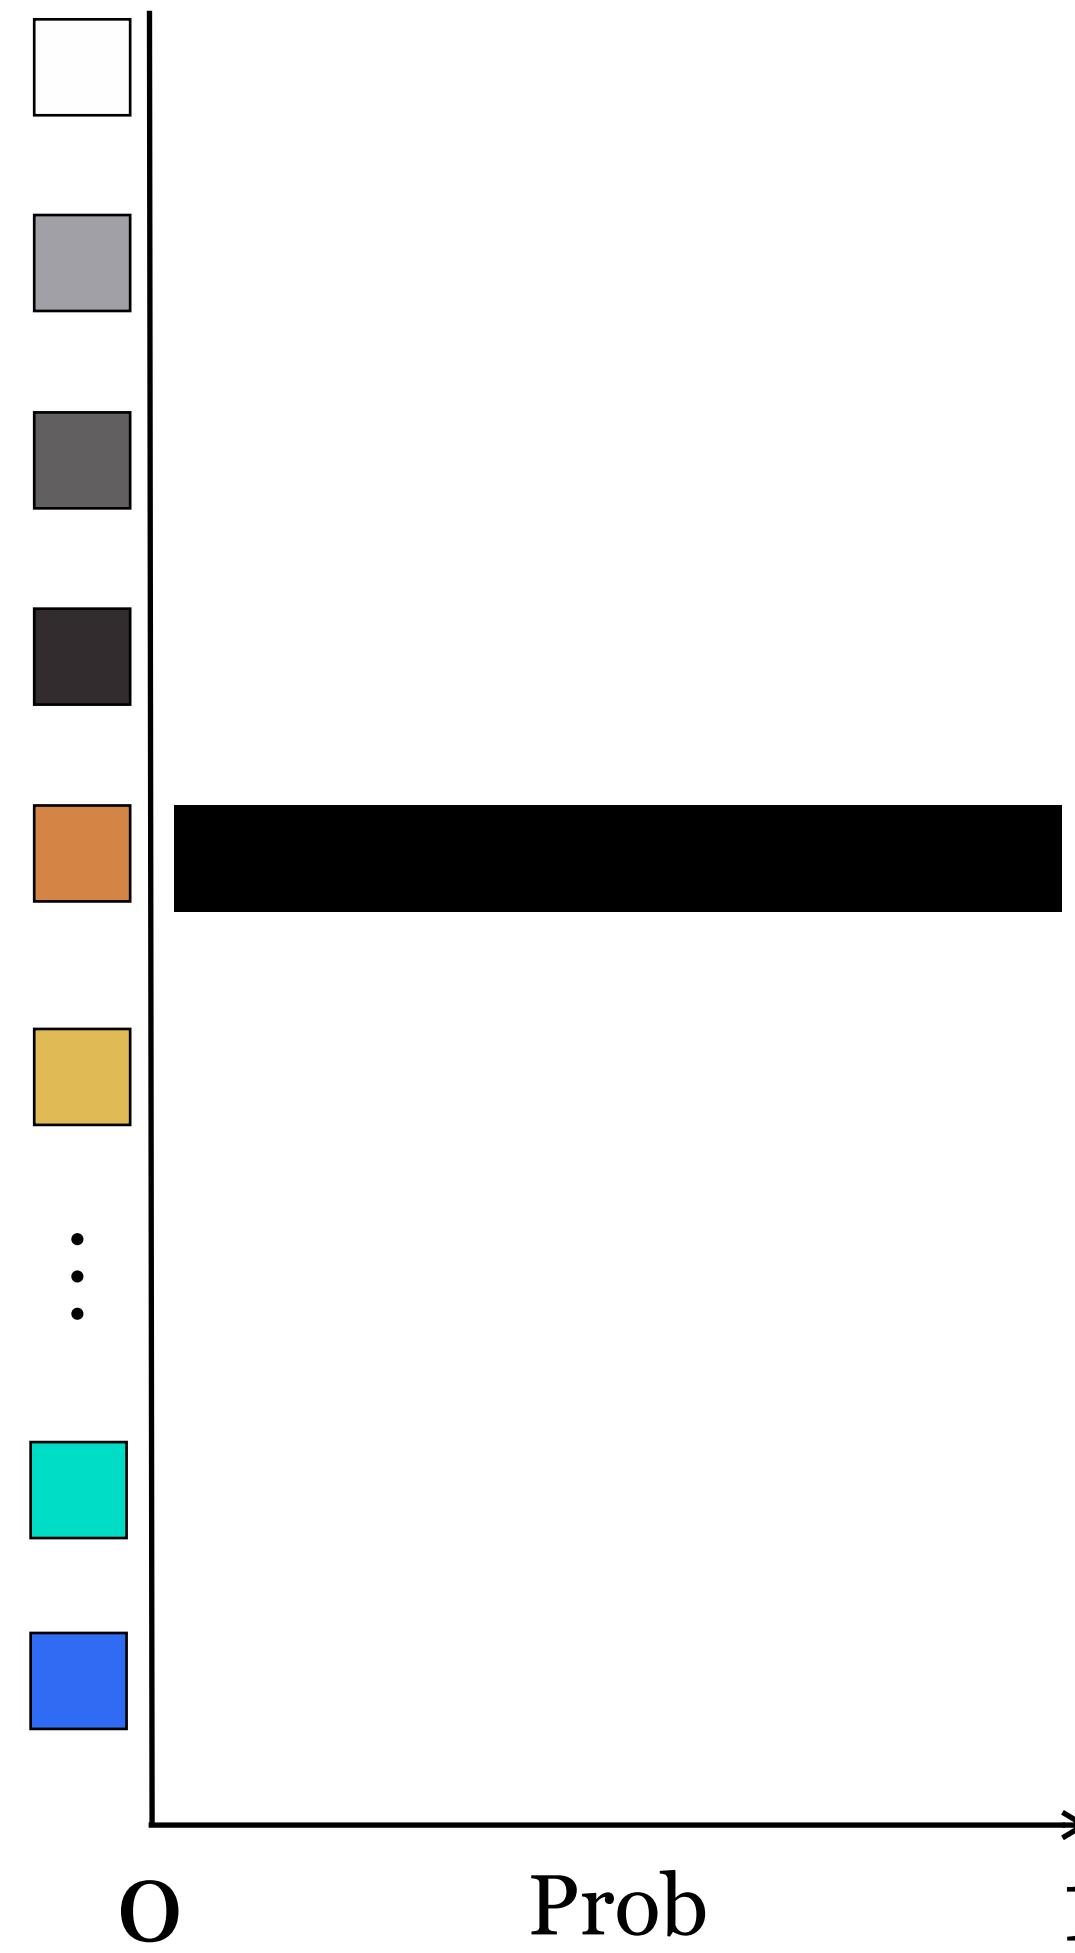


Elementwise scores  
 $\mathbf{x}_n \odot \log \hat{\mathbf{x}}_n$




## Training

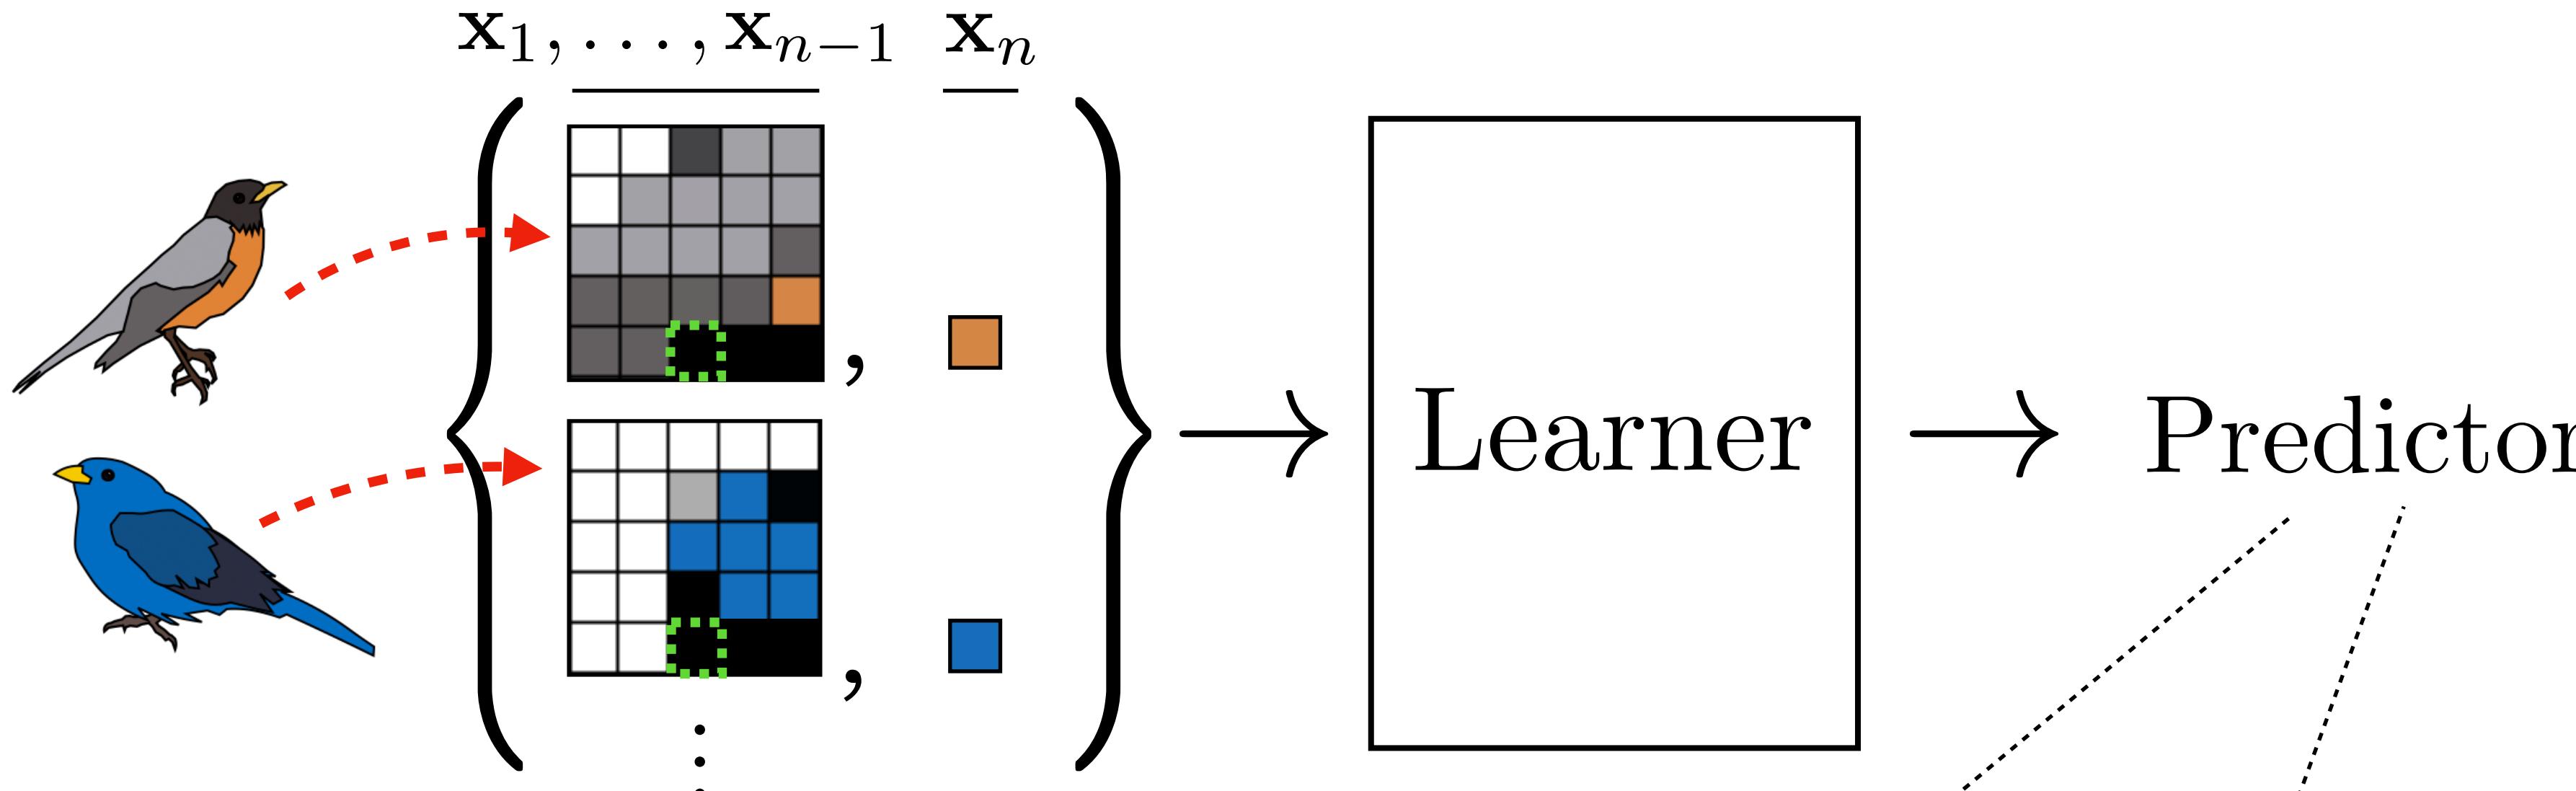


## Sampling

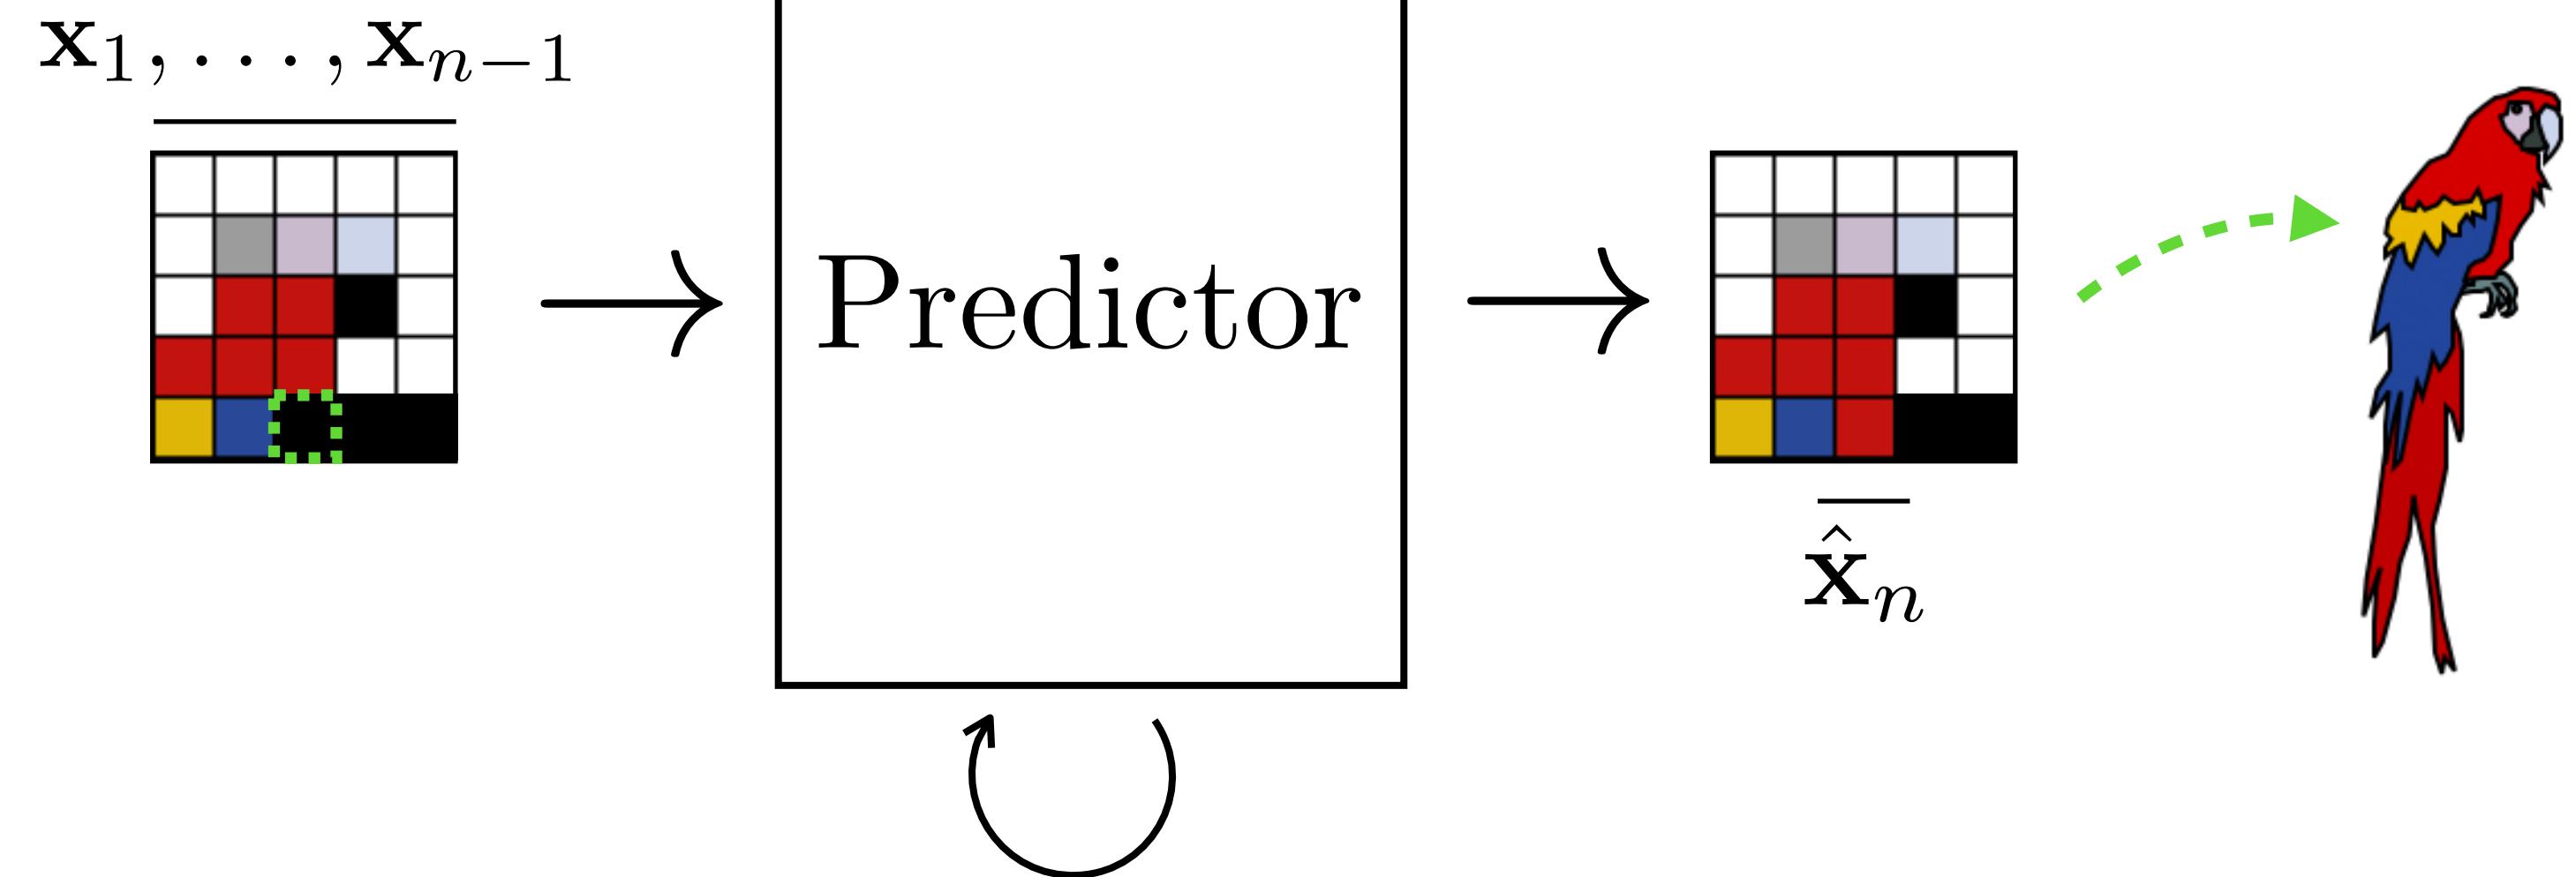

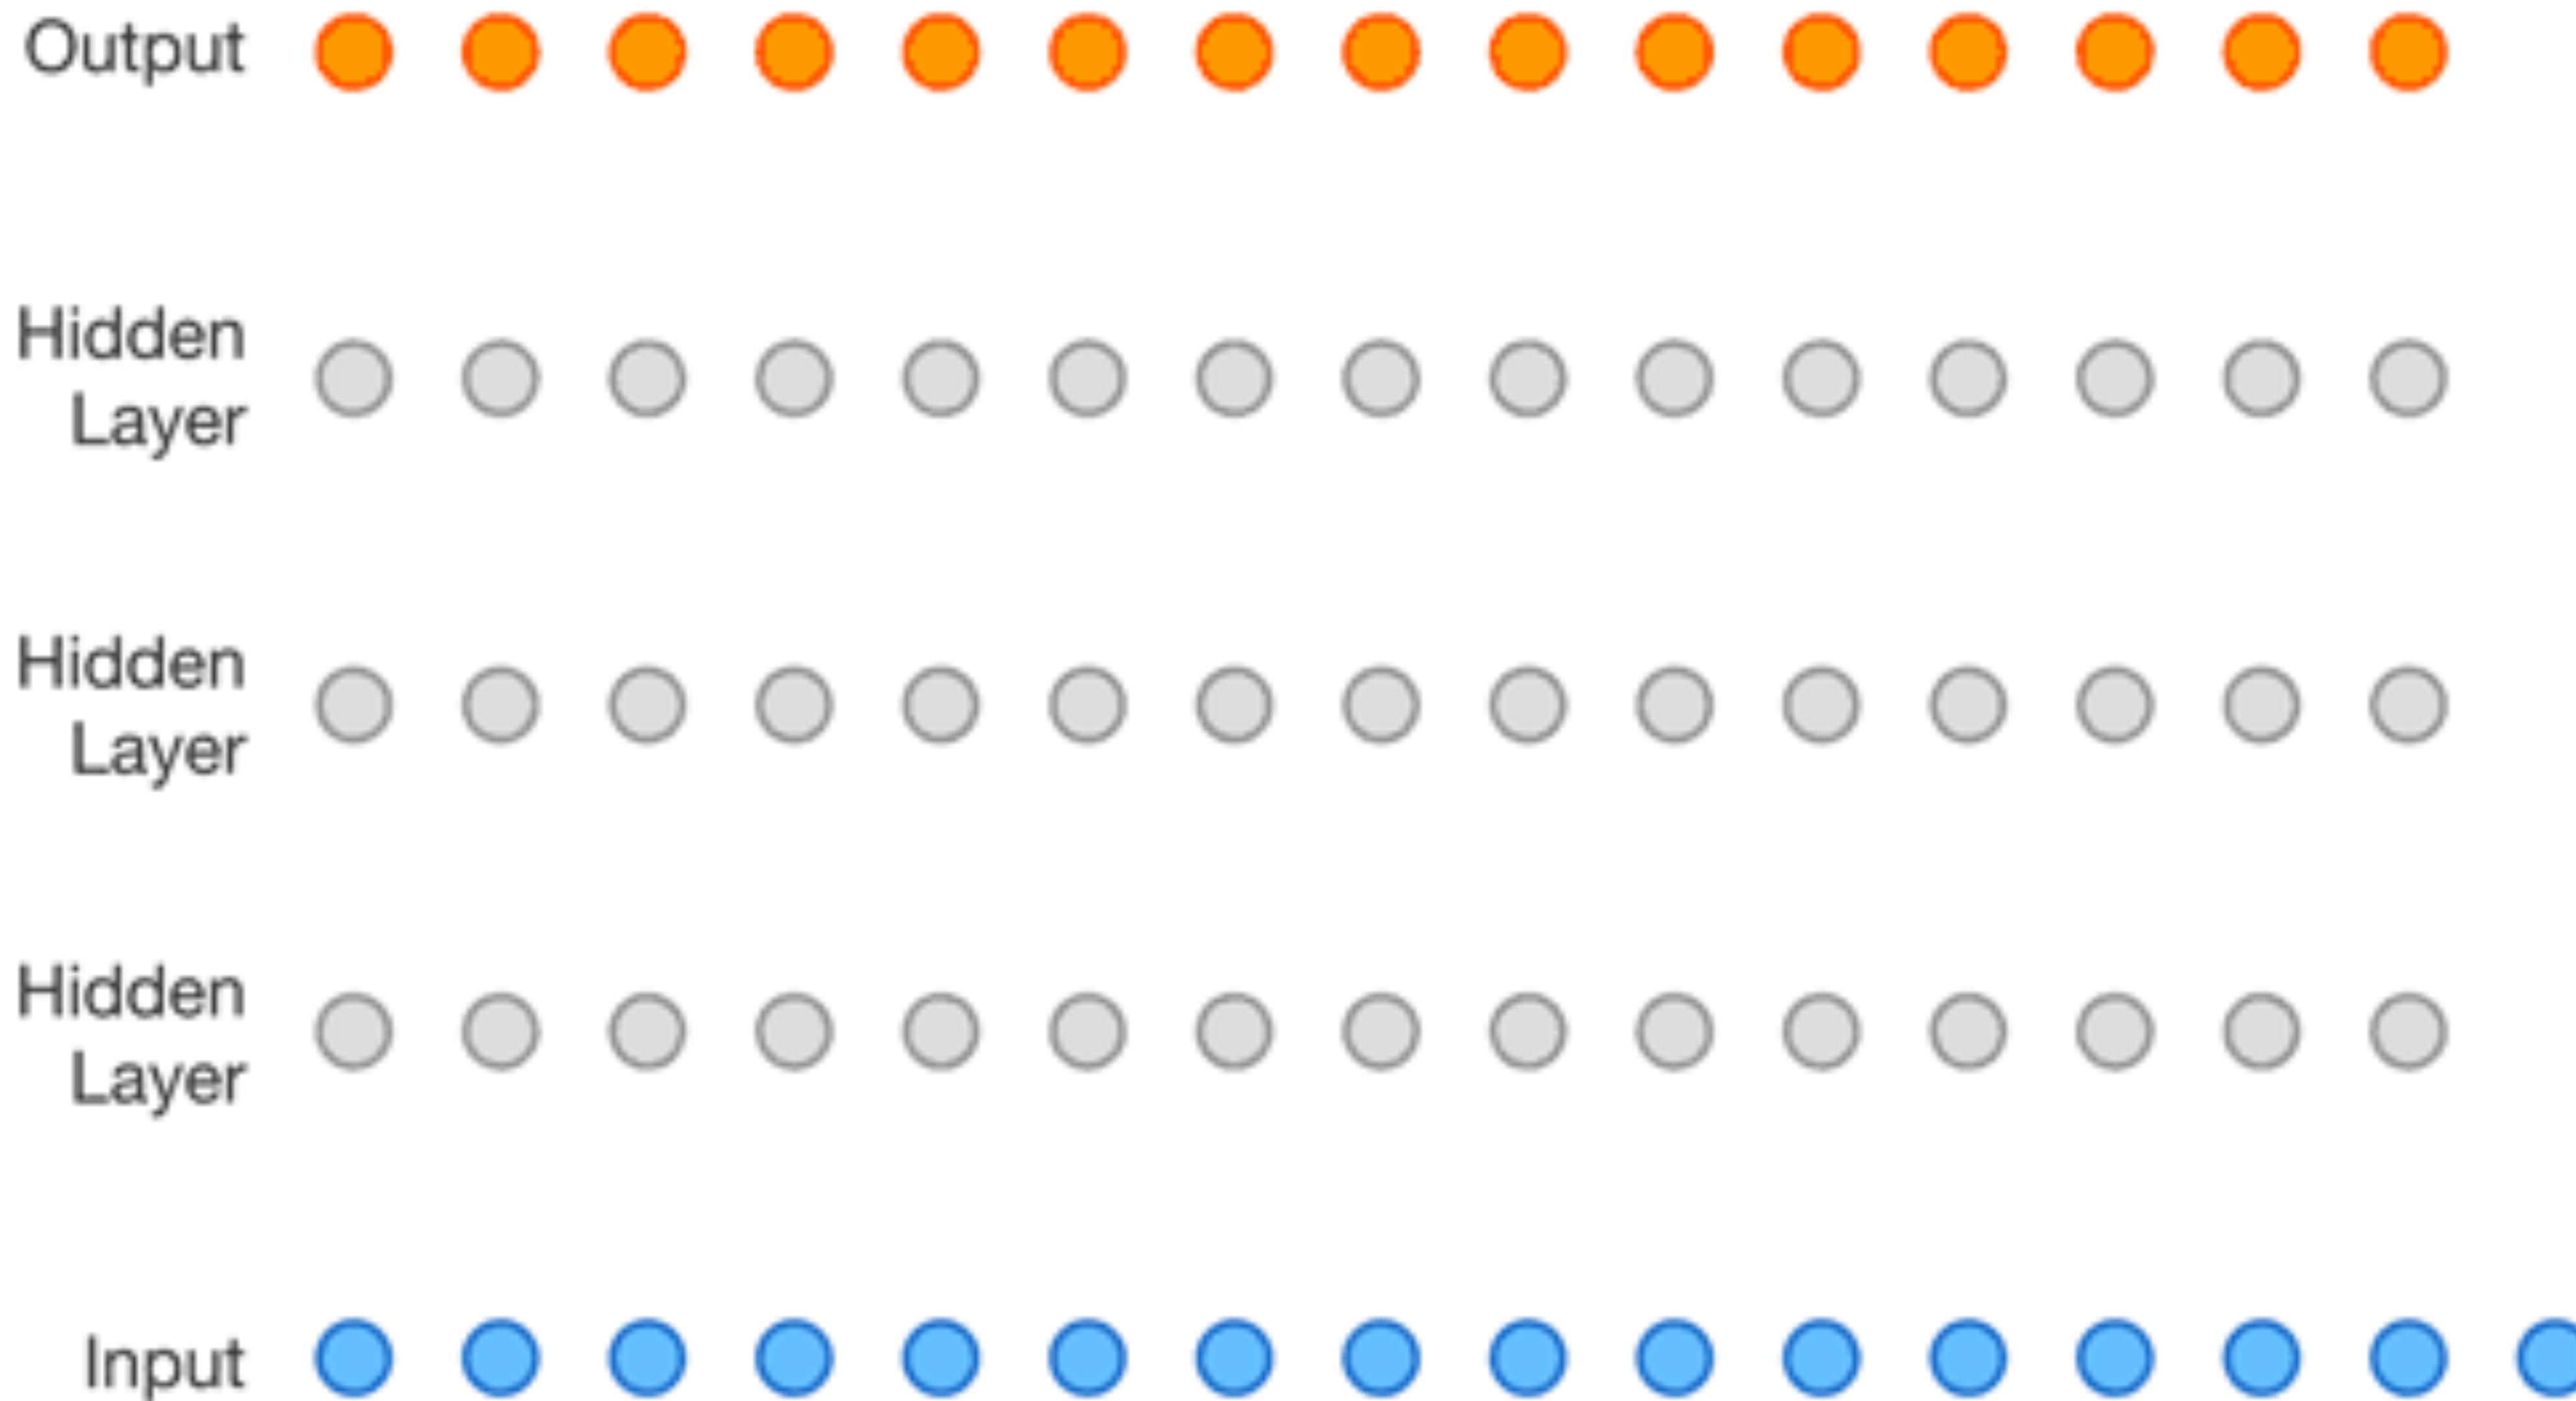


[**Wavenet**, <https://deepmind.com/blog/wavenet-generative-model-raw-audio/>]



# Diffusion models

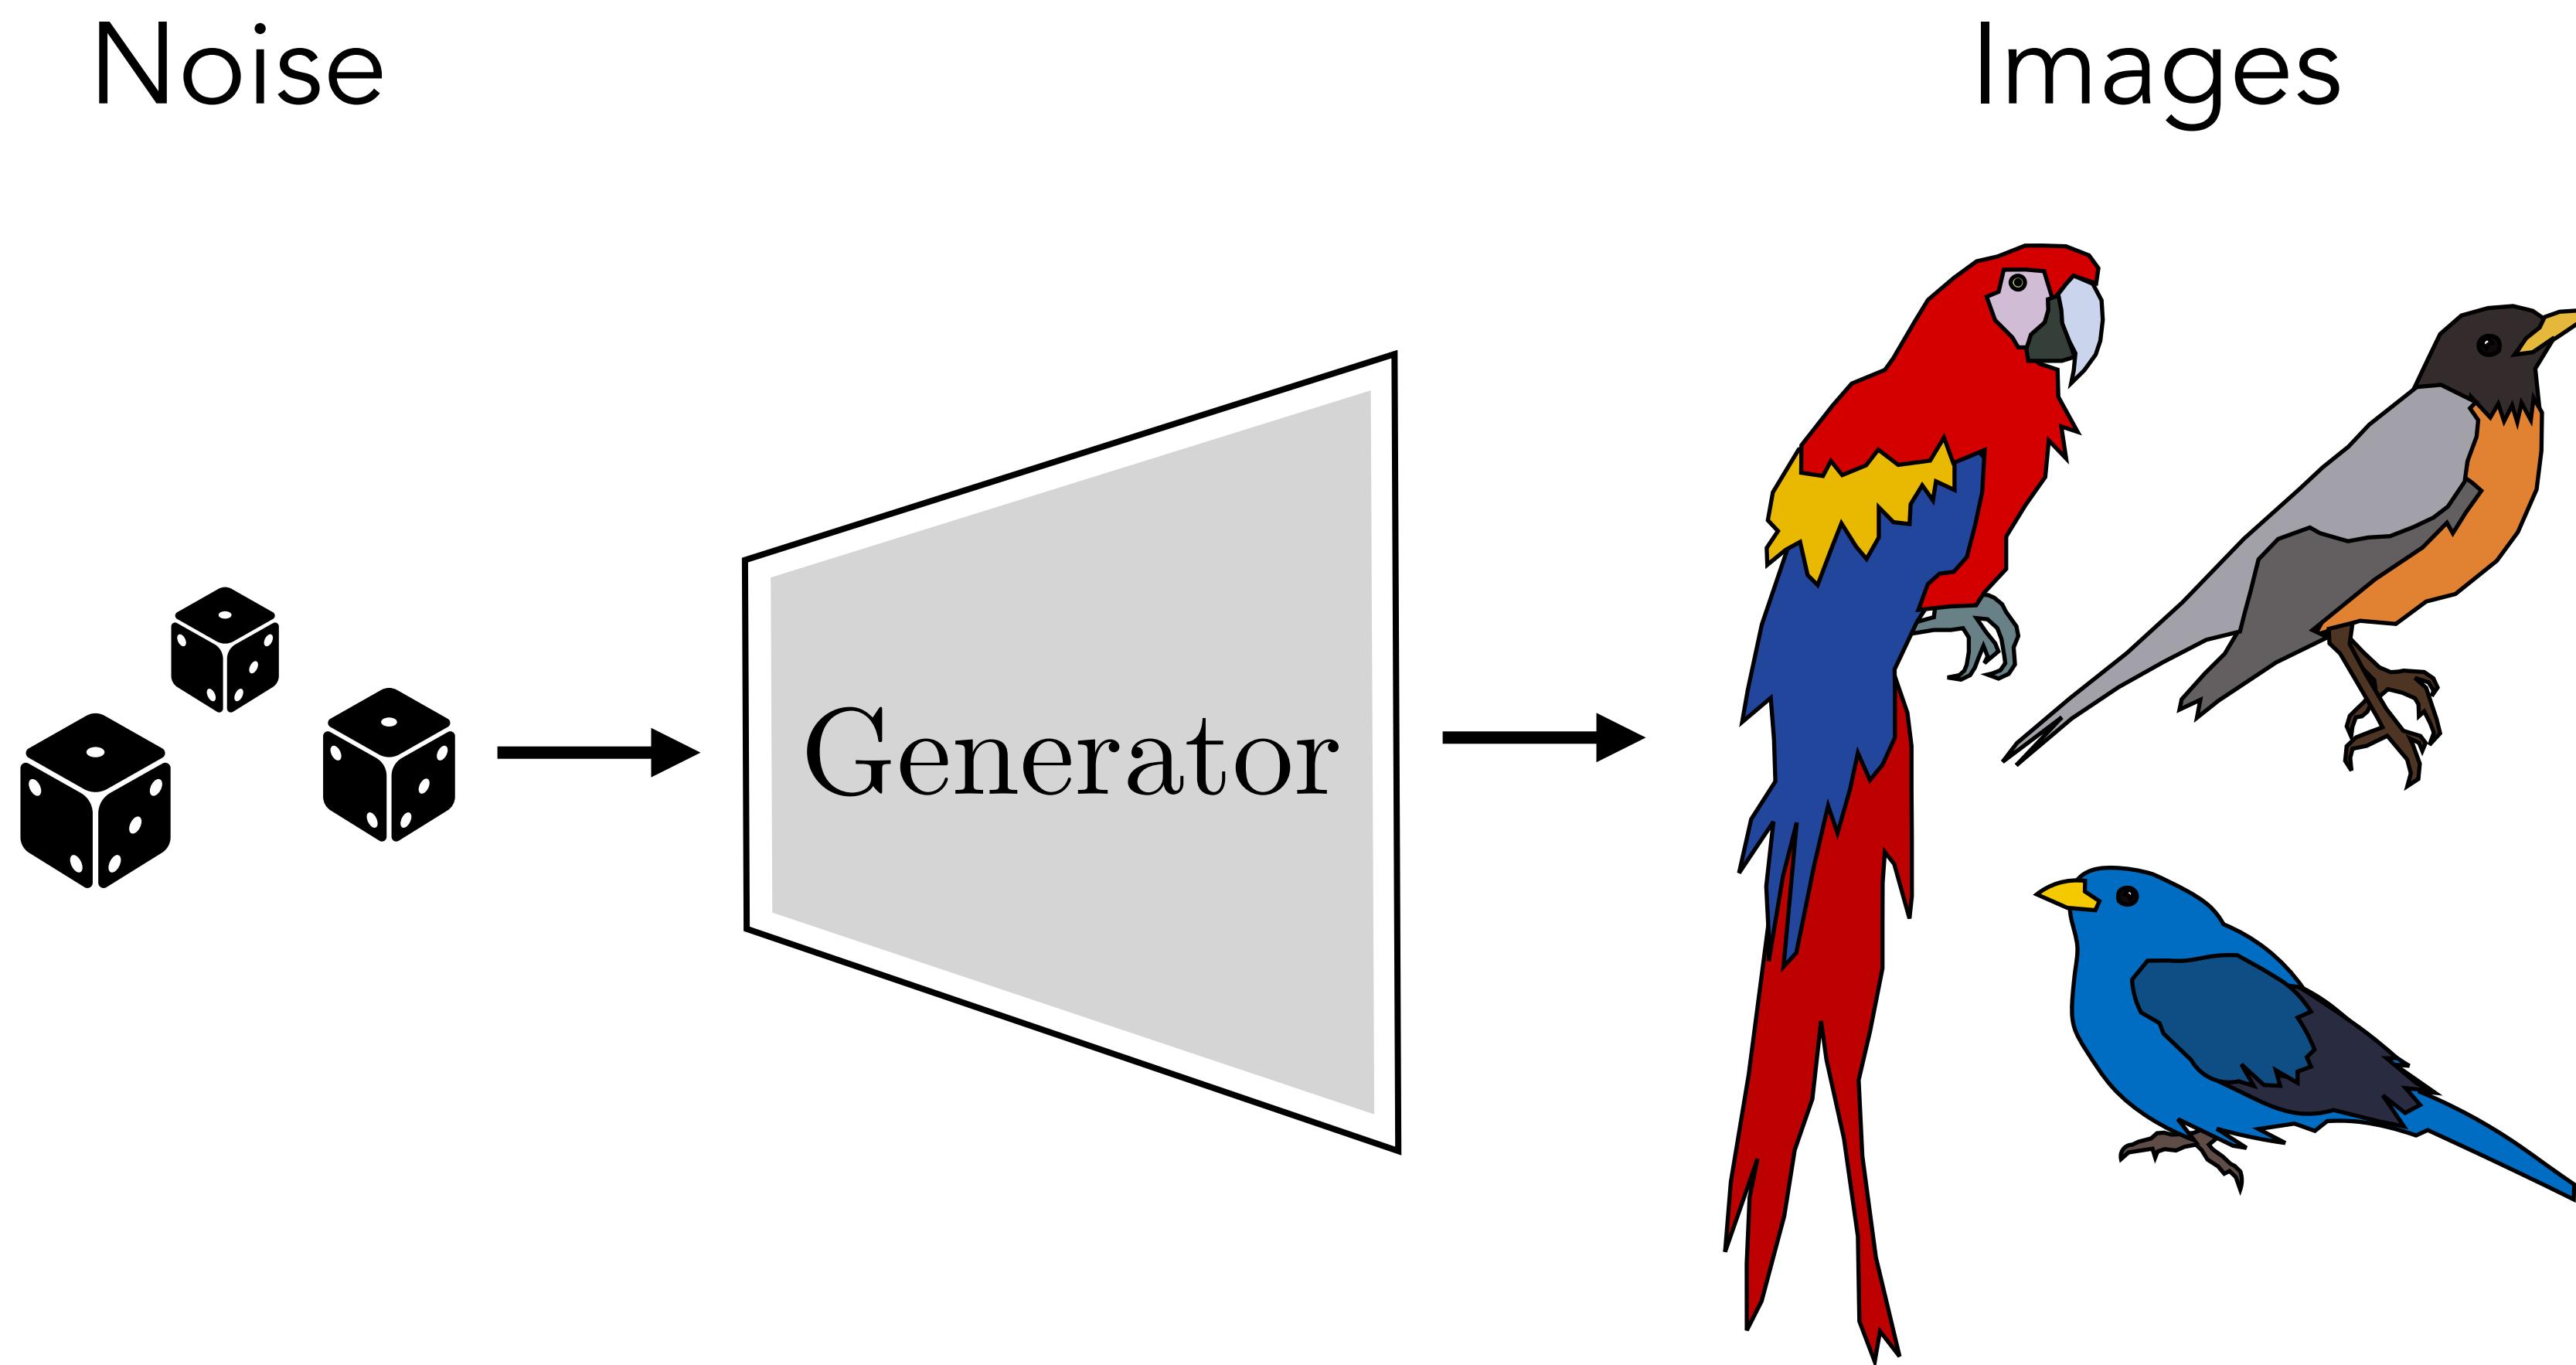

# Diffusion models

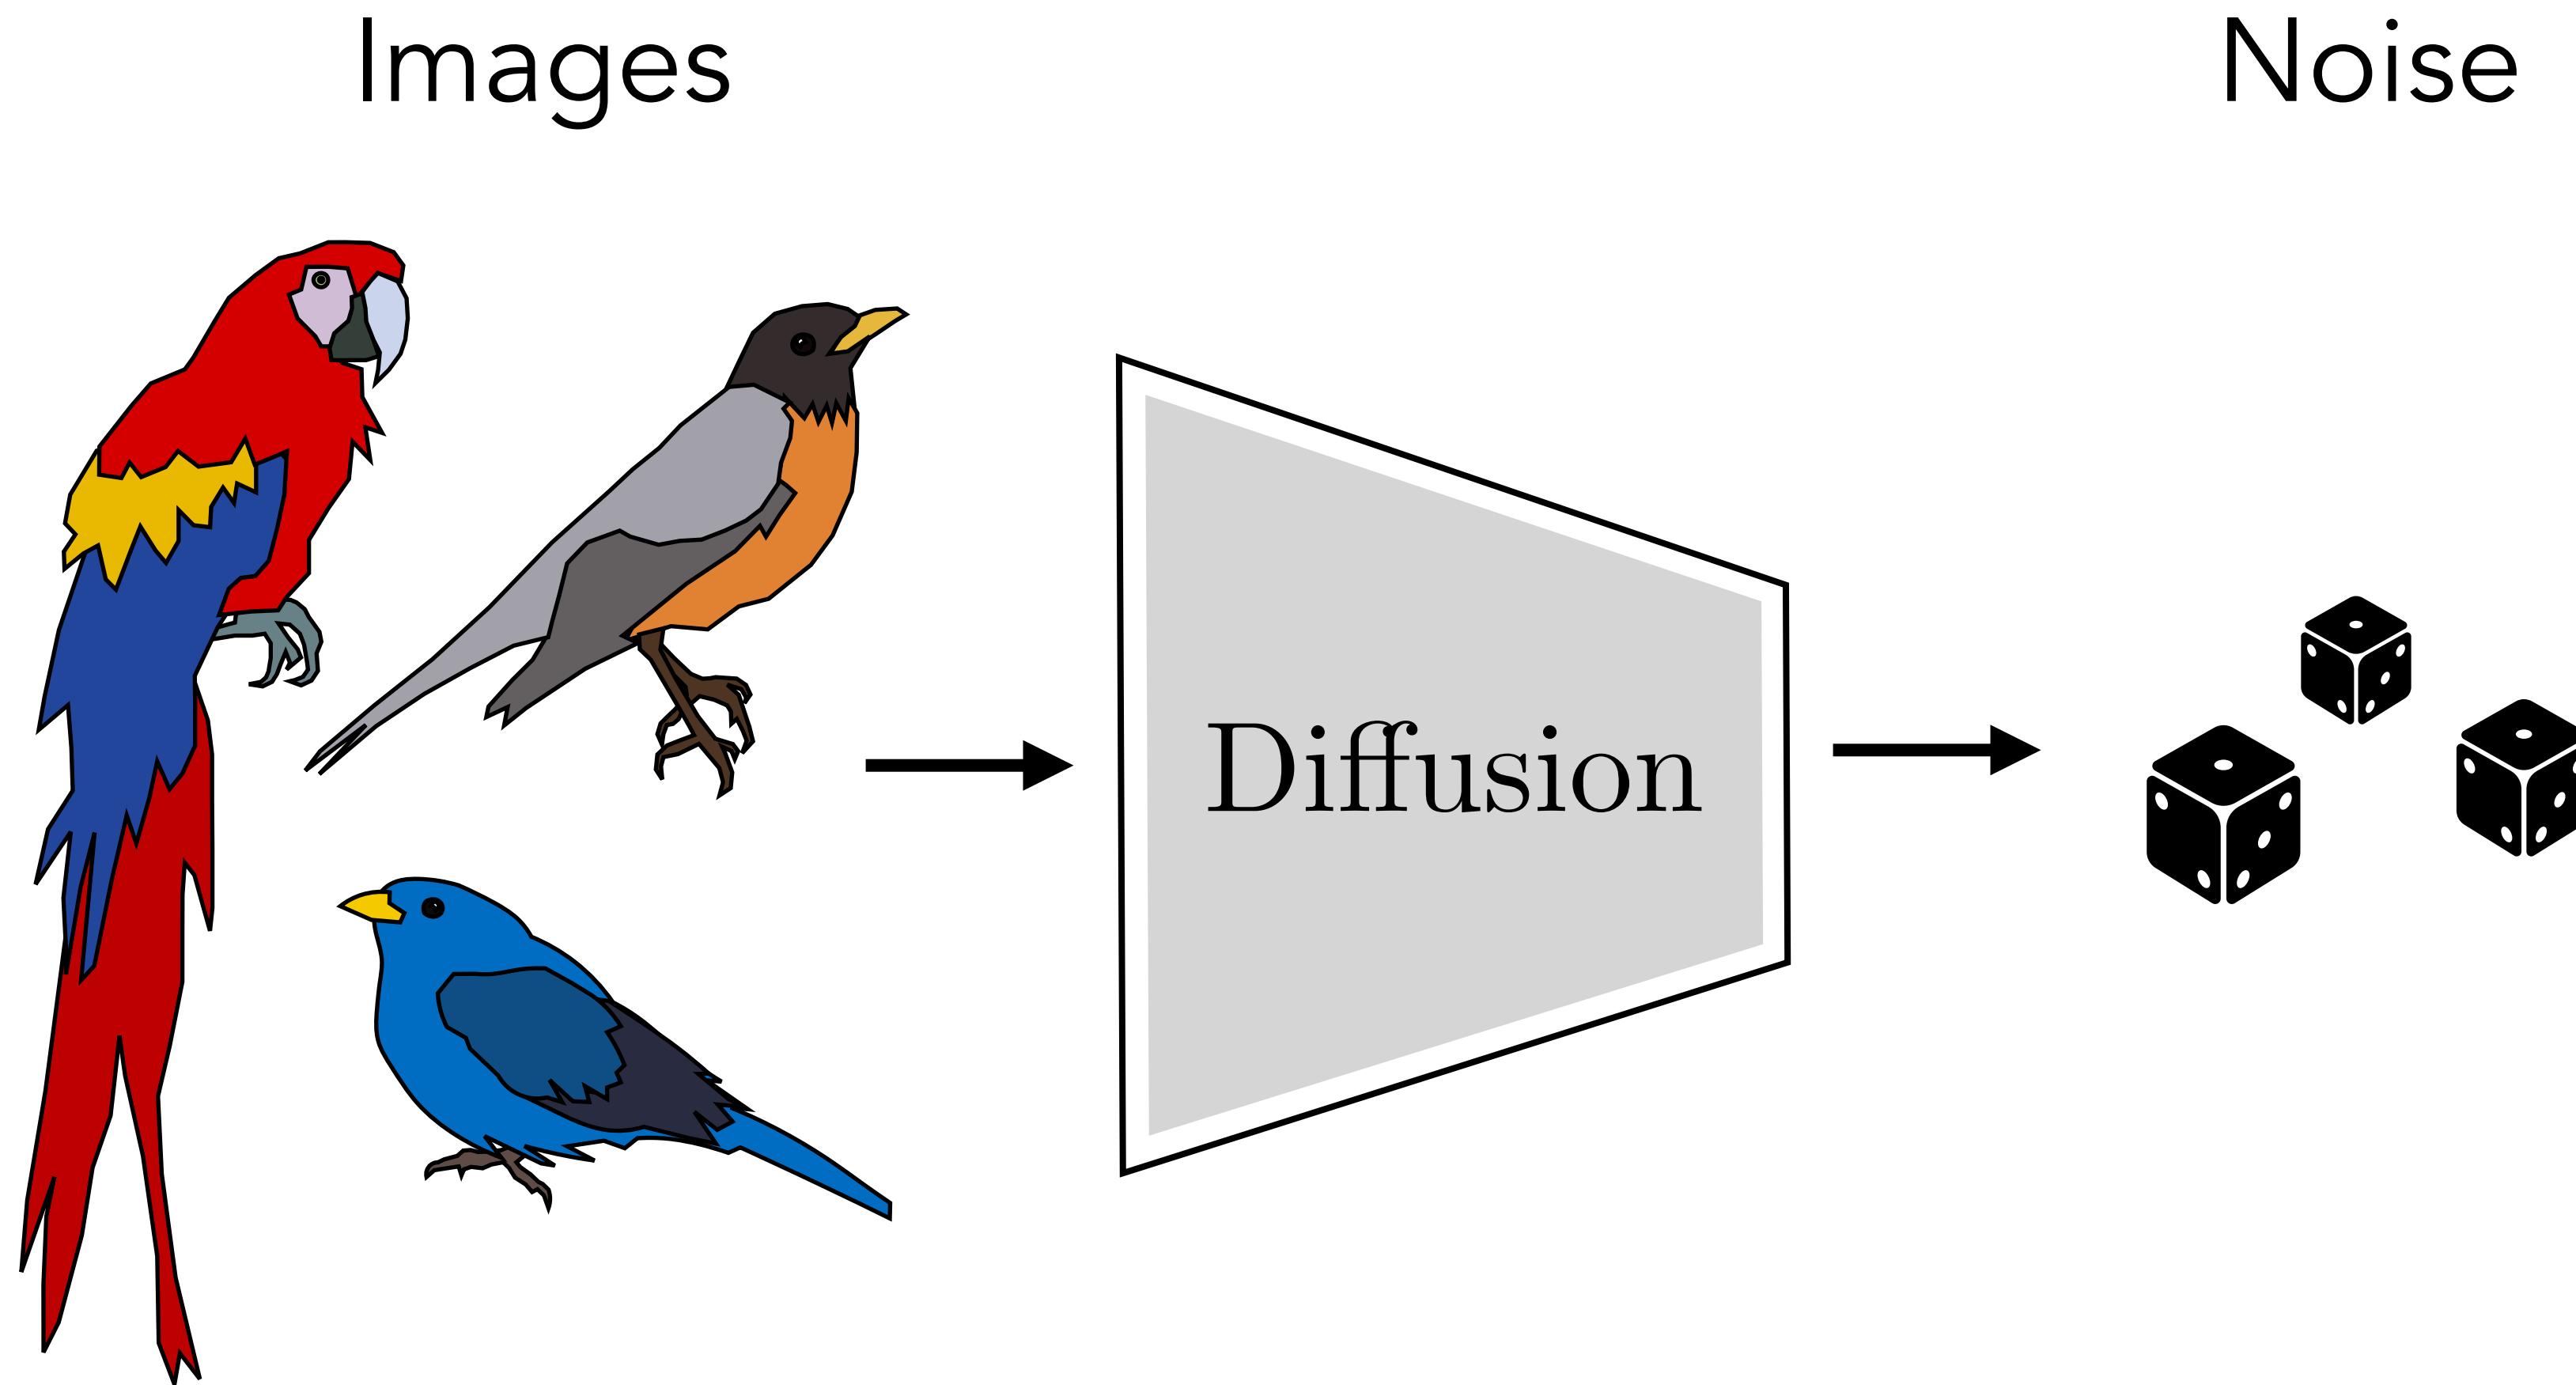


# Diffusion models

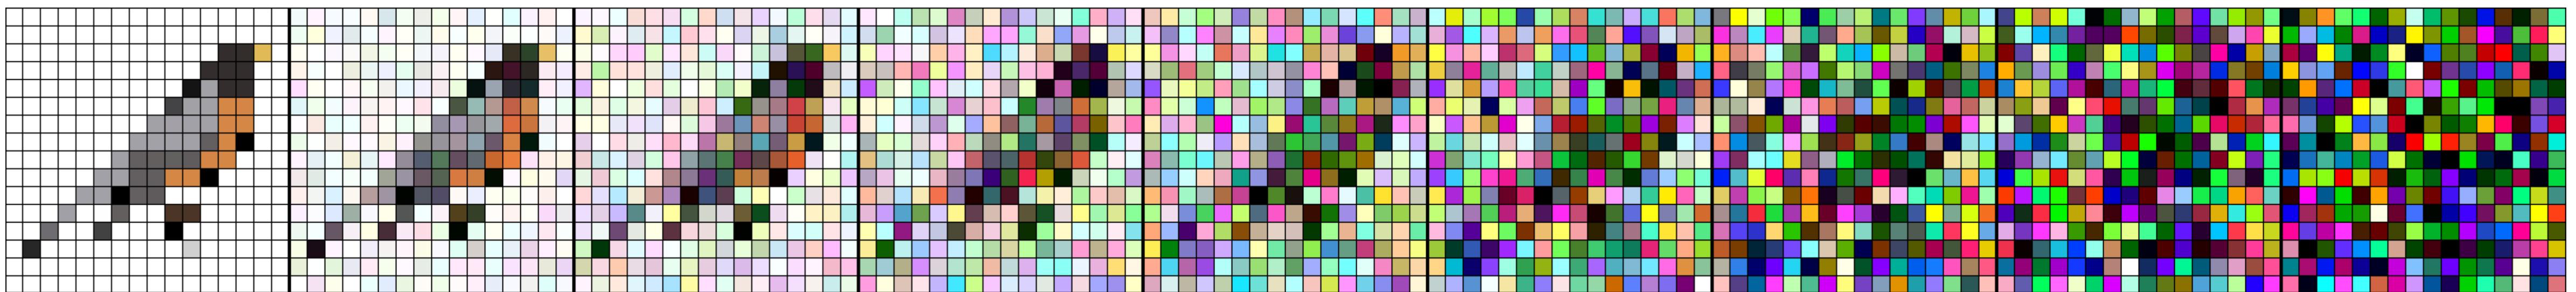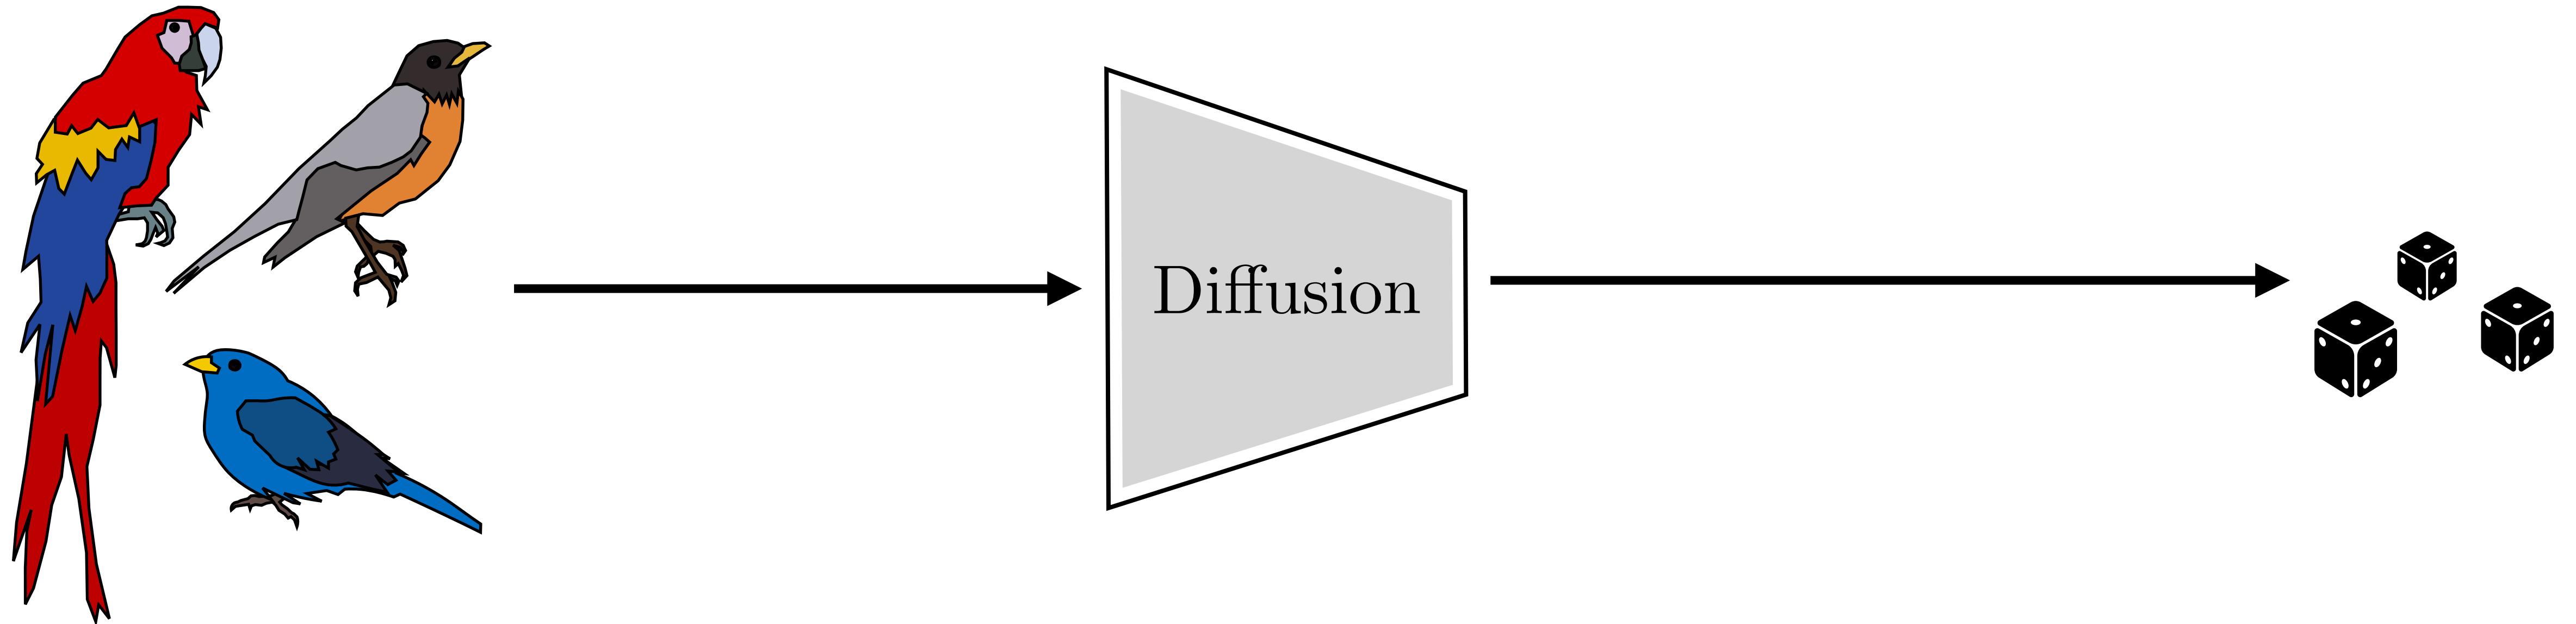


Diffusion: Just add noise

# Diffusion models


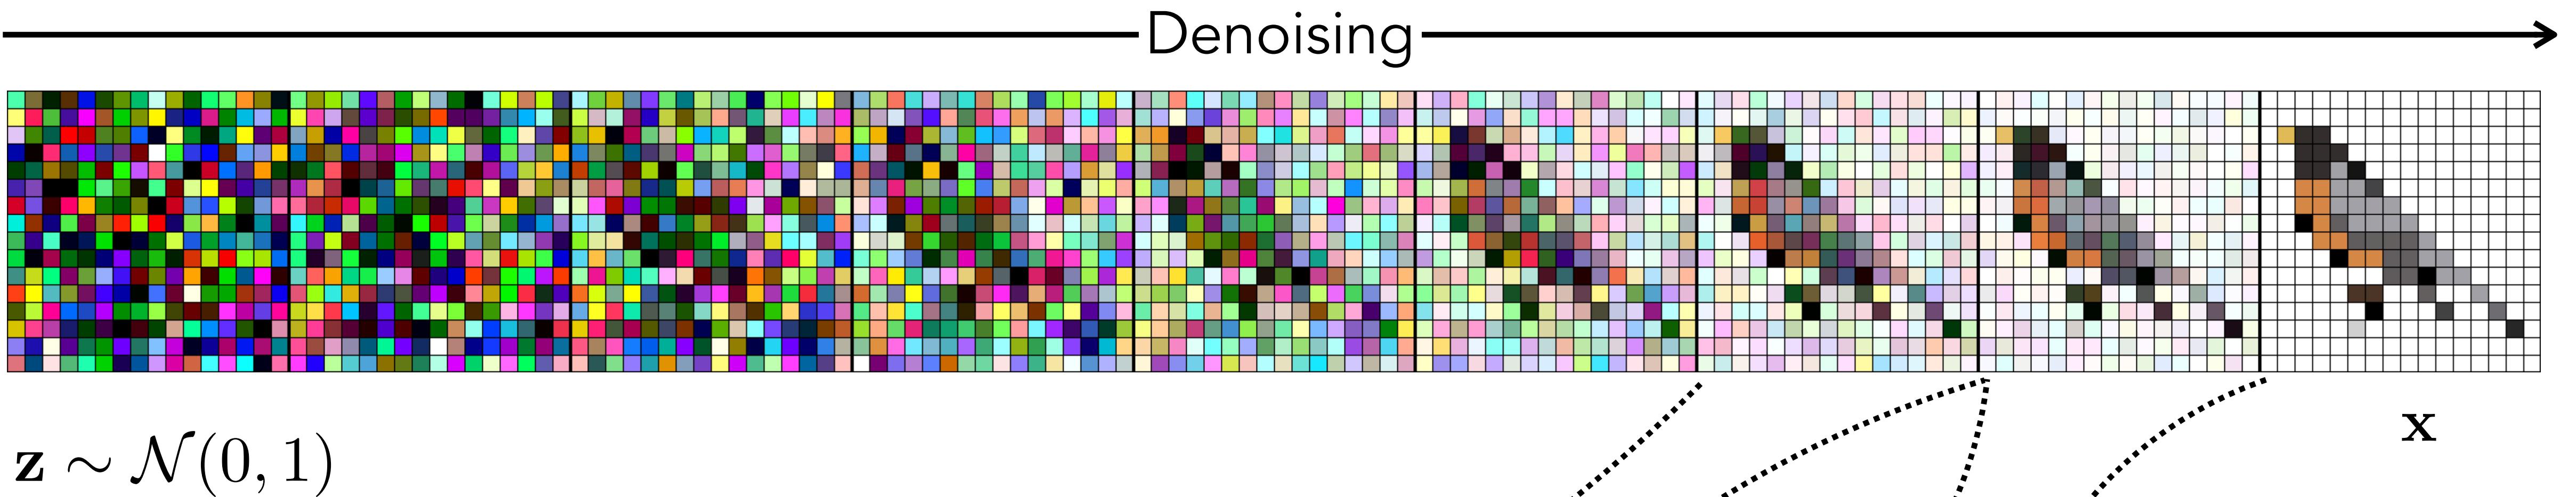


*Use supervised learning to reverse the process of adding noise*

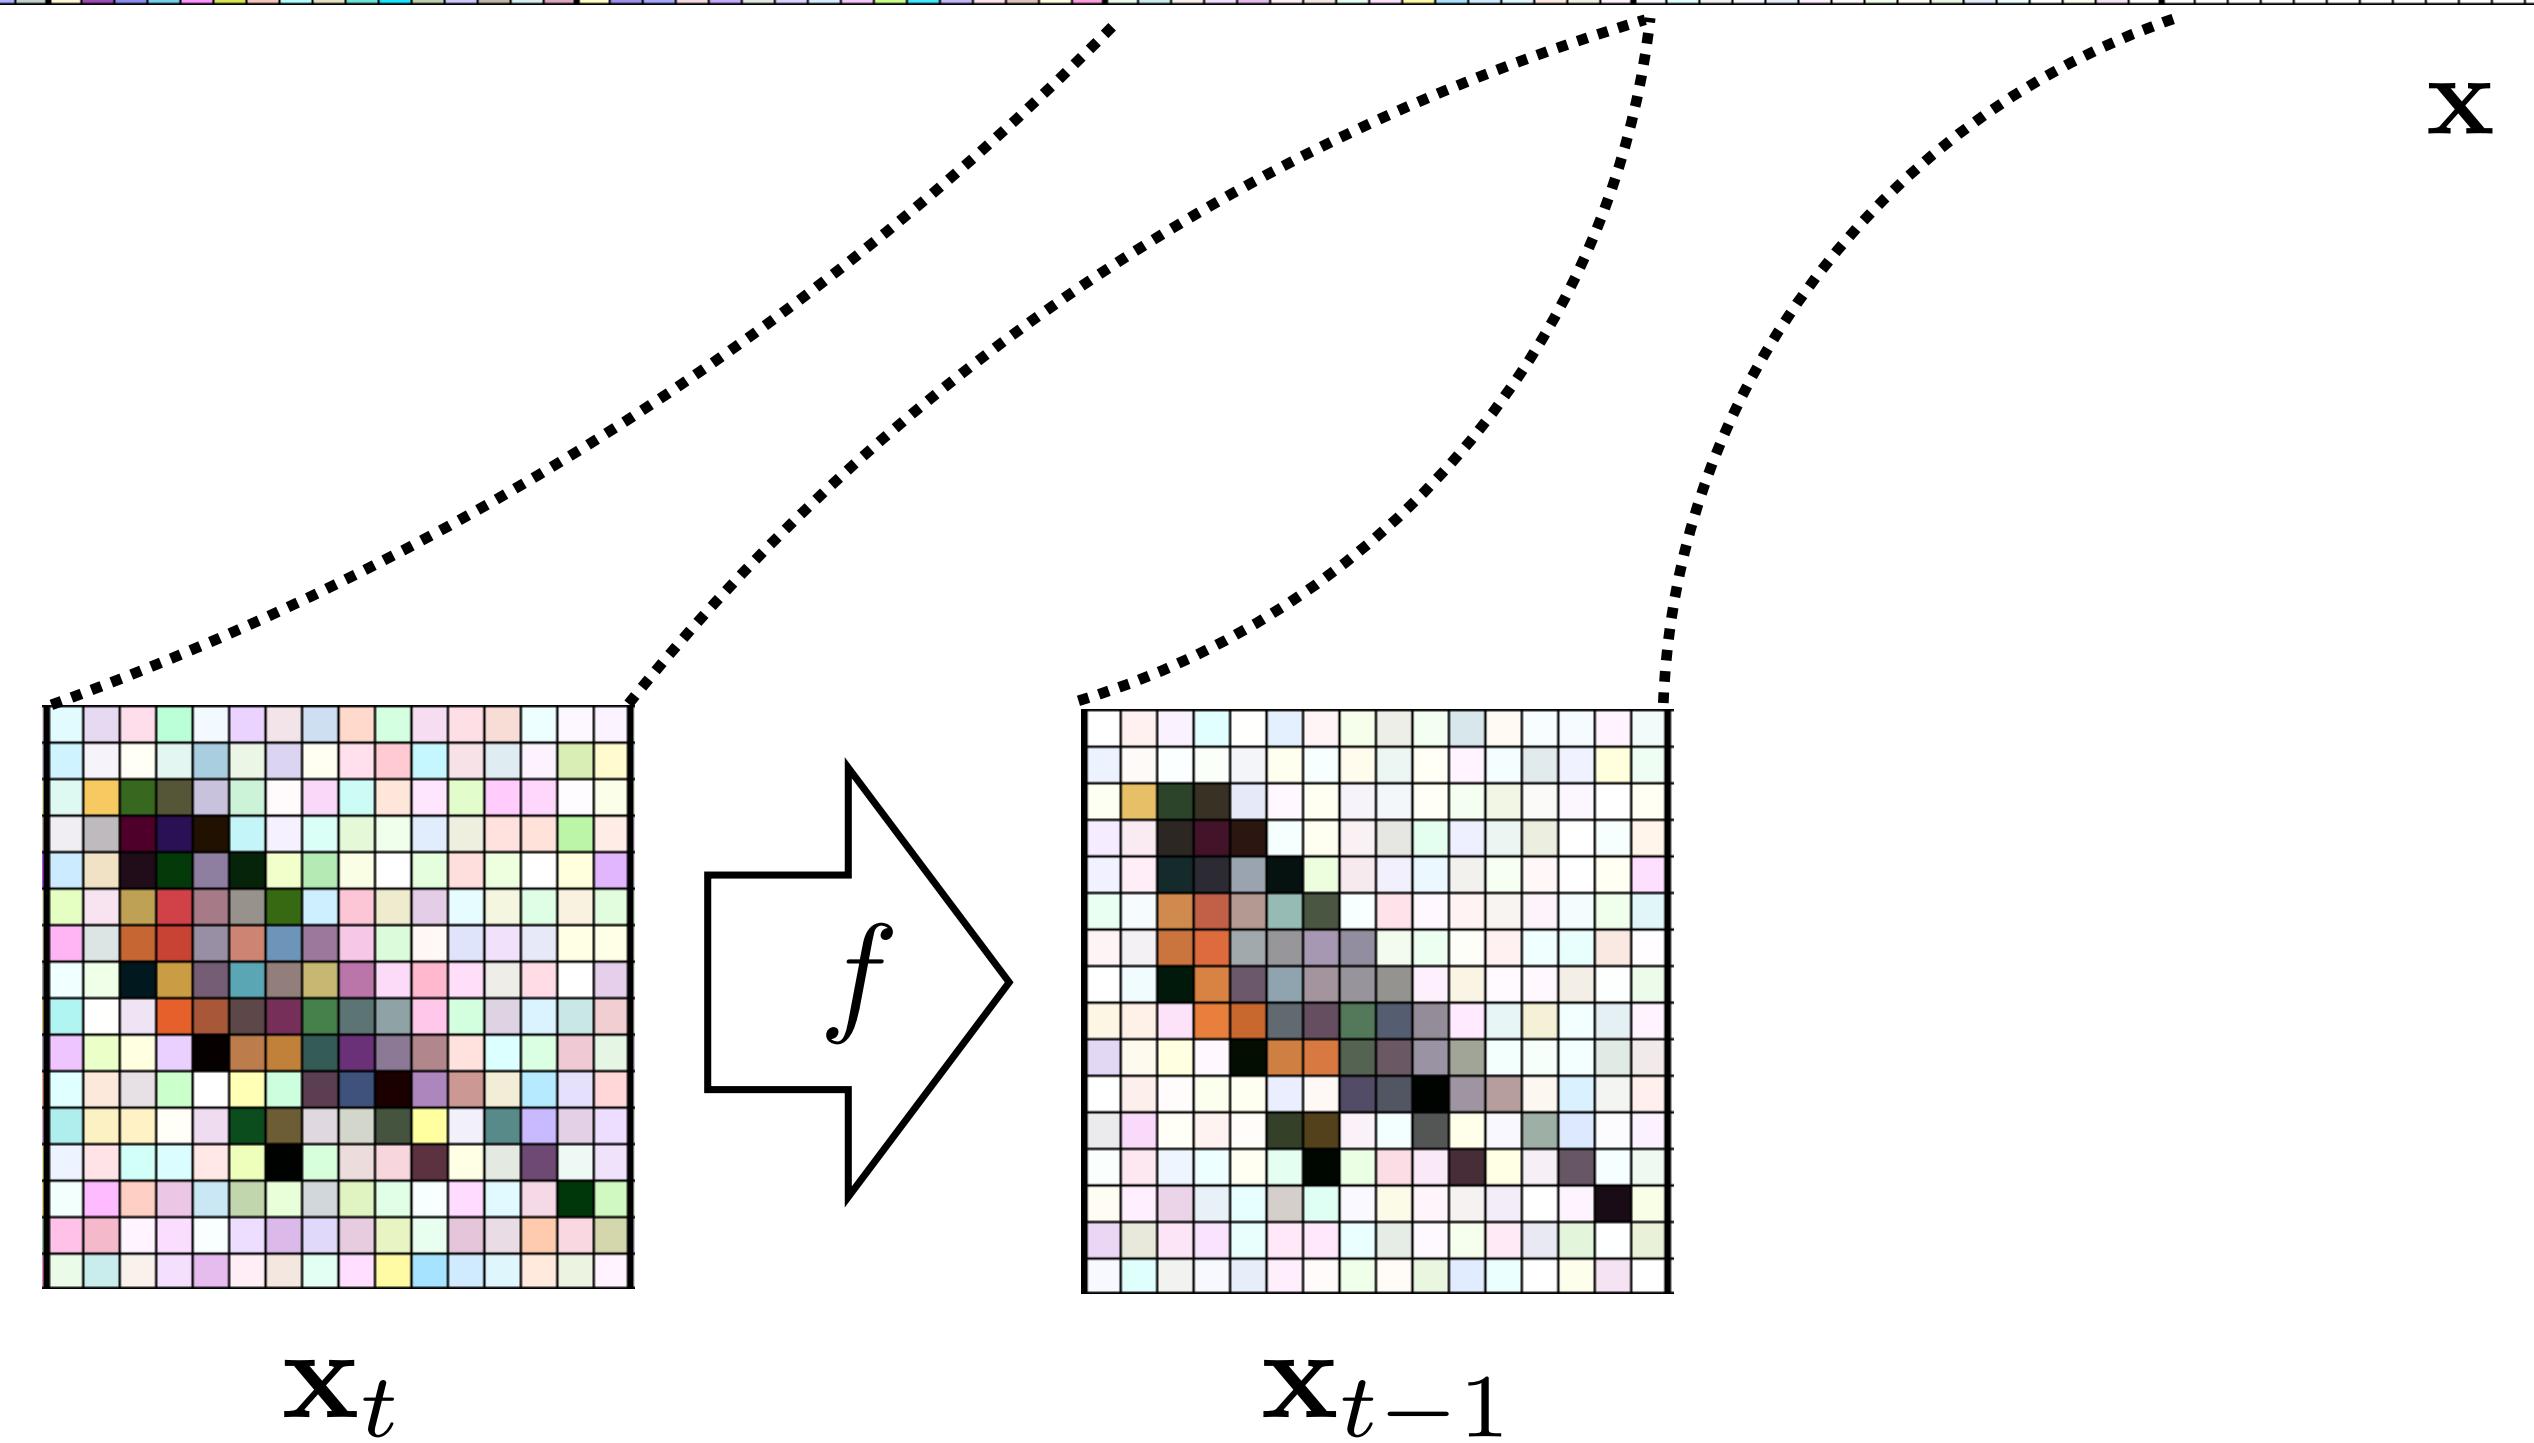







# Diffusion models

$$\mathbf{z} \sim \mathcal{N}(0, 1)$$

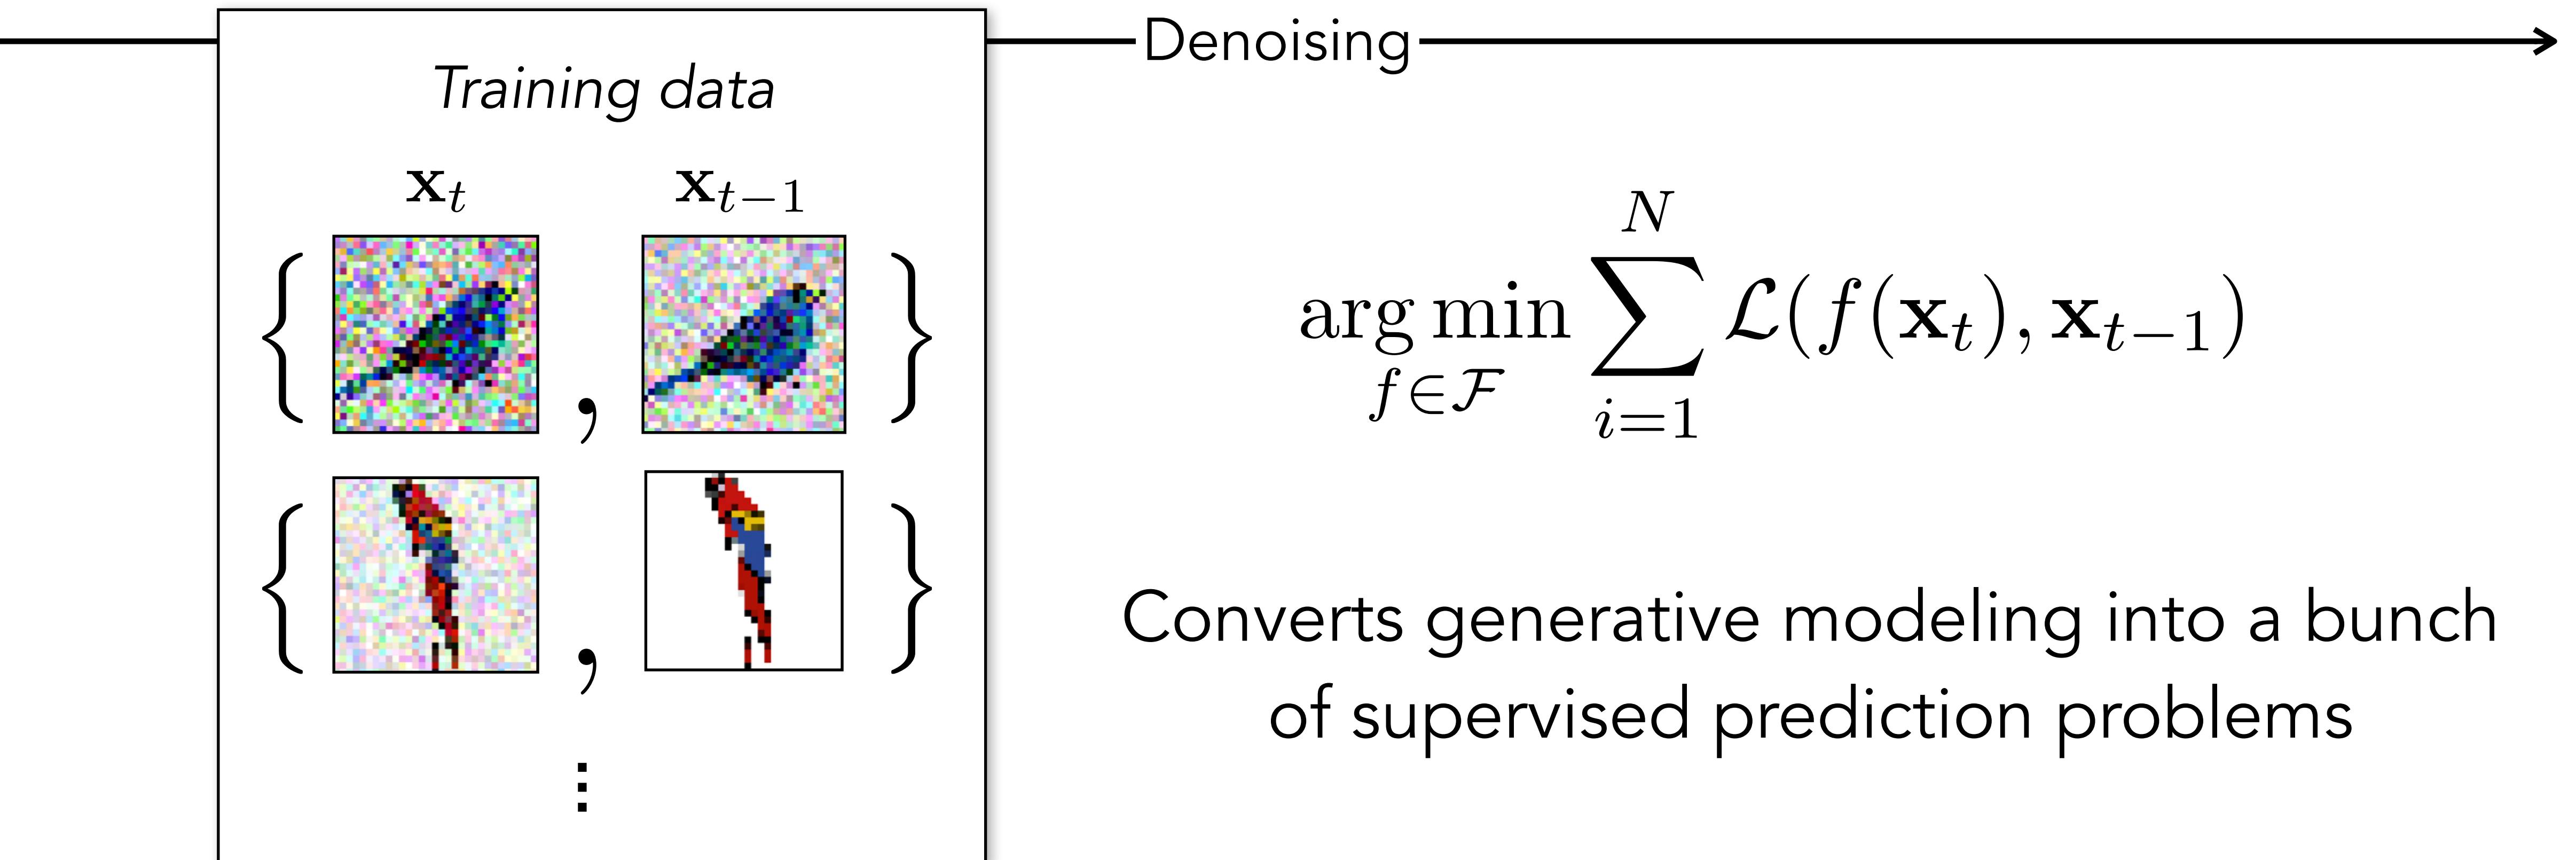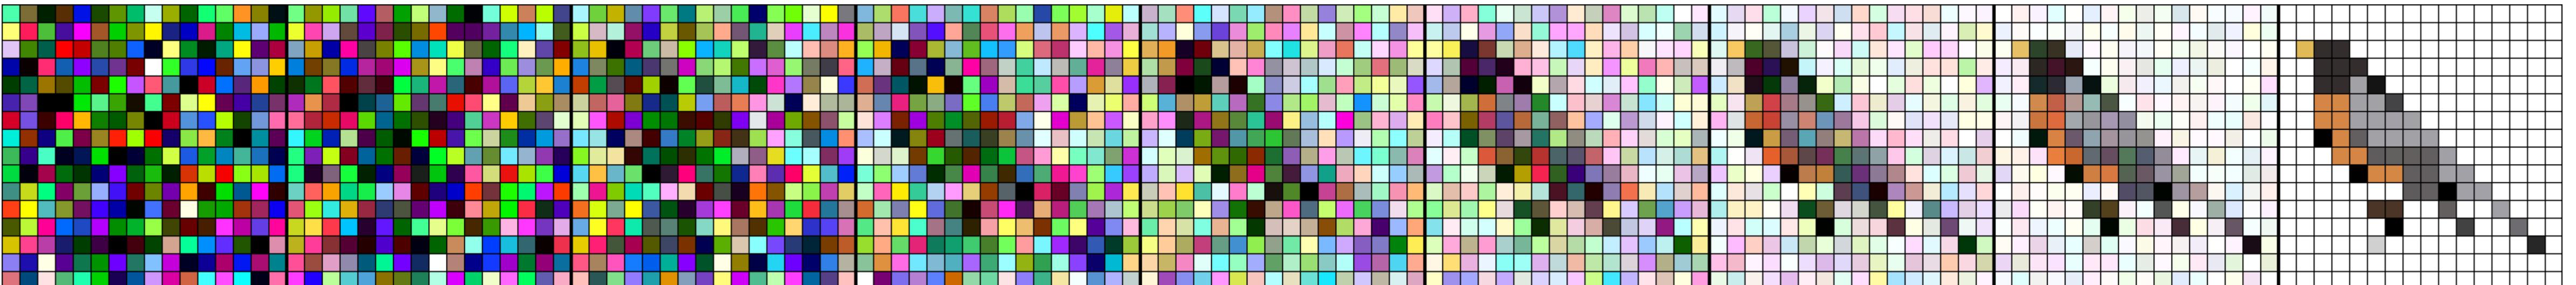


# Diffusion models

Different noise samples (dice rolls) result in different images

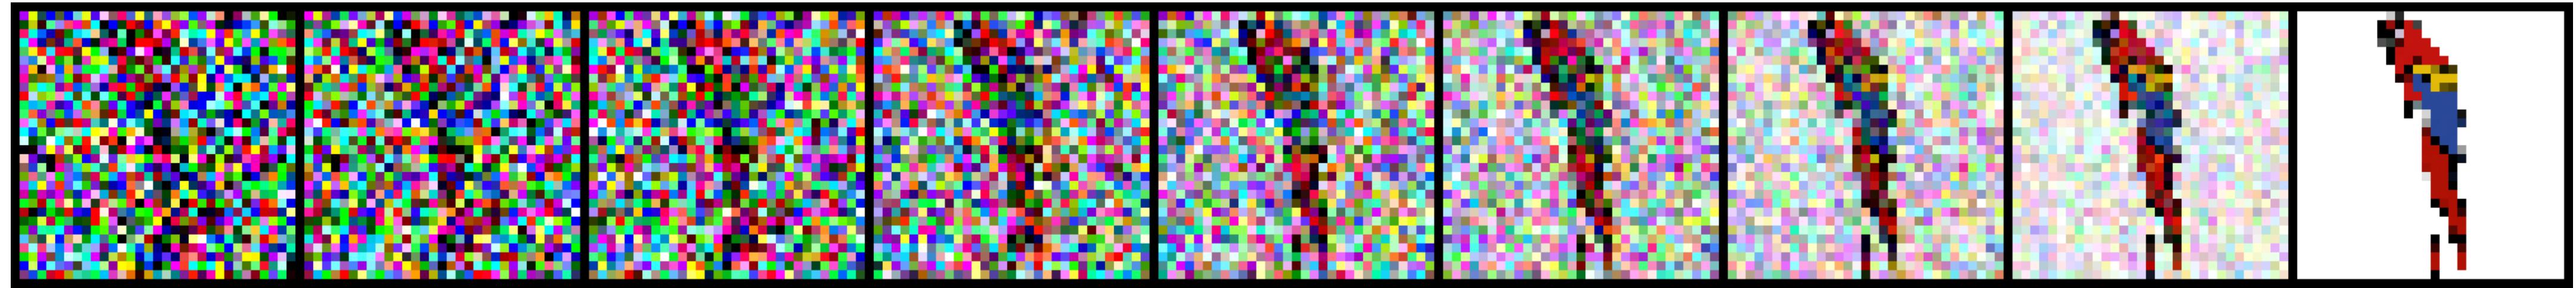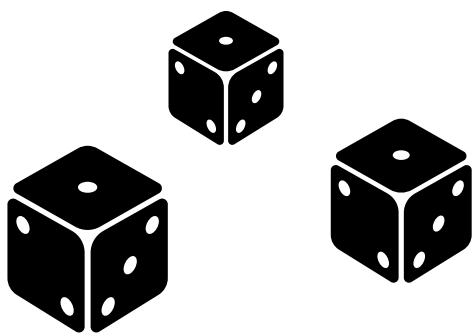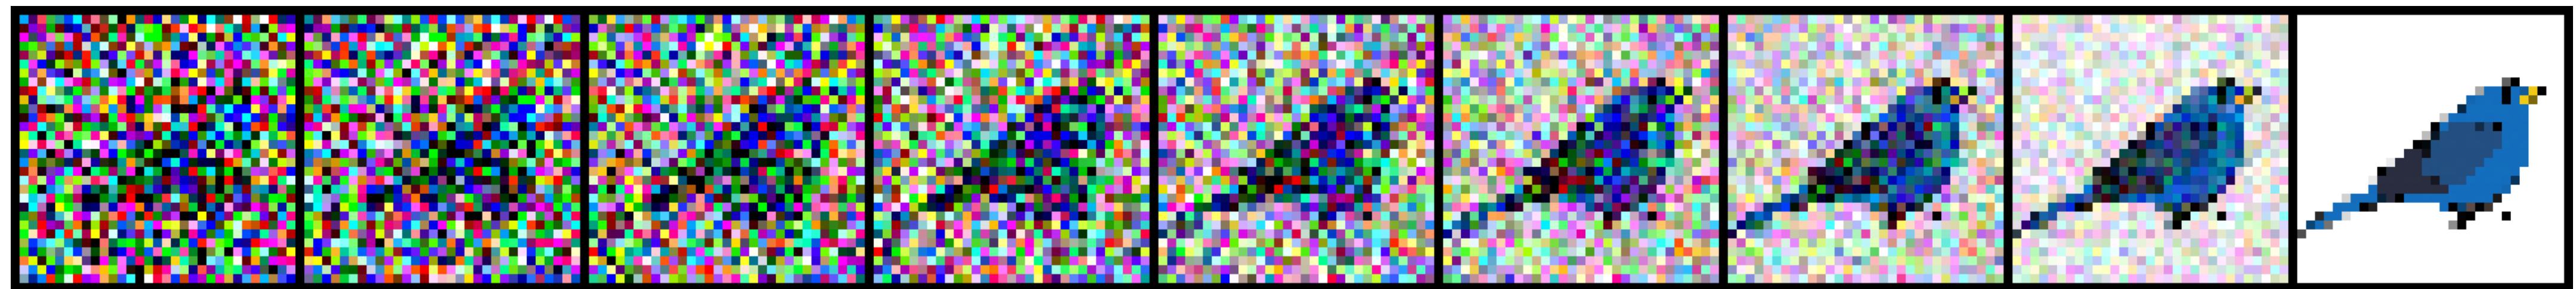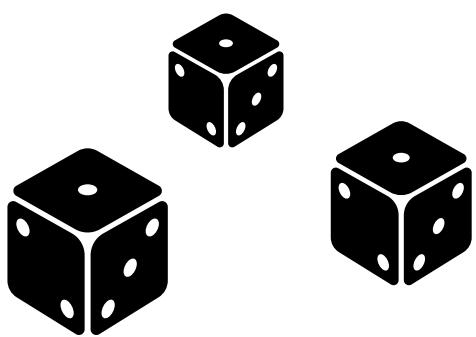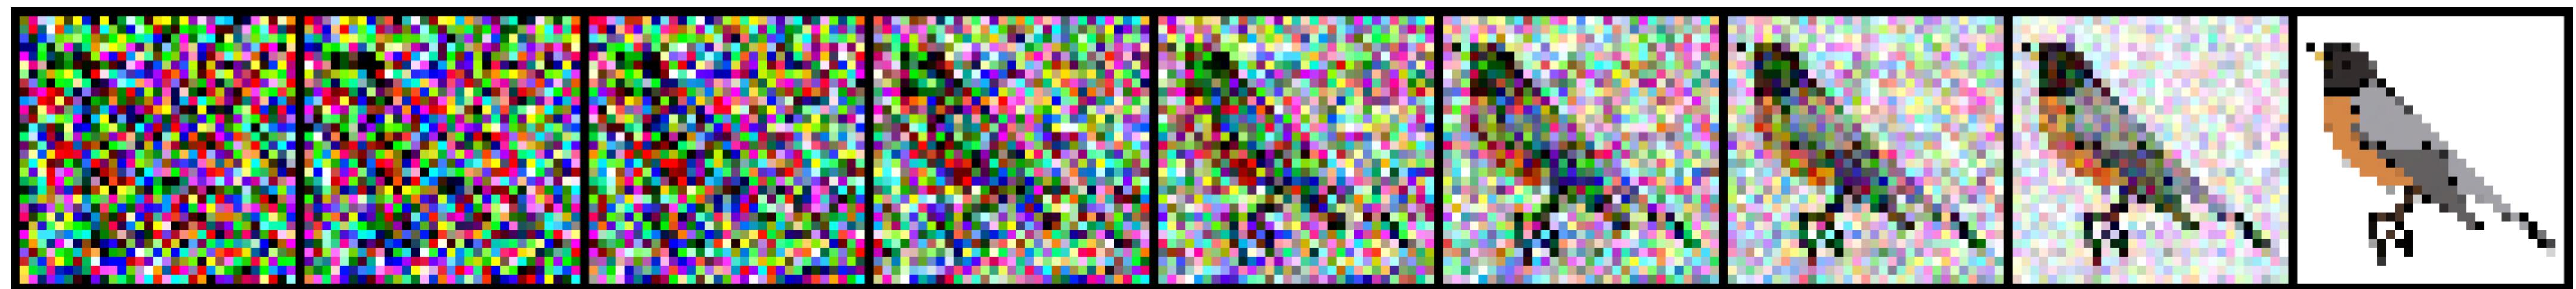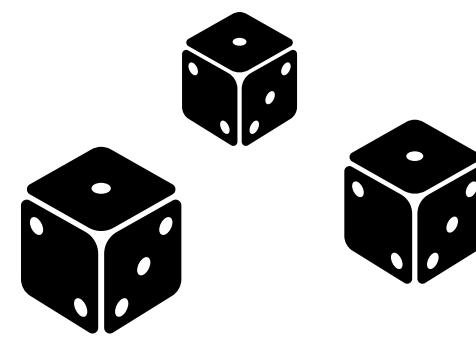

# Gaussian diffusion models

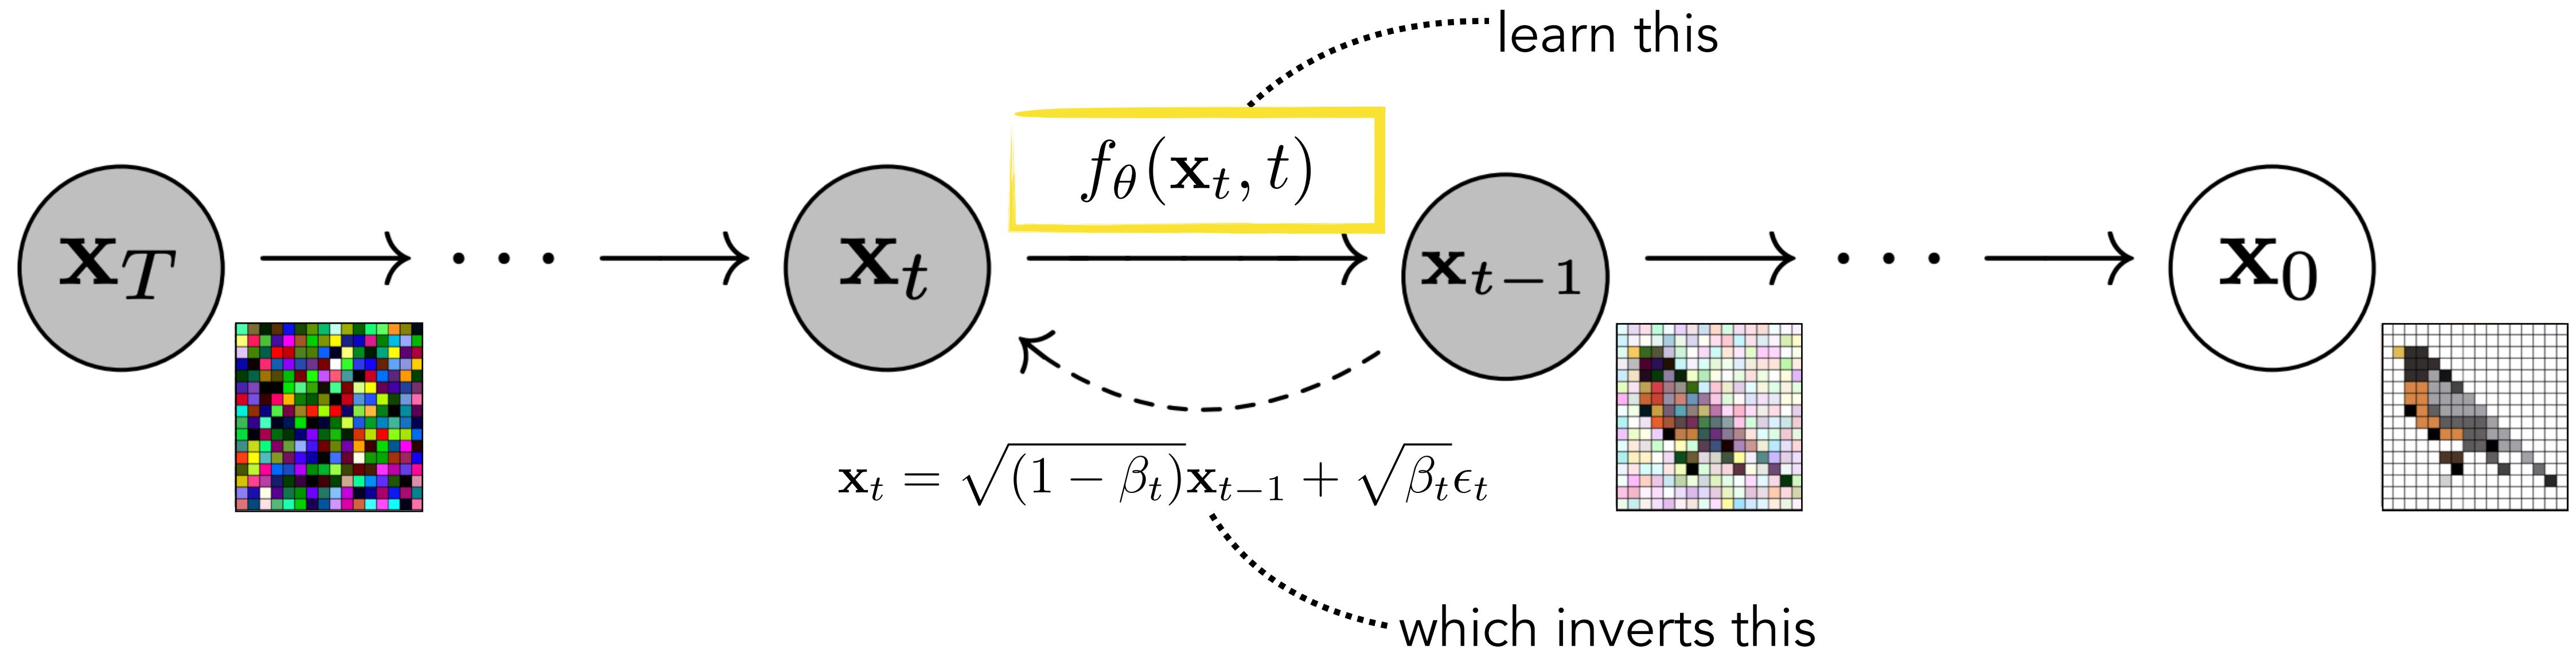

Forward process:

$$\epsilon_t \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$$

$$\mathbf{x}_t = \sqrt{(1 - \beta_t)}\mathbf{x}_{t-1} + \sqrt{\beta_t}\epsilon_t$$

The variances, beta and sigma, are modeling choices. See Ho, Jain, and Abbeel for details.


Reverse process:

$$\mu = f_\theta(\mathbf{x}_t, t)$$

$$\mathbf{x}_{t-1} \sim \mathcal{N}(\mu, \sigma^2)$$

[Fig adapted from Ho, Jain, Abbeel, 2020]

# Gaussian diffusion models

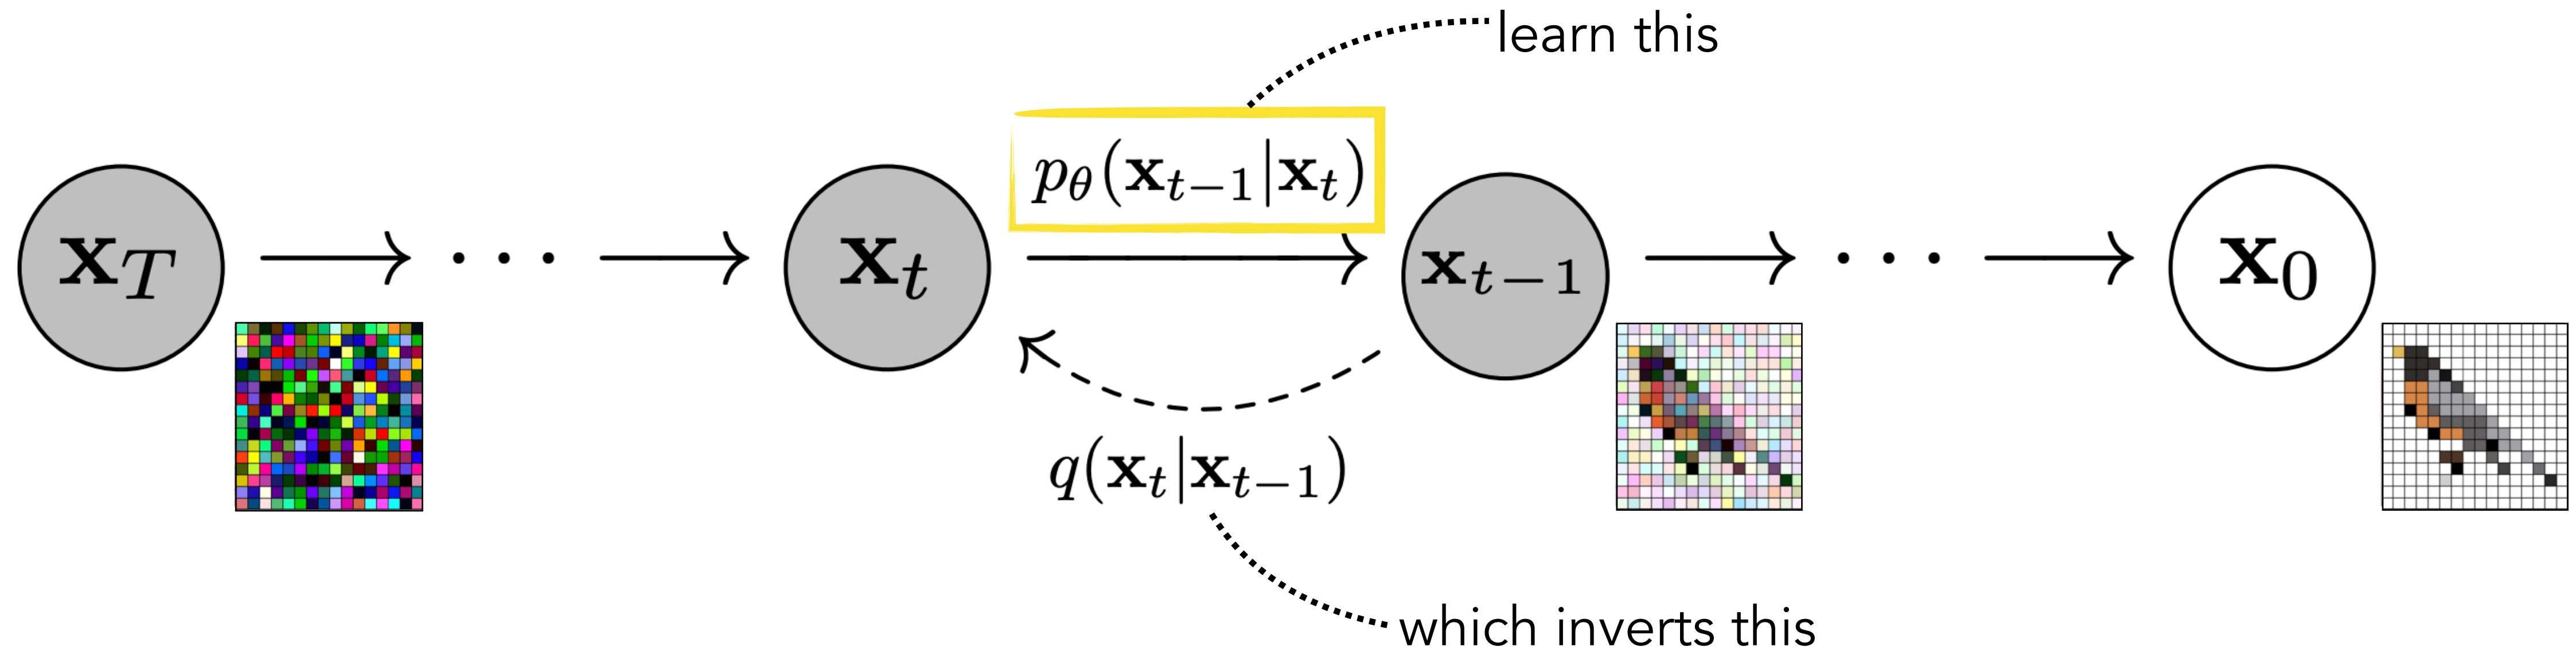

Forward process:

$$q(\mathbf{x}_t | \mathbf{x}_{t-1}) = \mathcal{N}(\sqrt{1 - \beta_t} \mathbf{x}_{t-1}, \beta_t)$$

Reverse process:

$$p_\theta(\mathbf{x}_{t-1} | \mathbf{x}_t) = \mathcal{N}(f_\theta(\mathbf{x}_t, t), \sigma^2)$$

The variances, beta and sigma, are modeling choices. See Ho, Jain, and Abbeel for details.

[Fig adapted from Ho, Jain, Abbeel, 2020]

# Stripped down training algorithm

---

**Algorithm 1.2:** Training a diffusion model.

---

- 1 **Input:** training data  $\{\mathbf{x}^{(i)}\}_{i=1}^N$
- 2 **Output:** trained model  $f_\theta$
- 3 **Generate training sequences via diffusion:**
- 4 **for**  $i = 1, \dots, N$  **do**
- 5     **for**  $t = 1, \dots, T$  **do**
- 6          $\epsilon_t \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$
- 7          $\mathbf{x}_t^{(i)} \leftarrow \sqrt{(1 - \beta_t)} \mathbf{x}_{t-1}^{(i)} + \sqrt{\beta_t} \epsilon_t$
- 8
- 9 **Train denoiser**  $f_\theta$  **to reverse these sequences:**
- 10  $\theta^* = \arg \min_{\theta} \sum_{i=1}^N \sum_{t=1}^T \mathcal{L}(f_\theta(\mathbf{x}_t^{(i)}, t), \mathbf{x}_{t-1}^{(i)})$
- 11 **Return:**  $f_{\theta^*}$


---

Colab:


<https://colab.research.google.com/drive/1YUFwGs0lEaBUpSdJIEZtCATe44TUjw?usp=sharing>

# Autoregressive models vs diffusion models


Forward diffusion process →

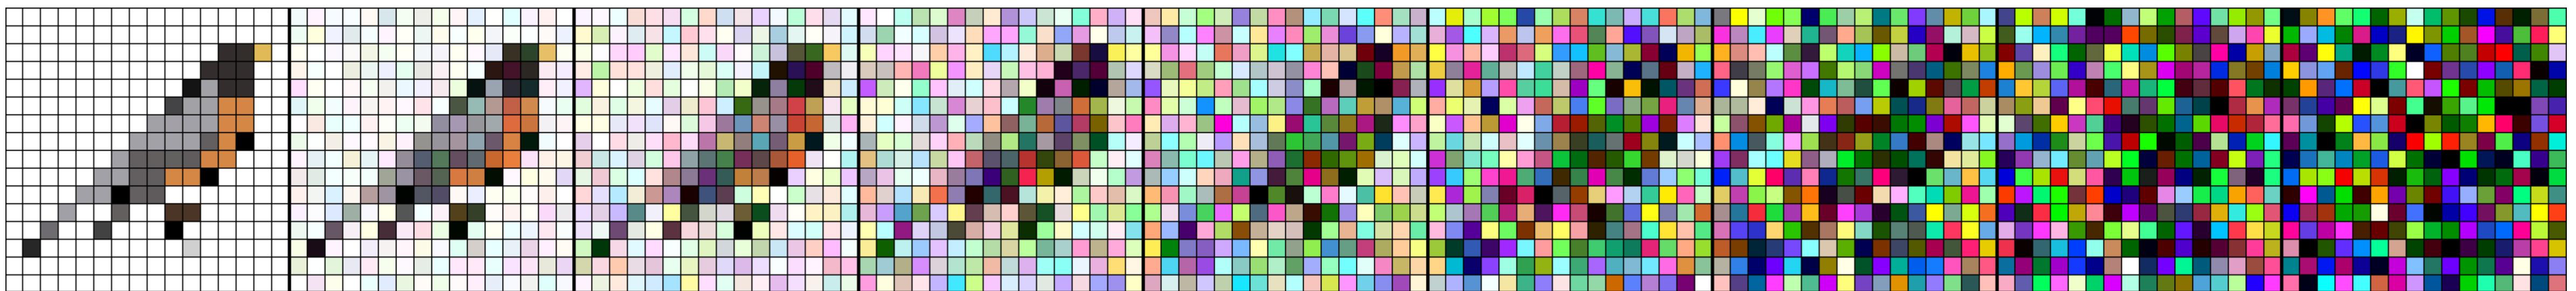

Reverse autoregressive sequence →

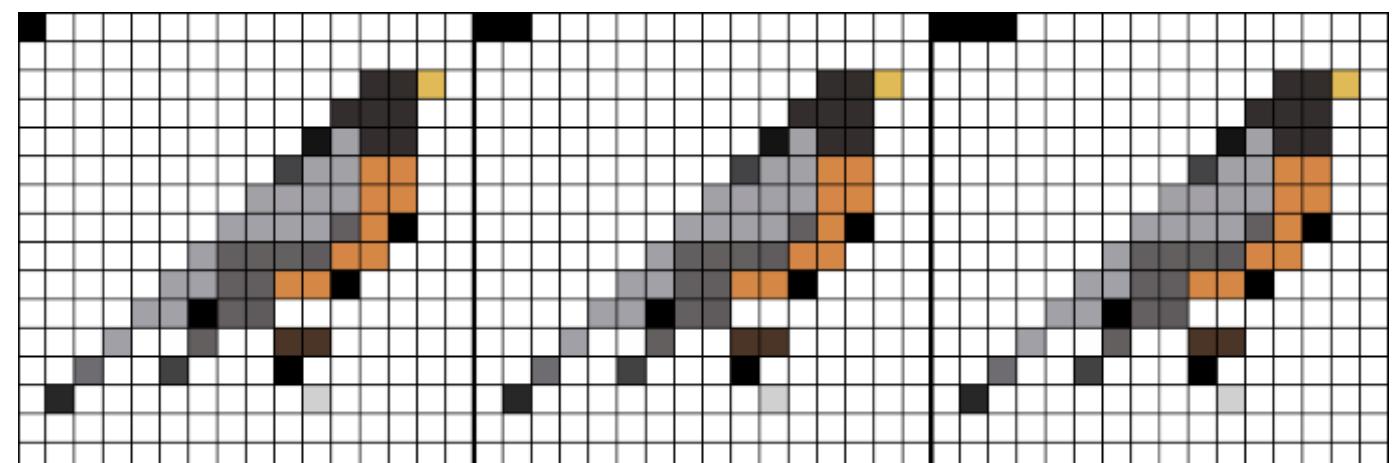


...

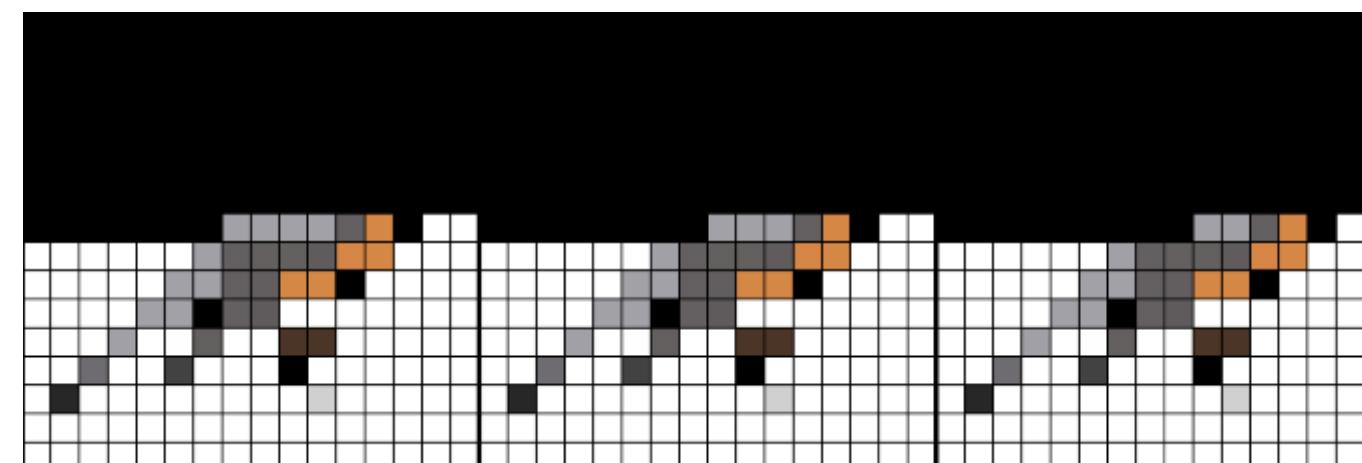


...




Diffusion model →

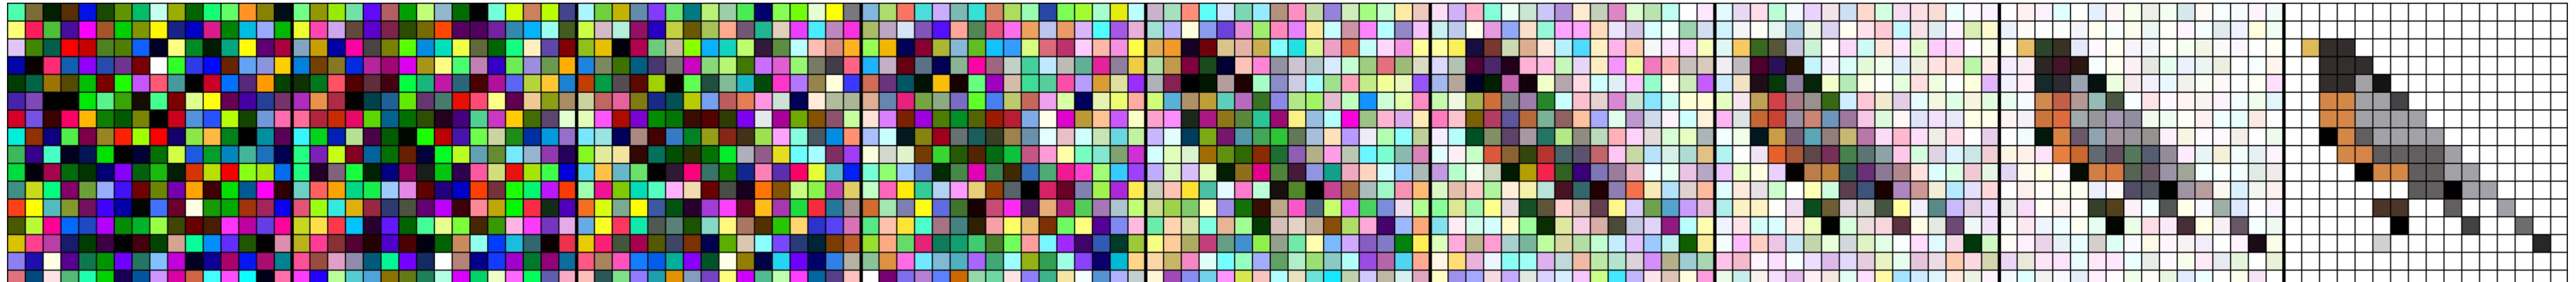

Autoregressive model →

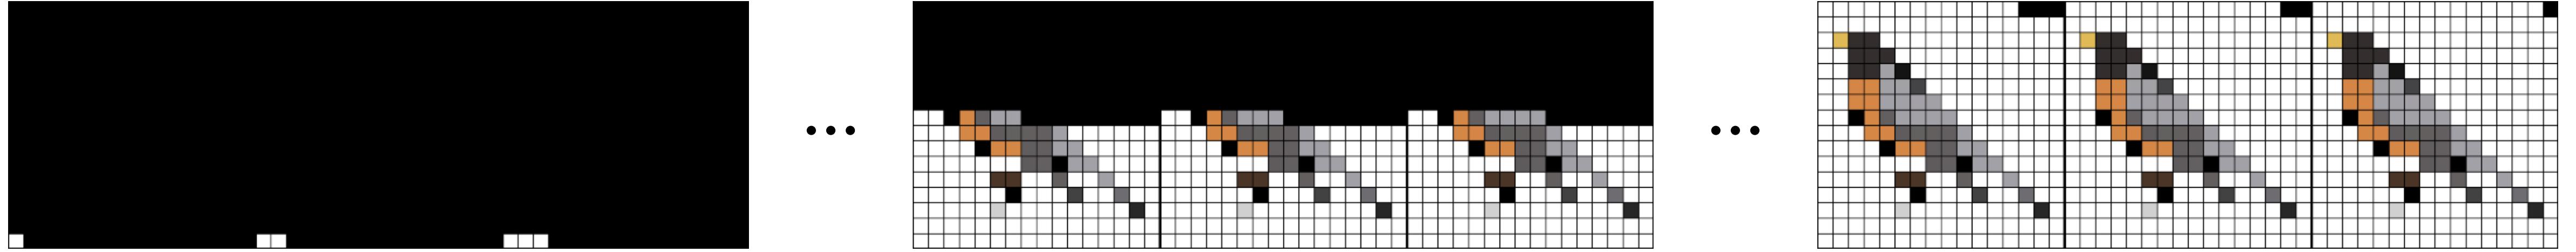



Concept #3: A common strategy is to turn generative modeling into a sequence of supervised learning problems

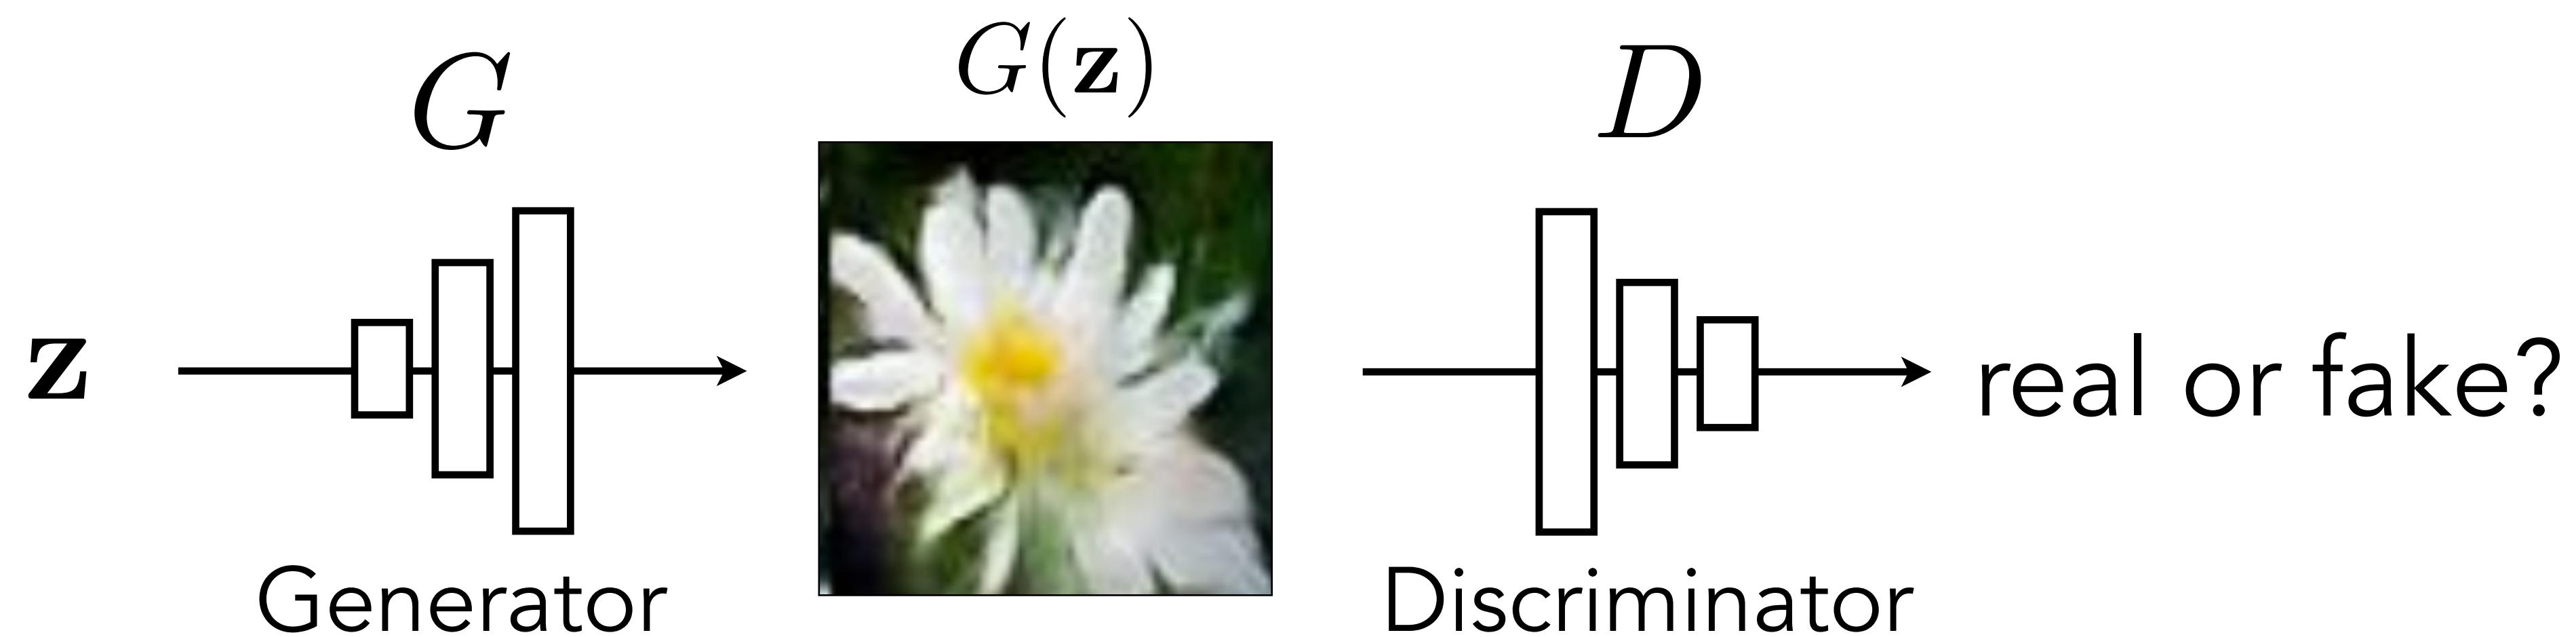

## Generative Adversarial Networks (GANs)


$G$  tries to synthesize fake images that fool  $D$

$D$  tries to identify the fakes

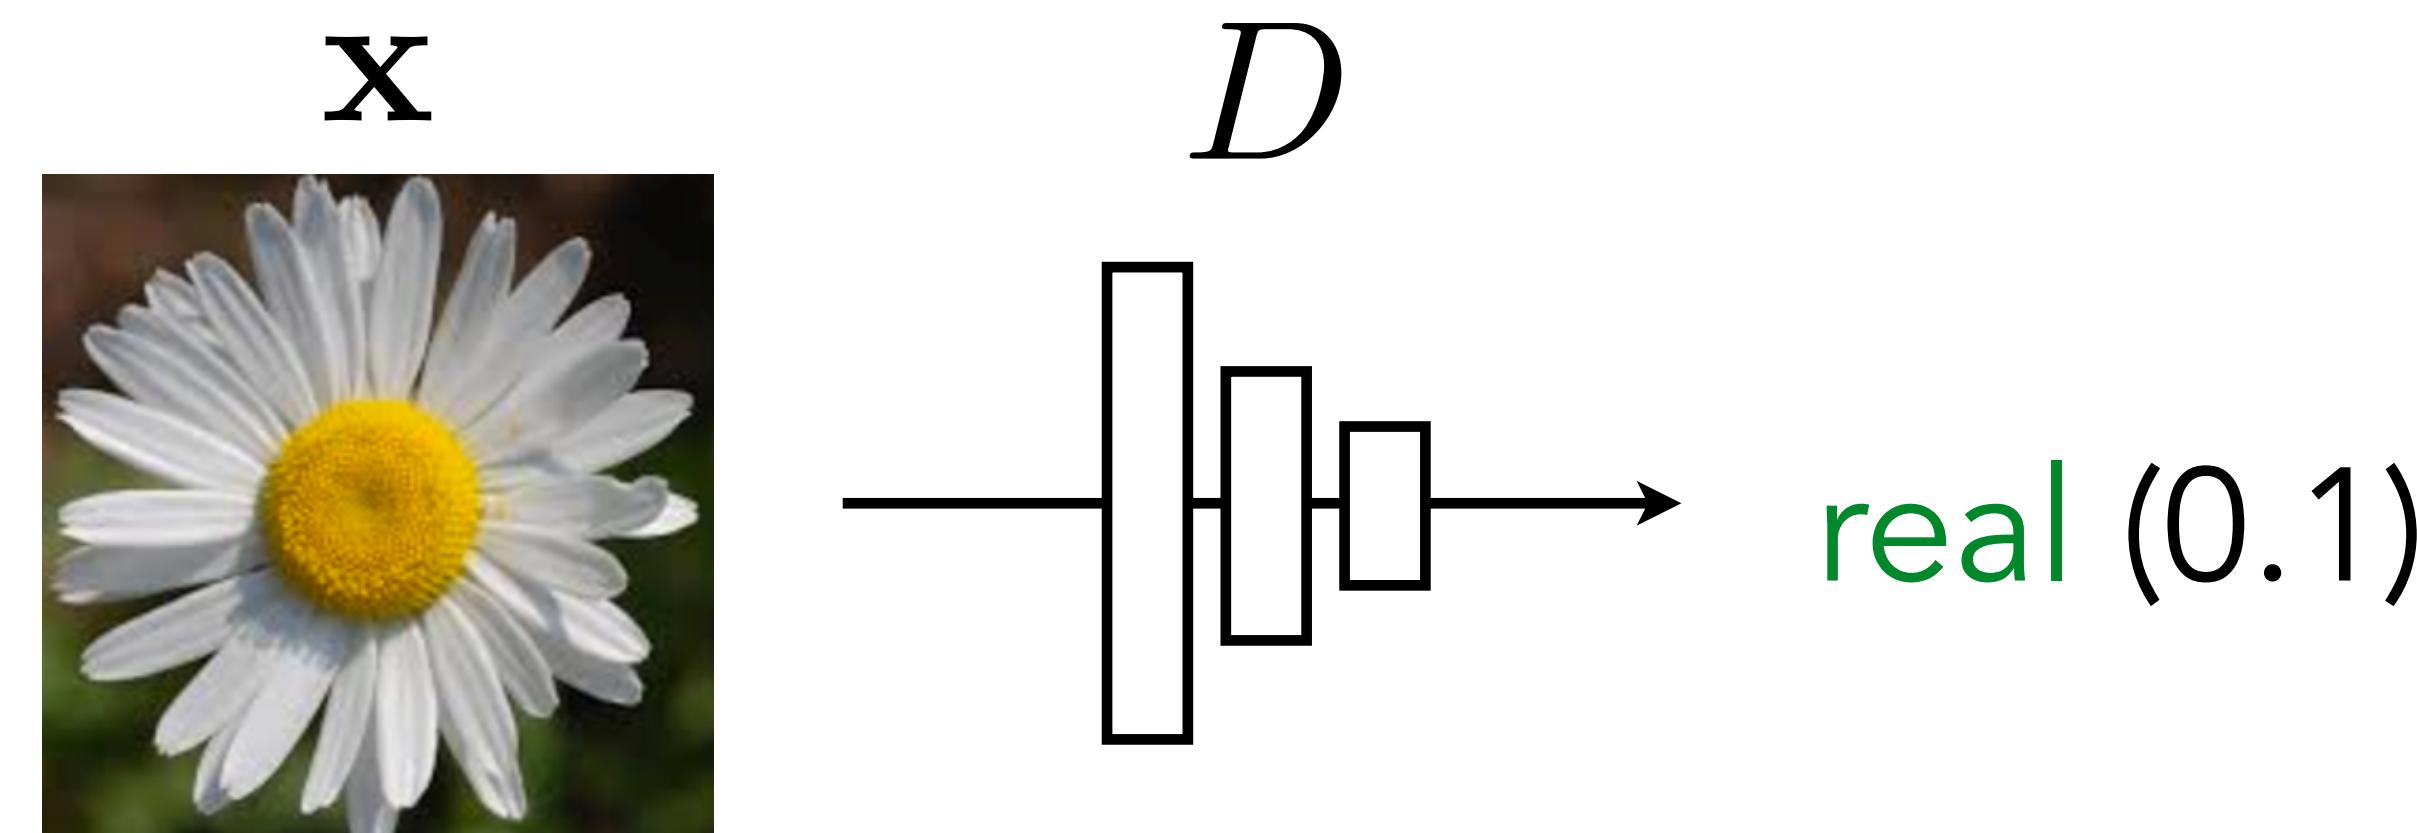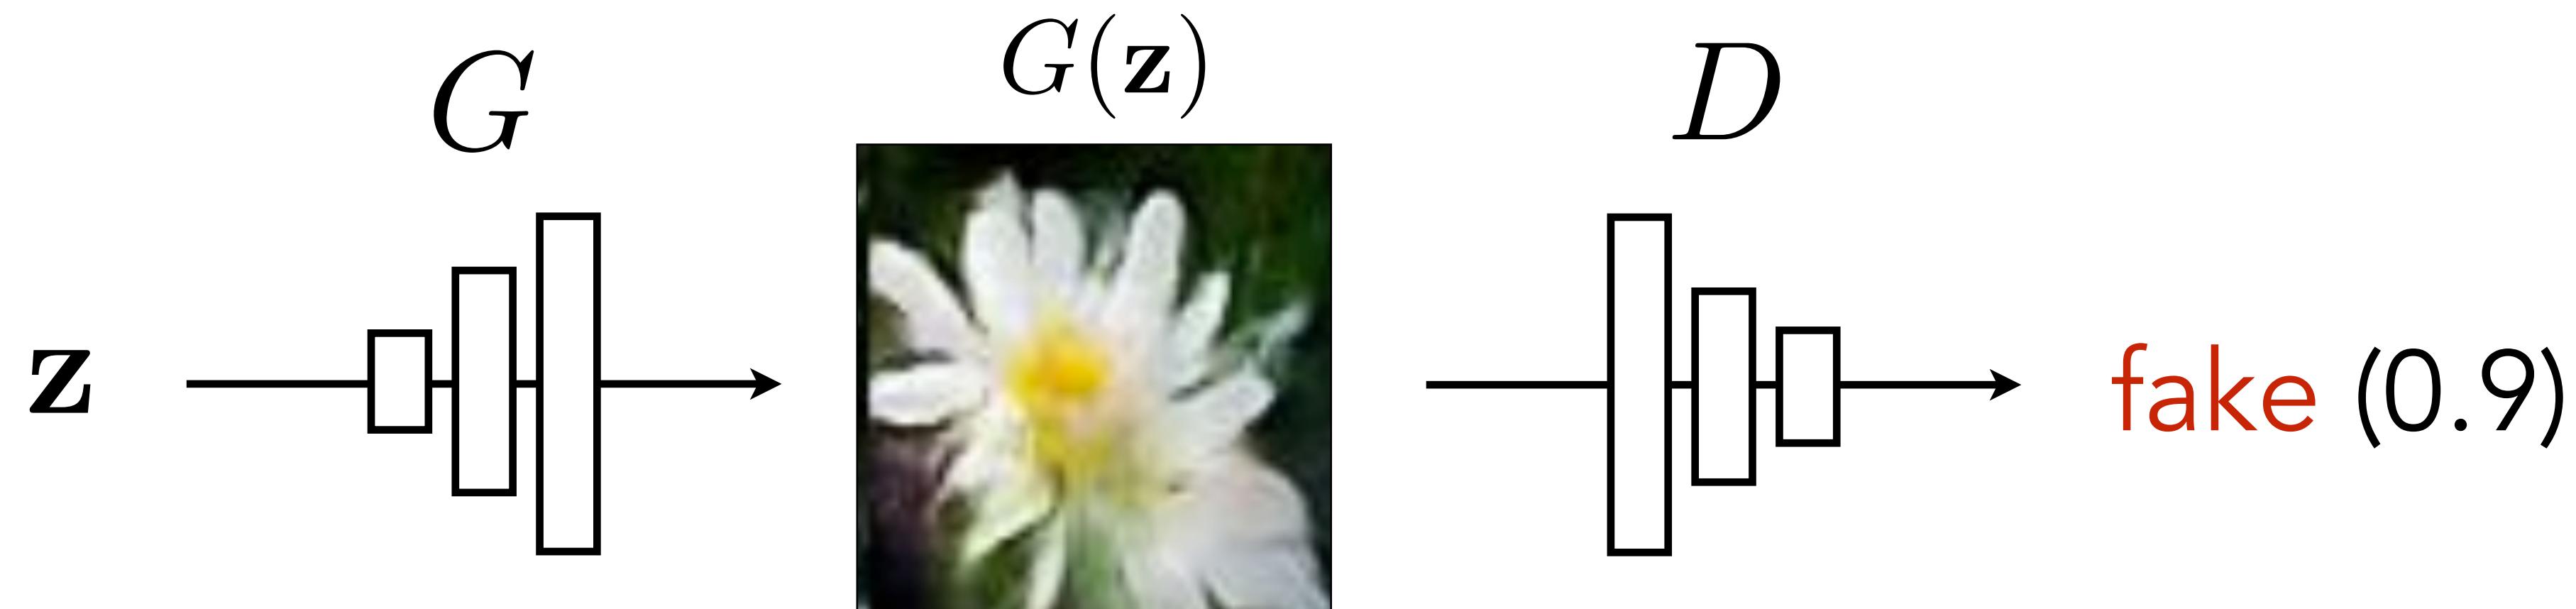


$$\arg \max_D \mathbb{E}_{\mathbf{z}, \mathbf{x}} [ \boxed{\log D(G(\mathbf{z}))} + \boxed{\log (1 - D(\mathbf{x}))} ]$$

[Goodfellow et al., 2014]

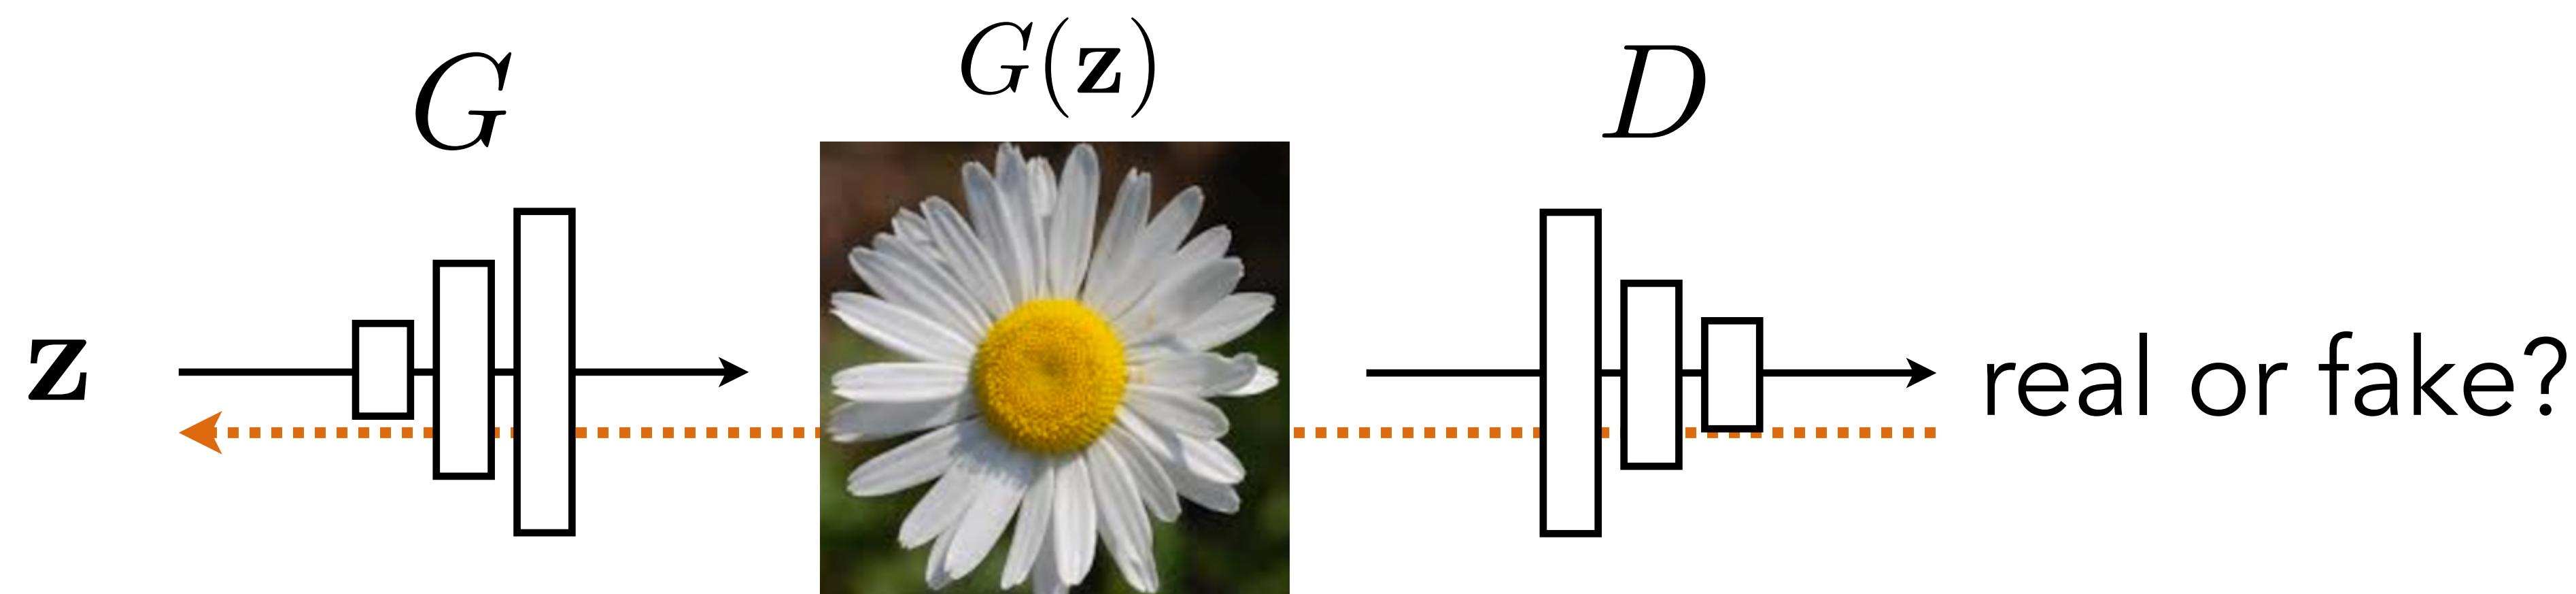

$G$  tries to synthesize fake images that *fool*  $D$ :


$$\arg \min_G \mathbb{E}_{\mathbf{z}, \mathbf{x}} [ \log D(G(\mathbf{z})) + \log (1 - D(\mathbf{x})) ]$$

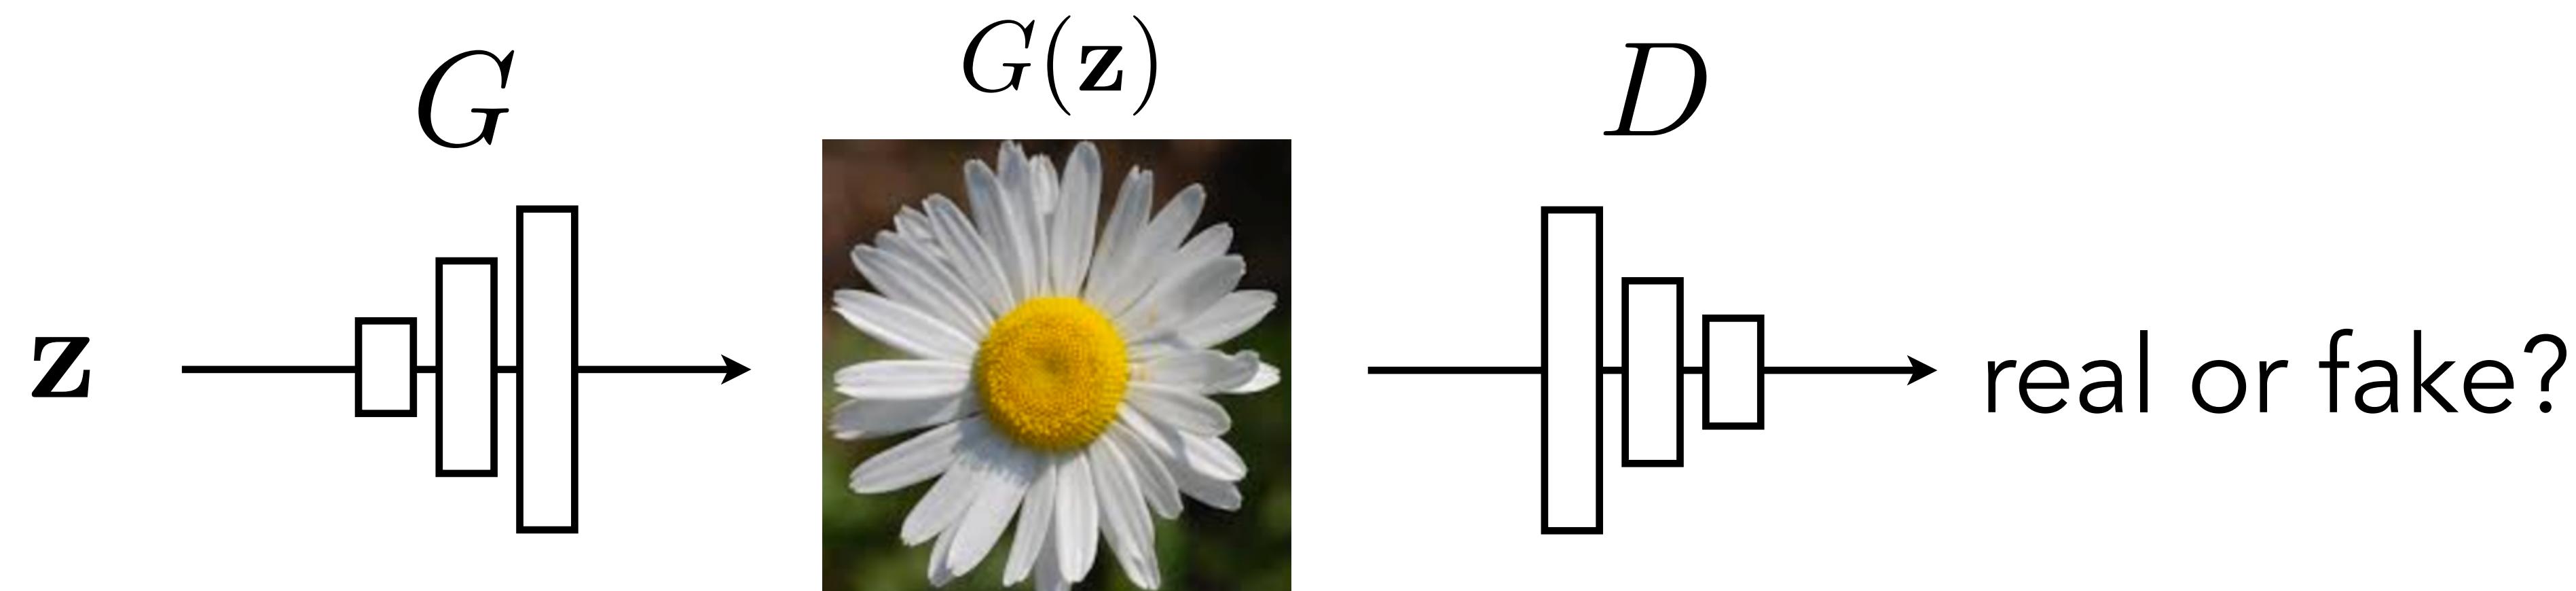

$G$  tries to synthesize fake images that *fool* the *best*  $D$ :

$$\arg \min_G \max_D \mathbb{E}_{\mathbf{z}, \mathbf{x}} [ \log D(G(\mathbf{z})) + \log (1 - D(\mathbf{x})) ]$$

# GANs — Training

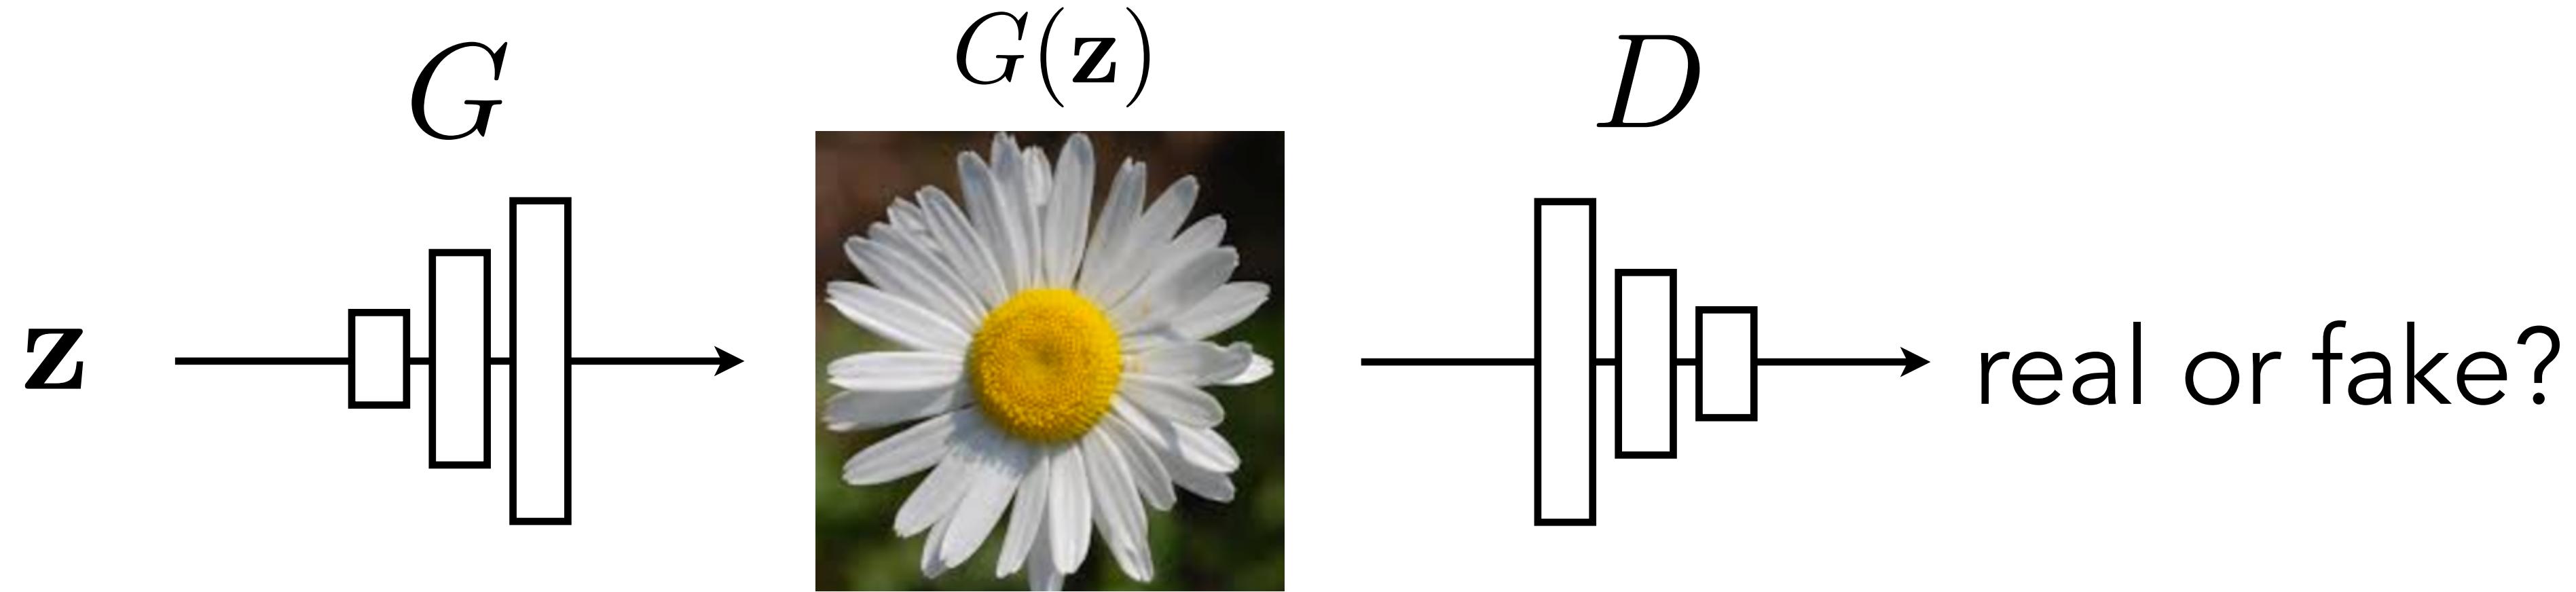


$G$  tries to synthesize fake images that fool  $D$




$D$  tries to identify the fakes

- Training: iterate between training  $D$  and  $G$  with backprop.
- Global optimum when  $G$  reproduces data distribution.

Synthetic data

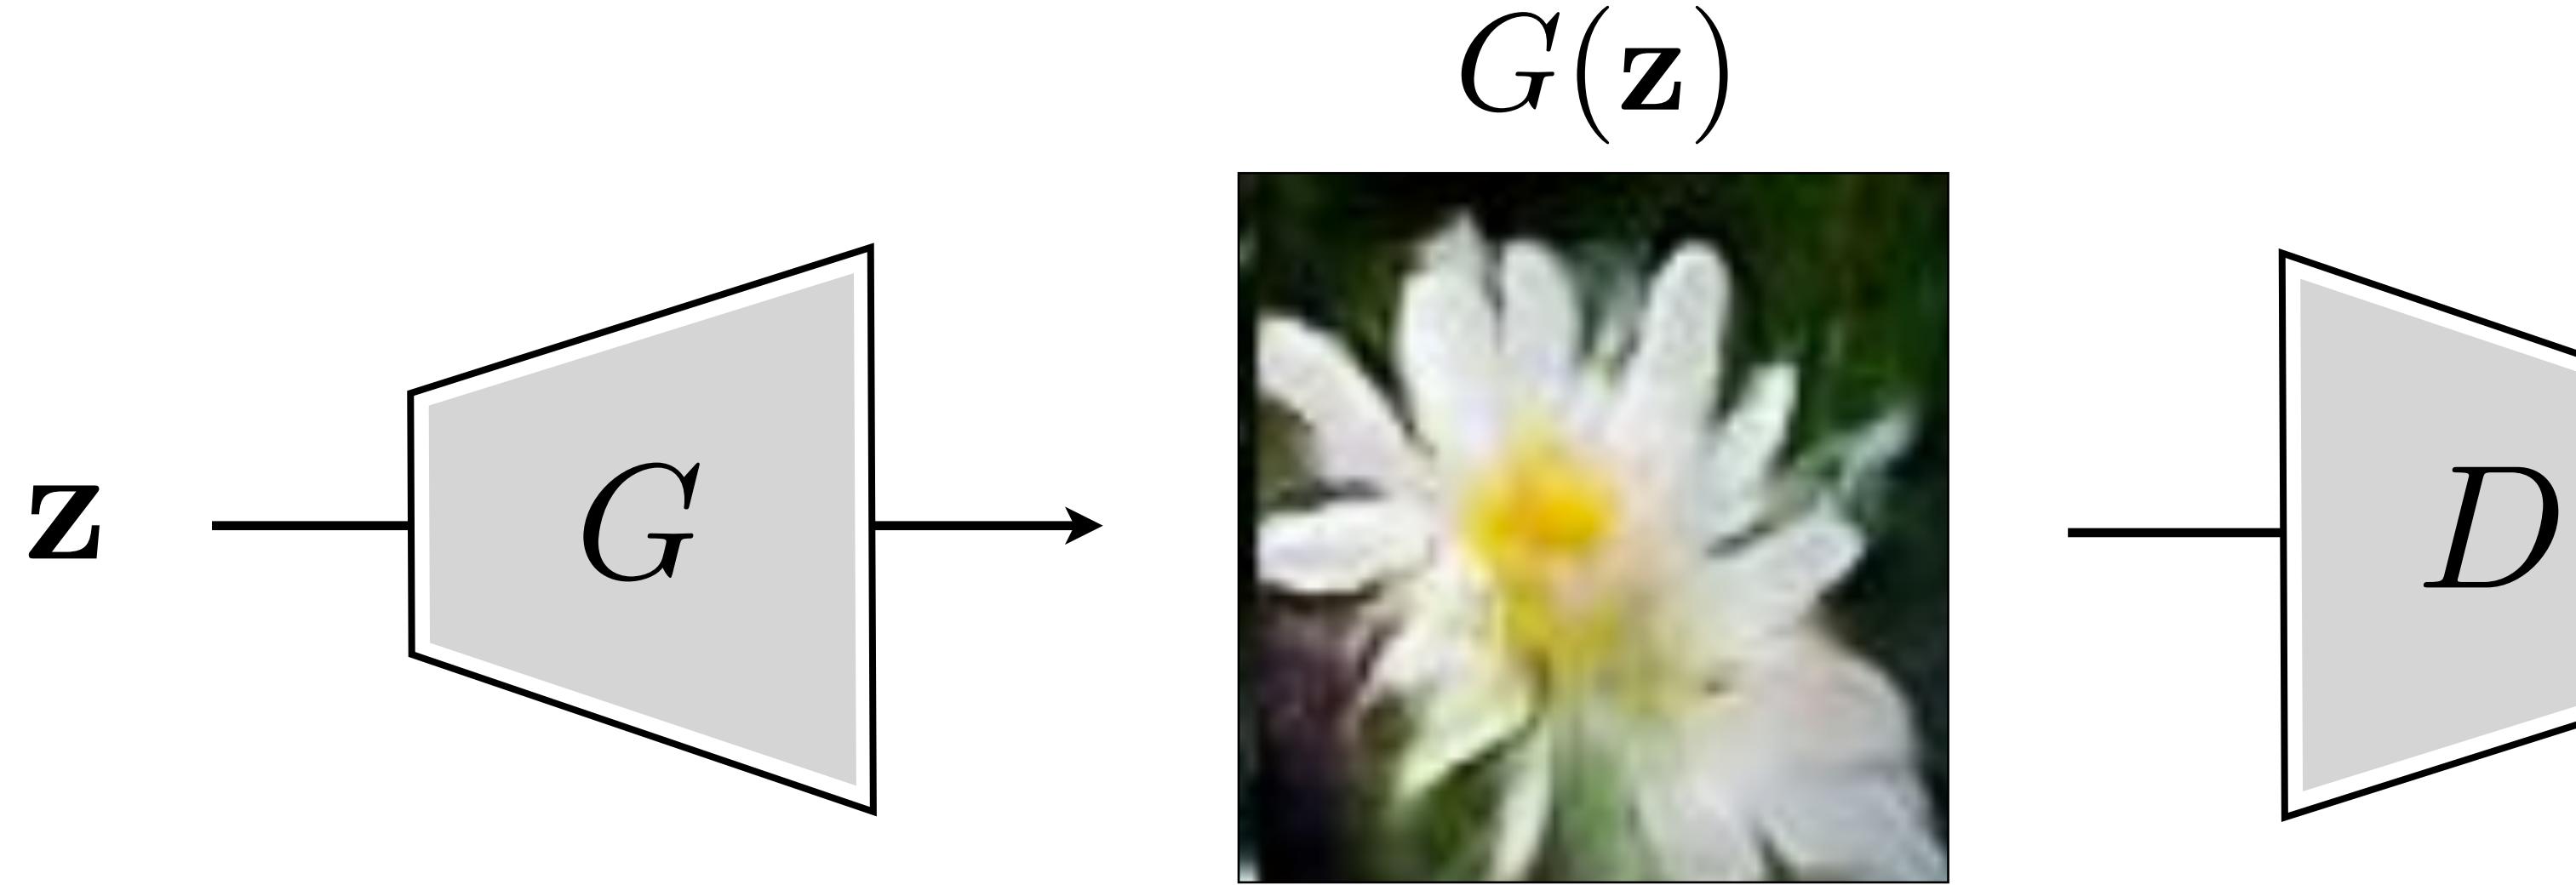


Real data

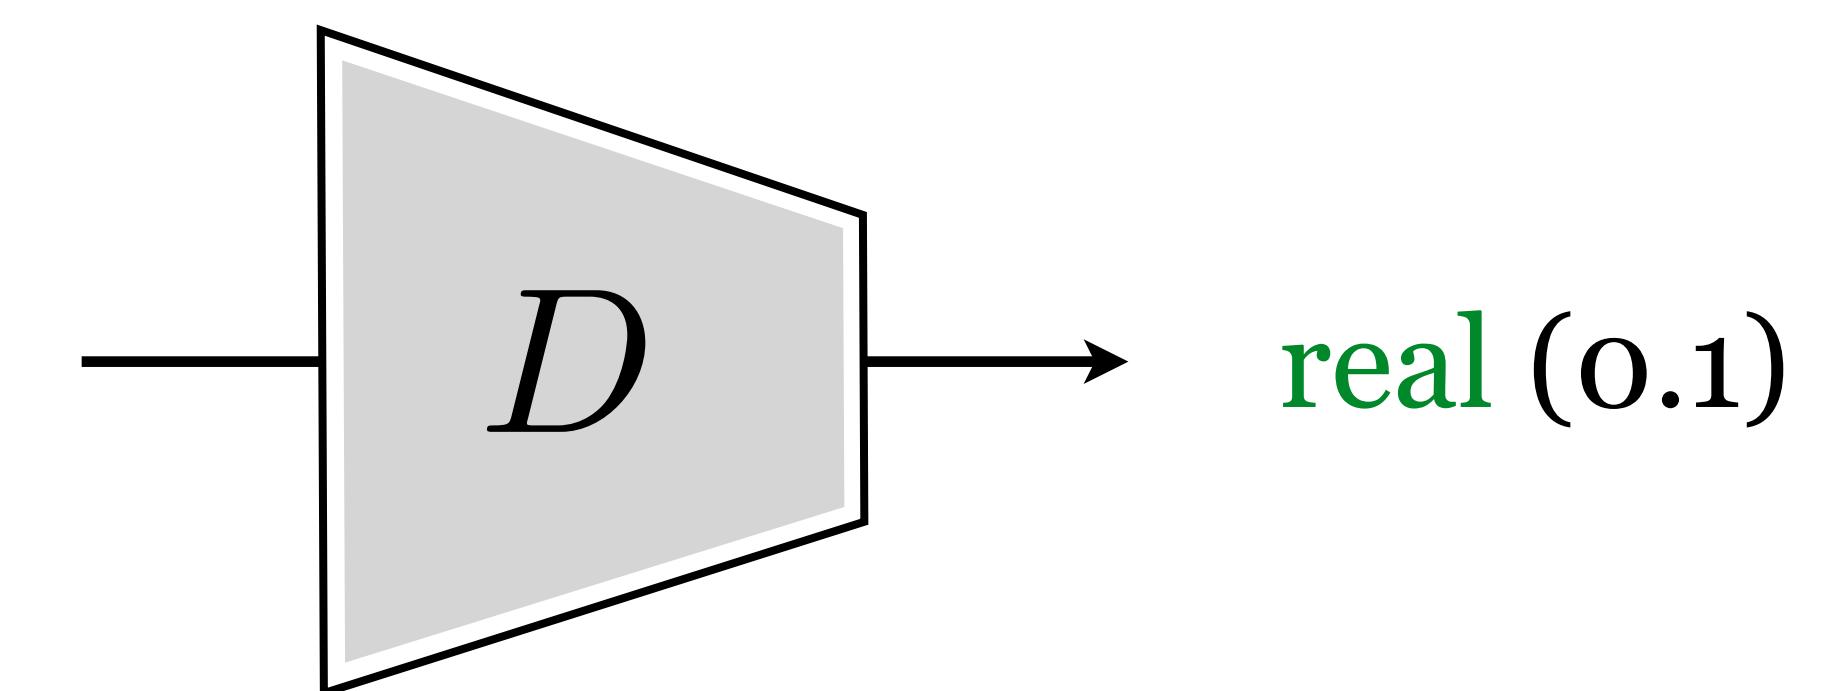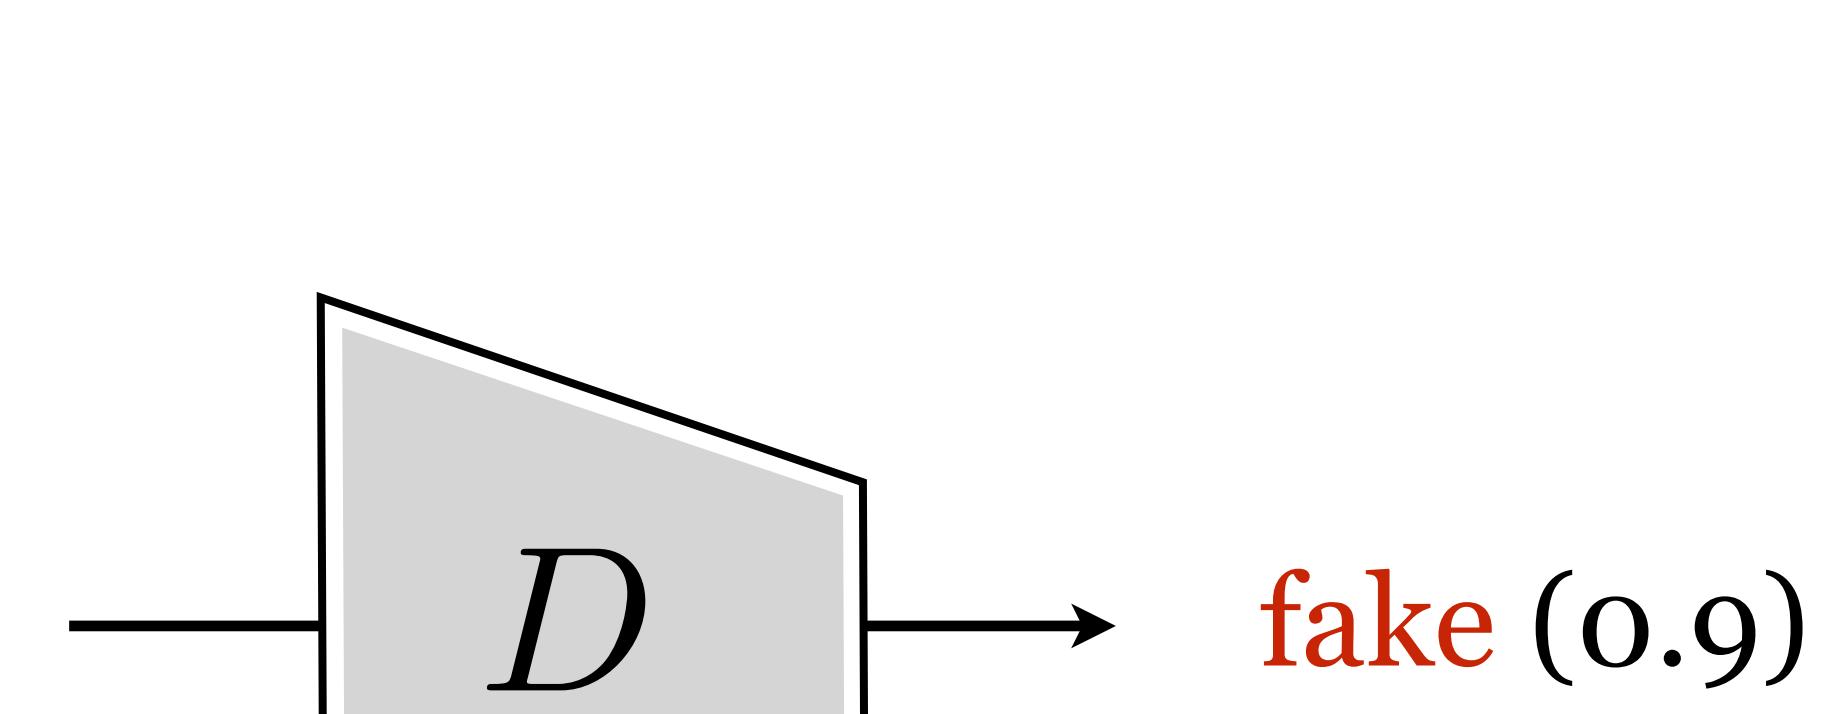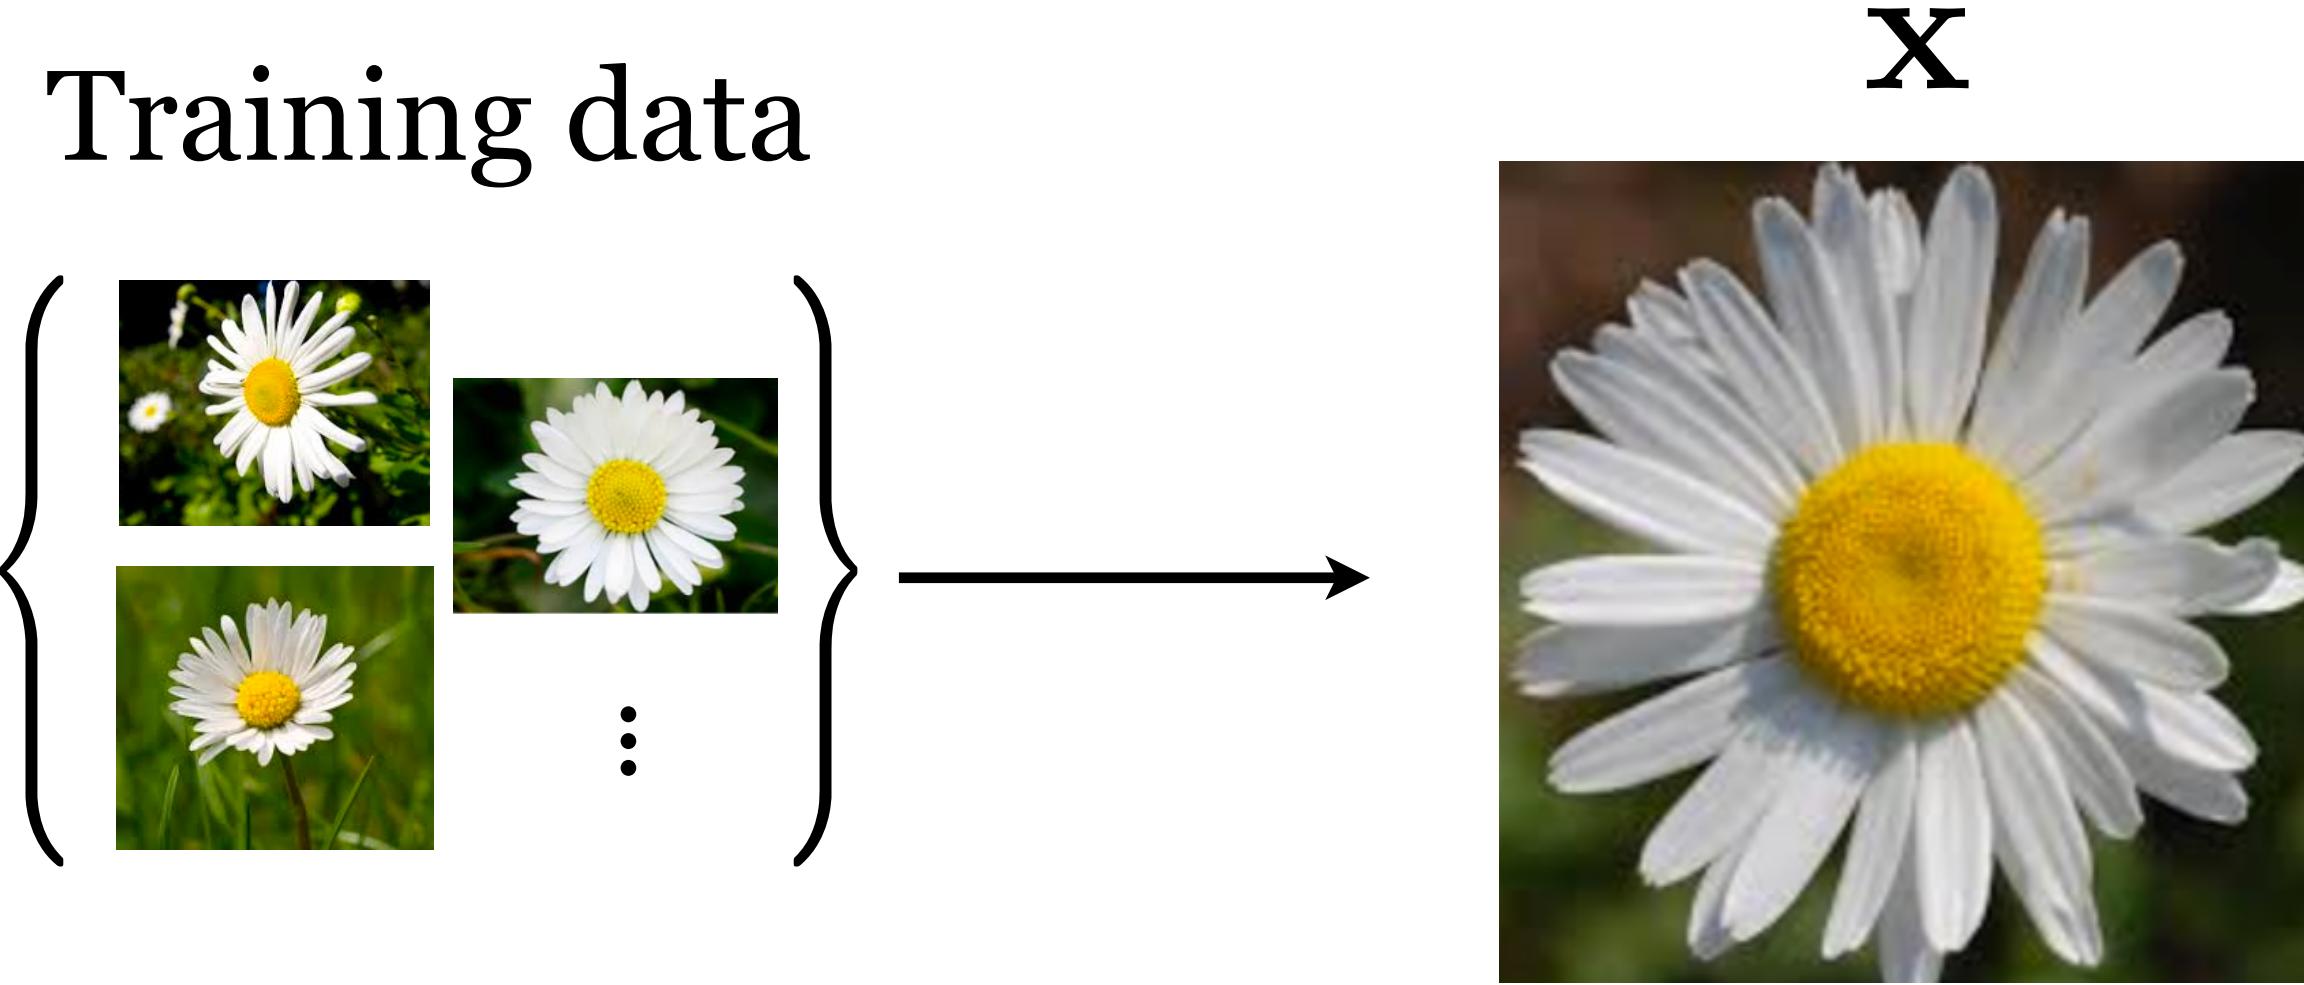

Discriminator's task

# Deep generative models are distribution transformers


Prior distribution

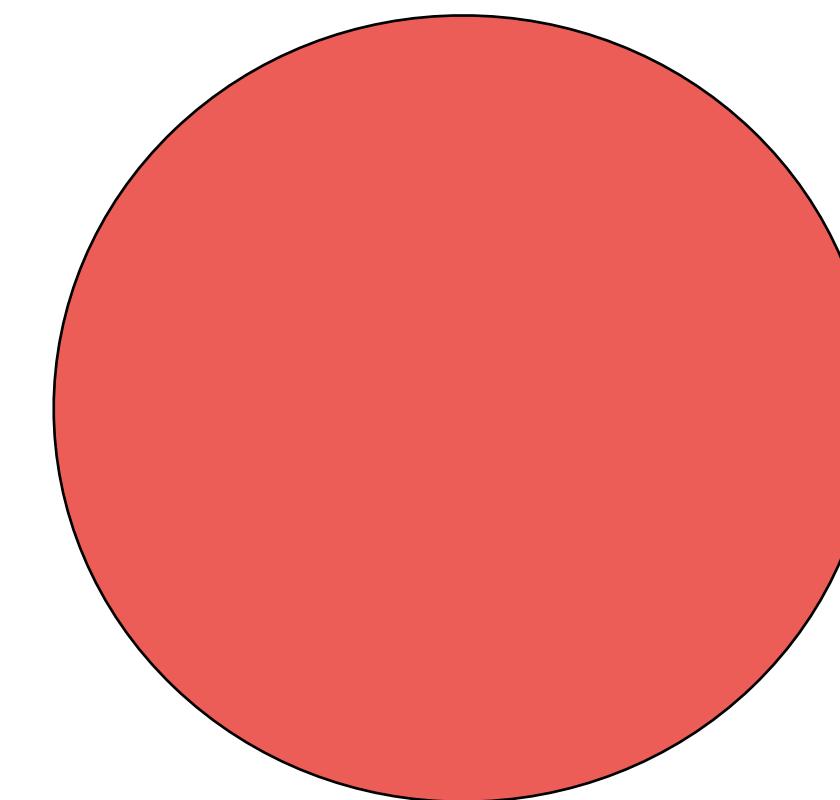

$$p(z)$$




Target distribution

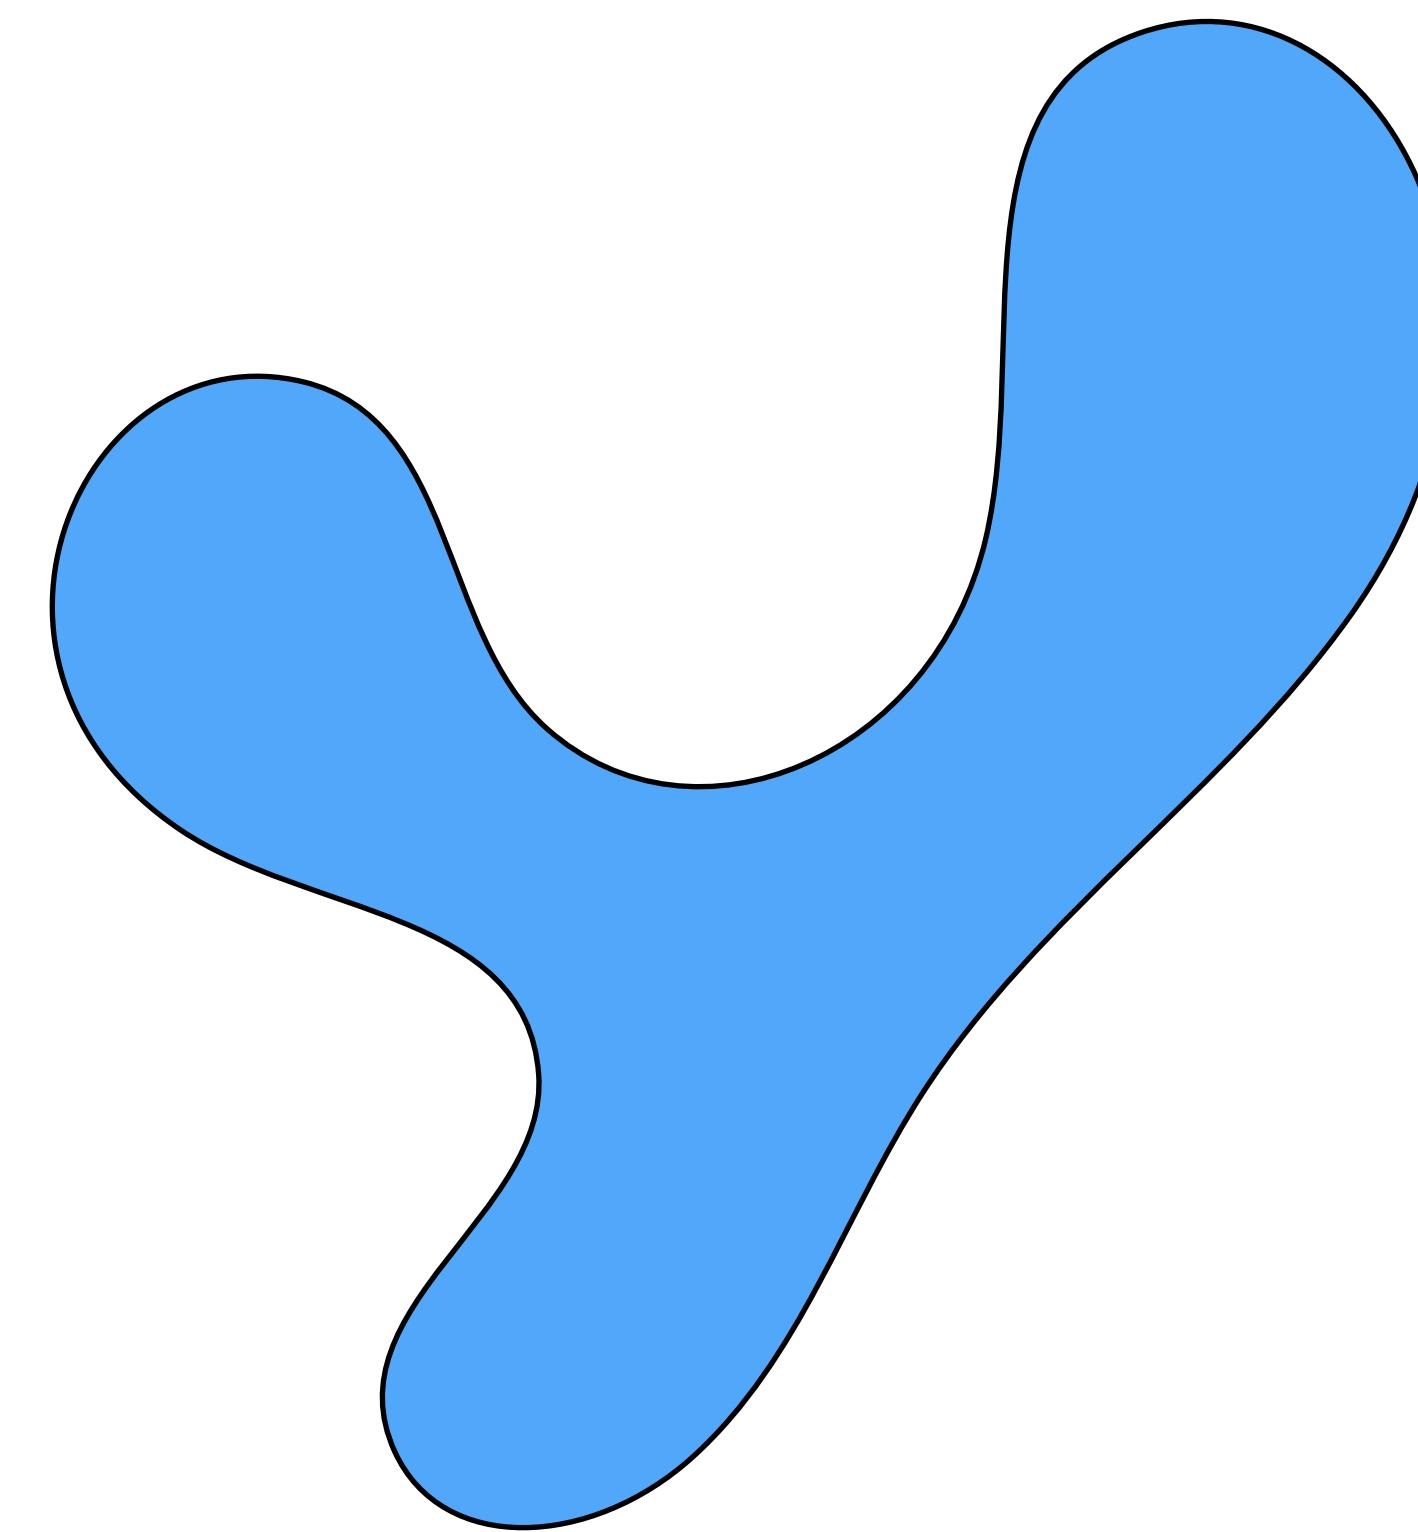


$$p(x)$$

# Deep generative models are distribution transformers

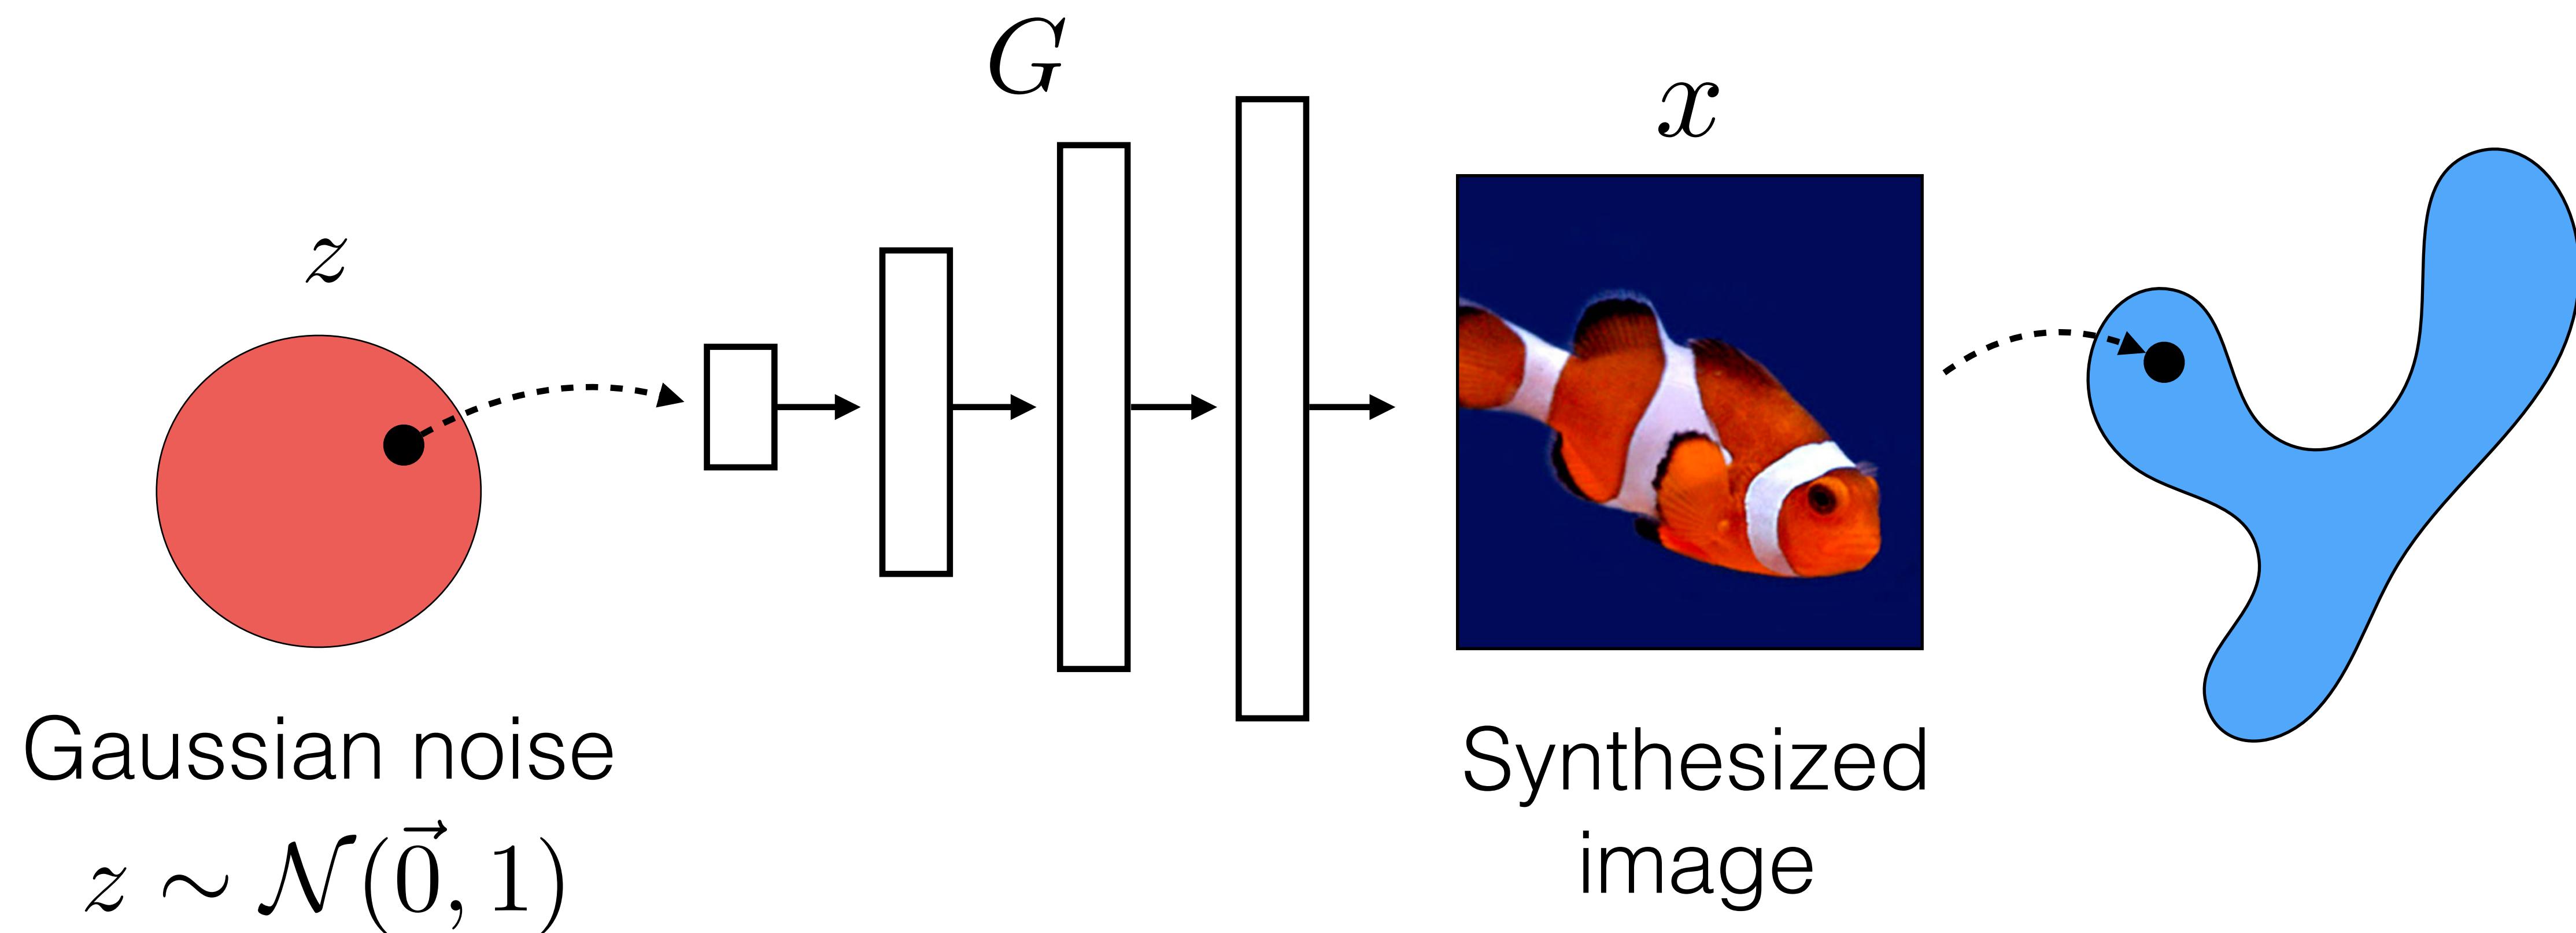

# Deep generative models are distribution transformers

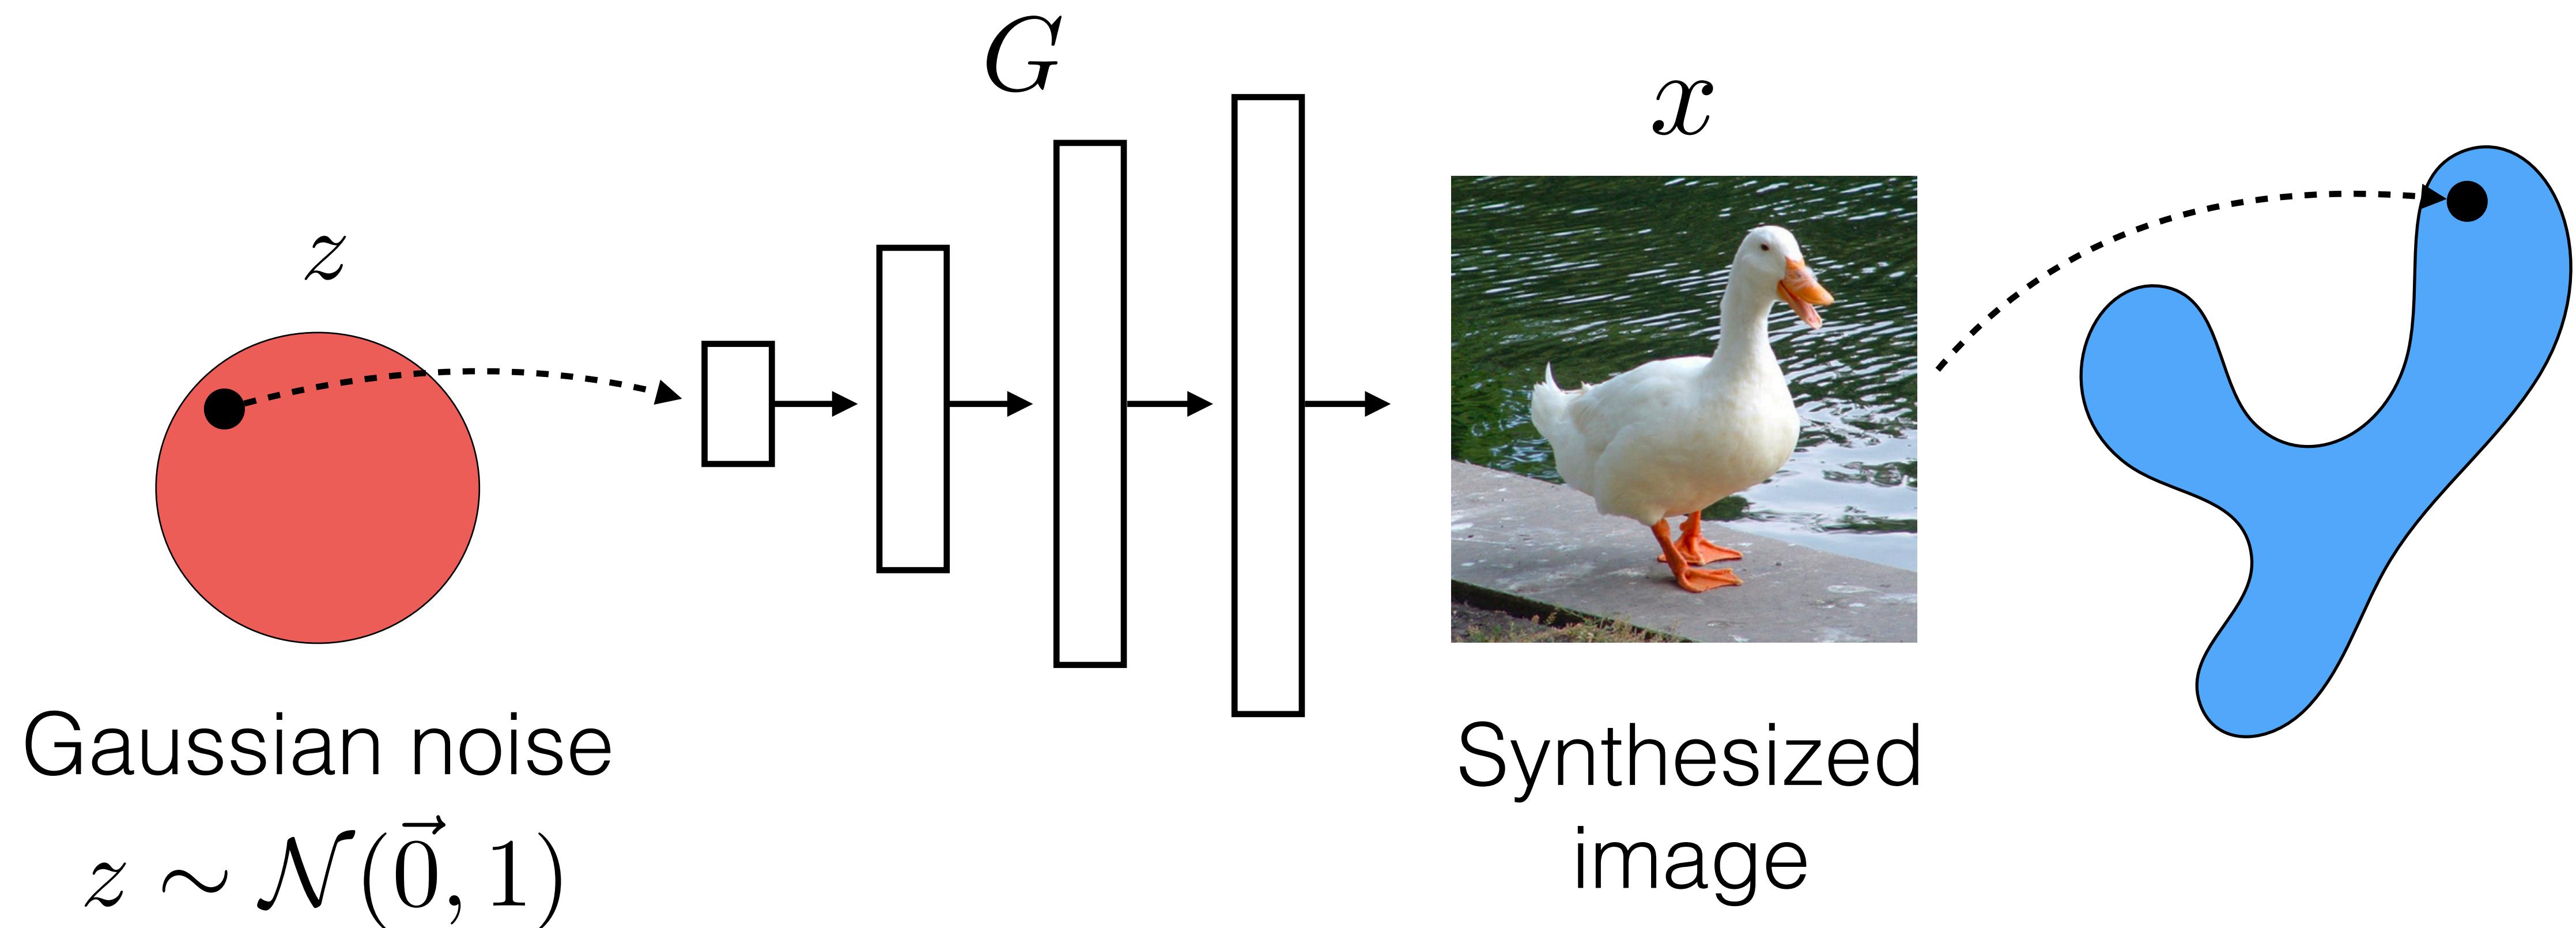

# Interpolation in data space

Data space  
(Natural image manifold)


$\mathbf{X}$




# Interpolation in latent space

Latent space  
(Gaussian)

Data space  
(Natural image manifold)

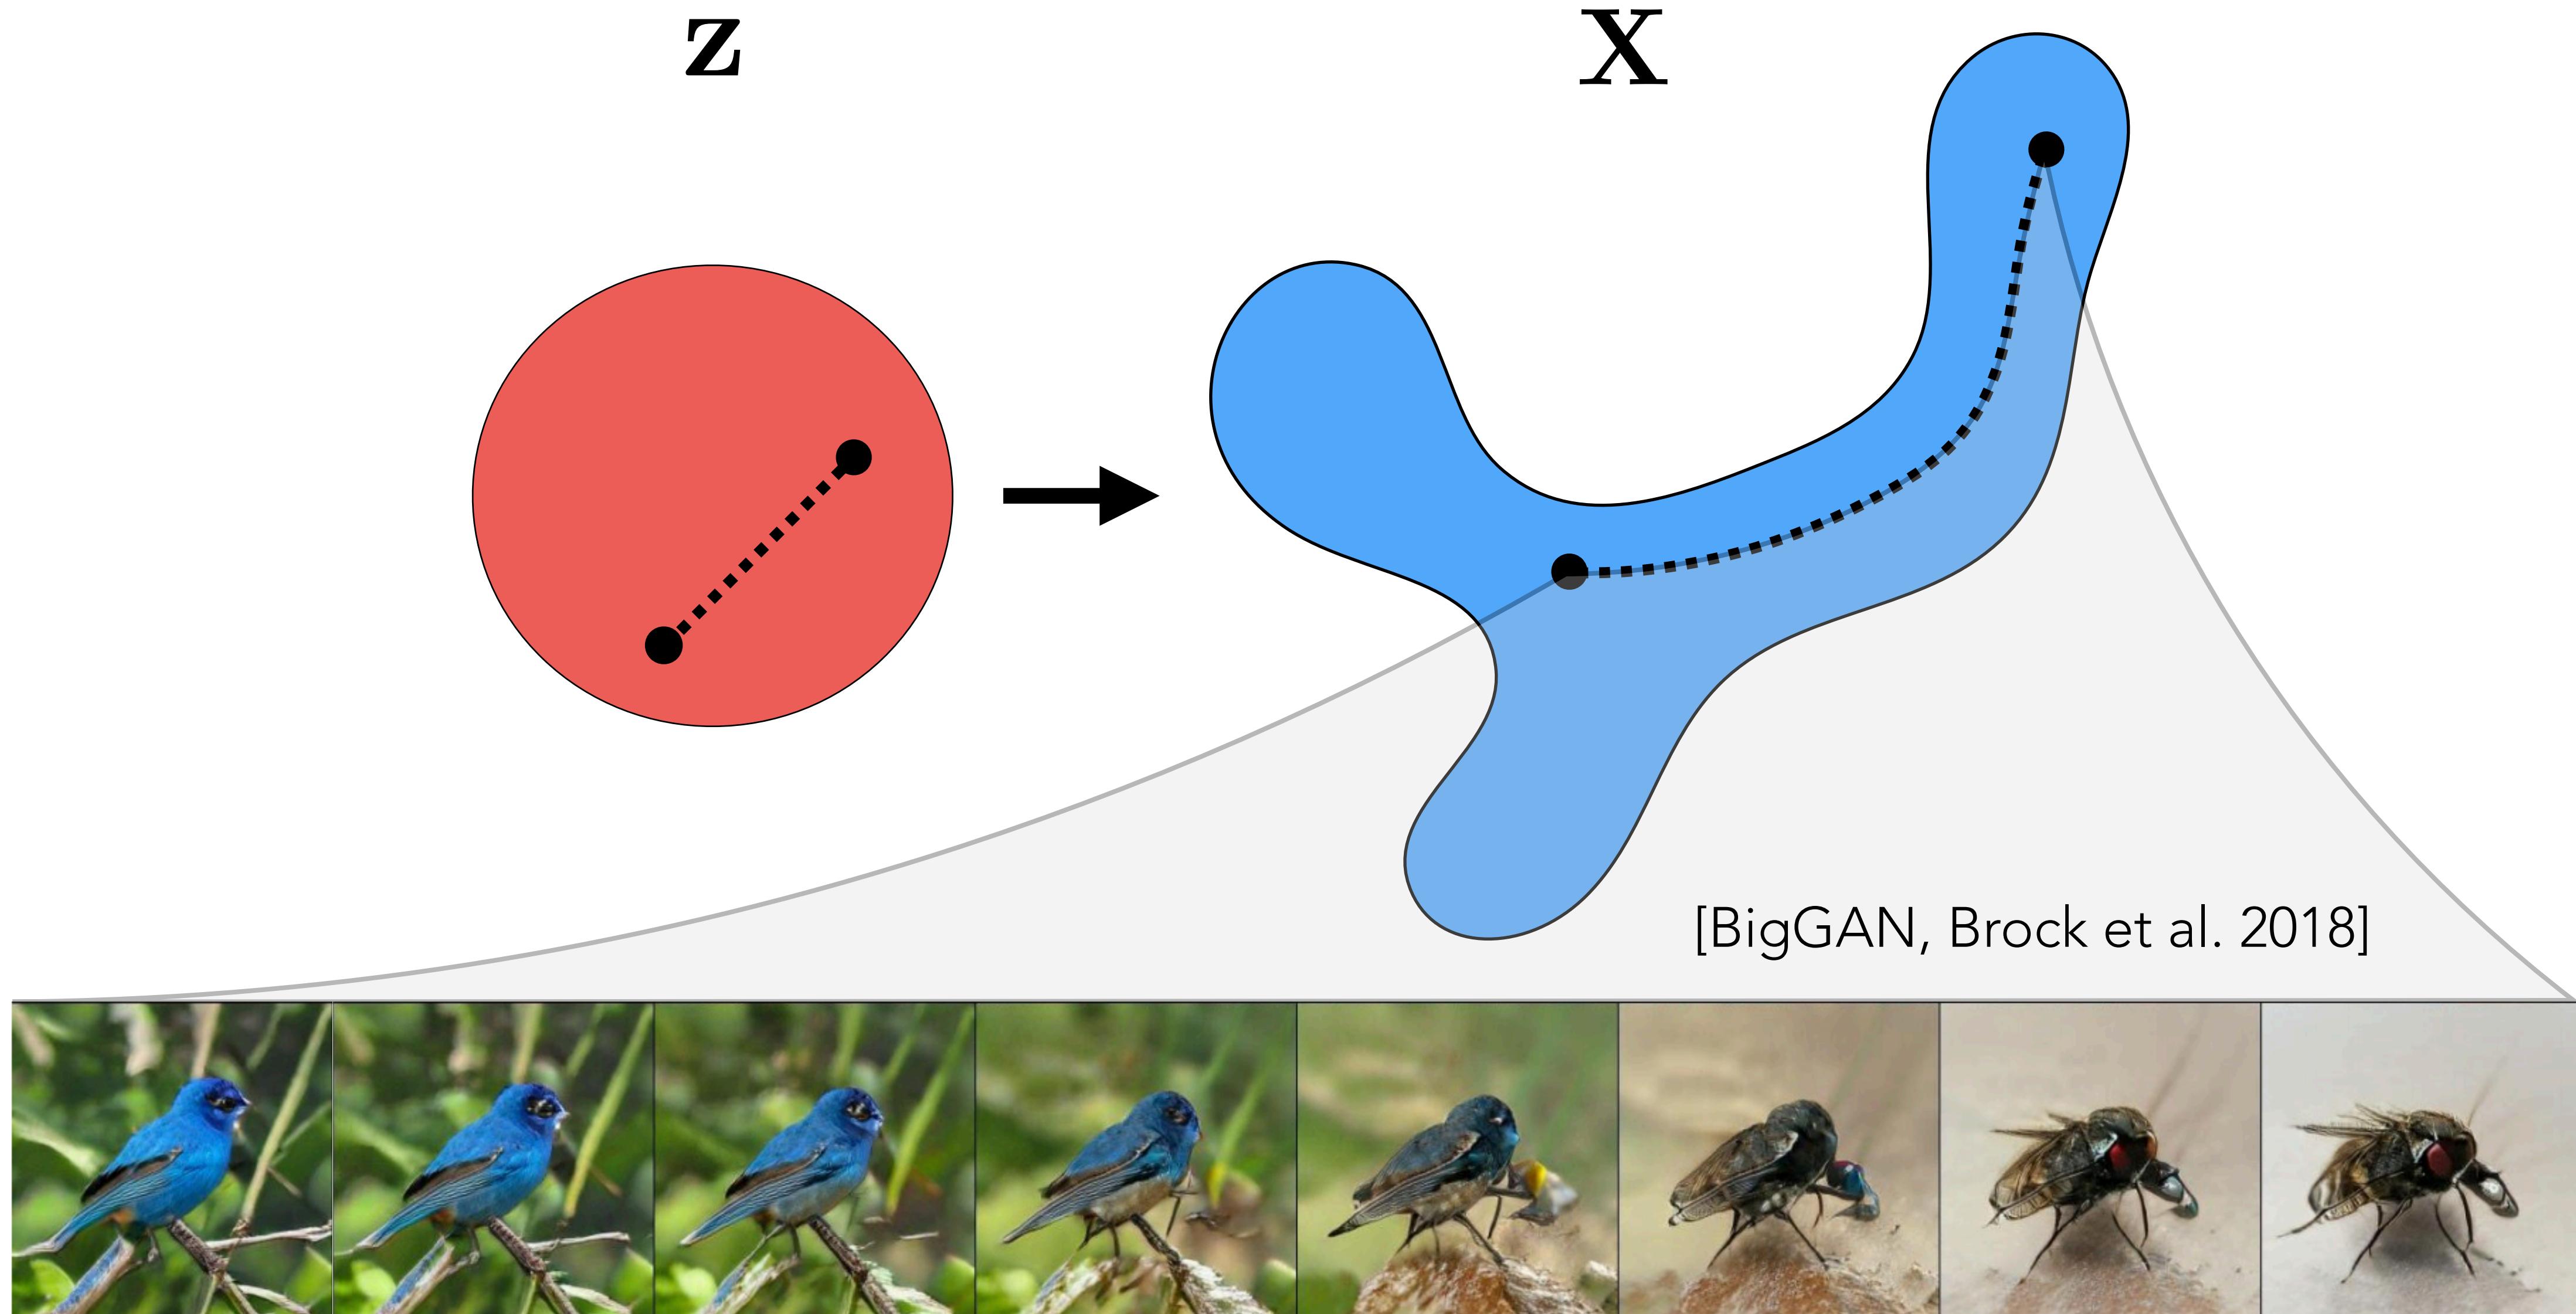

# Generative models organize the manifold of natural images

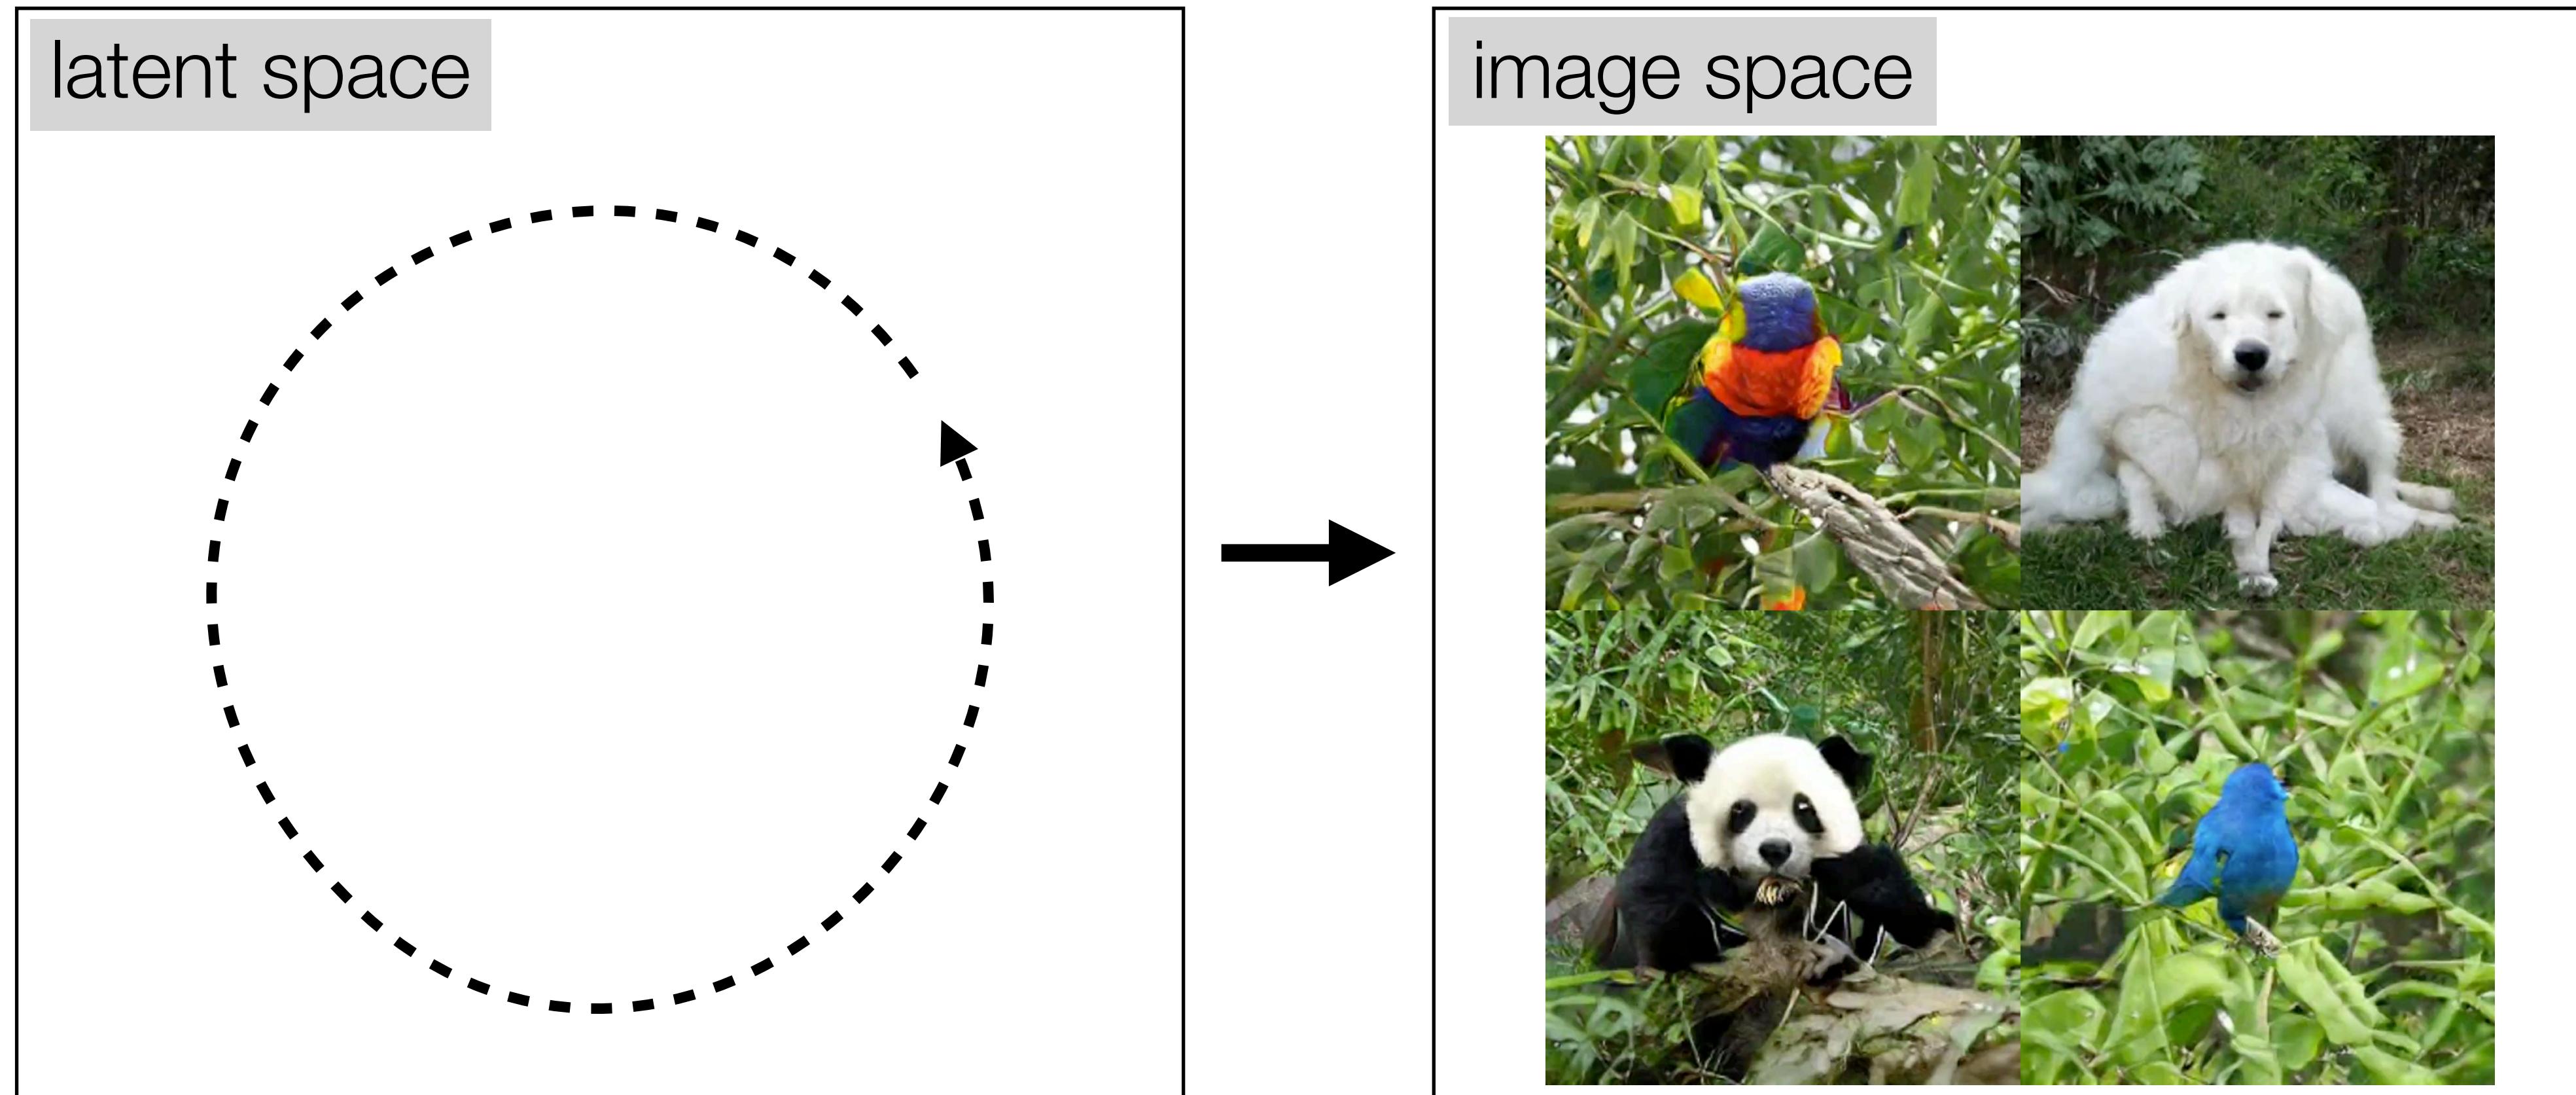

# Deep generative models I

- Fundamentals of generative modeling
- Density functions, energy functions, and samplers
- Gaussian models
- Autoregressive models
- Diffusion models
- Generative adversarial networks