

6.S898 Deep Learning

website: <https://phillipi.github.io/6.s898>



Instructor Phillip Isola
phillipi at mit dot edu
OH: TBD.



Instructor Sara Beery
beery at mit dot edu
OH: TBD.



Instructor Jeremy Bernstein
jbernstein at mit dot edu
OH: TBD.



TA Anthea Li
yichenli at mit dot edu
OH: TBD.



TA Thien Le
thienle at mit dot edu
OH: TBD.




TA Saachi Jain
saachij at mit dot edu
OH: TBD.



TA Veevee Cai
cail at mit dot edu
OH: TBD.



OpenAI, 2022

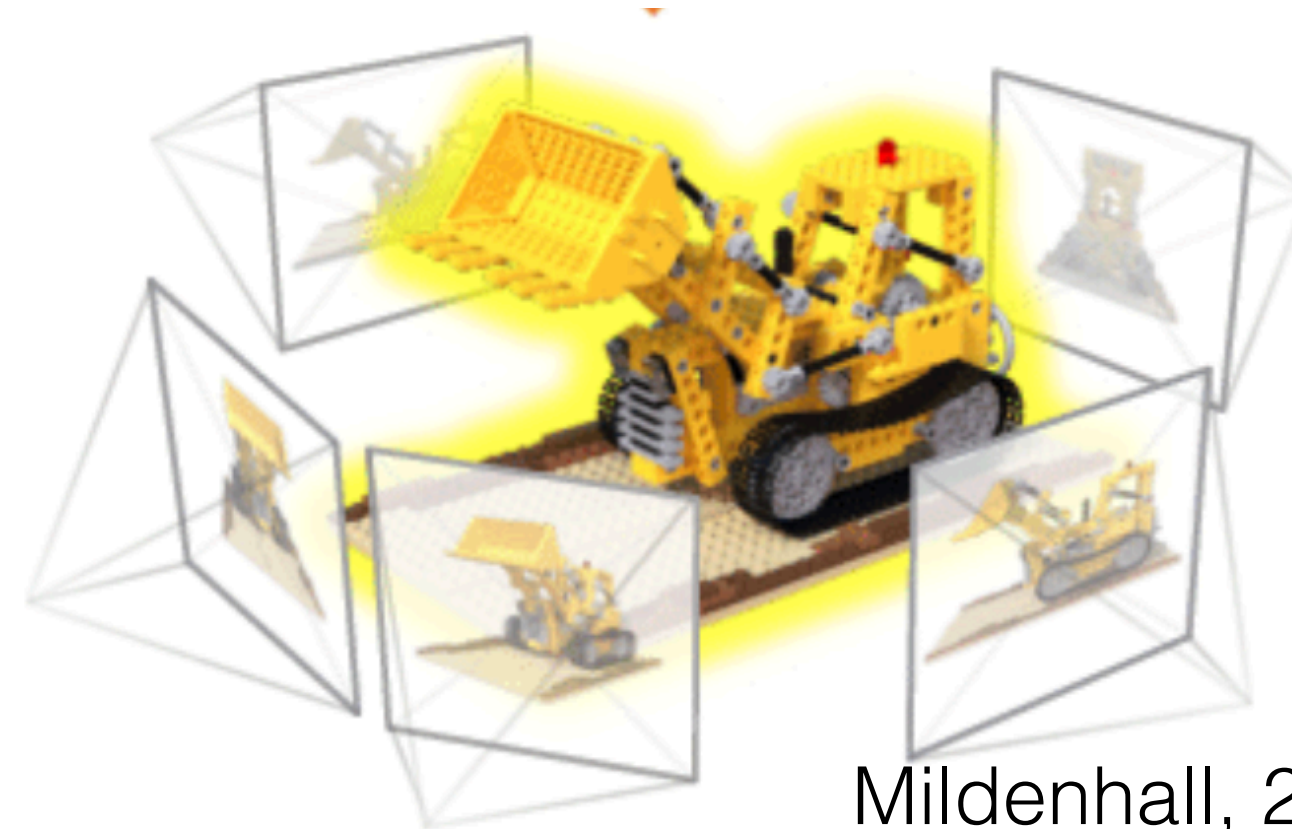

Mildenhall, 2014



Van Horn, 2017




Rombach, 2022



Kirillov, 2023



Chen, 2024

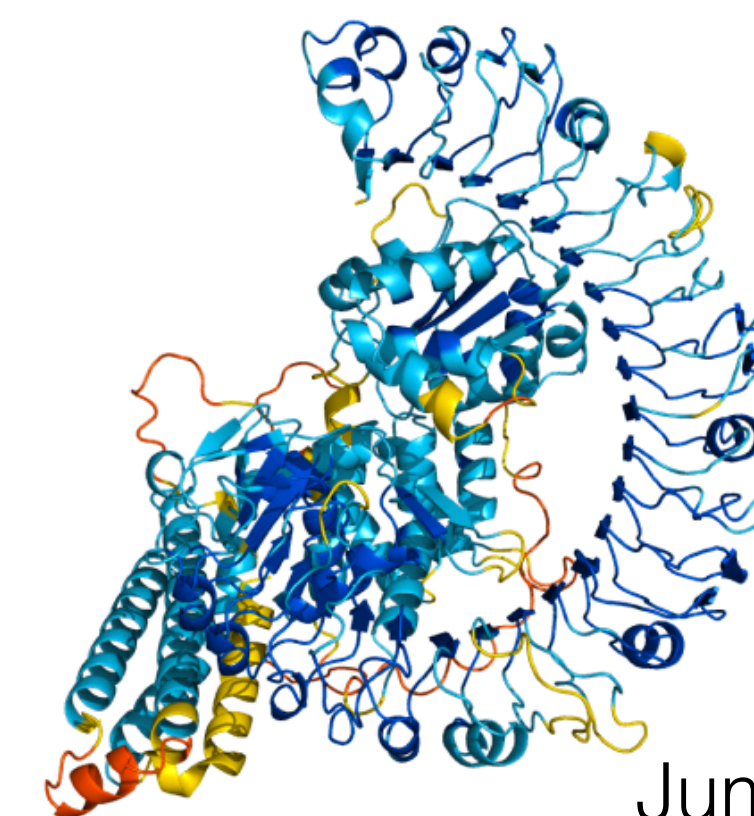

Jumper, 2021



Silver, 2016

What is “deep learning”?

1. **Neural nets:** A class of machine learning architectures that use stacks of linear transformations interleaved with pointwise nonlinearities
2. **Differentiable programming:** A programming paradigm where parameterize parts of the program and let gradient-based optimization tune the parameters

Course philosophy

- Breakthroughs in deep learning have been driven by a mixture of theory and practice, and both dimensions are vital for future progress in the field
- This course provides:
 - Theoretical grounding in important deep learning building blocks
 - Practice implementing, understanding, and using those blocks

Coursework

- **65% of grade:** Problem sets
 - 5 psets, each 1-2 weeks long
 - pen and paper + coding
- **35% of grade:** Final project: research project focused on deeper understanding
 - No provided compute - not a SOTA project (resource constrained: be creative)
 - Project proposal
 - Blog post demonstrating novel experimentation and visualization
 - Groups of up to 2

Schedule

**** class schedule is subject to change ****

Date	Topics	Speaker	Course Materials	Assignments
Week 1				
Thu 9/7	Course overview, introduction to deep neural networks and their basic building blocks	Sara Beery		
Week 2				
Tue 9/12	How to train a neural net + details	Sara Beery		pset 1 out
Thu 9/14	Approximation theory + details	Phillip Isola		
Week 3				
Tue 9/19	Architectures: Grids + details	Phillip Isola		
Thu 9/22	Architectures: Graphs + details	Phillip Isola		

Week 4				
Tue 9/26	Bayesian analysis of learning and generalisation + details	Jeremy Bernstein		pset 1 due pset 2 out
Thu 9/28	Geometric deep learning + details	Phillip Isola		
Week 5				
Tue 10/3	Guest Lecture: Tess Smidt + details	Tess Smidt		
Thu 10/5	Hacker's guide to DL + details	Phillip Isola		
Week 6				
Tues 10/10	Student holiday			pset 2 due pset 3 out
Thu 10/12	Architectures -- transformers + details	Sara Beery		

Week 7				
Tue 10/17	Architectures -- memory + details	Sara Beery		
Thu 10/19	Representation learning -- reconstruction-based + details	Phillip Isola		
Week 8				
Tue 10/24	Representation learning -- similarity-based + details	Sara Beery		pset 3 due pset 4 out
Thu 10/26	Representation learning -- theory + details	Jeremy Bernstein		
Week 9				
Tue 10/31	Generative models -- basics + details	Phillip Isola		
Thu 11/2	Generative models -- representation learning meets generative modeling + details	Phillip Isola		

Week 10				
Tue 11/7	Generative models --- conditional models + details	Phillip Isola		pset 4 due pset 5 out
Thu 11/9	Generalization (OOD) + details	Sara Beery		
Fri 11/10				project proposal due
Week 11				
Tue 11/14	Transfer learning -- models + details	Sara Beery		
Thu 11/16	Transfer learning -- data + details	Sara Beery		
Week 12				
Tue 11/21	Guest lecture: TBA + details	TBA		pset 5 due
Tue 11/23	No class: Thanksgiving			

Week 13				
Tue 11/28	Theory of neural architecture + details	Jeremy Bernstein		
Thu 11/30	Theory of deep net optimisation + details	Jeremy Bernstein		
Week 14				
Tue 12/5	Project office hours			
Thu 12/7	Deploying computer vision systems - A case study on birdsong identification + details	Grant Van Horn		
Week 15				
Tue 12/12	Guest lecture: TBA	TBA		Final project due

PyTorch Tutorials

- If you aren't familiar with pytorch or need a refresher, we strongly recommend you attend one of the two pytorch tutorials we are offering next week.
- Dates
 - Tuesday 5PM-6PM ET with Saachi (Room TBA)
 - Wednesday 10AM-11AM with Anthea (Room TBA)

Weekly Office Hours (Rooms TBA)

Phil	Monday 2PM-3PM ET
Sara	Tuesday 9AM-10AM ET
Jeremy	Tuesday 4PM-5PM ET
Saachi	Wednesday 10AM-11AM ET
Anthea	Wednesday 4PM-5PM ET
Thien	Thursday 3PM-4PM ET
Veevee	Friday 11AM-12PM ET

Collaboration Policy

- Psets should be written up individually and should reflect your own individual work. However, you may discuss with your peers, TAs, and instructors.
- You should not copy or share complete solutions.
- If you work with anyone on the pset (other than TAs and instructors), list their names at the top of the pset

AI Assistants Policy

- Our policy for using ChatGPT and other AI assistants is *identical* to our policy for using human assistants.
- This is a deep learning class and you *should* try out all the latest AI assistants (they are pretty much all using deep learning). It's very important to play with them to learn what they can do and what they can't do. That's a part of the content of this course.
- Just like you can come to office hours and ask a human questions (about the lecture material, clarifications about pset questions, tips for getting started, etc), you are very welcome to do the same with AI assistants.
- But: just like you are not allowed to ask an expert friend to do your homework for you, you also should not ask an expert AI.
- If it is ever unclear, just imagine the AI as a human and apply the same norm as you would with a human.
- If you work with any AI on a pset, briefly describe which AI and how you used it at the top of the pset (a few sentences is enough).

Late Policy


- Homeworks will not be accepted more than 7 days after the deadline.
- The grade on a homework received n days after the deadline ($n \leq 7$) will be multiplied by $(1 - n/14)$. We will round up to units of full days; submitting 1 hour late counts as using 1 late day.
- Ten penalty days will be automatically waived for each student.
 - Intended to replace special requests for normal circumstances of life — being behind on work, forgetting the deadline, having a conference to attend, etc. **No further extensions will be provided.**
 - Any serious medical or personal emergencies must go through S3 or GradSupport, we will work with them directly to find a solution

Keeping track of everything

- Course webpage: <https://phillipi.github.io/6.s898/>
 - High-level course information, schedule
- Canvas: <https://canvas.mit.edu/courses/22523>
 - Syllabus, course recordings, psets
- Piazza: <https://piazza.com/mit/fall2023/6s898>
 - Interact with TAs, ask questions
- GradeScope: <https://www.gradescope.com/courses/599409>
 - Psets are submitted and graded here

Lecture 1: Introduction to Deep Learning

Speaker: Sara Beery

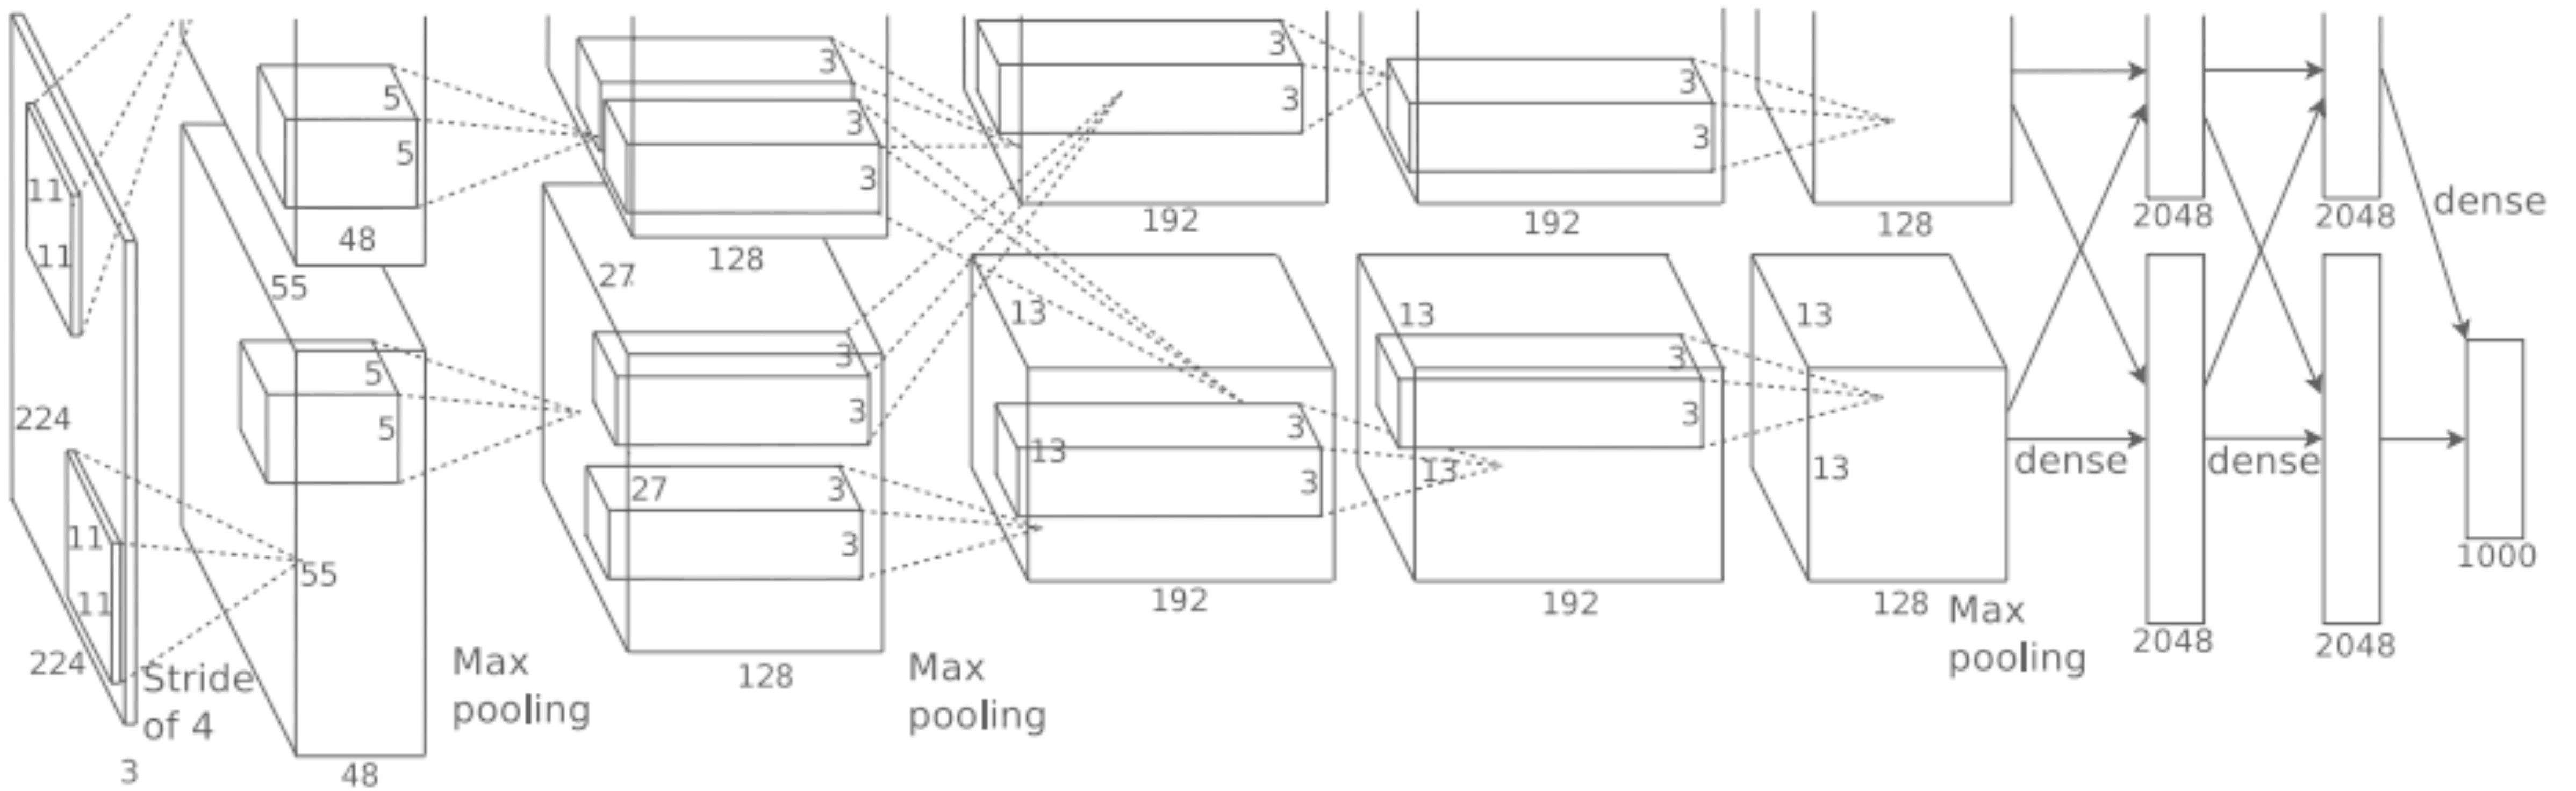

Why are we here?

- **What's the goal?**
 - Model complex phenomena in the real world
- **What are complex phenomena?**
 - Natural language, Images, DNA, Ecosystems, Climate Change
- **Why is this hard?**
 - See: complex
- **Existence proof for deep learning as a solution:** The human brain?




1. Introduction to Deep Learning

- How did we get where we are today? (Brief History)
- What we expect you have seen before (ok if you haven't!)
- What we will cover in this class

A brief history of Neural Networks




Perceptrons, 1958

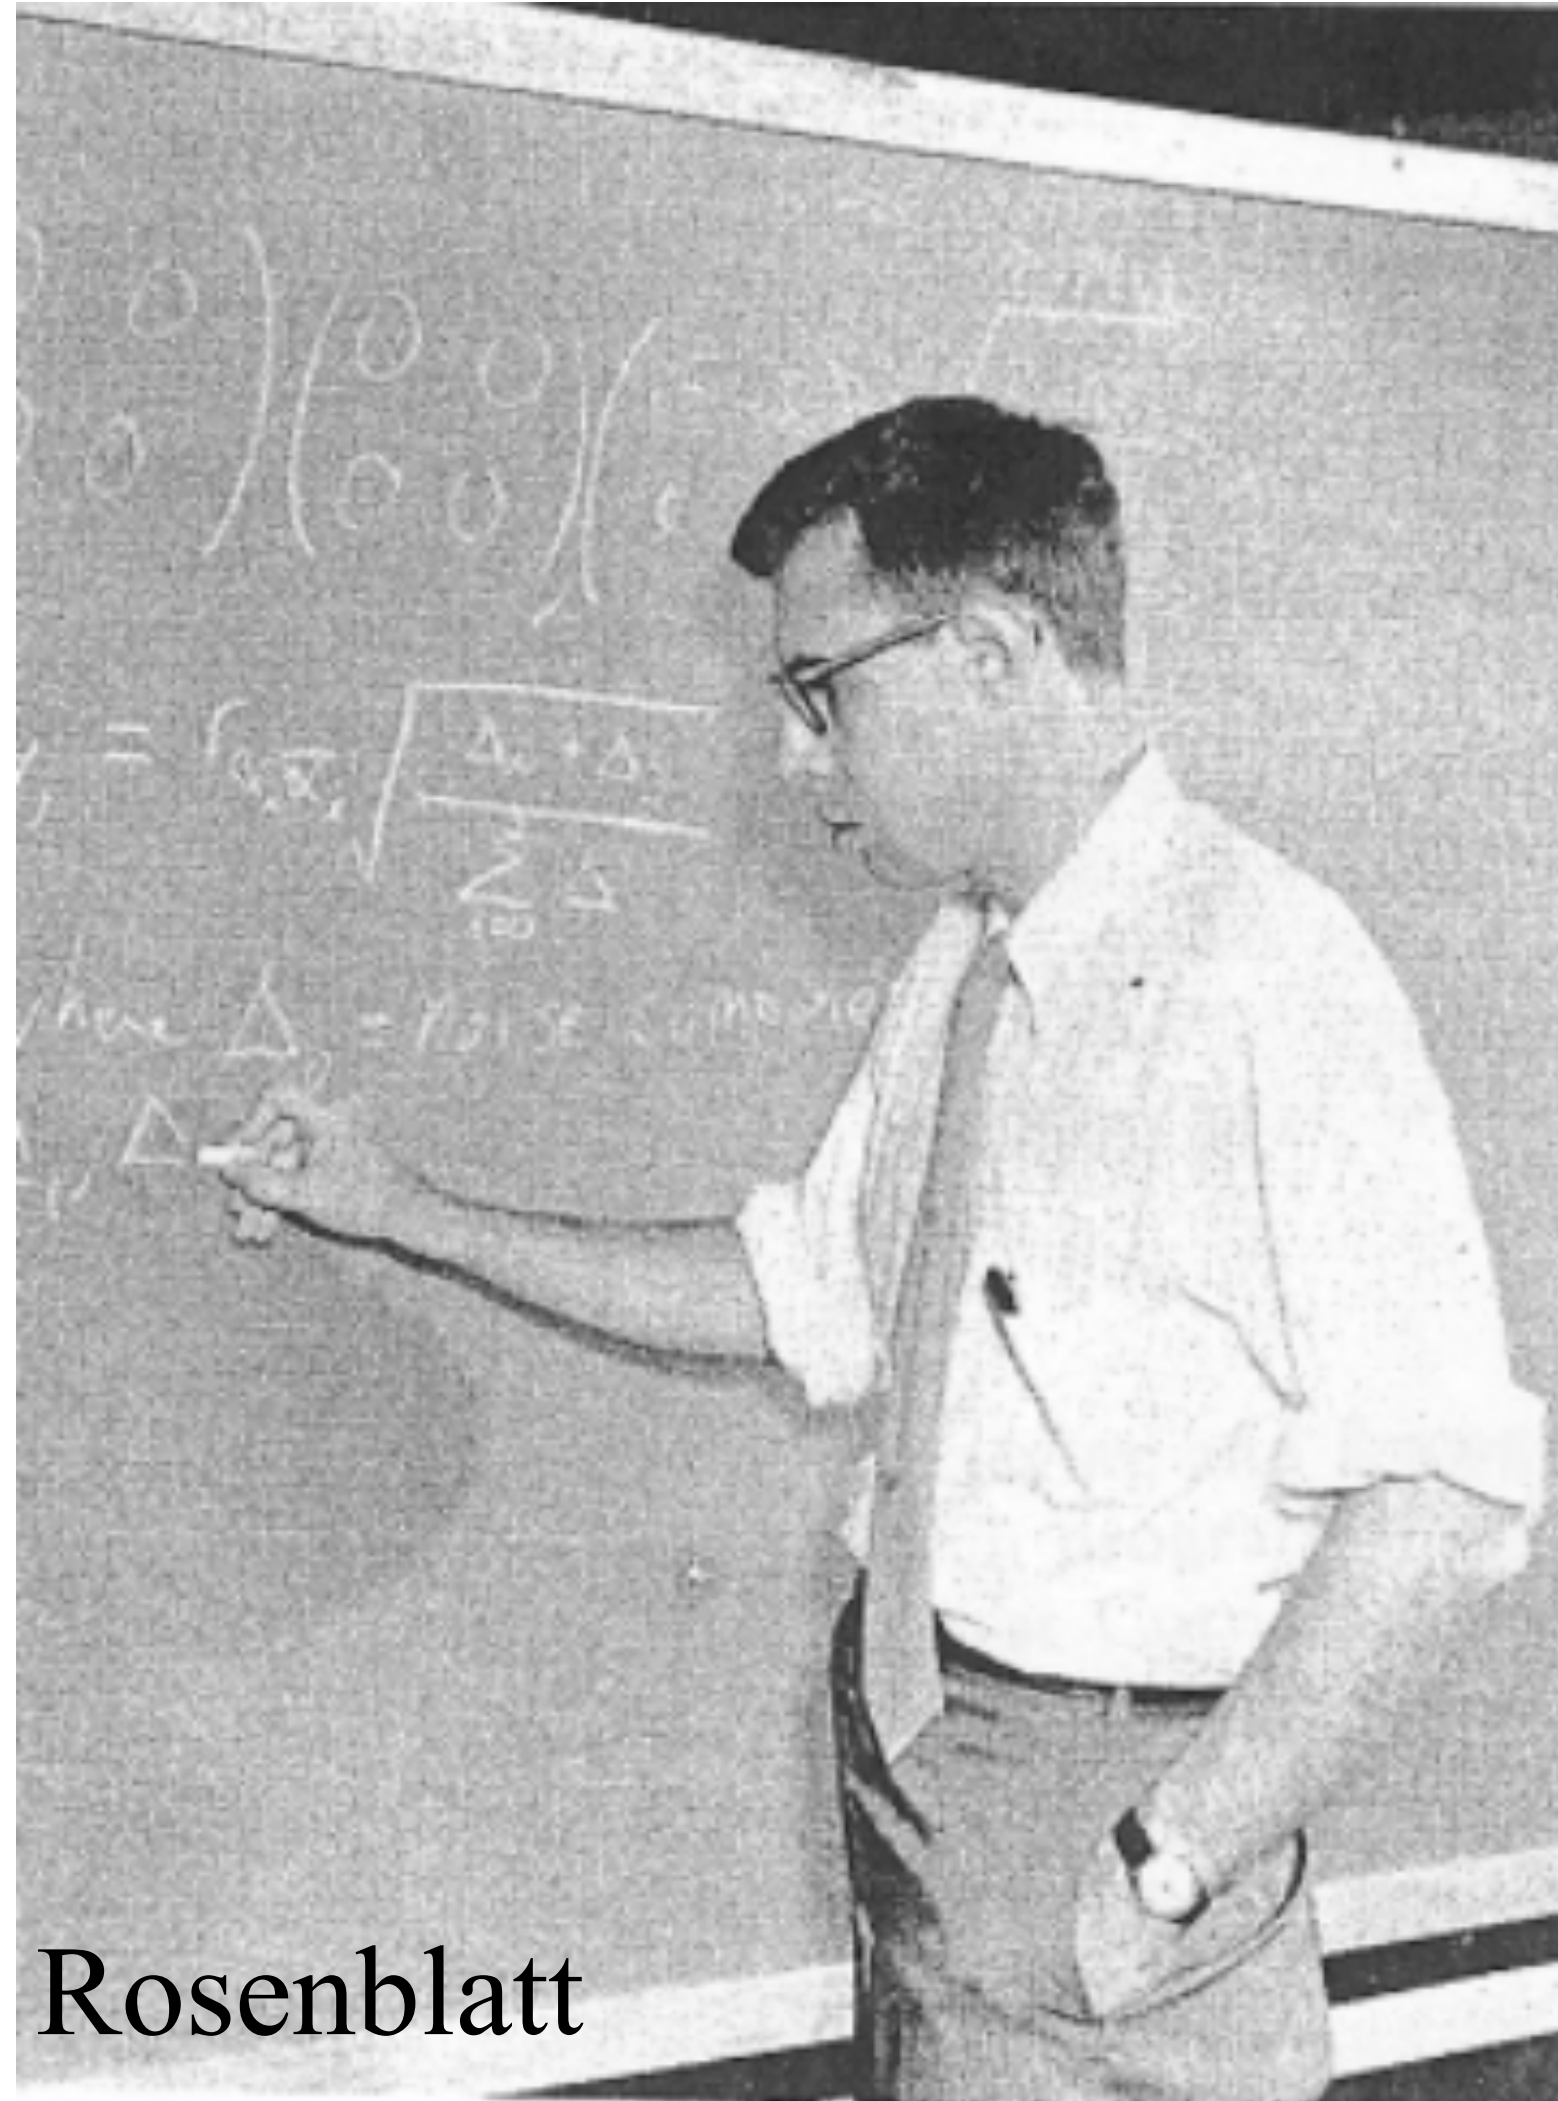


Rosenblatt


http://www.ecse.rpi.edu/homepages/nagy/PDF_chrono/2011_Nagy_Pace_FR.pdf. Photo by George Nagy

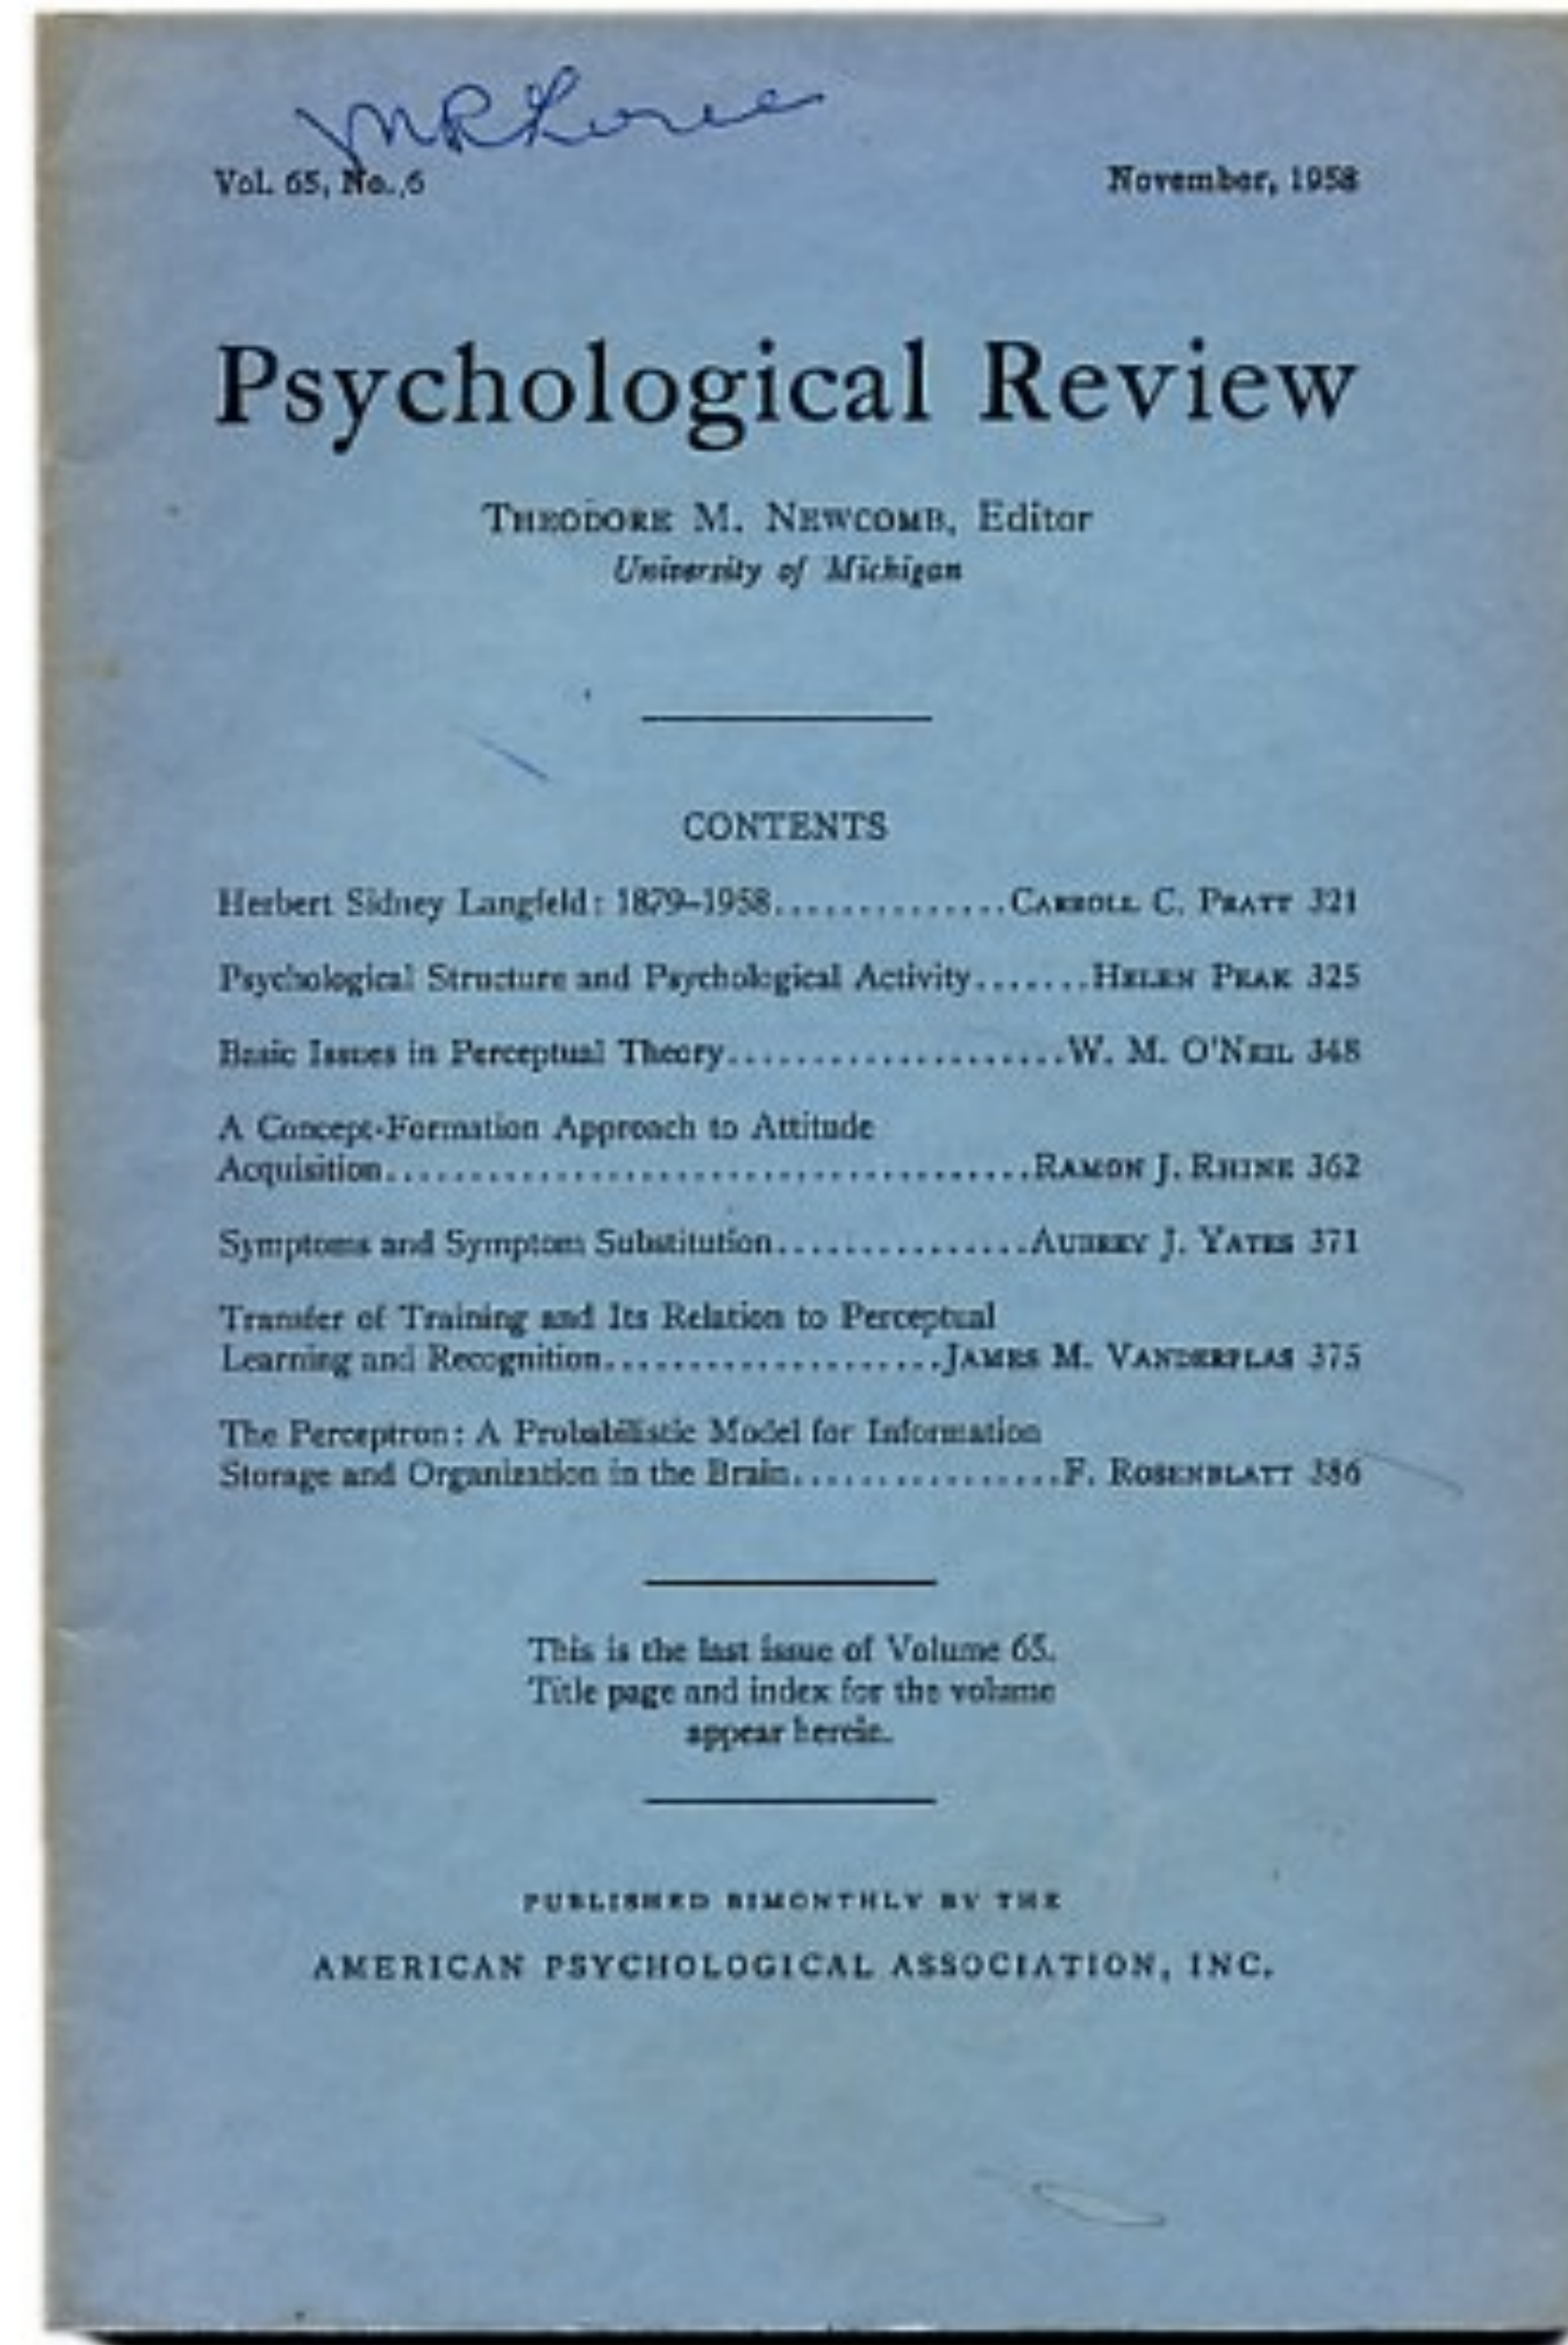


<http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.335.3398&rep=rep1&type=pdf>

Perceptrons, 1958

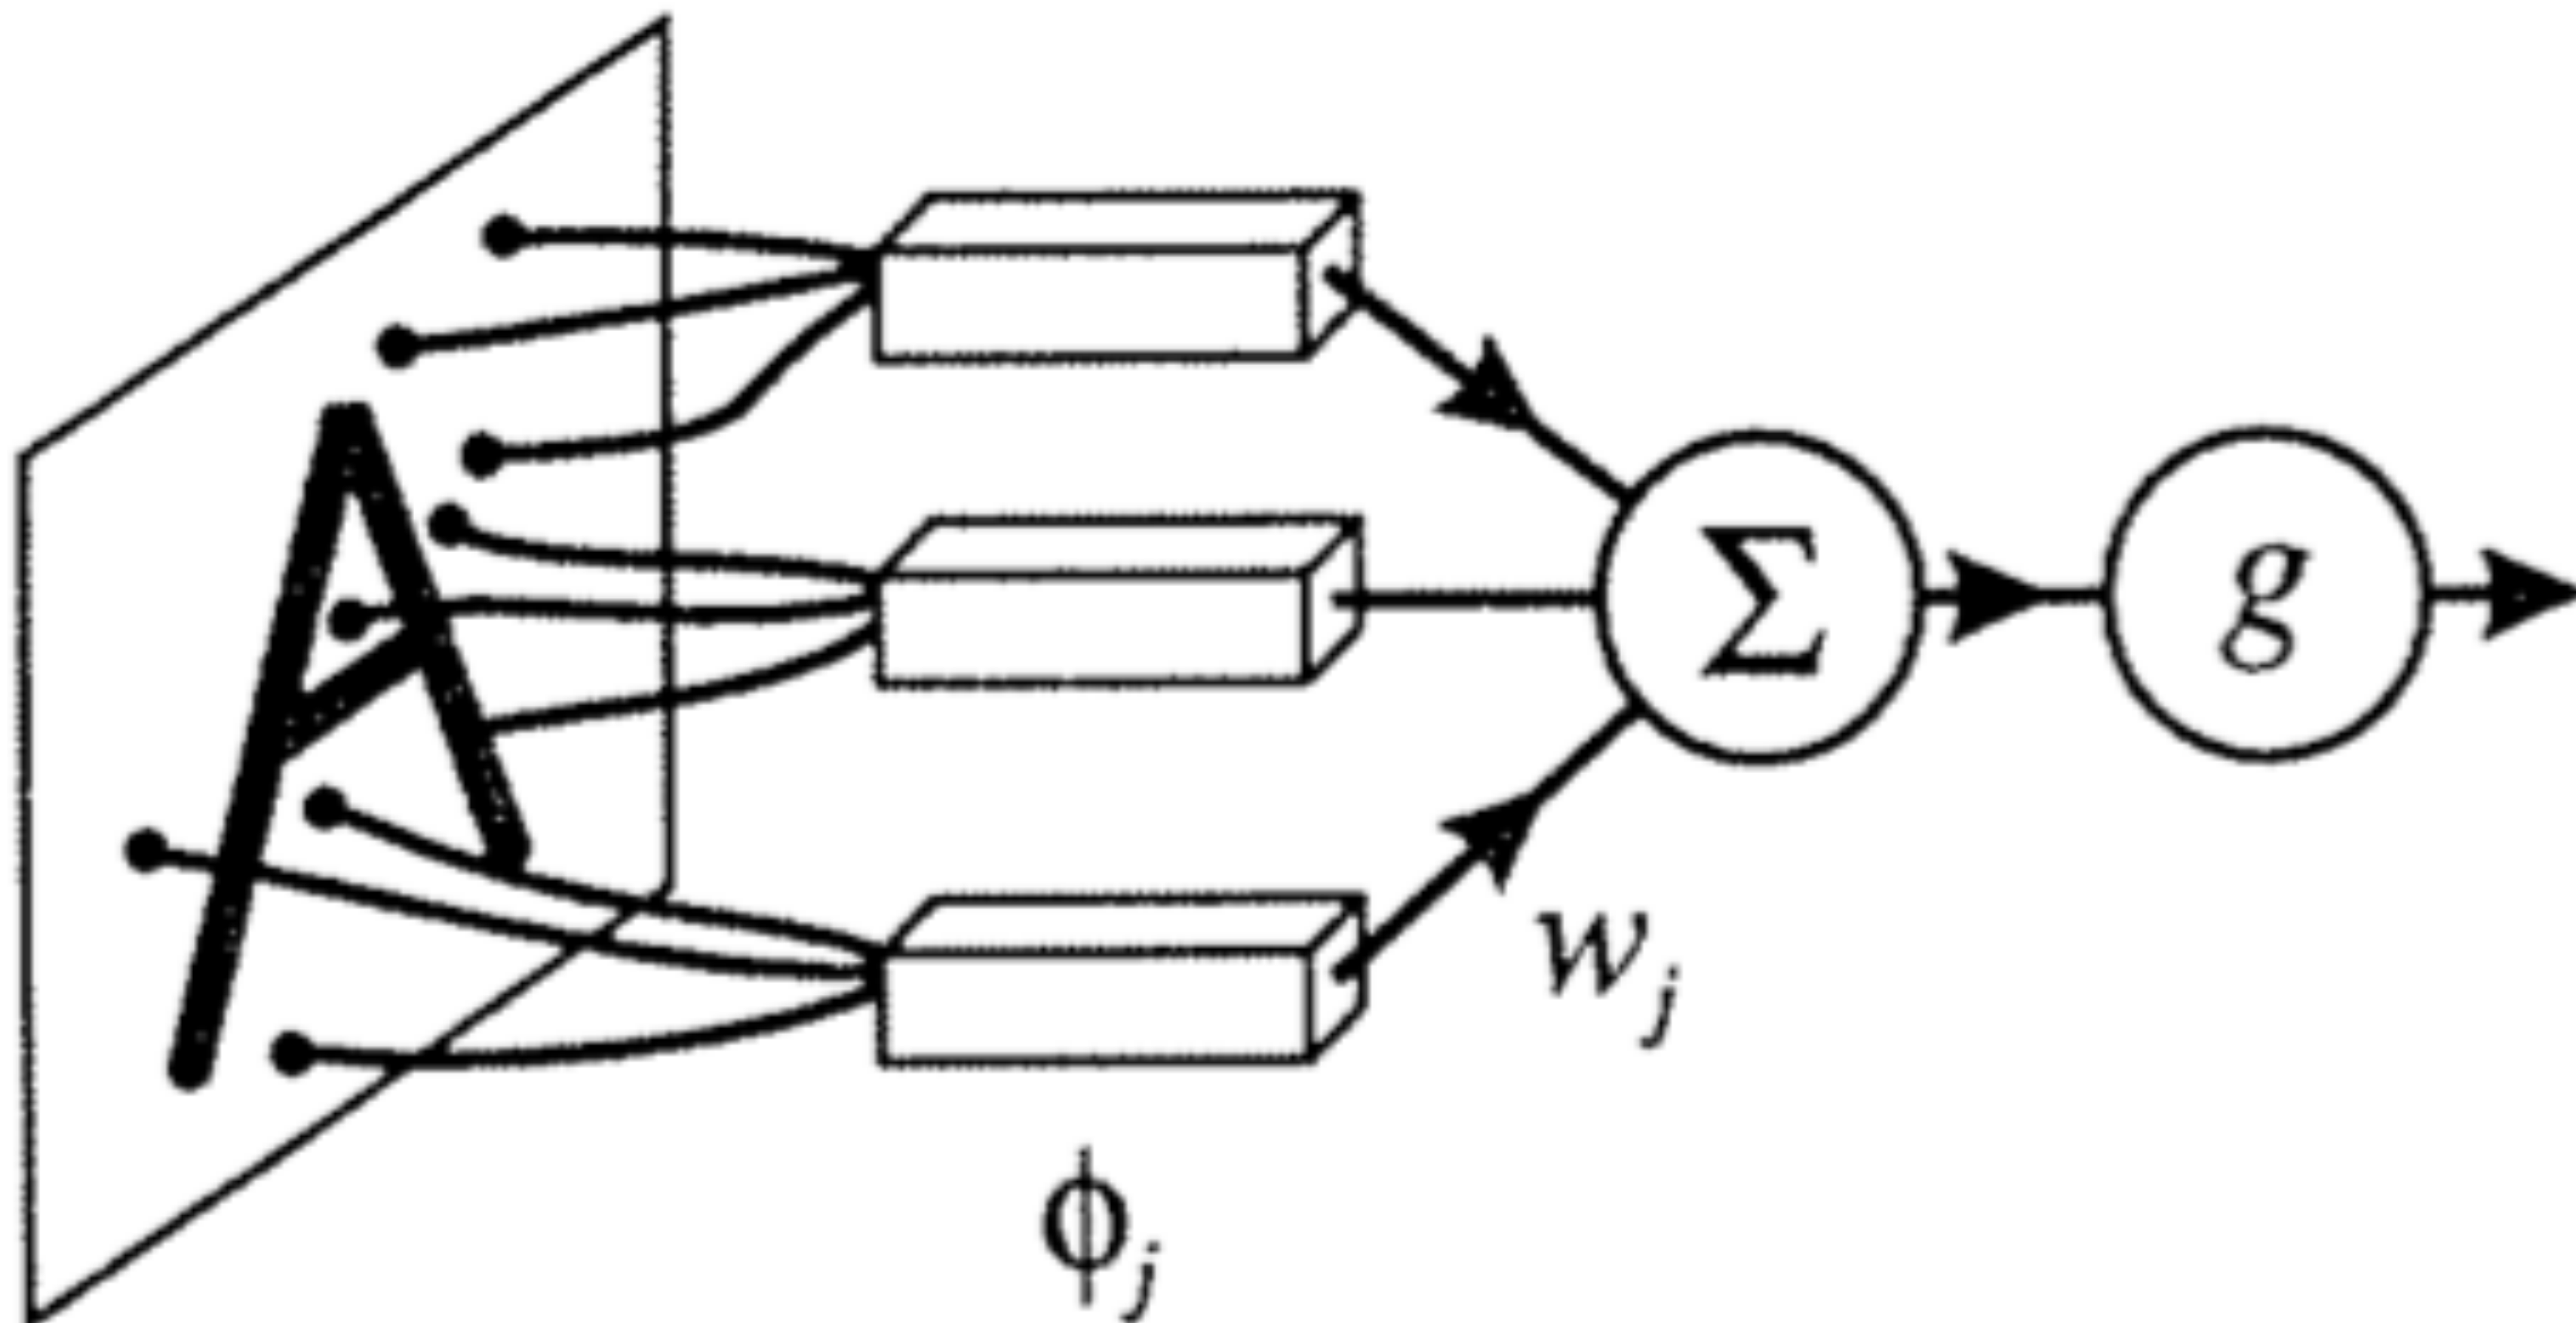

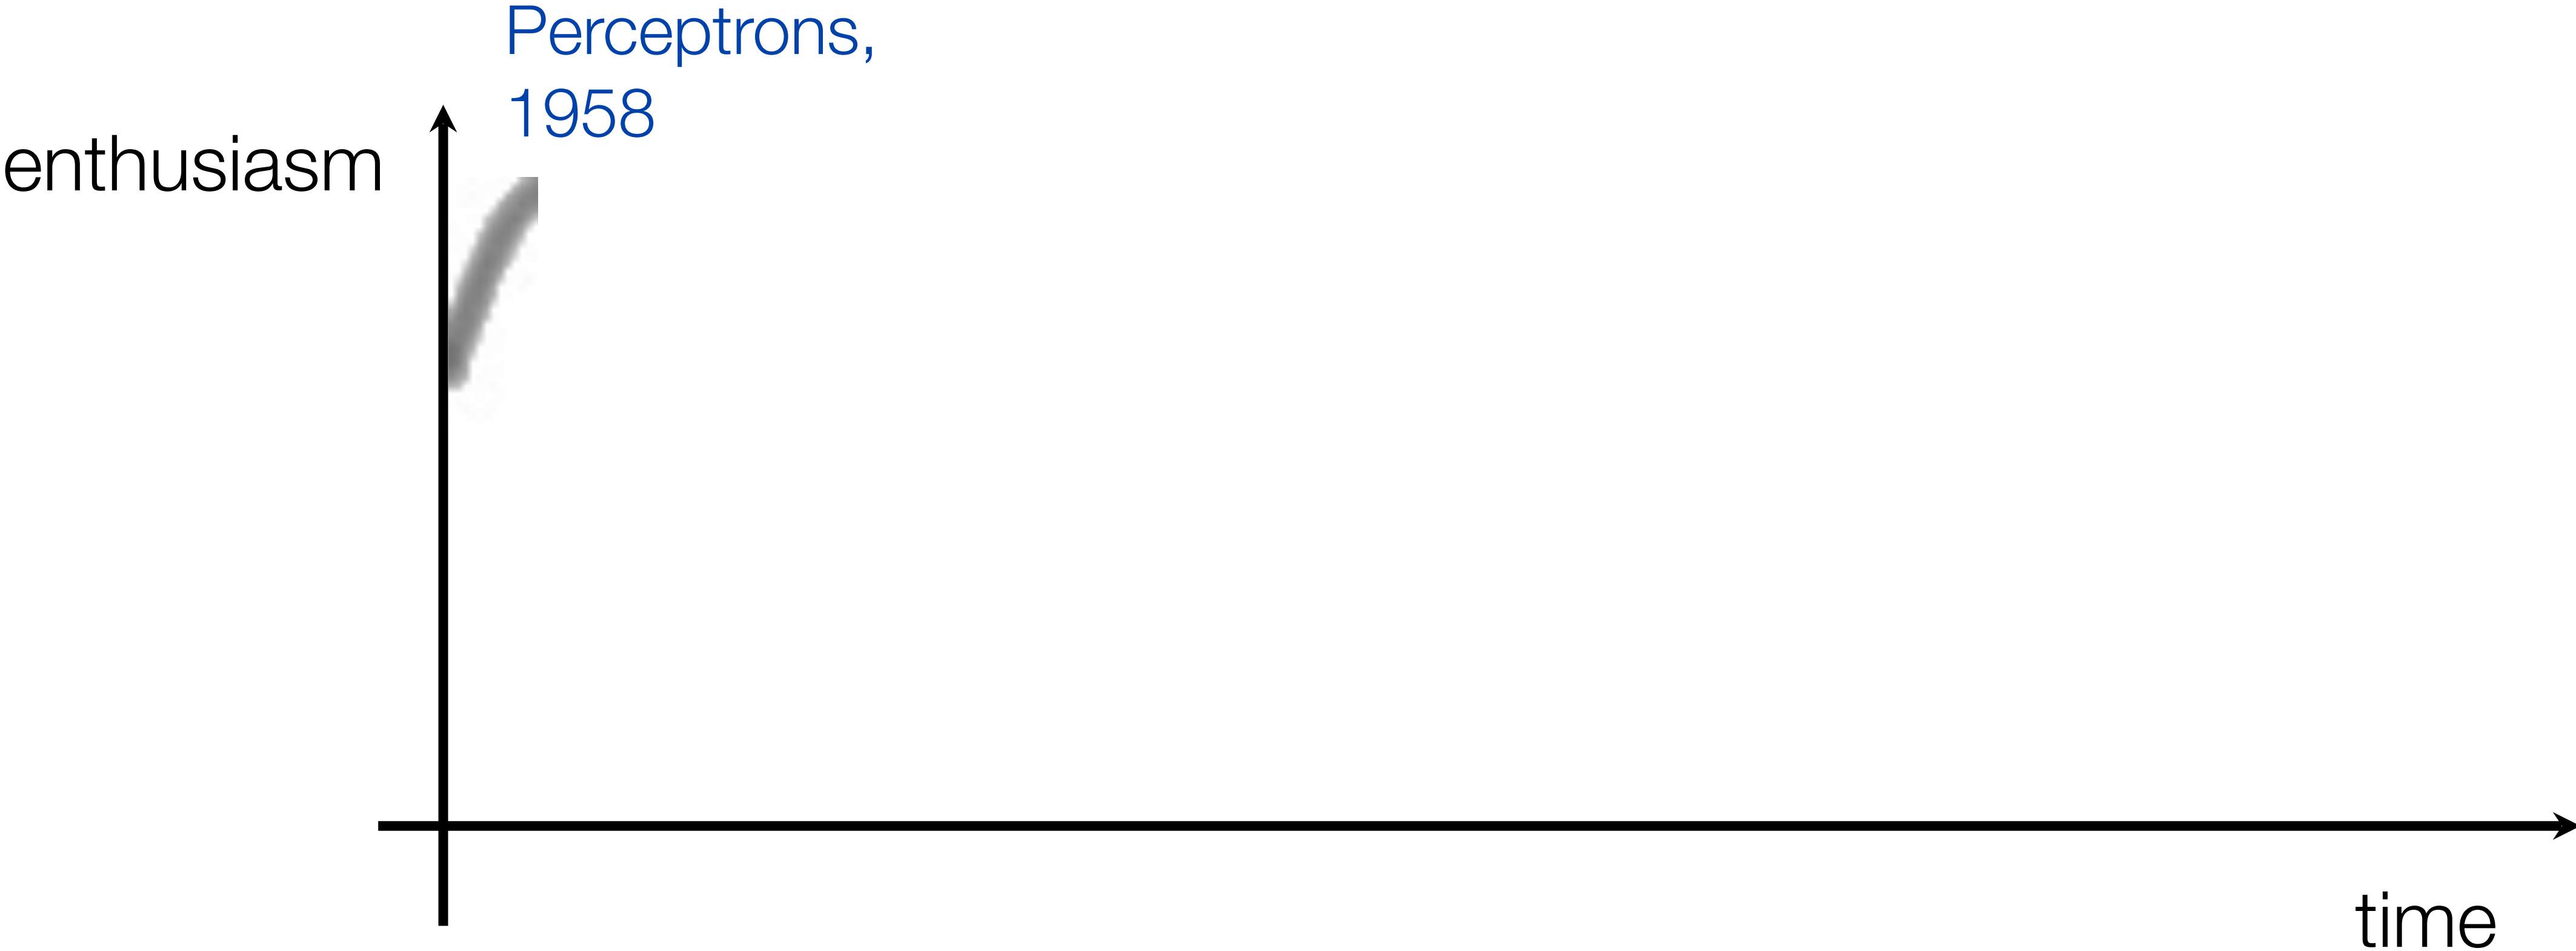

Minsky and Papert, Perceptrons, 1972

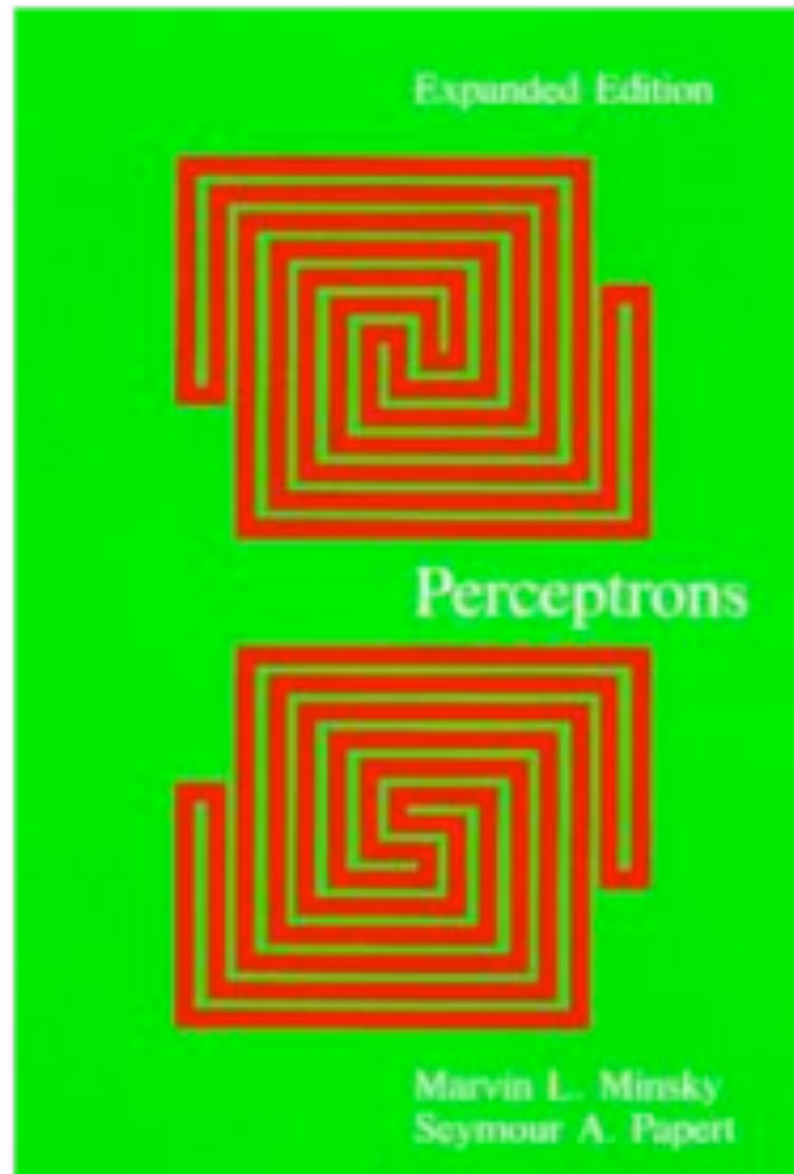

FOR BUYING OPTIONS, START HERE

Select Shipping Destination

Paperback | \$35.00 Short | £24.95 |
ISBN: 9780262631112 | 308 pp. | 6 x
8.9 in | December 1987

Perceptrons, expanded edition

An Introduction to Computational Geometry


By [Marvin Minsky](#) and [Seymour A. Papert](#)

Overview


Perceptrons - the first systematic study of parallelism in computation - has remained a classical work on threshold automata networks for nearly two decades. It marked a historical turn in artificial intelligence, and it is required reading for anyone who wants to understand the connectionist counterrevolution that is going on today.

Artificial-intelligence research, which for a time concentrated on the programming of von Neumann computers, is swinging back to the idea that intelligence might emerge from the activity of networks of neuronlike entities. Minsky and Papert's book was the first example of a mathematical analysis carried far enough to show the exact limitations of a class of computing machines that could seriously be considered as models of the brain. Now the new developments in mathematical tools, the recent interest of physicists in the theory of disordered matter, the new insights into and psychological models of how the brain works, and the evolution of fast computers that can simulate networks of automata have given *Perceptrons* new importance.


Witnessing the swing of the intellectual pendulum, Minsky and Papert have added a new chapter in which they discuss the current state of parallel computers, review developments since the appearance of the 1972 edition, and identify new research directions related to connectionism. They note a central theoretical challenge facing connectionism: the challenge to reach a deeper understanding of how "objects" or "agents" with individuality can emerge in a network. Progress in this area would link connectionism with what the authors have called "society theories of mind."

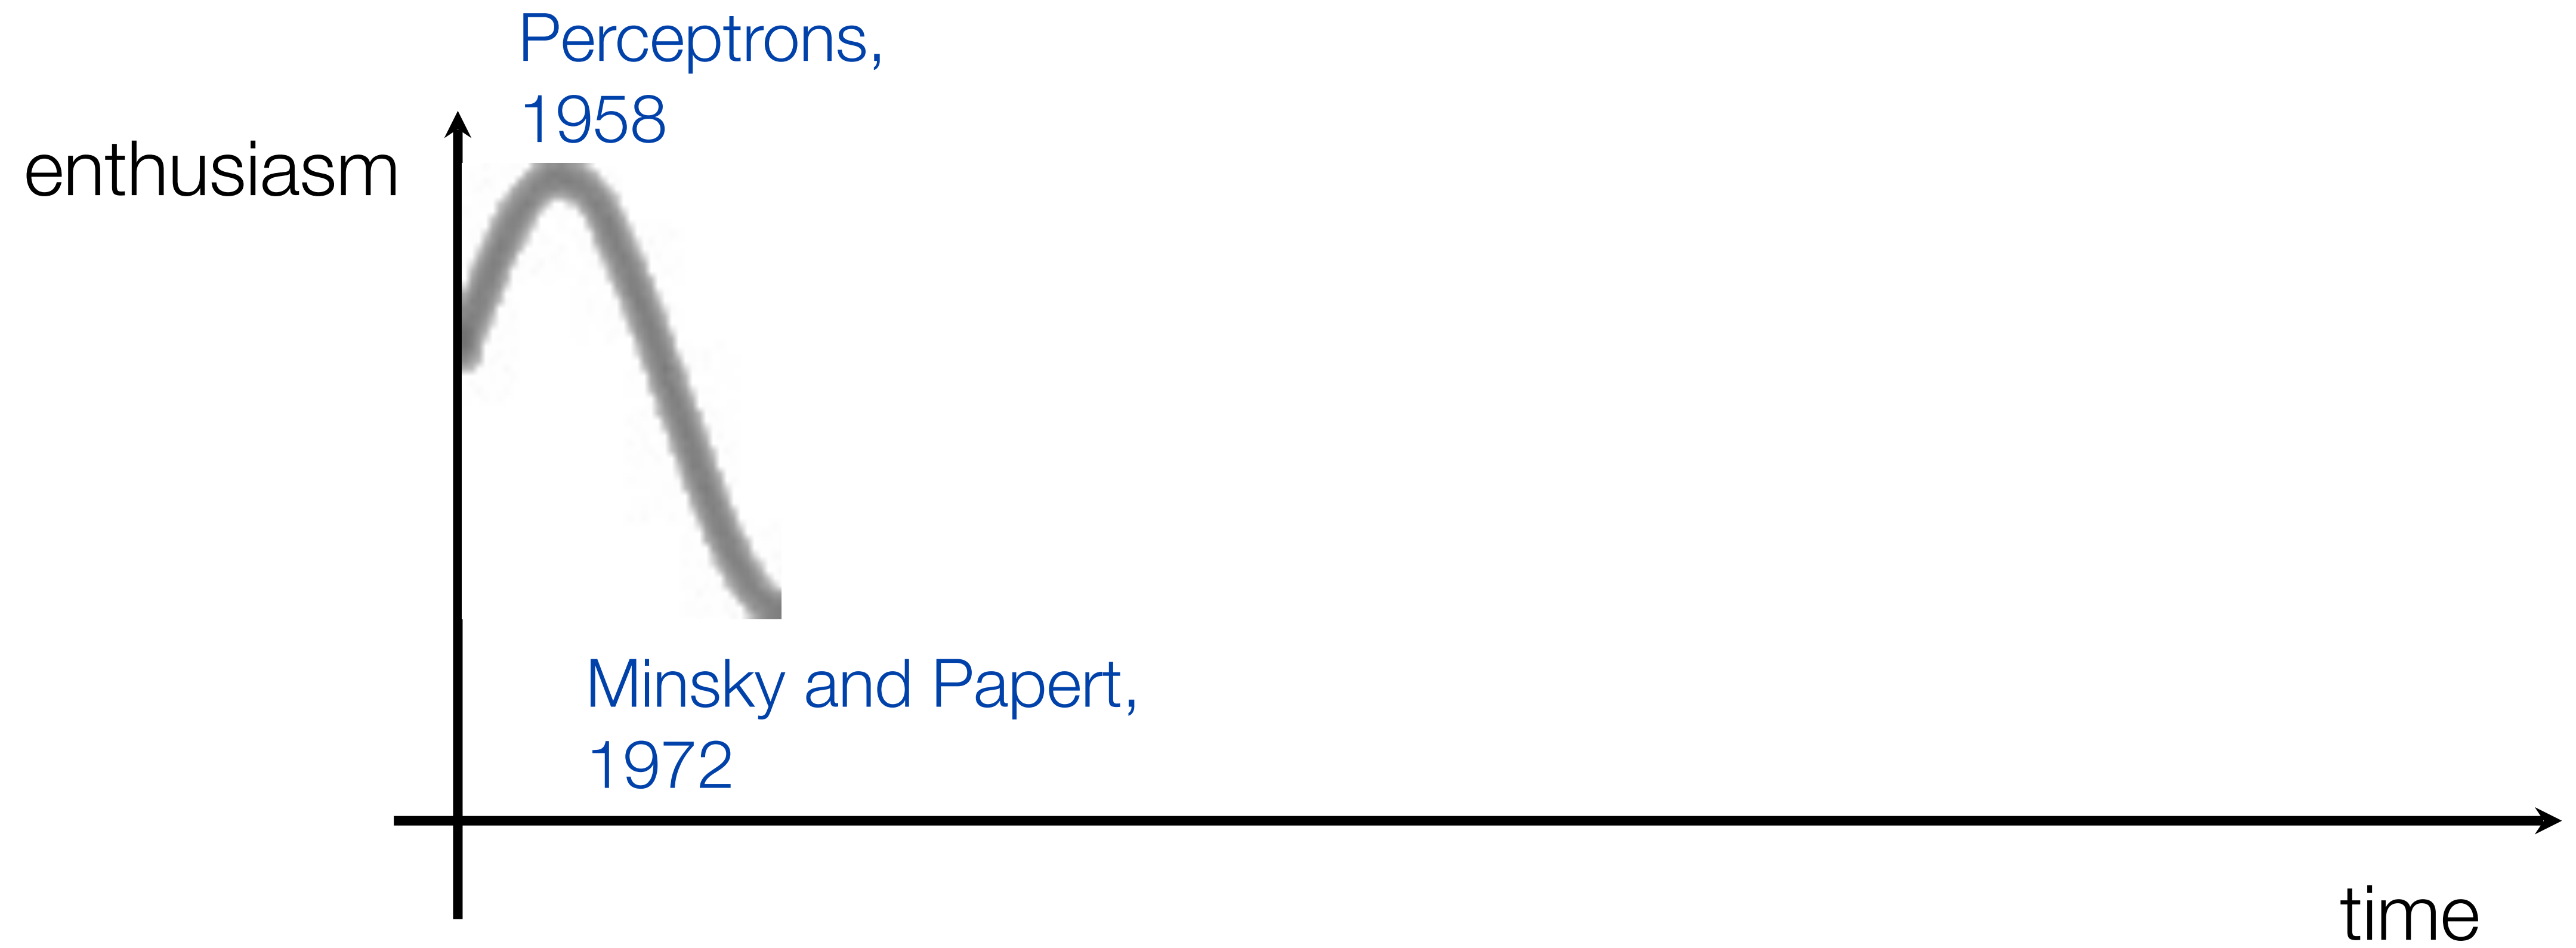


Parallel Distributed Processing (PDP), 1986

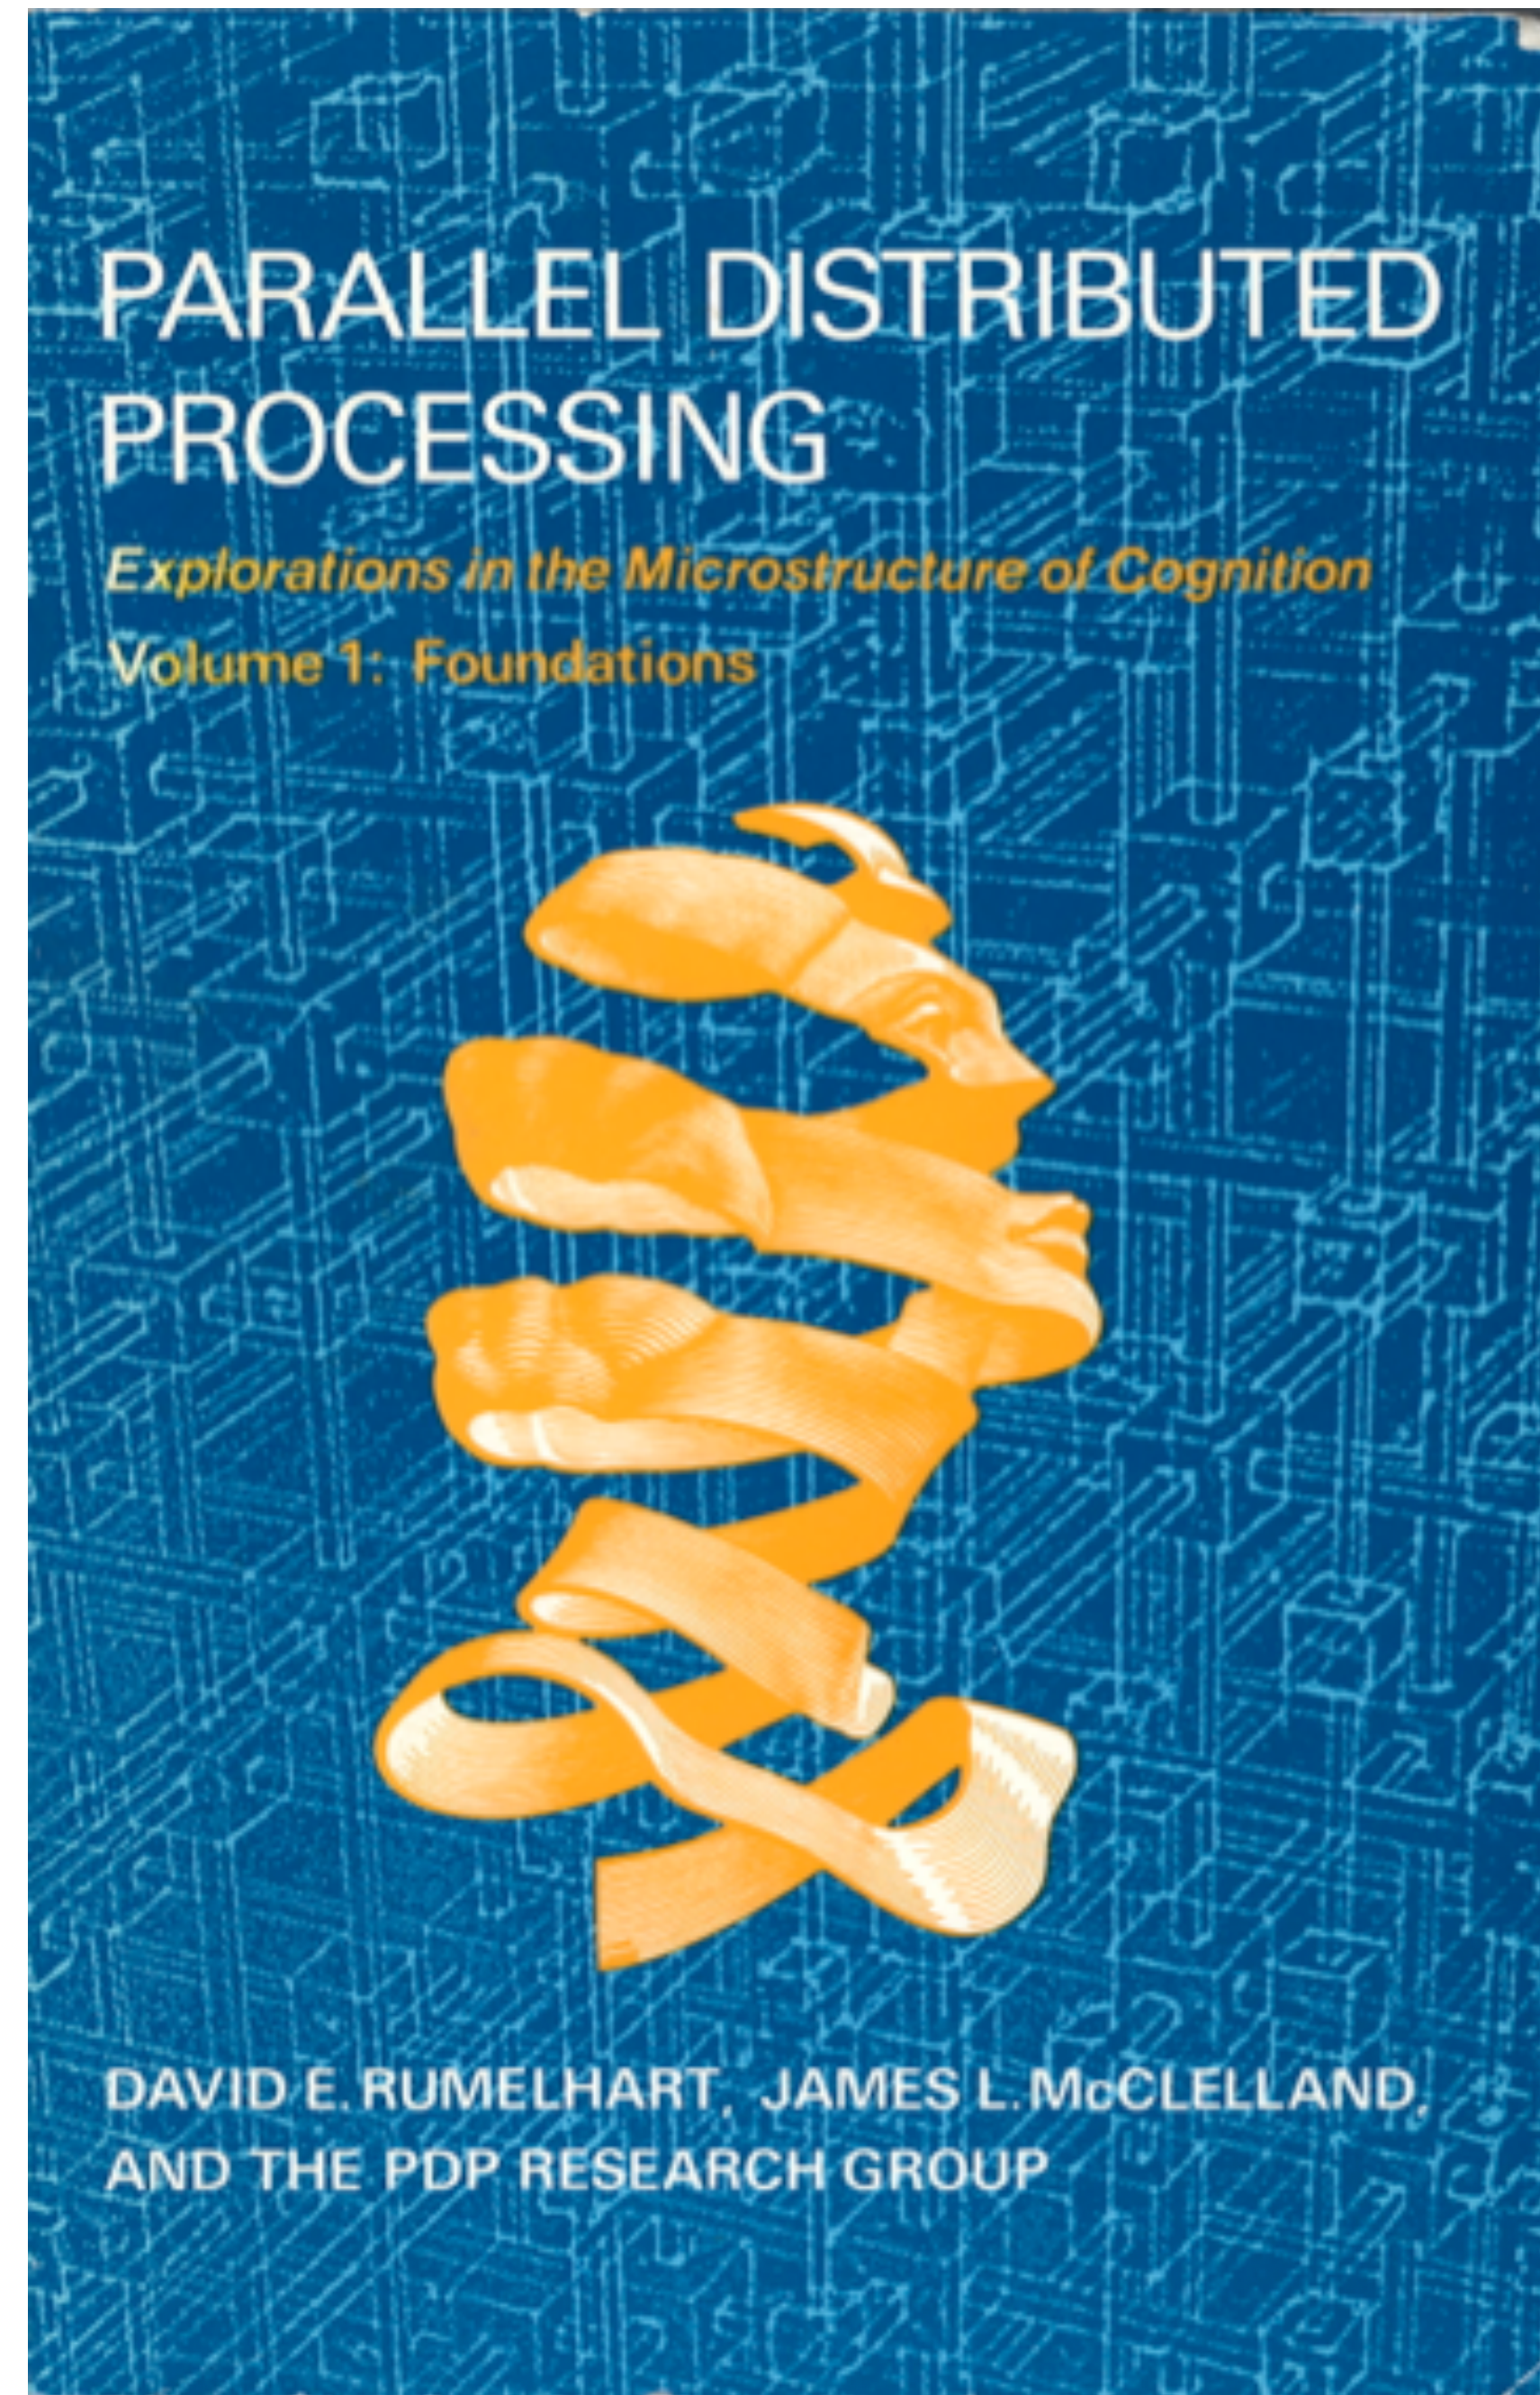

XOR problem

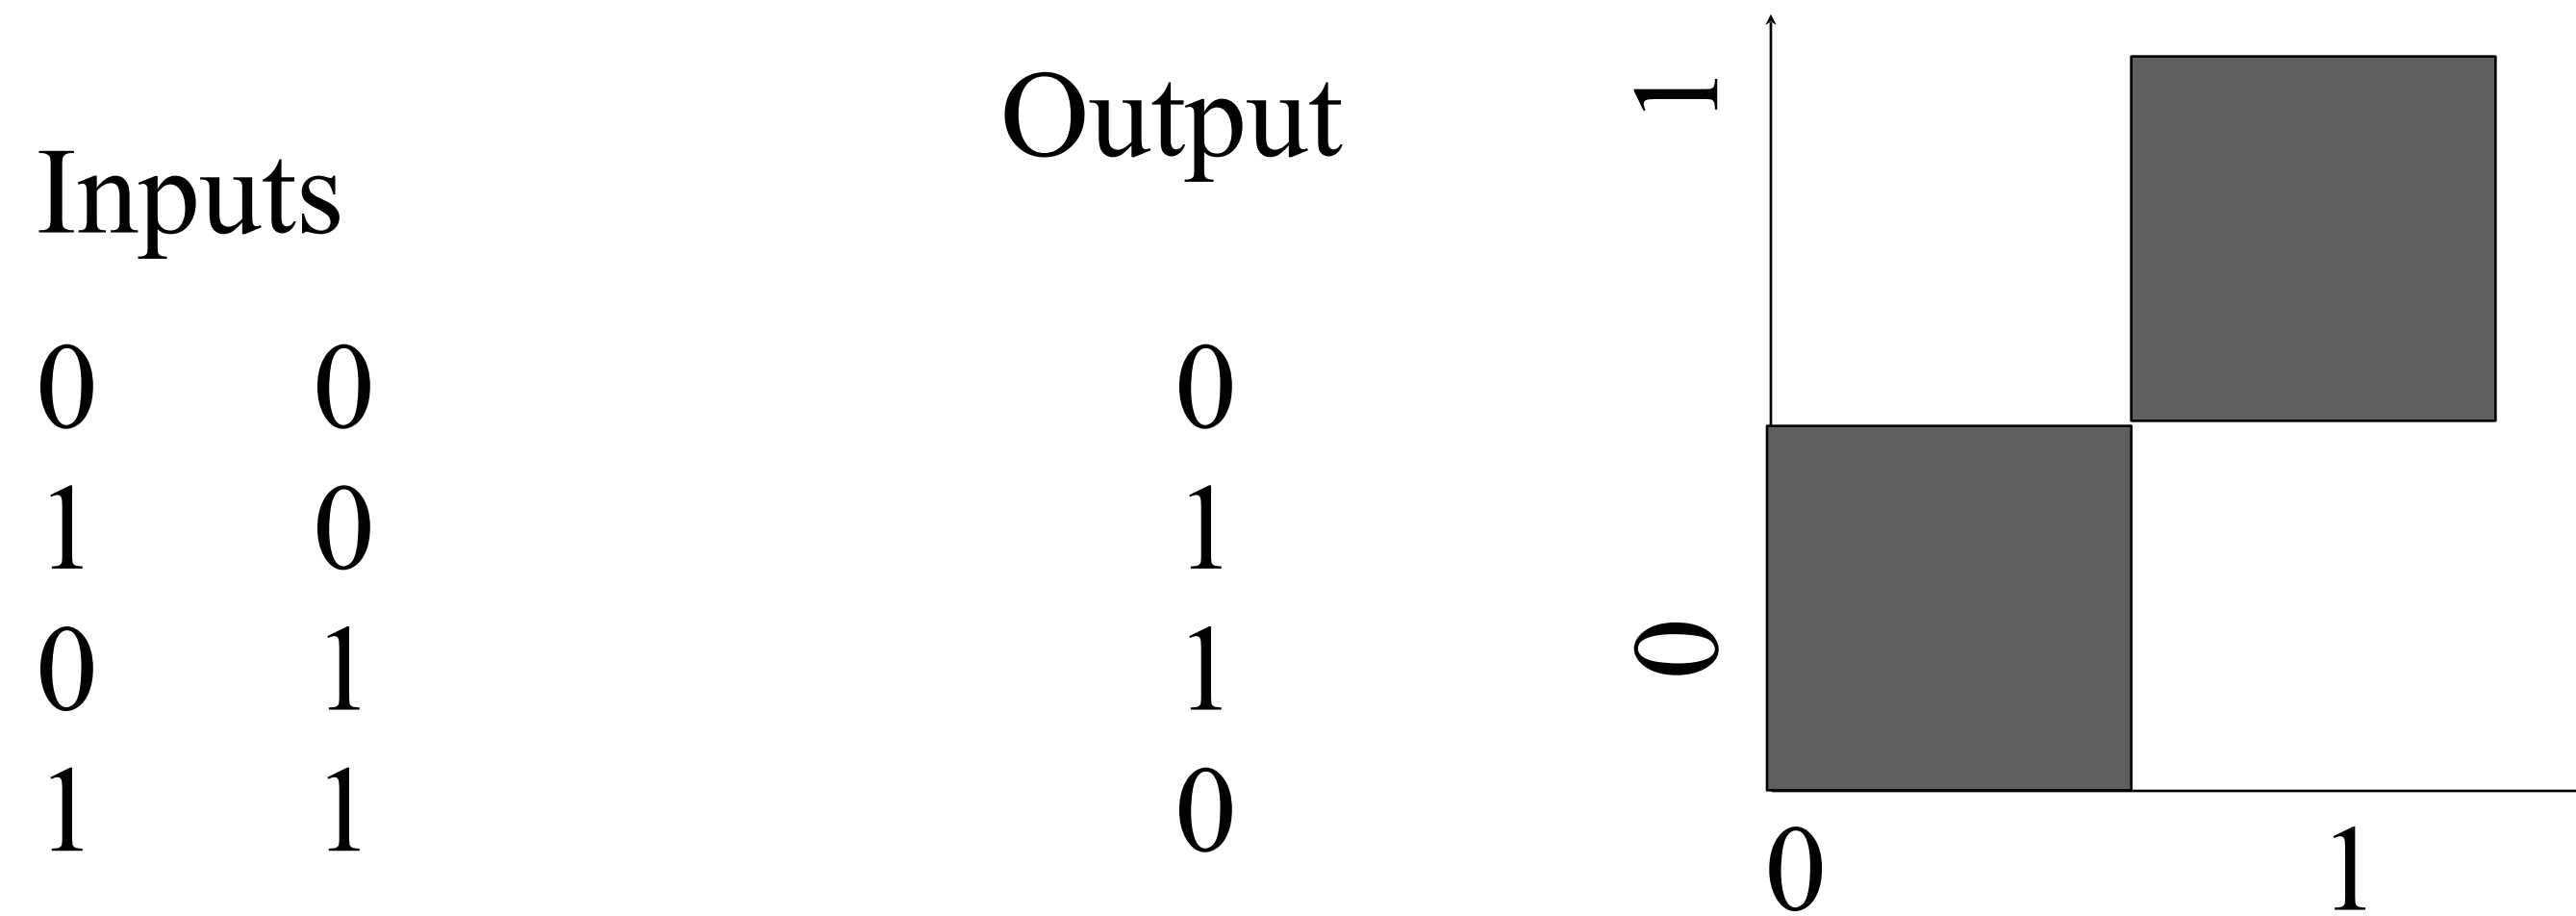

PDP authors pointed to the backpropagation algorithm as a breakthrough, allowing multi-layer neural networks to be trained. Among the functions that a multi-layer network can represent but a single-layer network cannot: the XOR function.

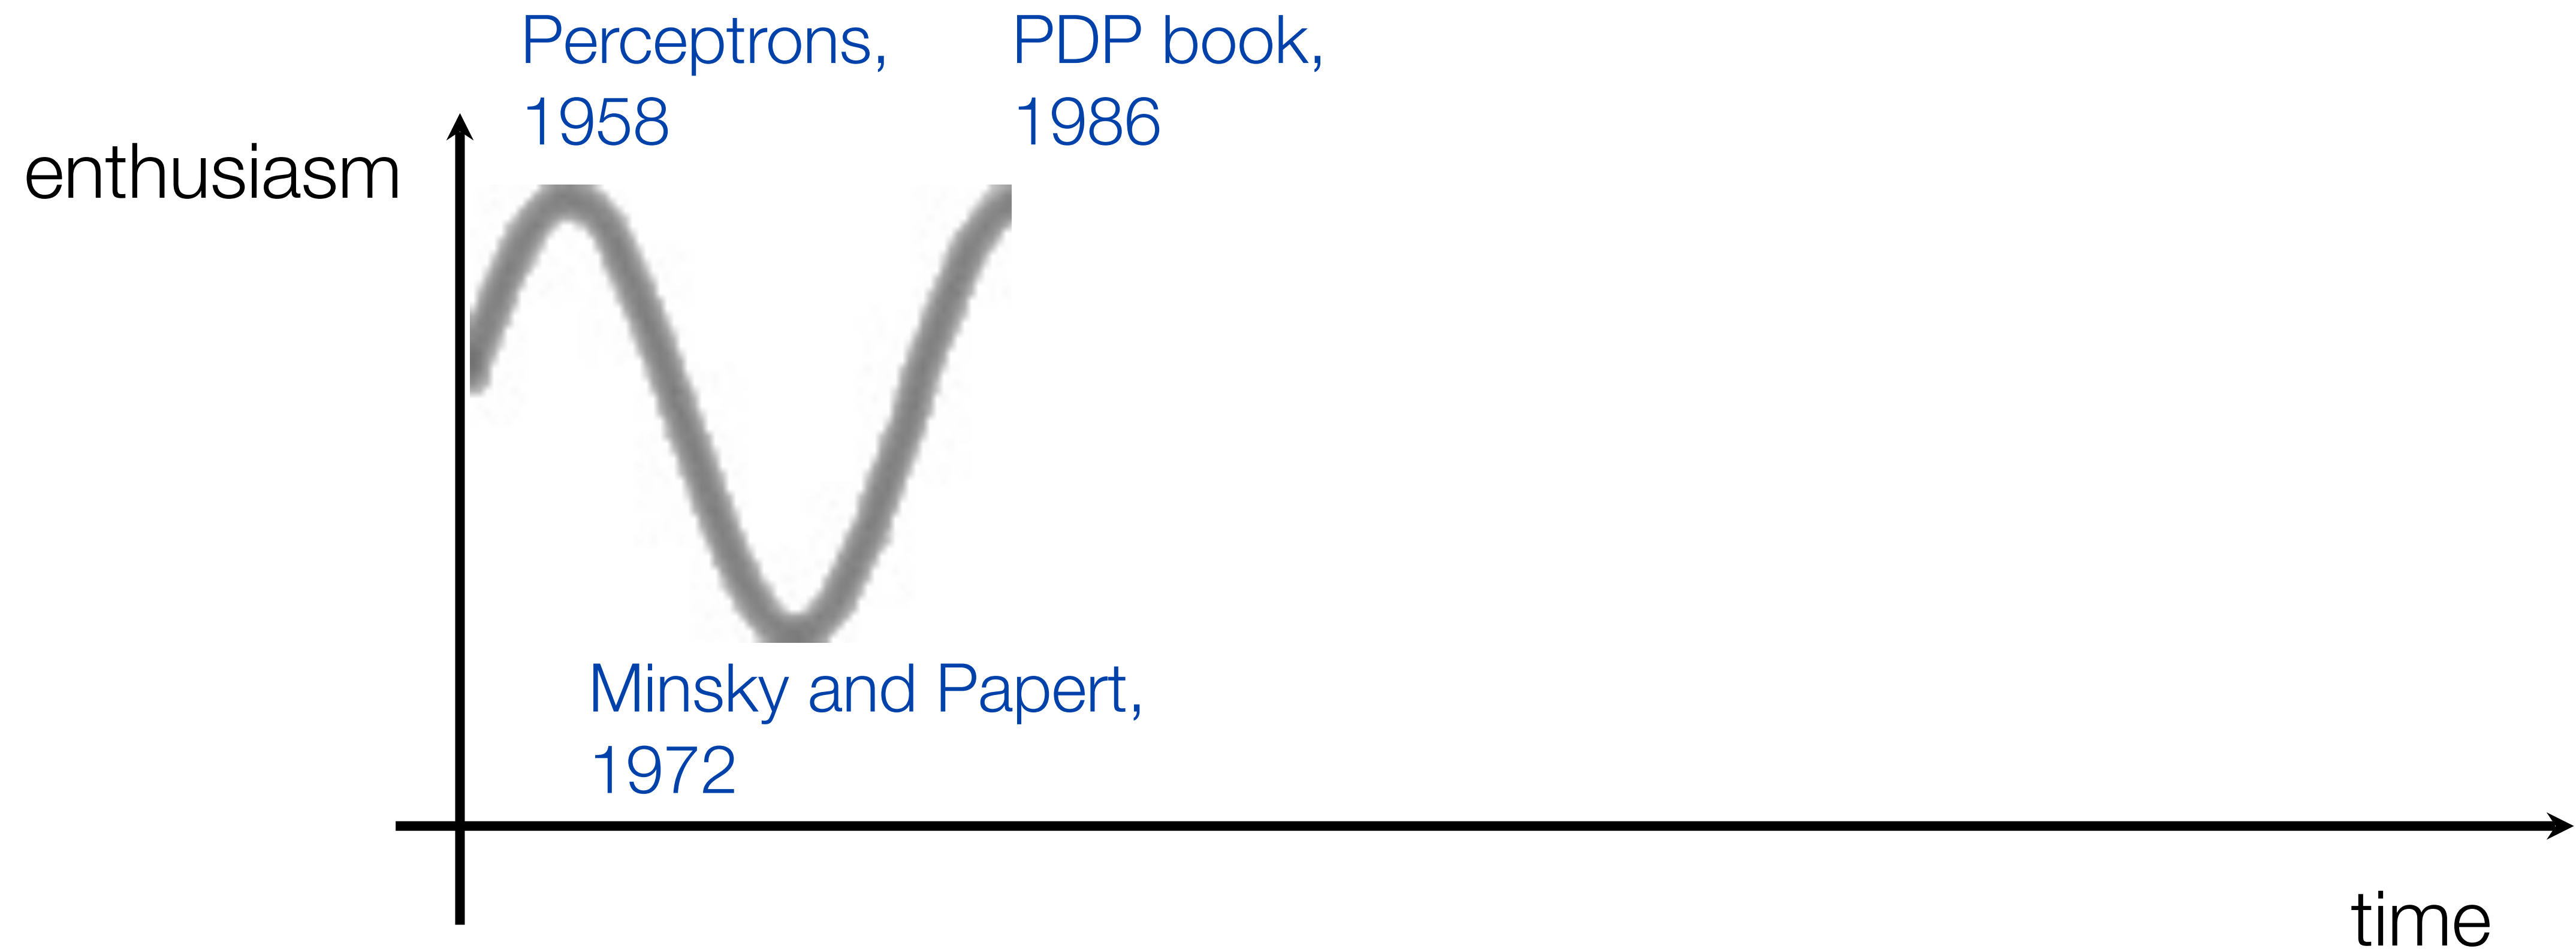

LeCun conv nets, 1998

PROC. OF THE IEEE, NOVEMBER 1998

7

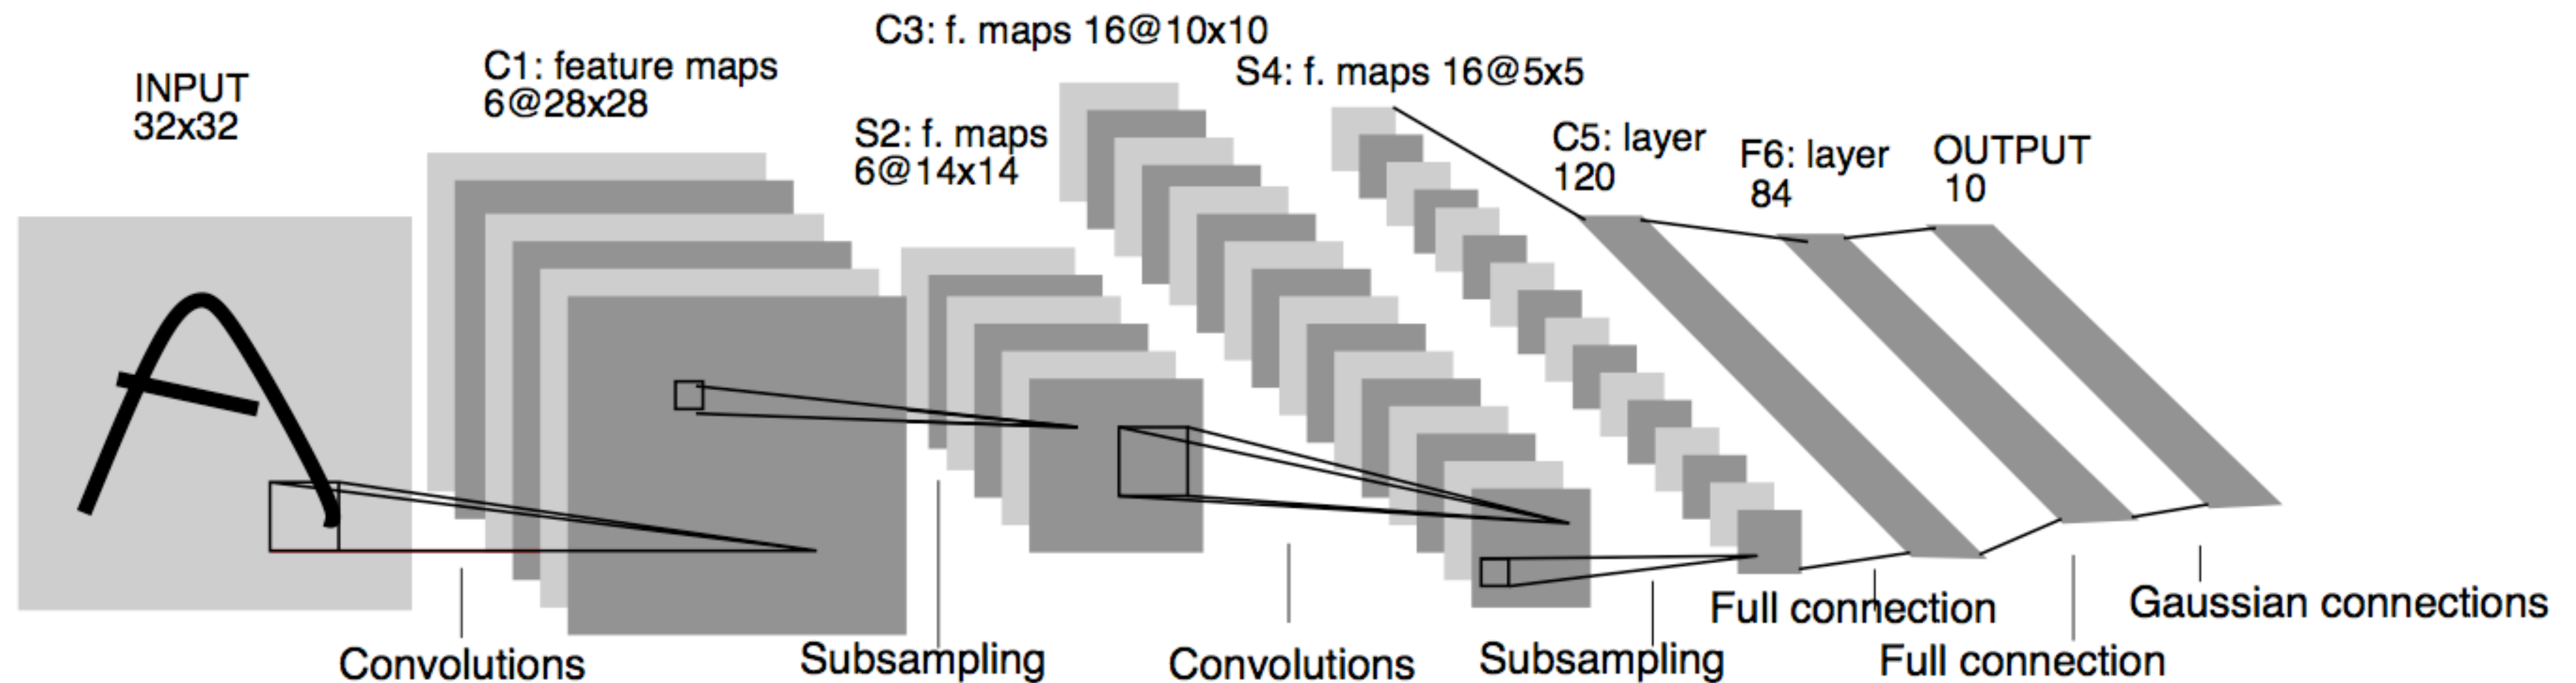



Fig. 2. Architecture of LeNet-5, a Convolutional Neural Network, here for digits recognition. Each plane is a feature map, i.e. a set of units whose weights are constrained to be identical.

Demos:

<http://yann.lecun.com/exdb/lenet/index.html>


Neural Information Processing Systems 2000

- Neural Information Processing Systems is the premier conference on machine learning. Evolved from an interdisciplinary conference to a machine learning conference.
- For the 2000 conference:
 - title words predictive of paper acceptance: “Belief Propagation” and “Gaussian”.
 - title words predictive of paper rejection: “Neural” and “Network”.

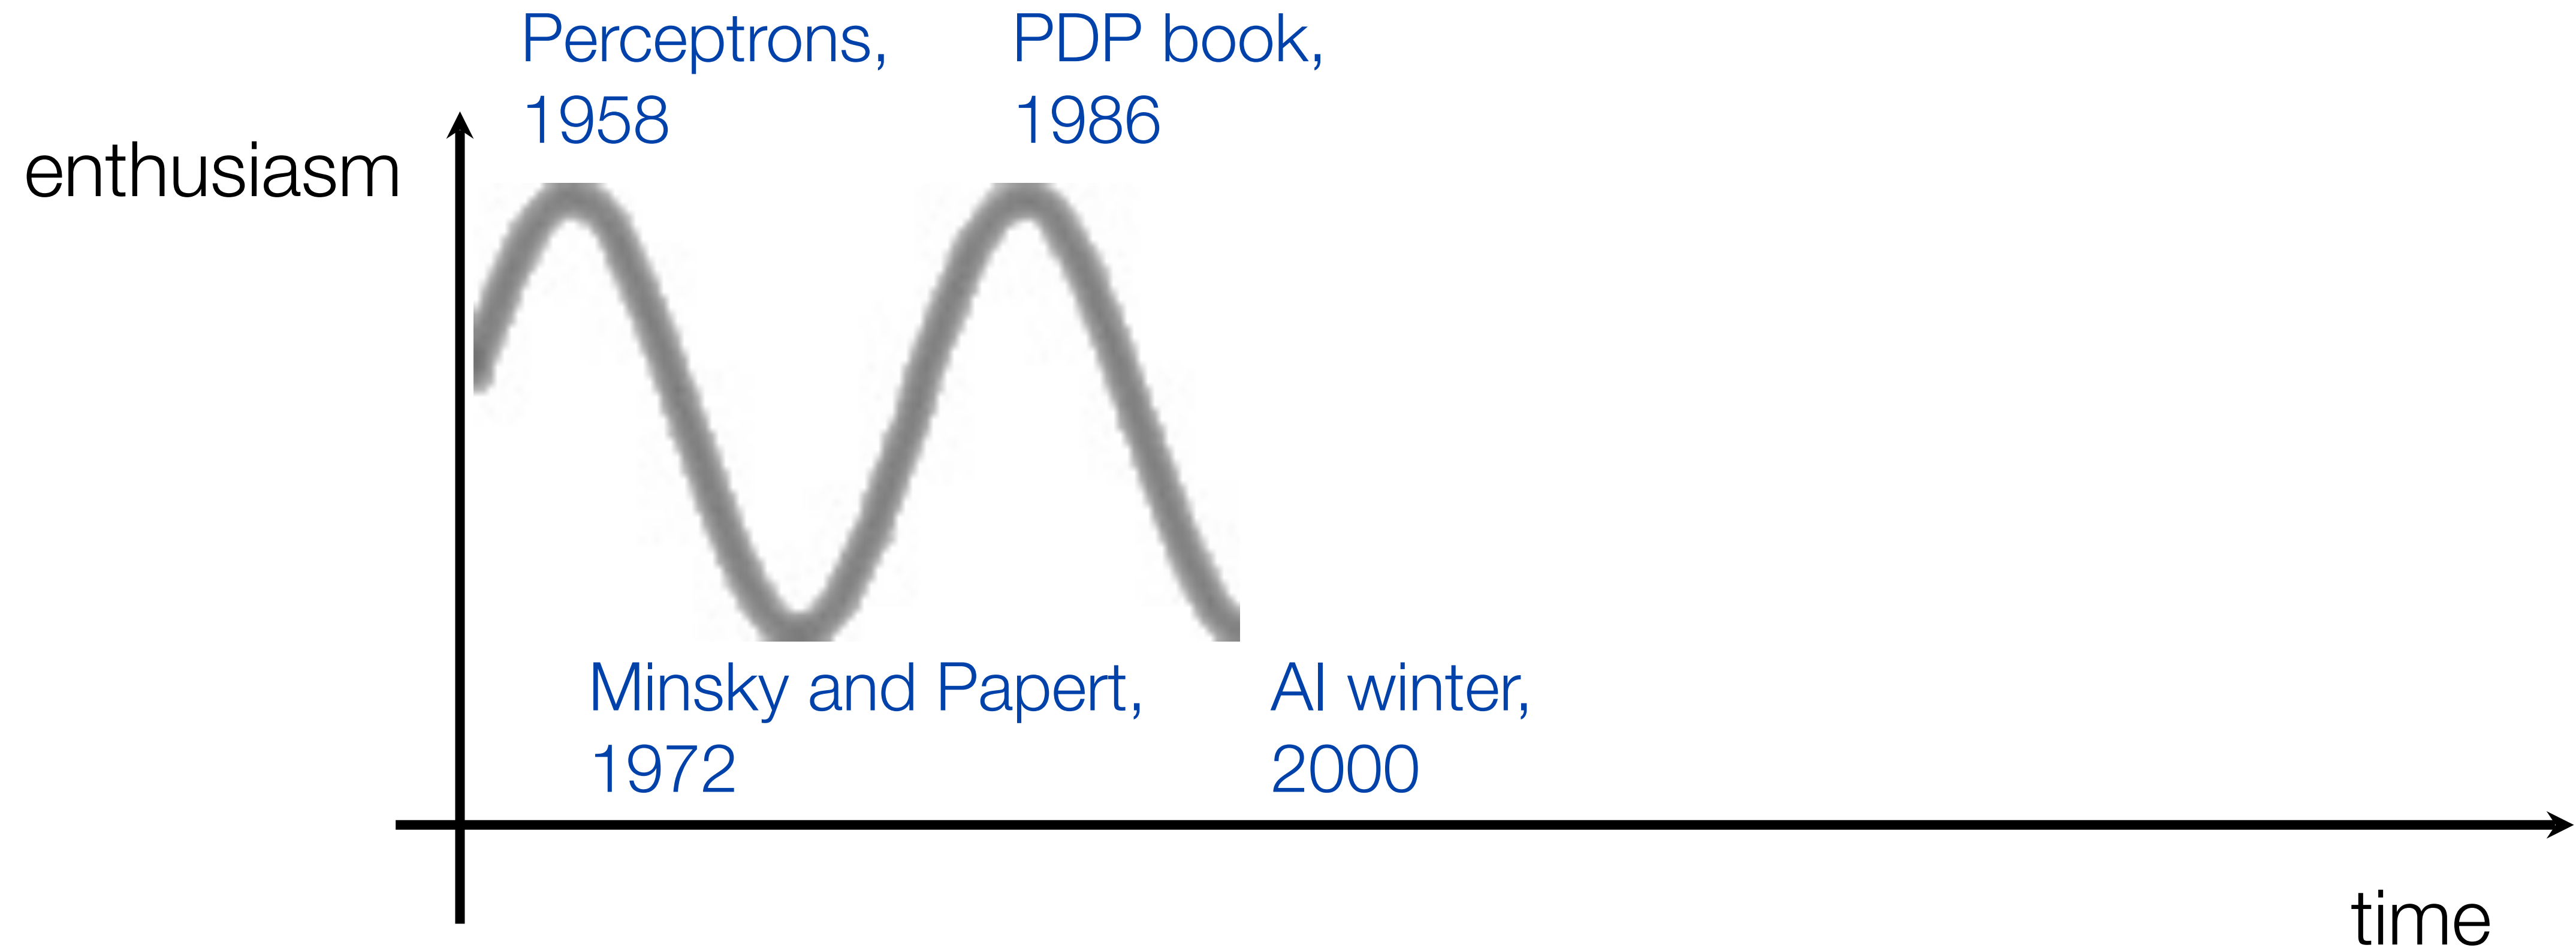


Krizhevsky, Sutskever, and Hinton, NeurIPS 2012

“Alexnet”

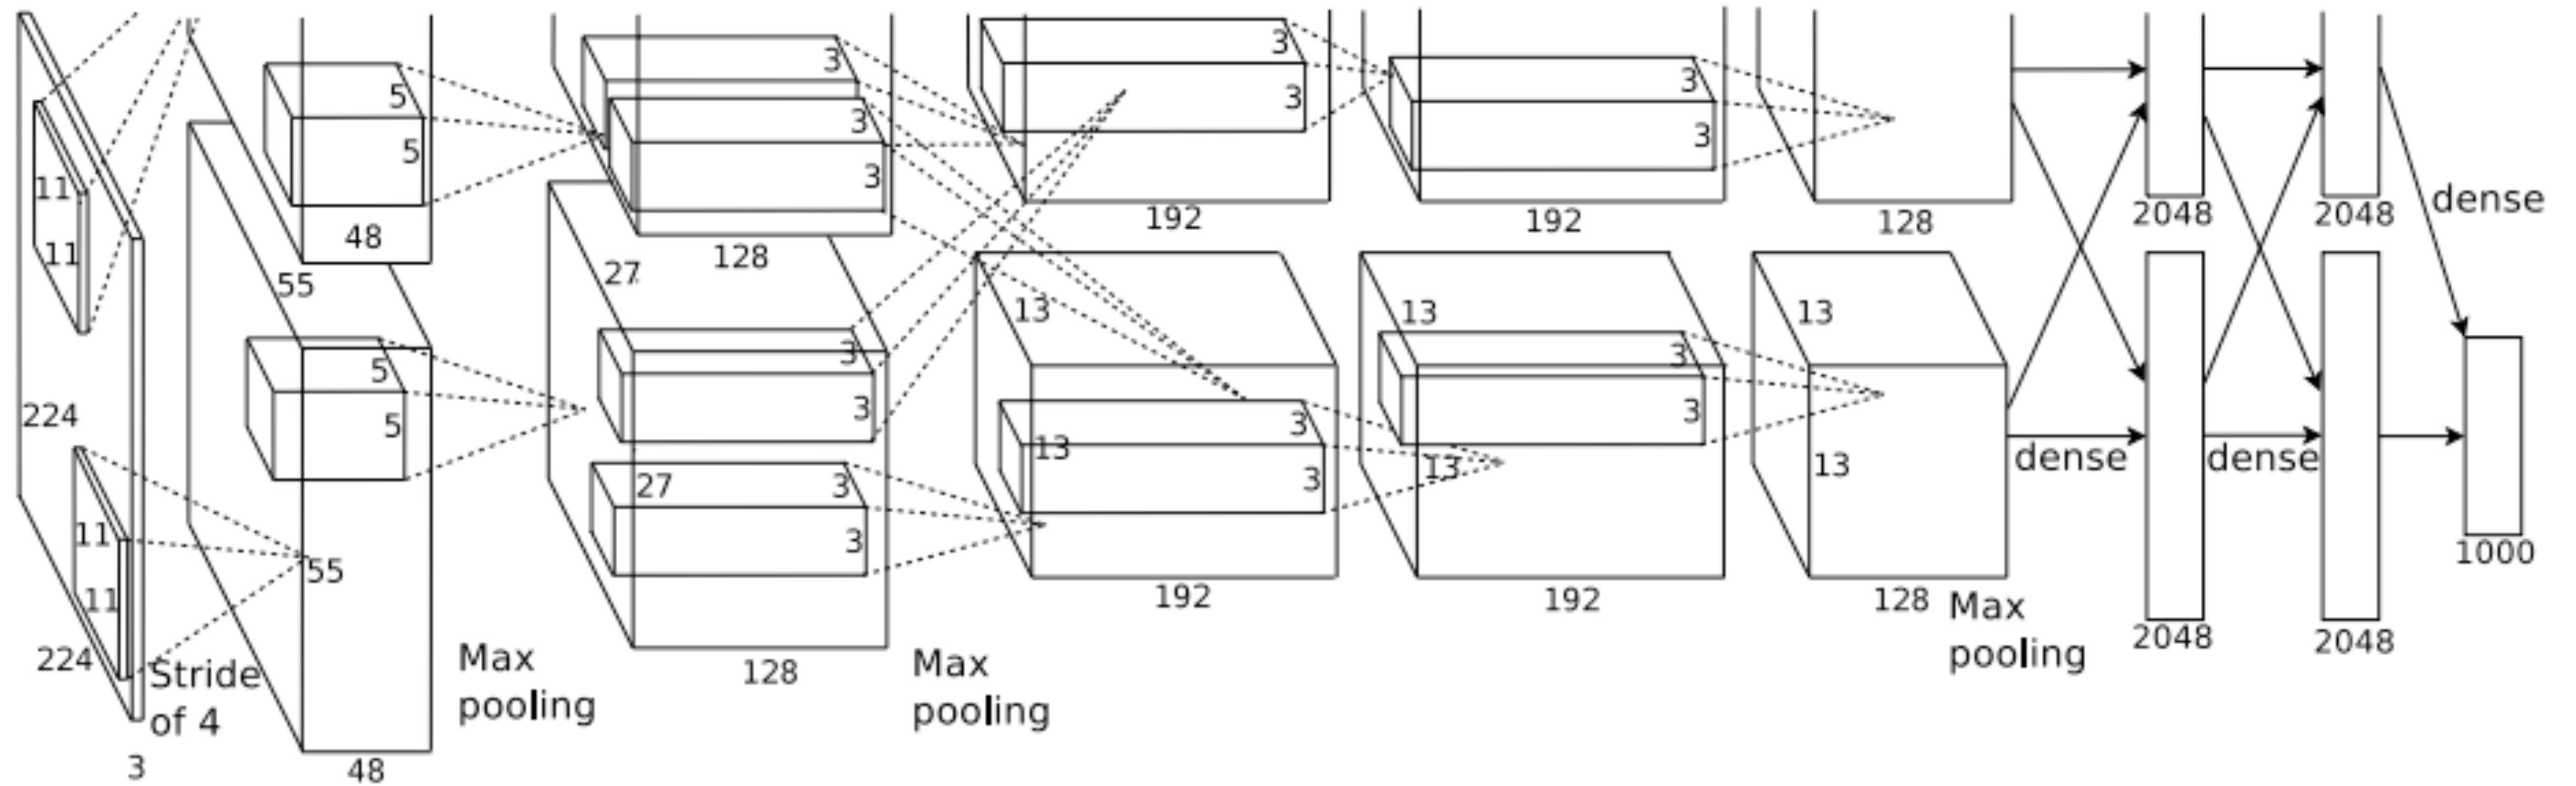


Krizhevsky, Sutskever, and Hinton, NeurIPS 2012

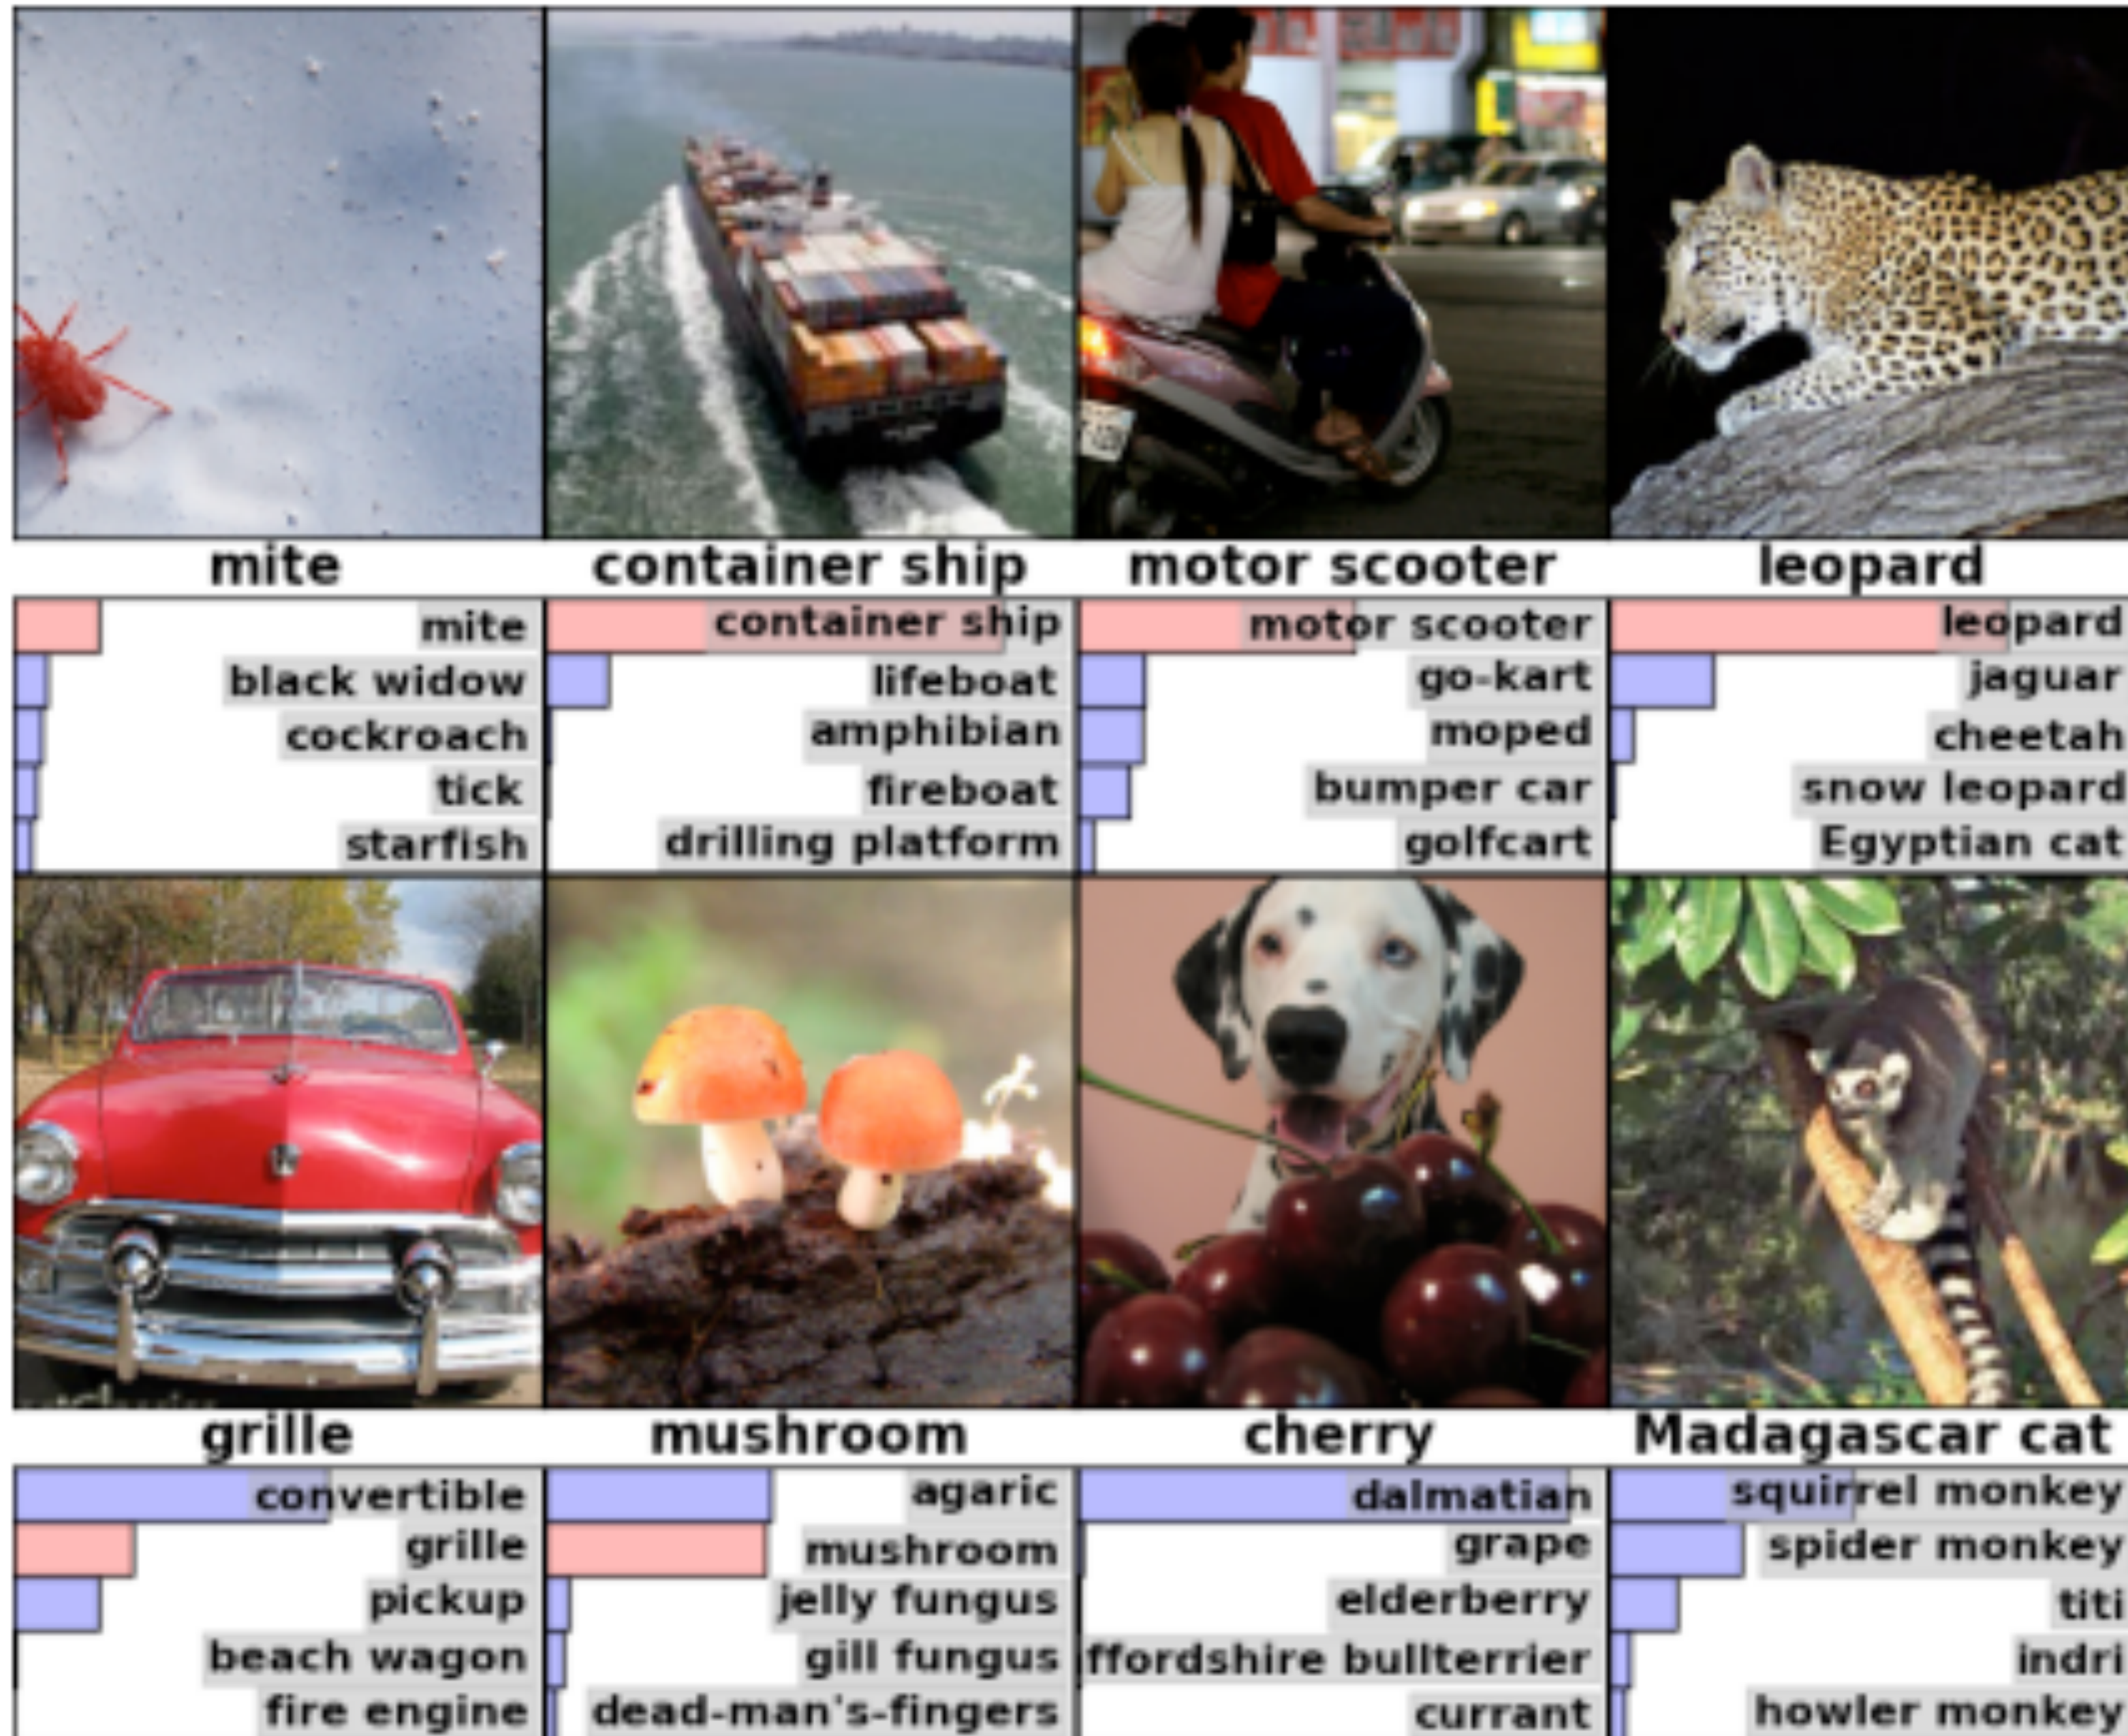




What comes next?

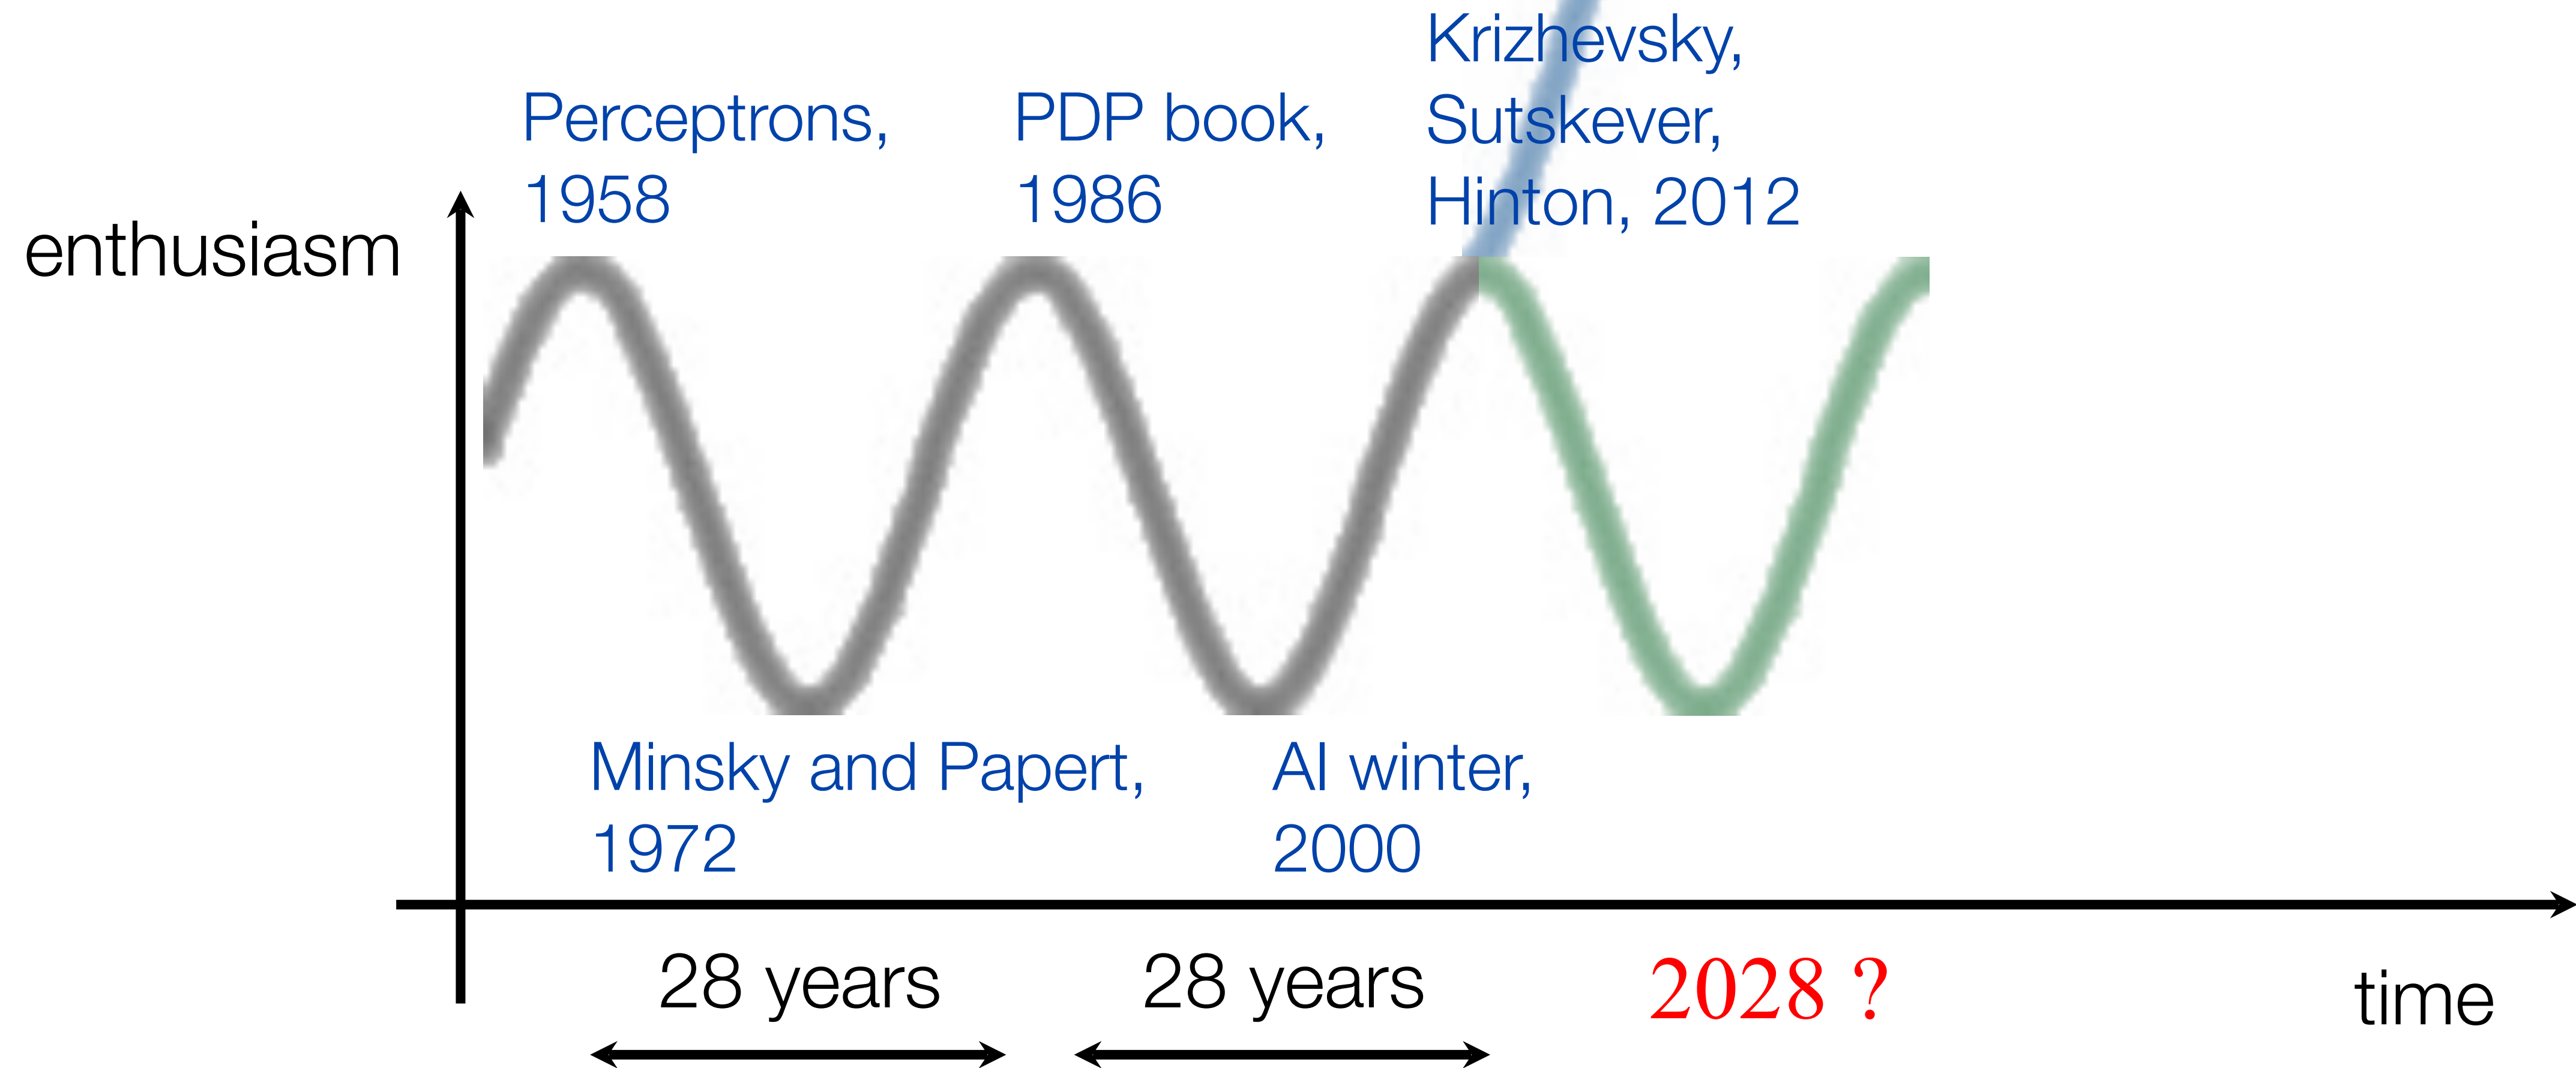


What comes next?

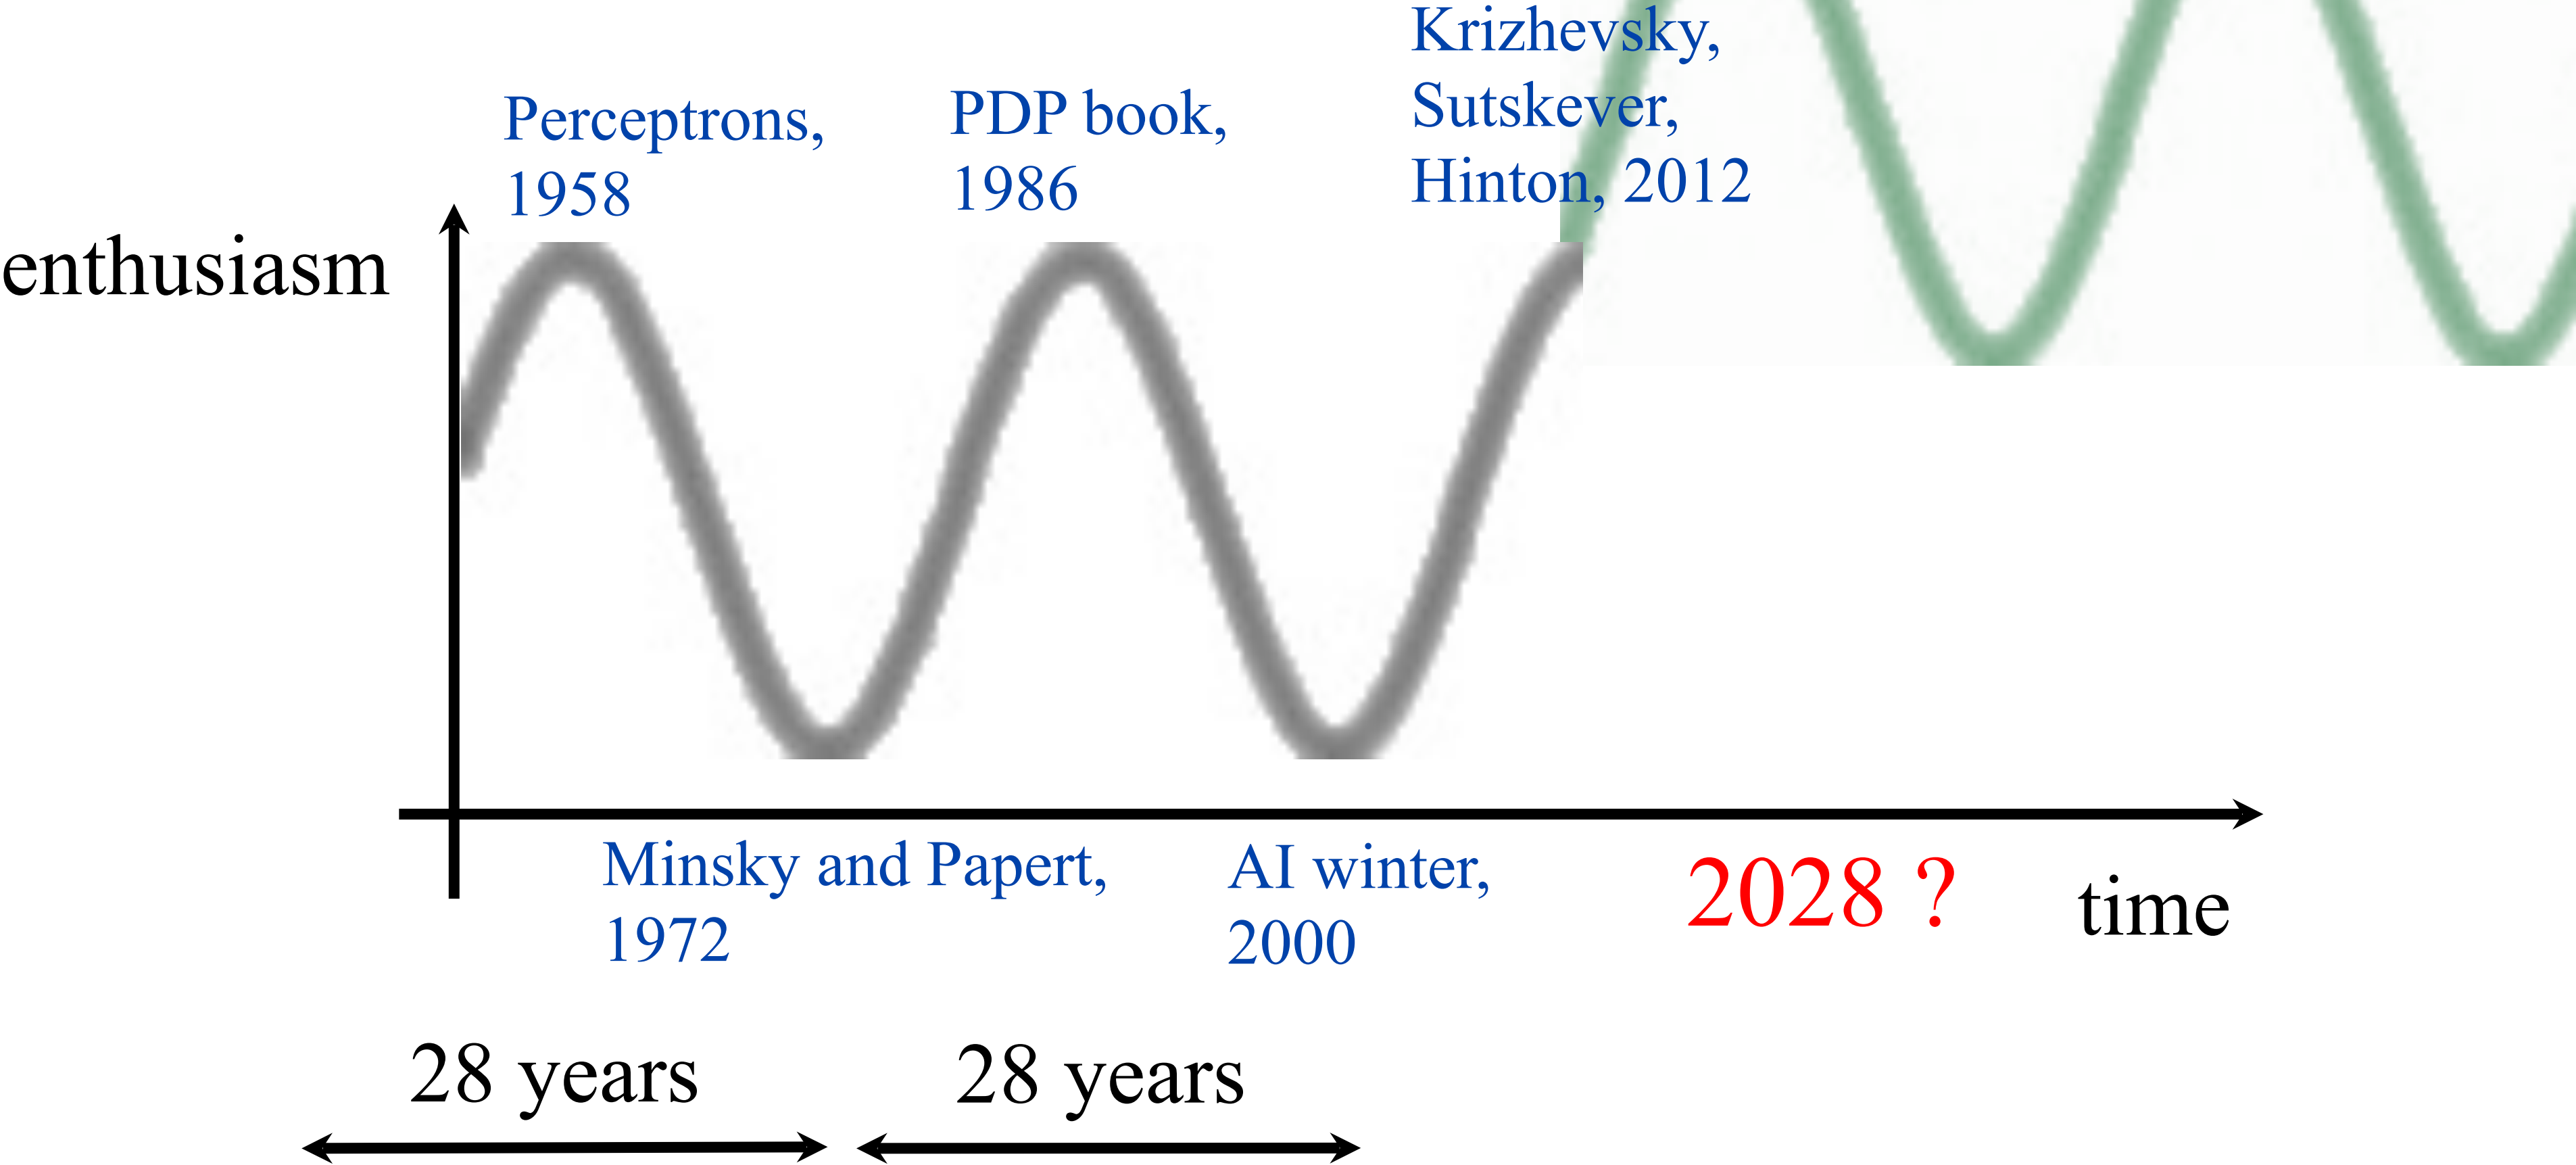


What is deep learning today?

- Autograd (pytorch, tensorflow)
- Billion+ data point datasets
- Parallel training on thousands of GPUs
- Billion+ parameter architectures
- Million+ dollar training costs
- Shockingly good results
- Massive isn't necessary - e.g. Stable Diffusion
- Open source community and modular reuse

Signposting for the rest of the lecture

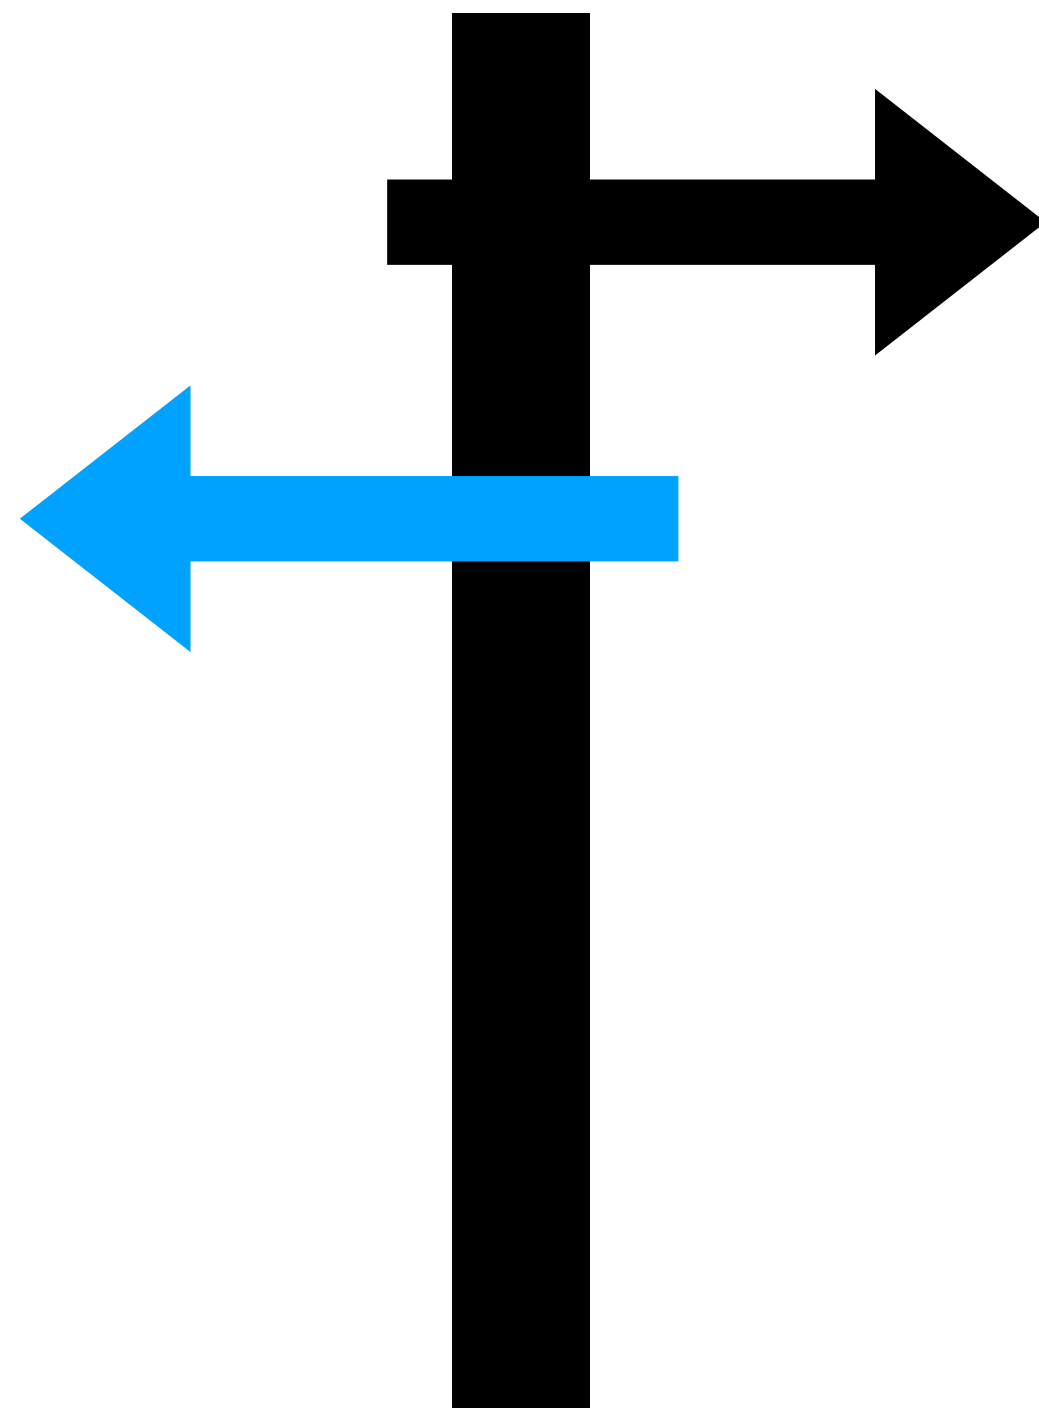


What we expect you to
have seen before

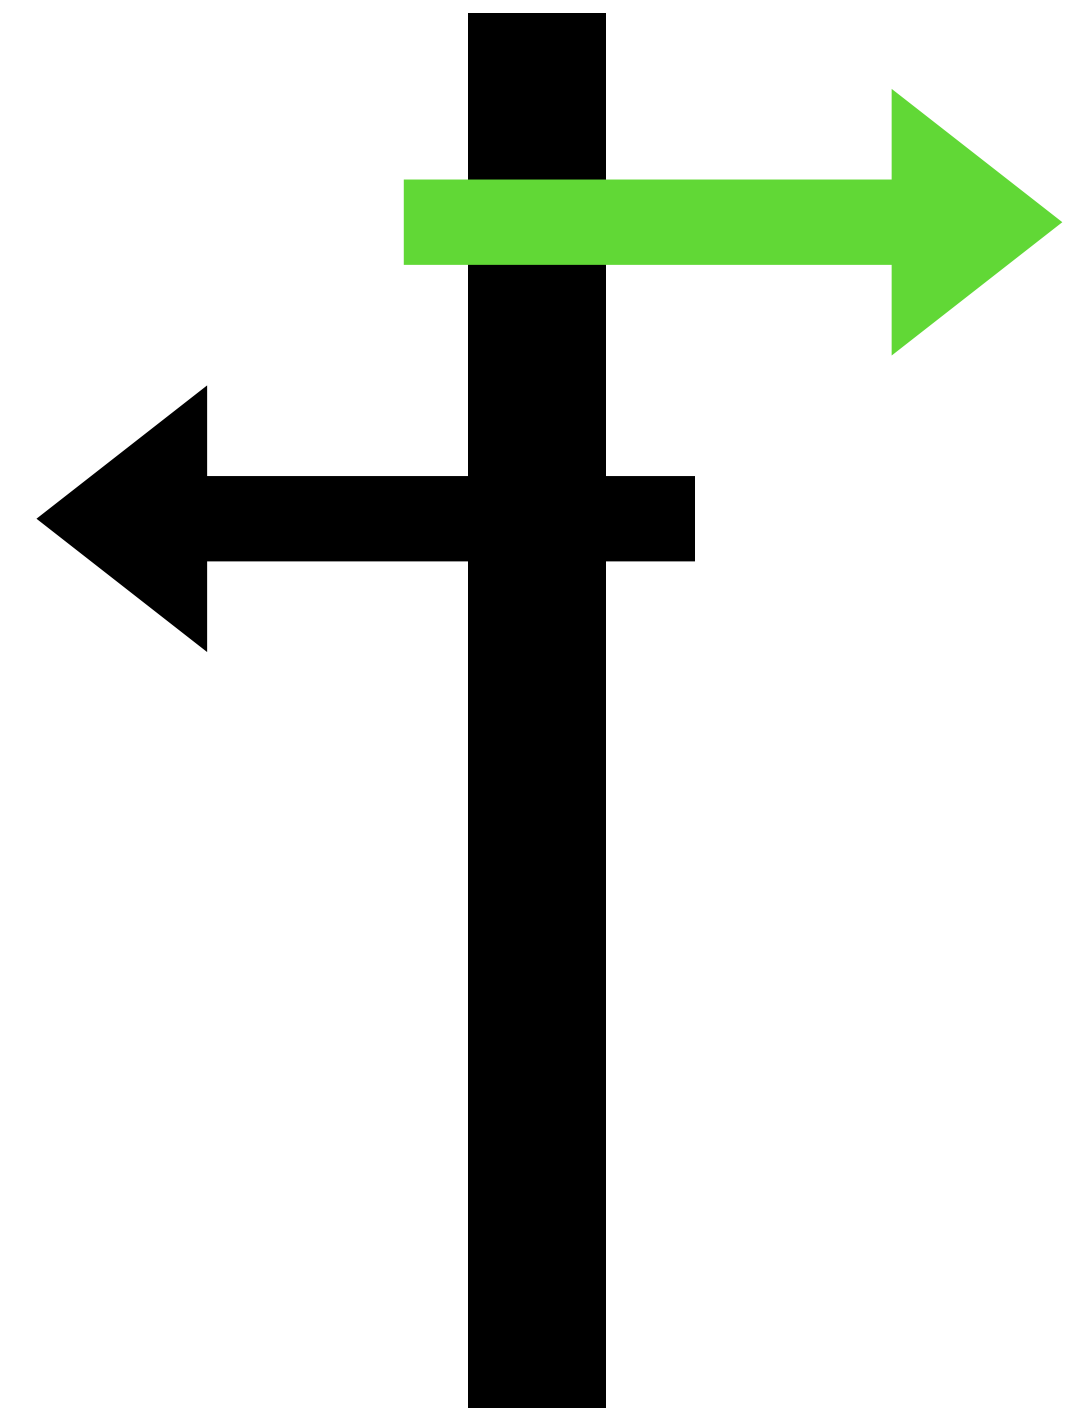

What we will cover in
this class

What we expect you to have seen before


- Gradient descent

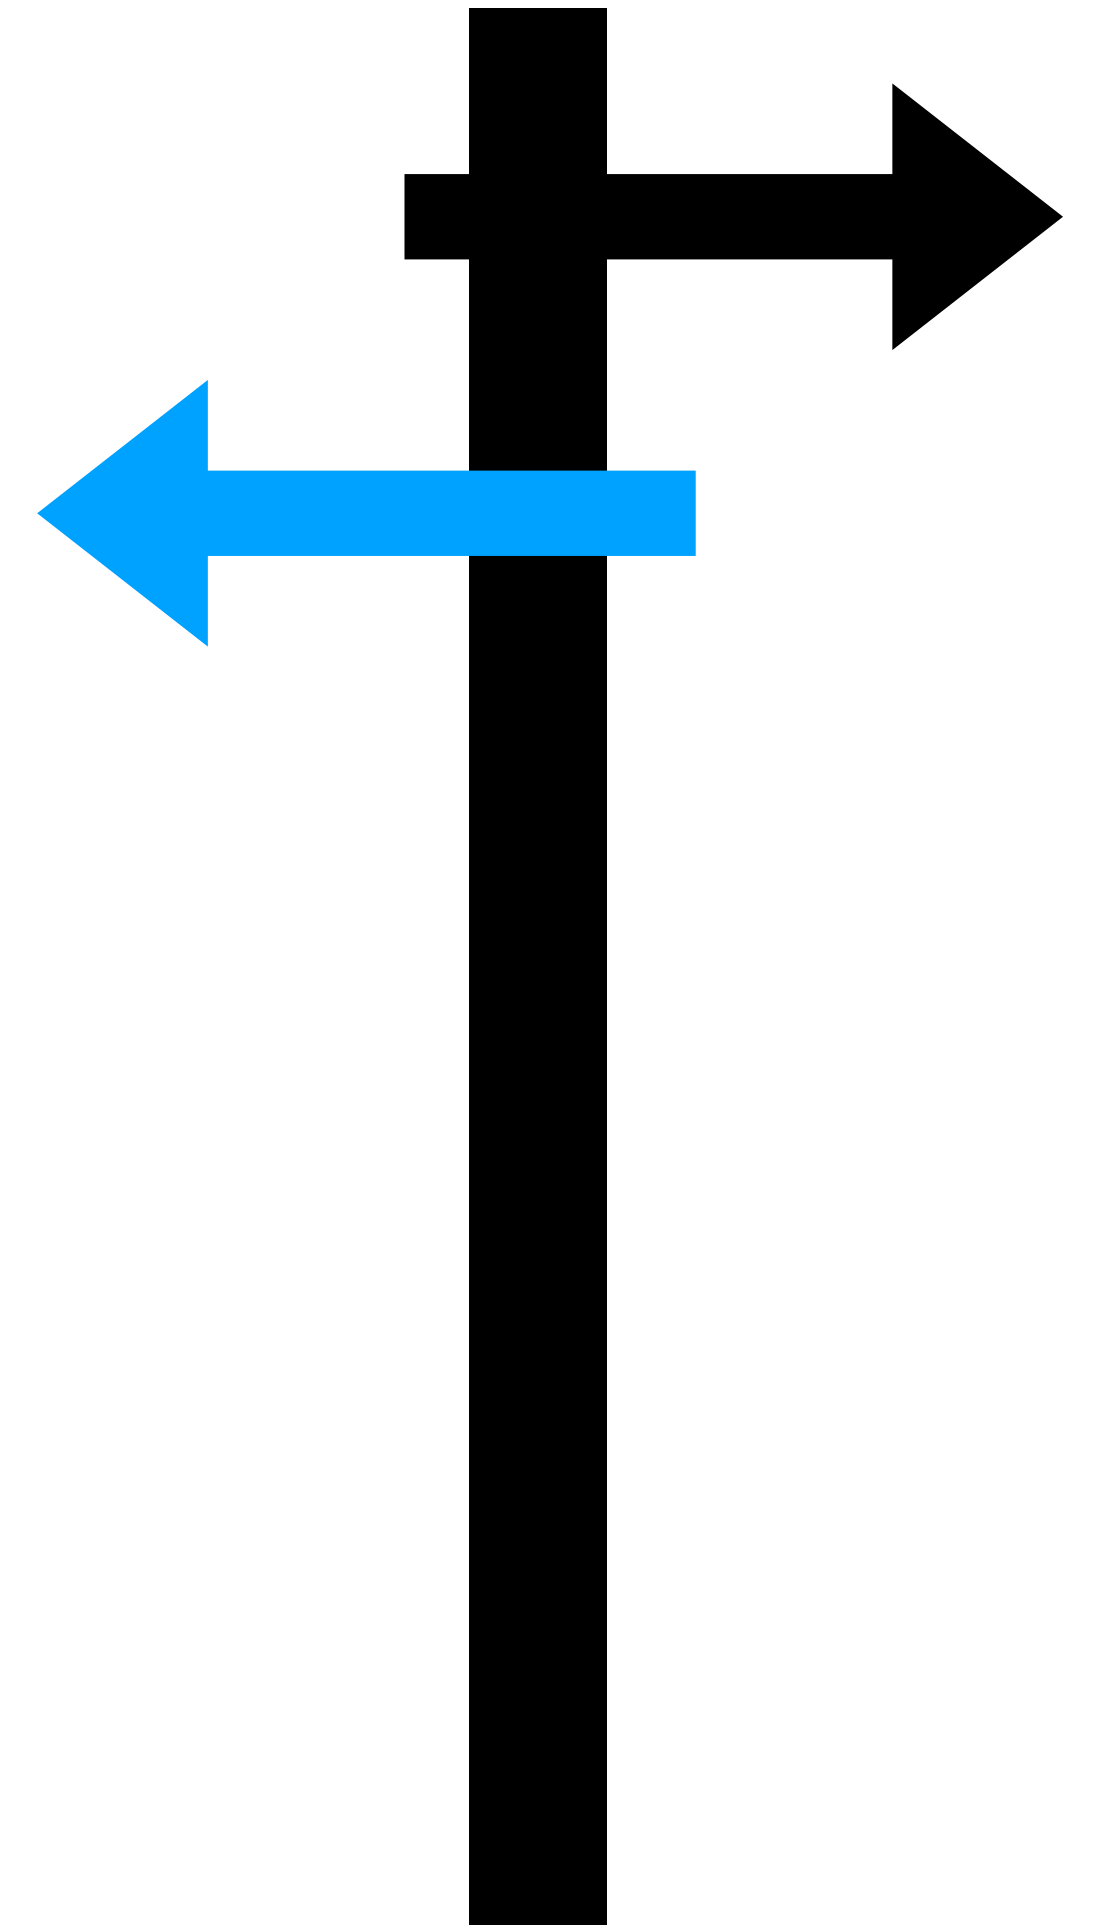

Gradient descent

$$\theta^* = \arg \min_{\theta} \underbrace{\sum_{i=1}^N \mathcal{L}(f_{\theta}(\mathbf{x}^{(i)}), \mathbf{y}^{(i)})}_{J(\theta)}$$


Gradient descent

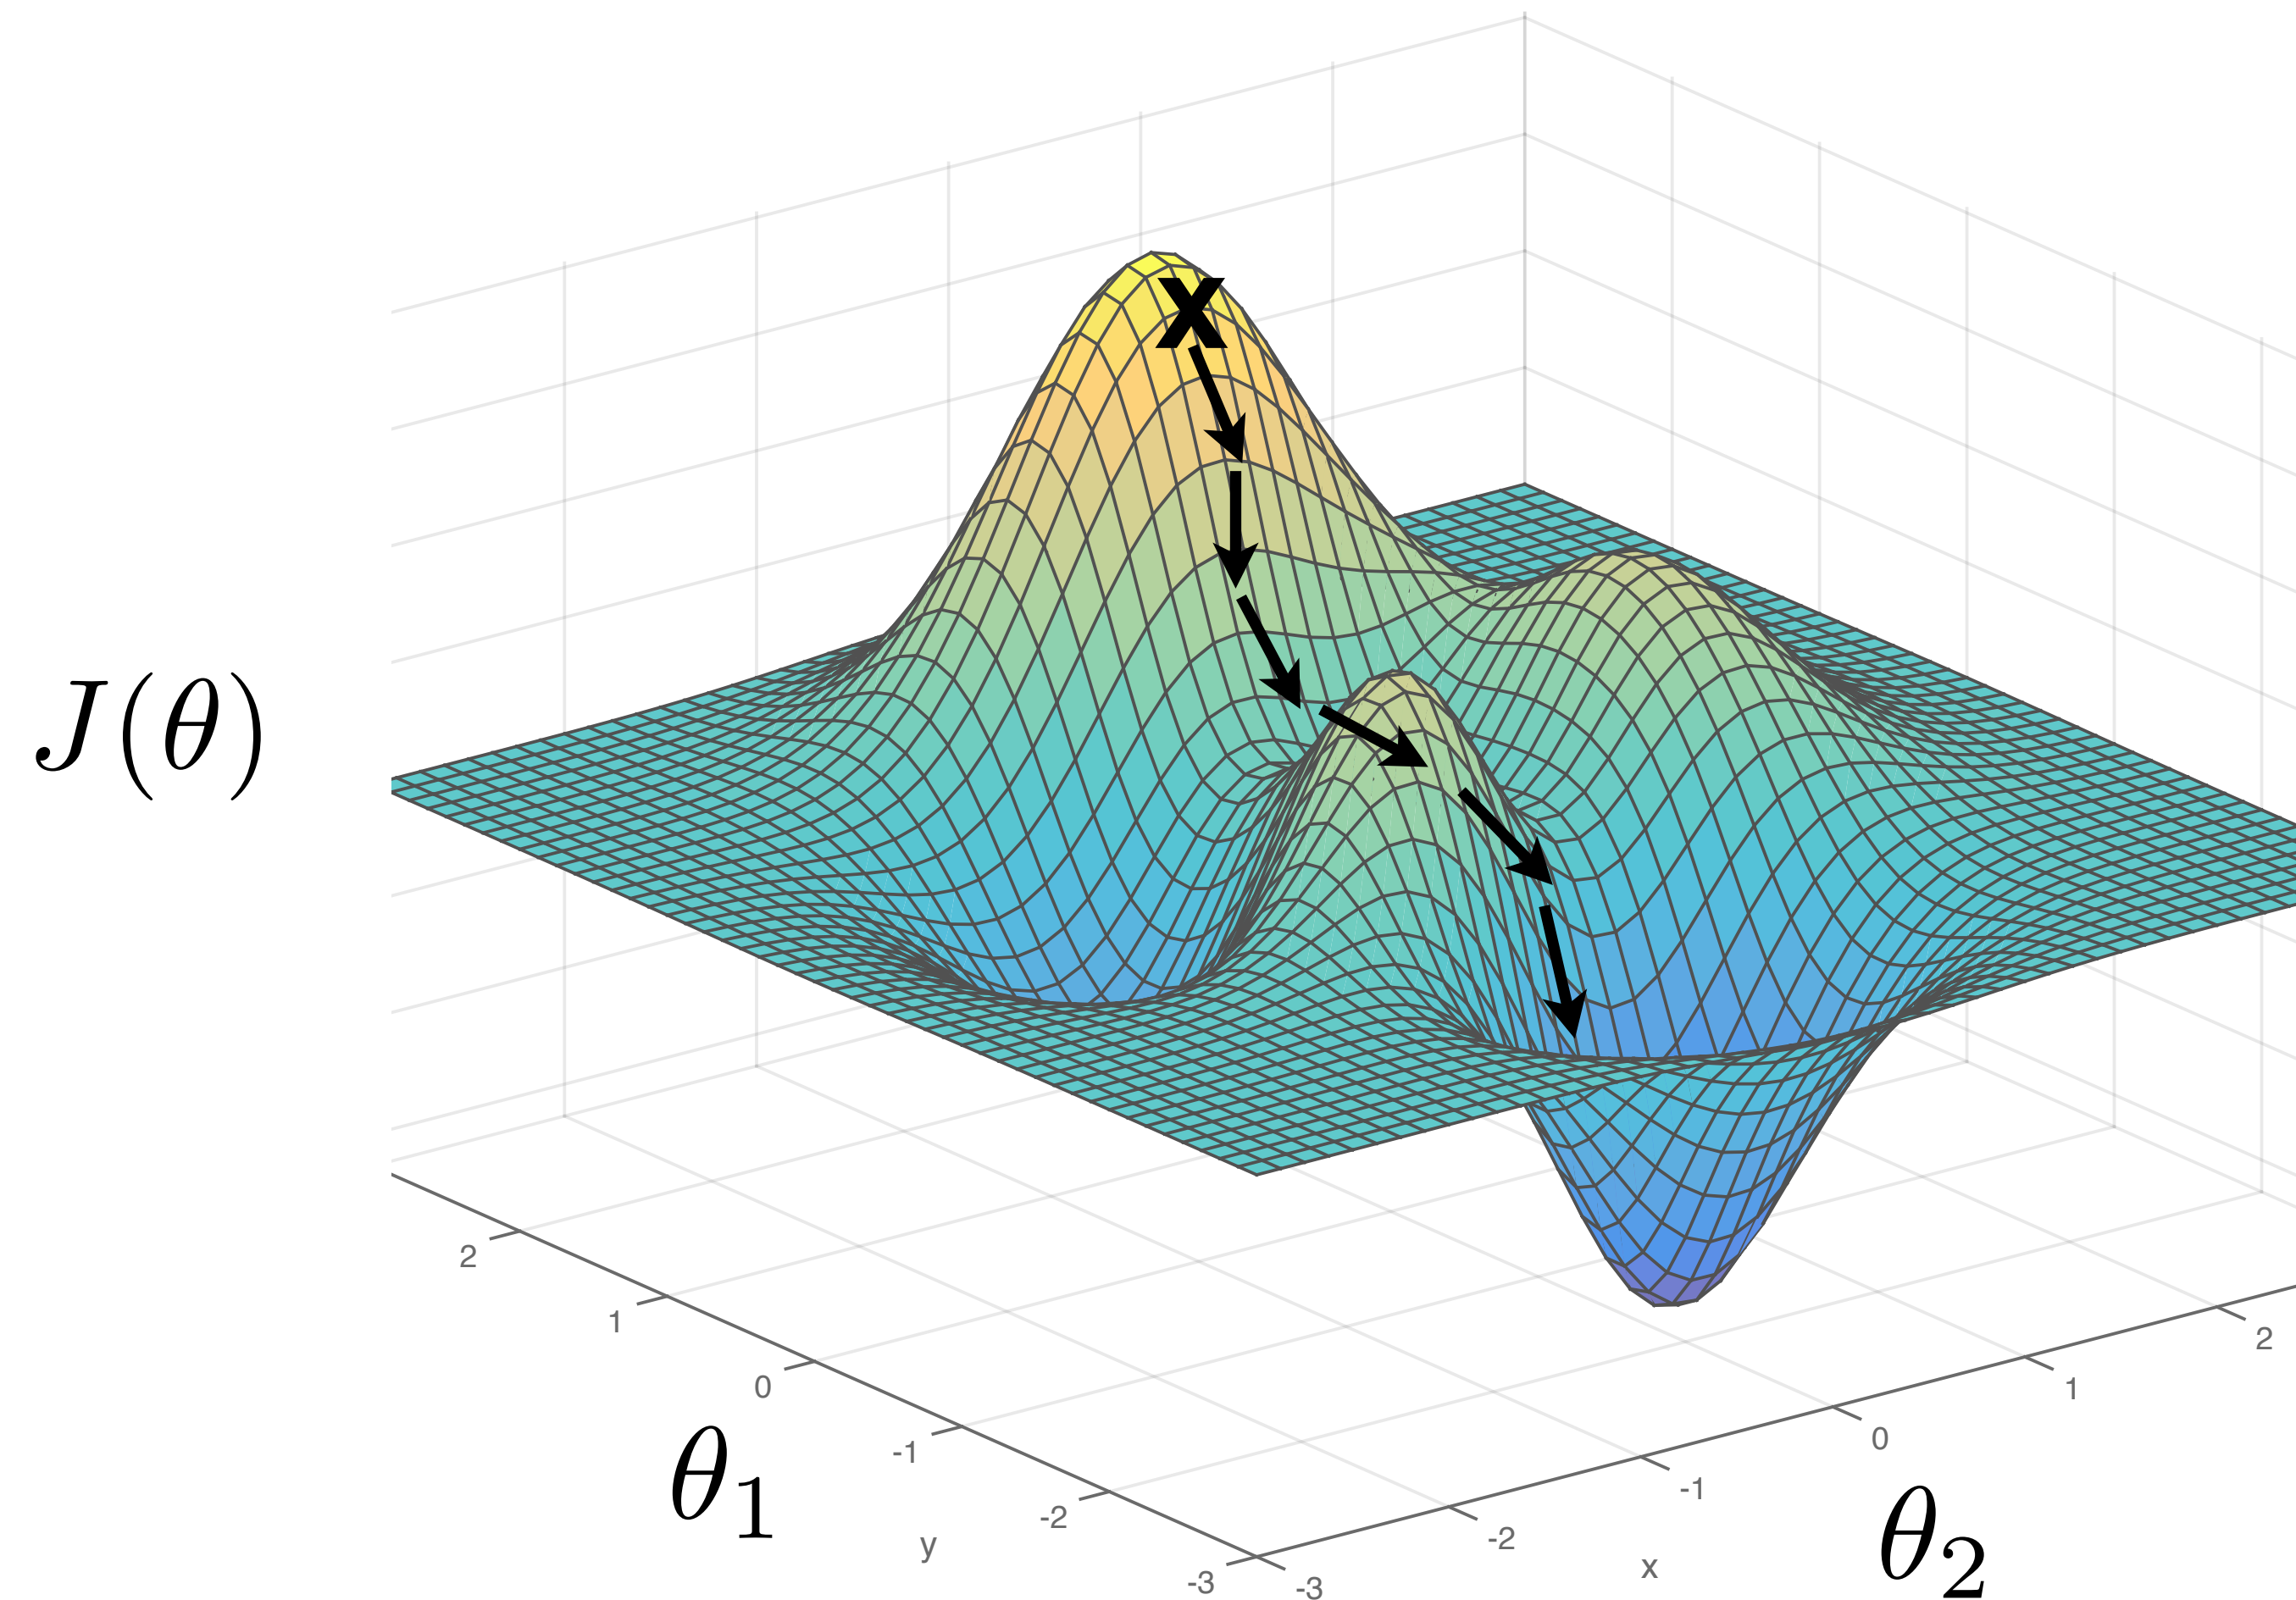

$$\theta^* = \arg \min_{\theta} J(\theta)$$

What we'll cover in this class

- Backprop and differentiable programming

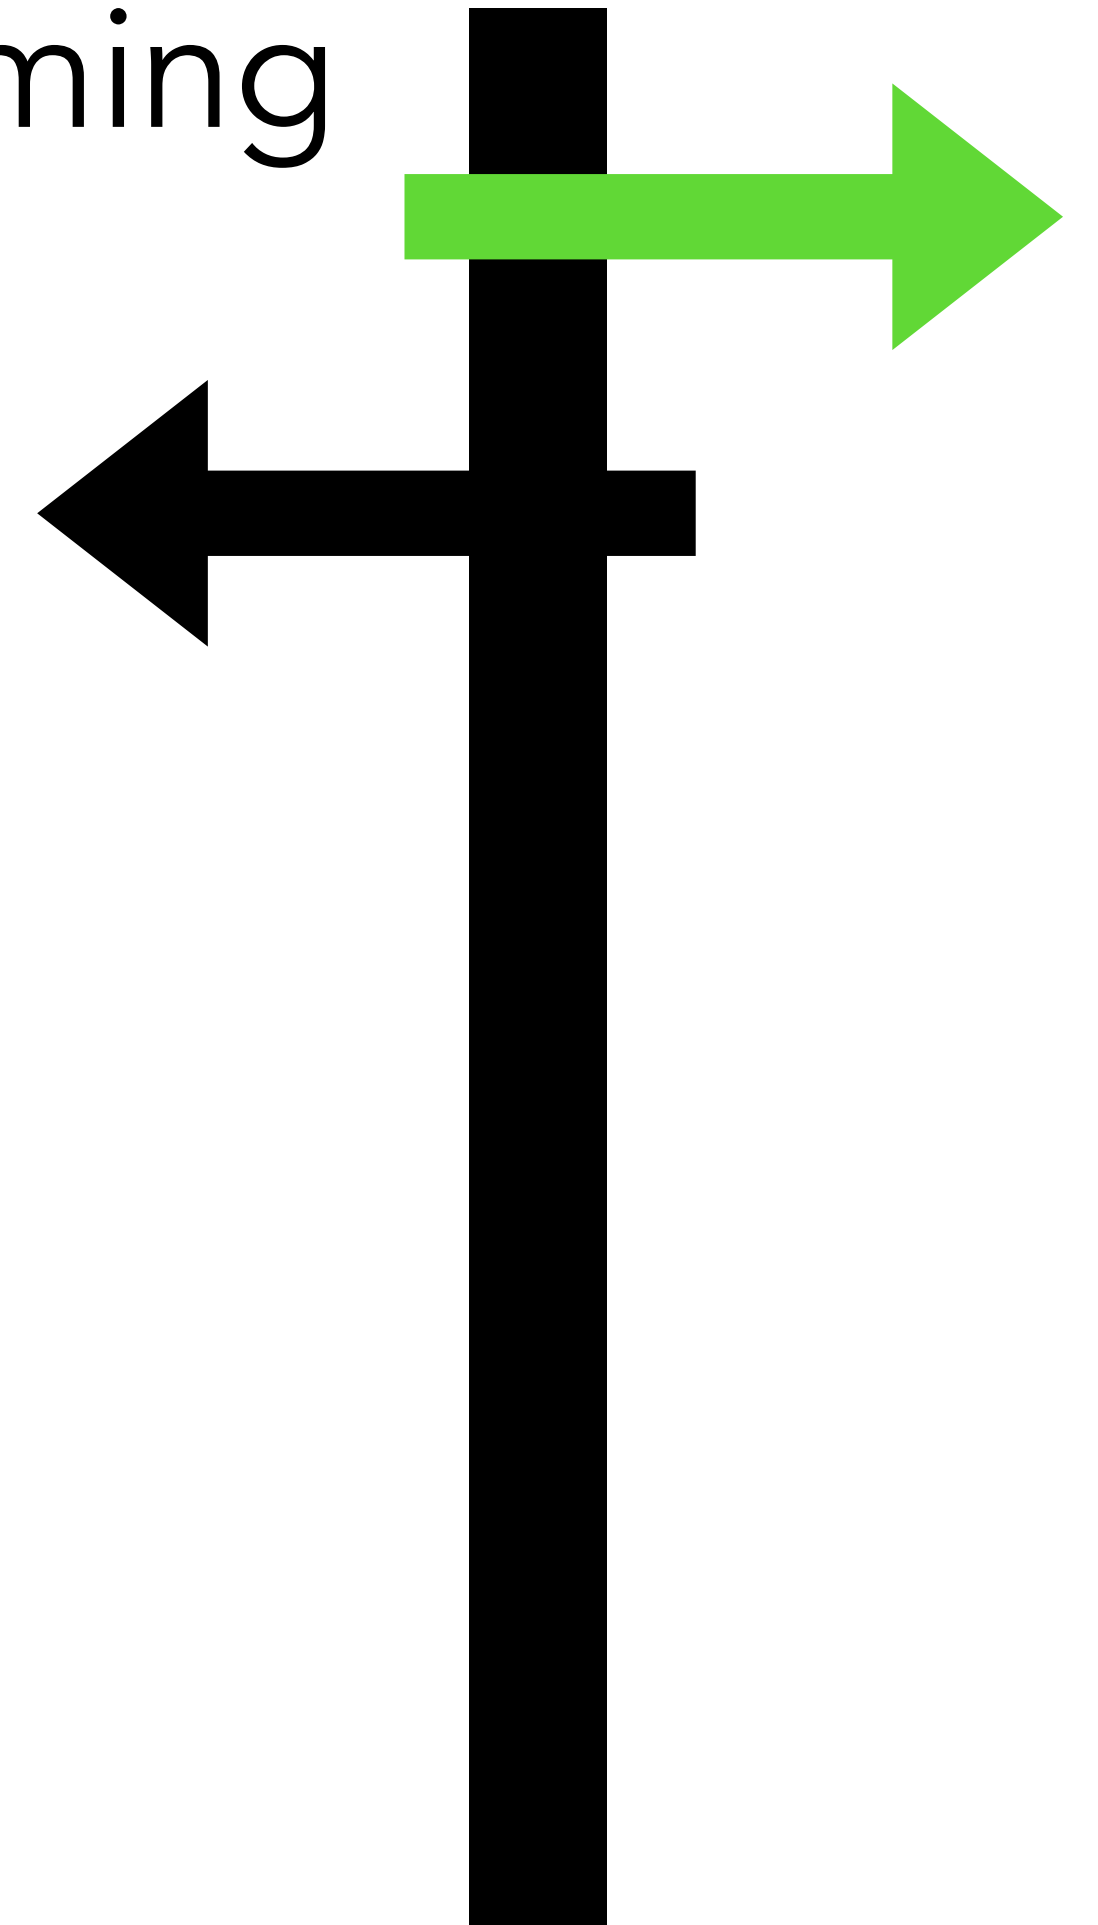

Gradient descent

$$\theta^* = \arg \min_{\theta} \sum_{i=1}^N \mathcal{L}(f_{\theta}(\mathbf{x}^{(i)}), \mathbf{y}^{(i)})$$


Lecture 2: Backprop and Differentiable Programming

$$\theta^{t+1} = \theta^t - \eta_t \left. \frac{\partial \mathcal{L}}{\partial \theta} \right|_{\theta=\theta^t}$$

learning rate


What we expect you to have seen before

- Gradient descent
- MLPs, Nonlinearities (ReLu)

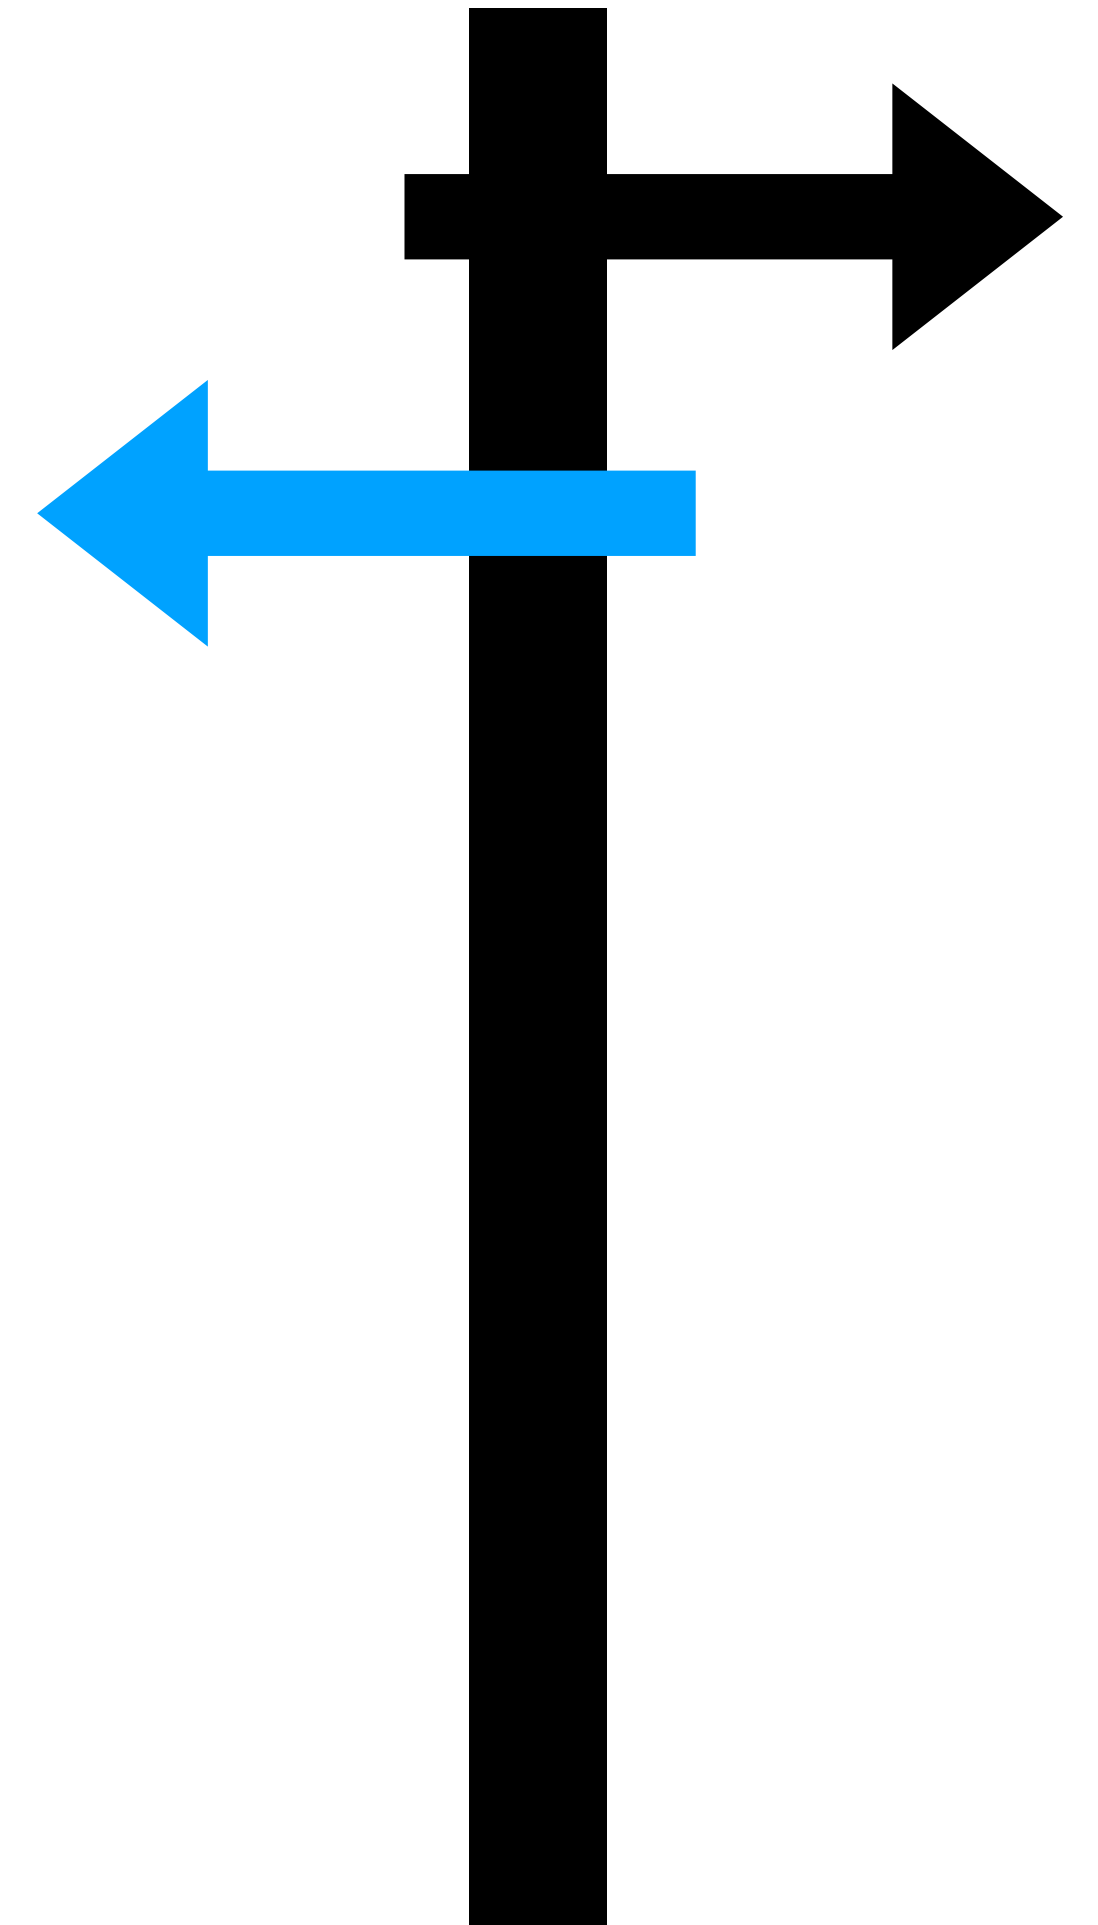


Computation in a neural net

Input
representation




Output
representation



Computation in a neural net


Linear layer

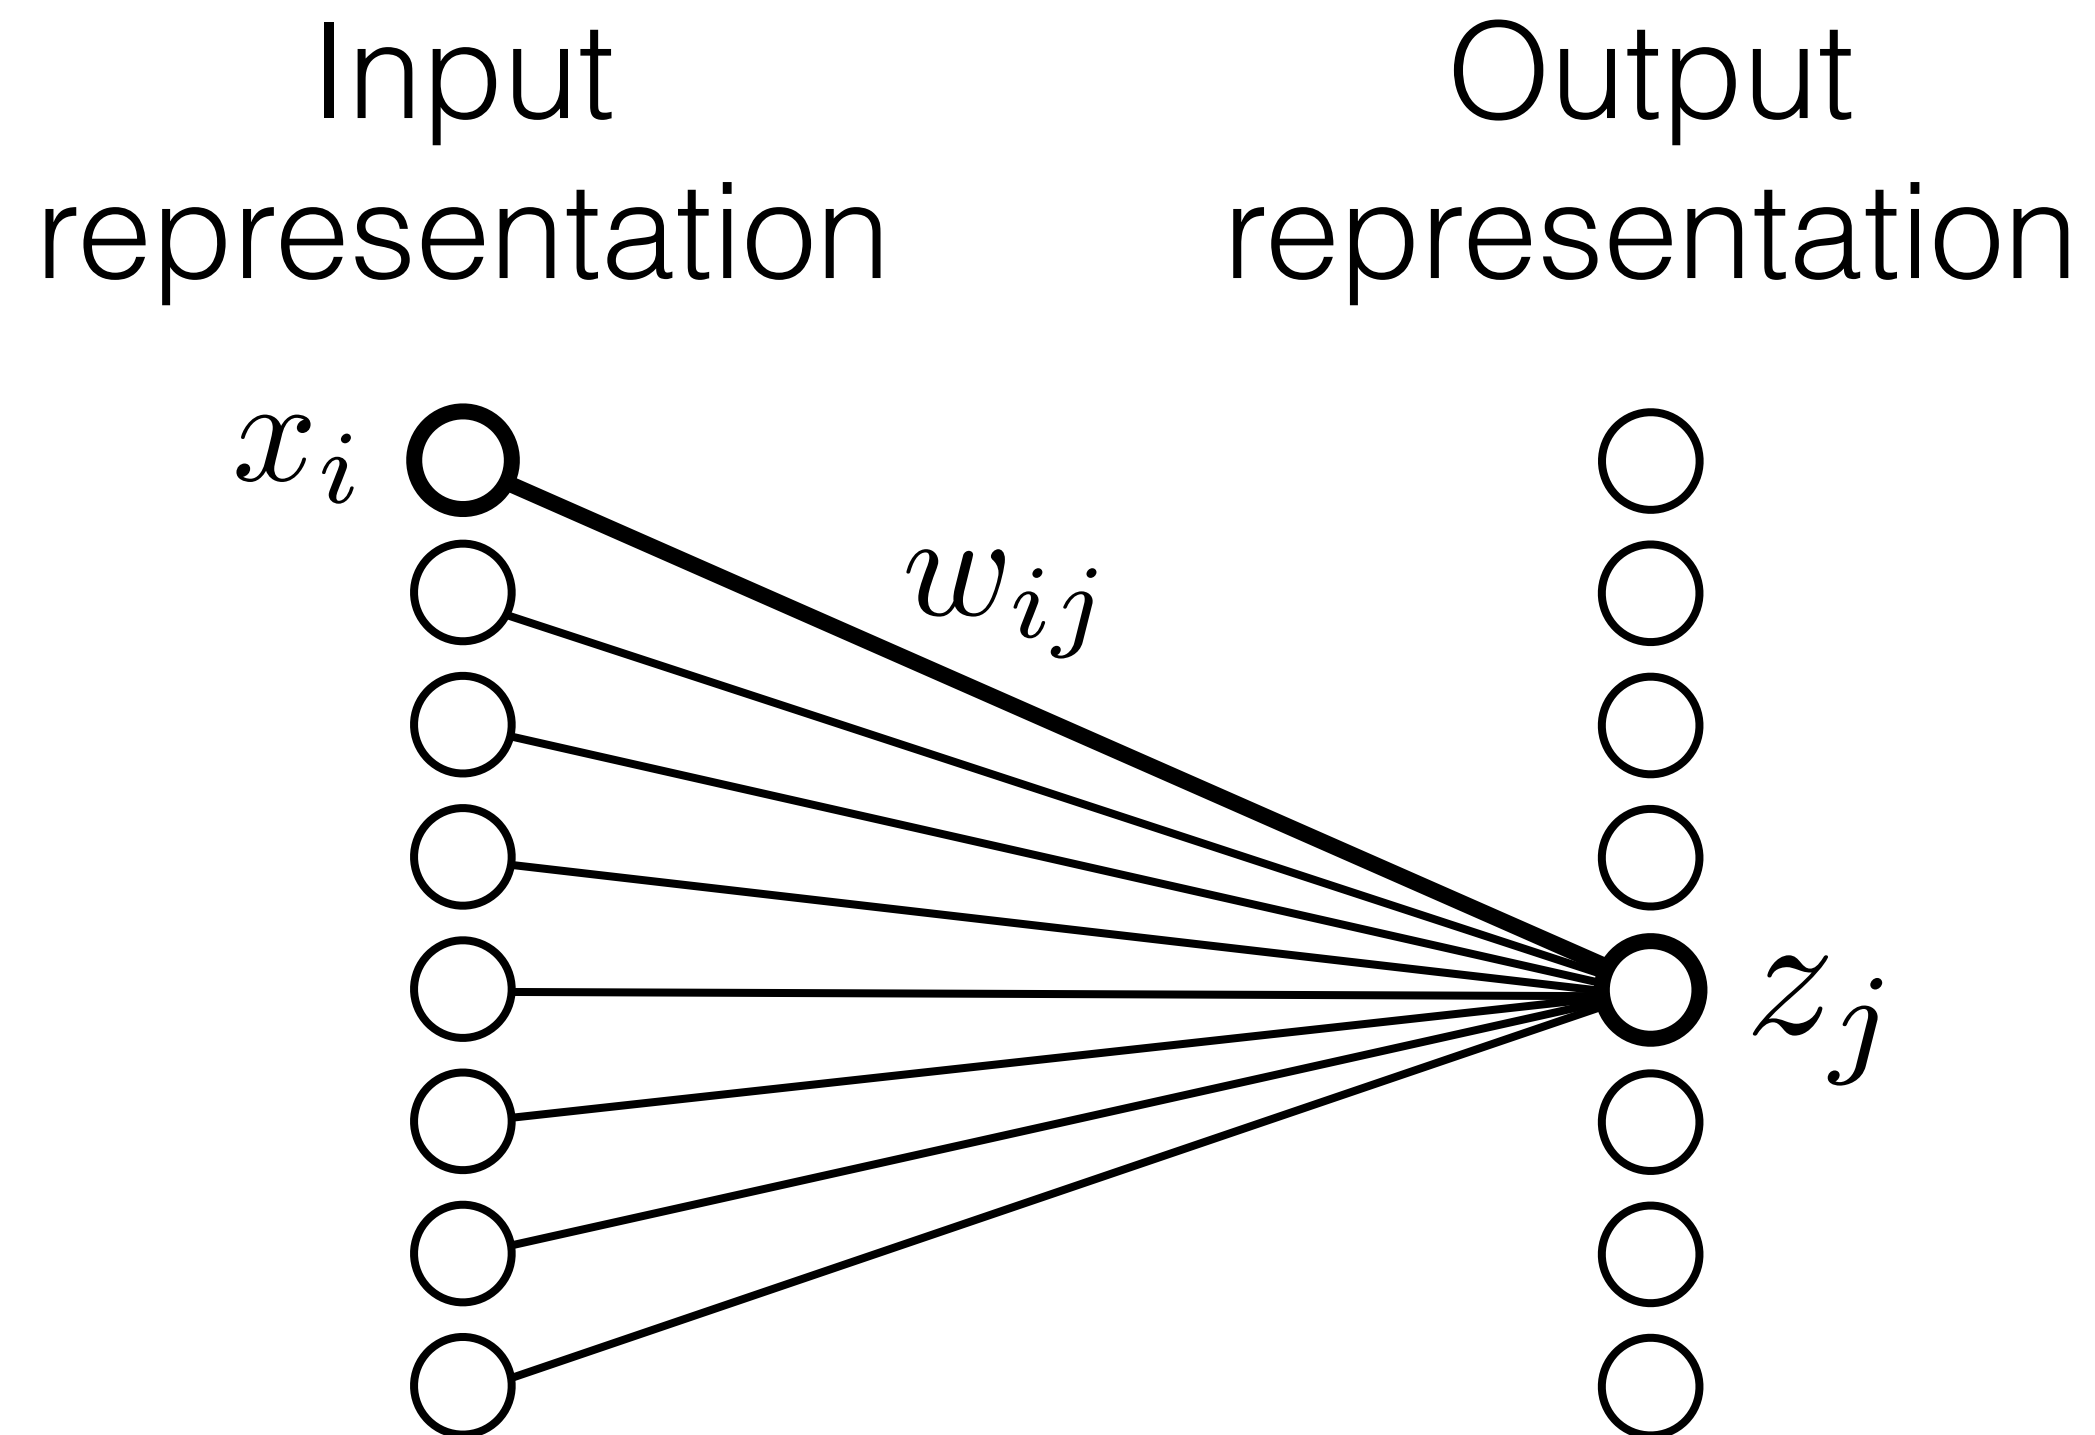

$$z_j = \sum_i w_{ij} x_i$$

Computation in a neural net

Linear layer

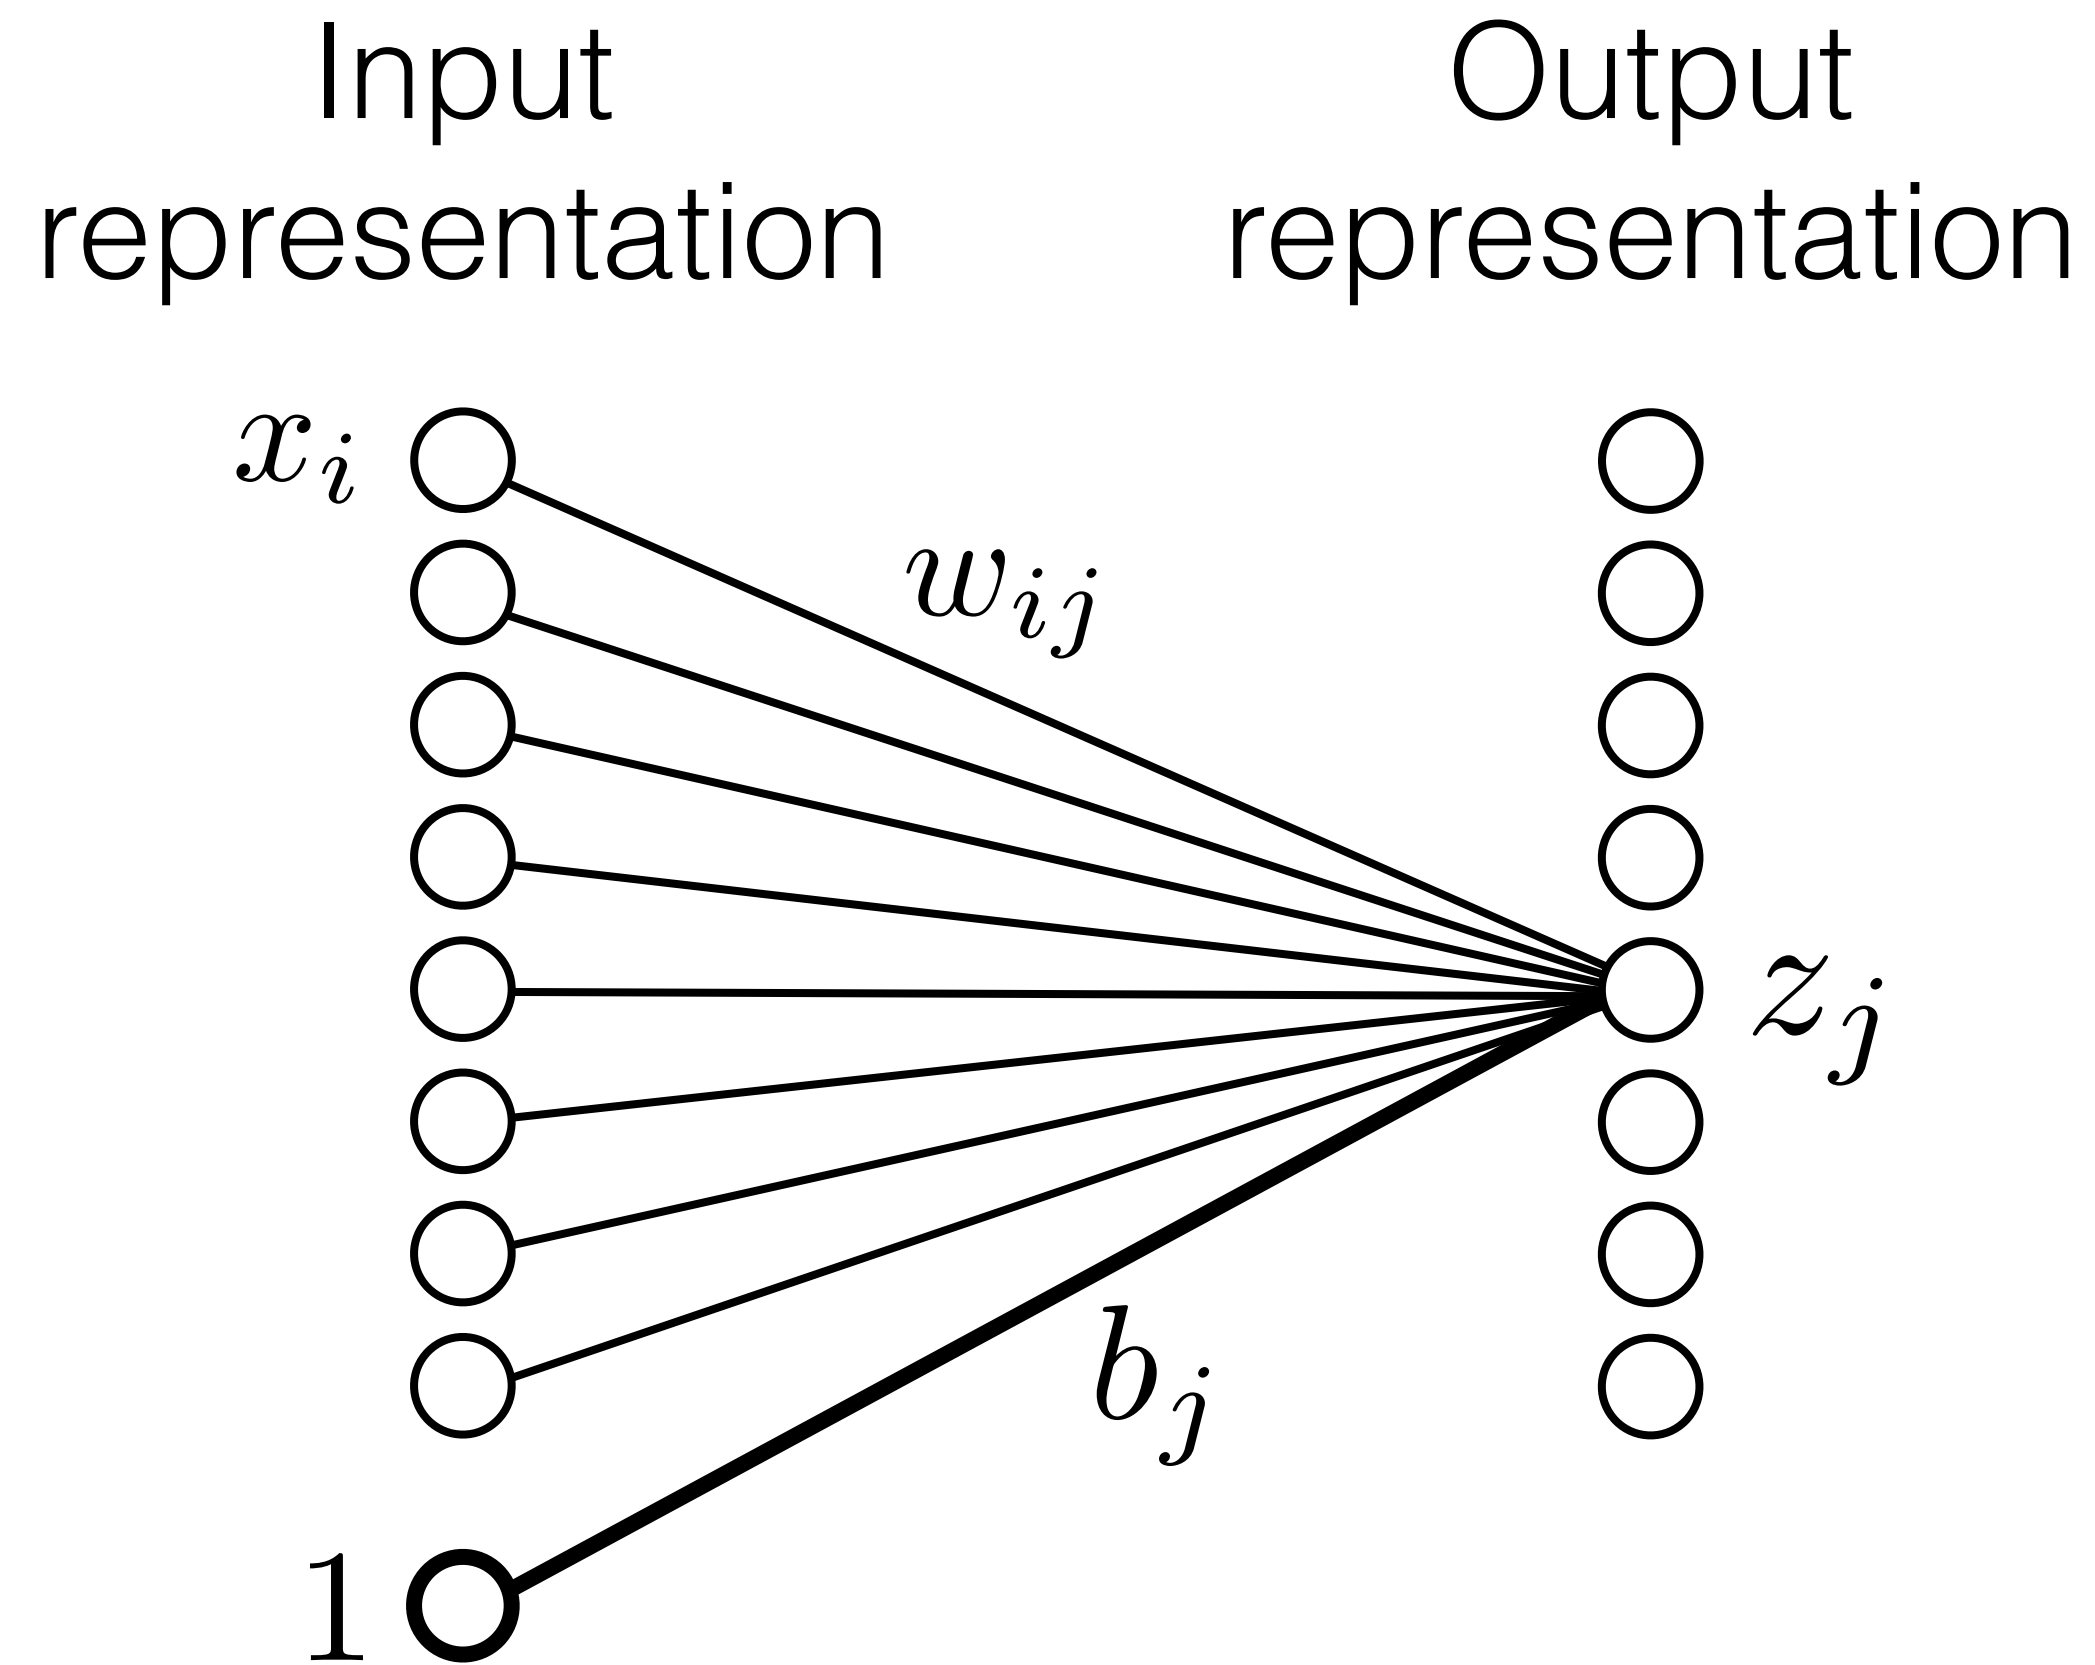


$$z_j = \sum_i w_{ij} x_i + b_j$$

weights

bias

Computation in a neural net

Linear layer

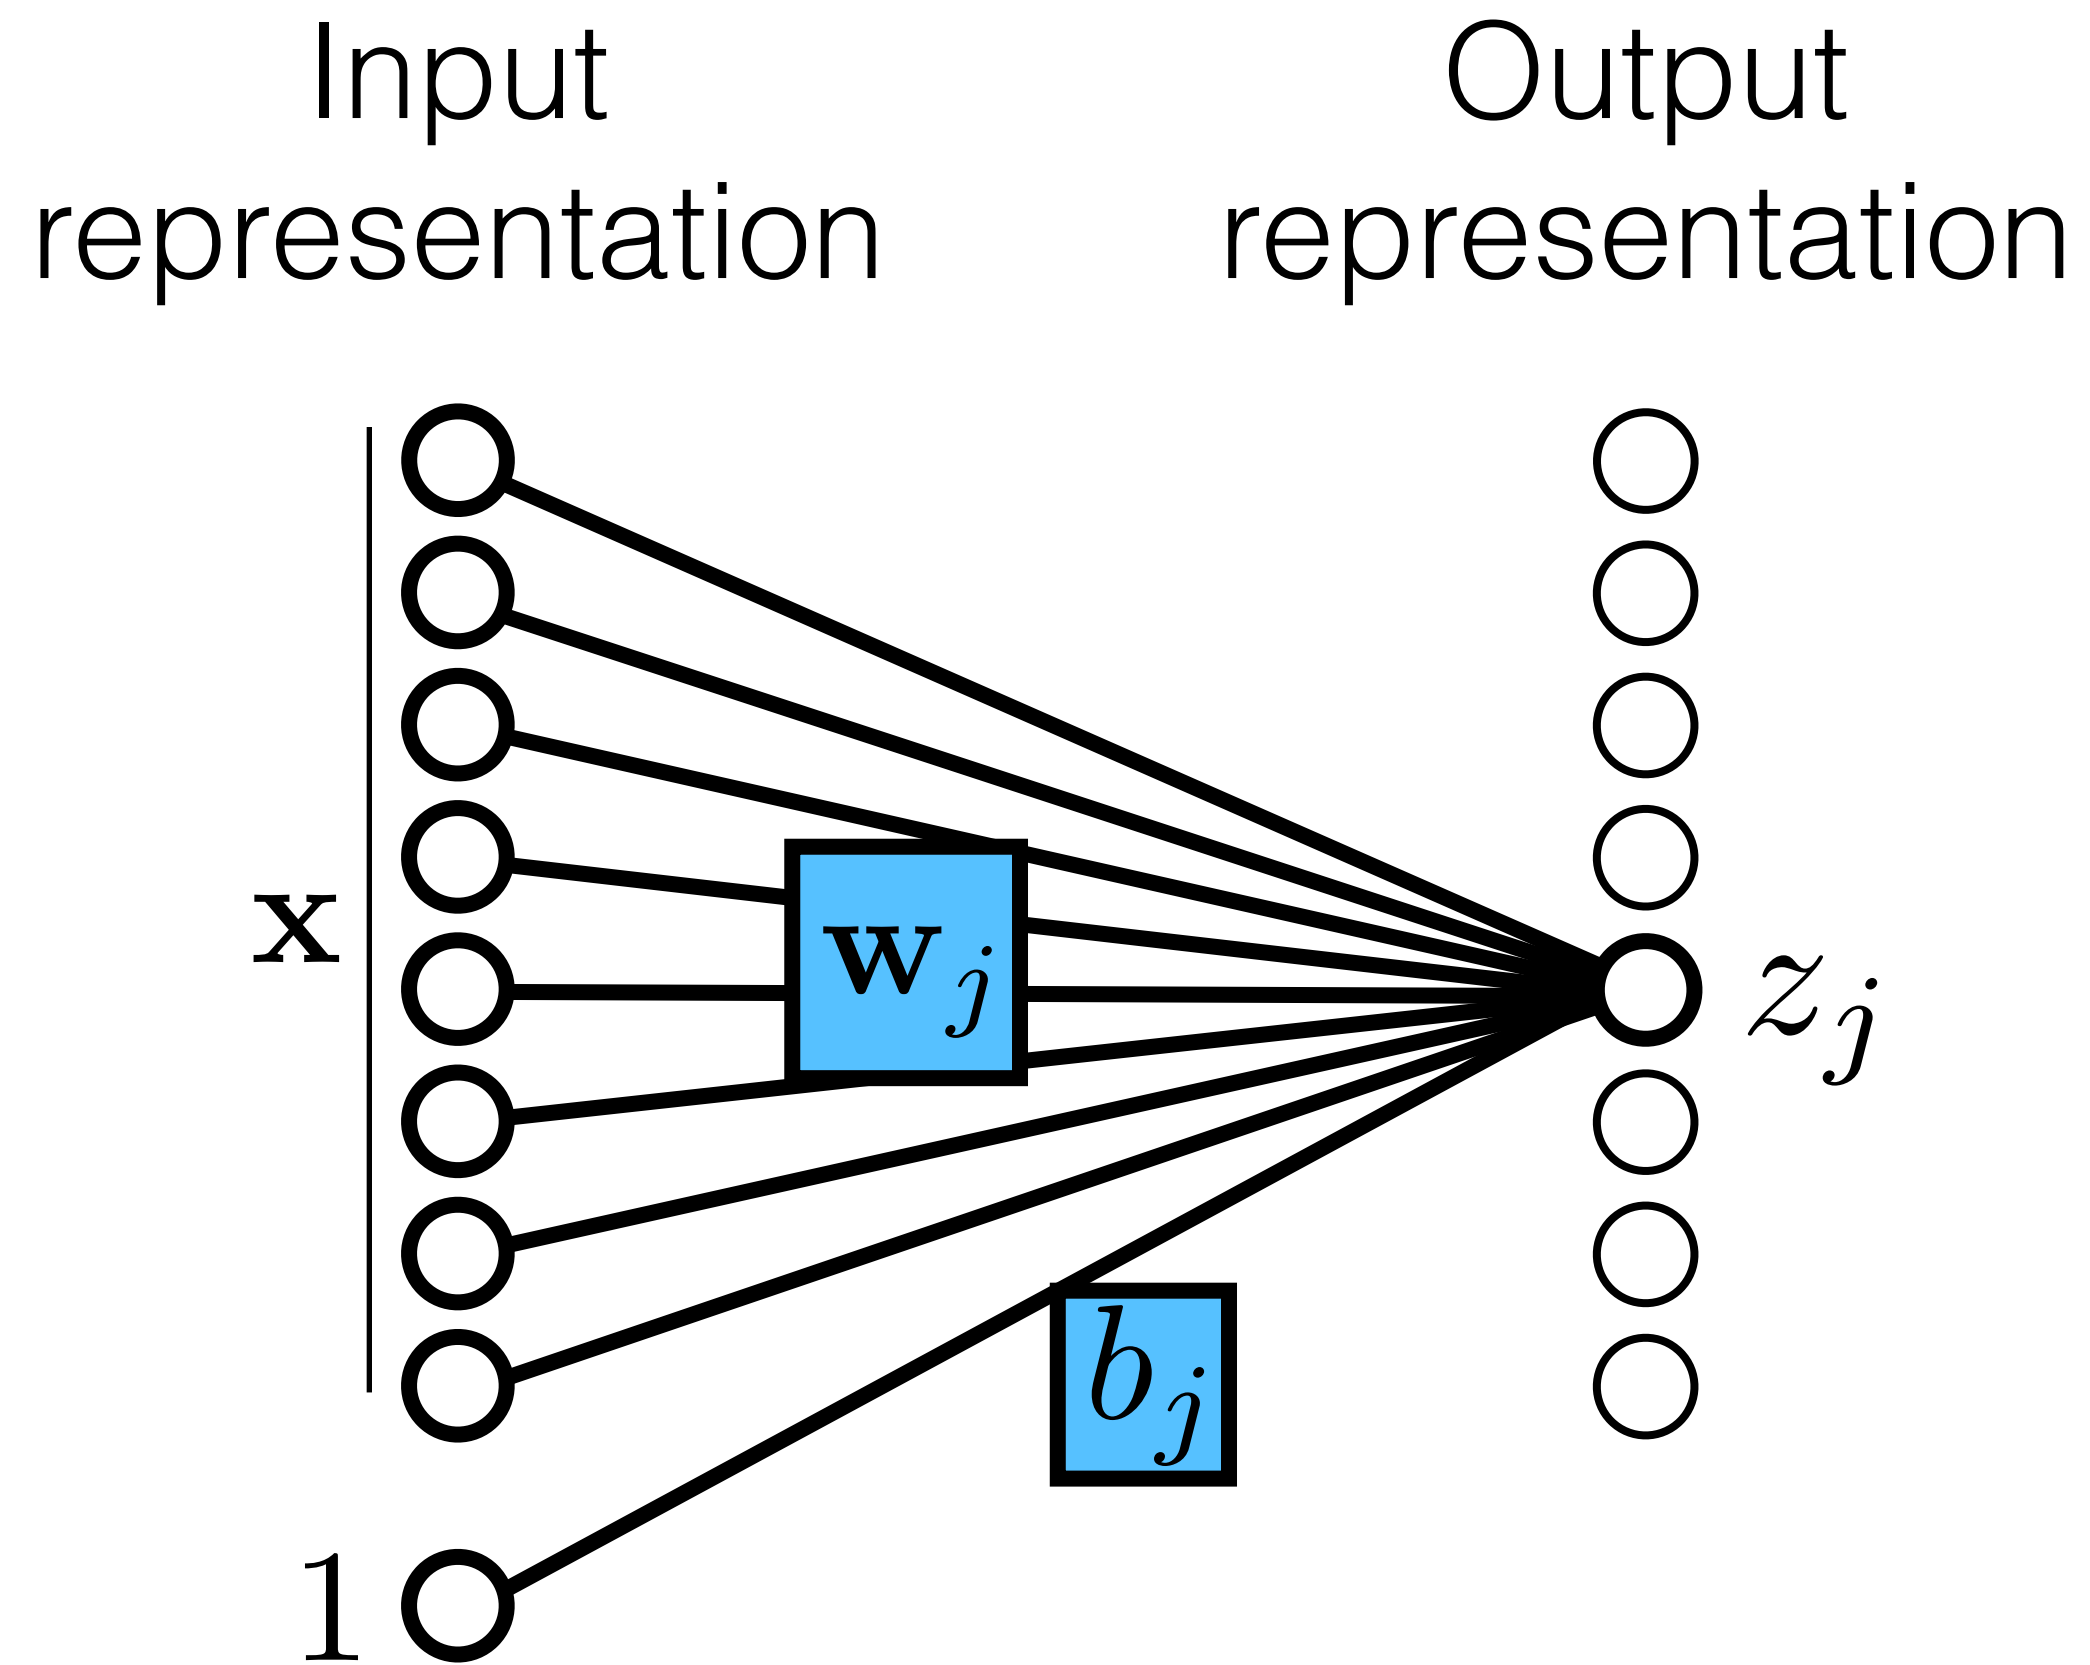

$$z_j = \mathbf{x}^T \mathbf{w}_j + b_j$$

weights

bias

$$\theta = \{\mathbf{W}, \mathbf{b}\}$$


parameters of the model

Computation in a neural net

“Perceptron”


Input
representation

Output
representation

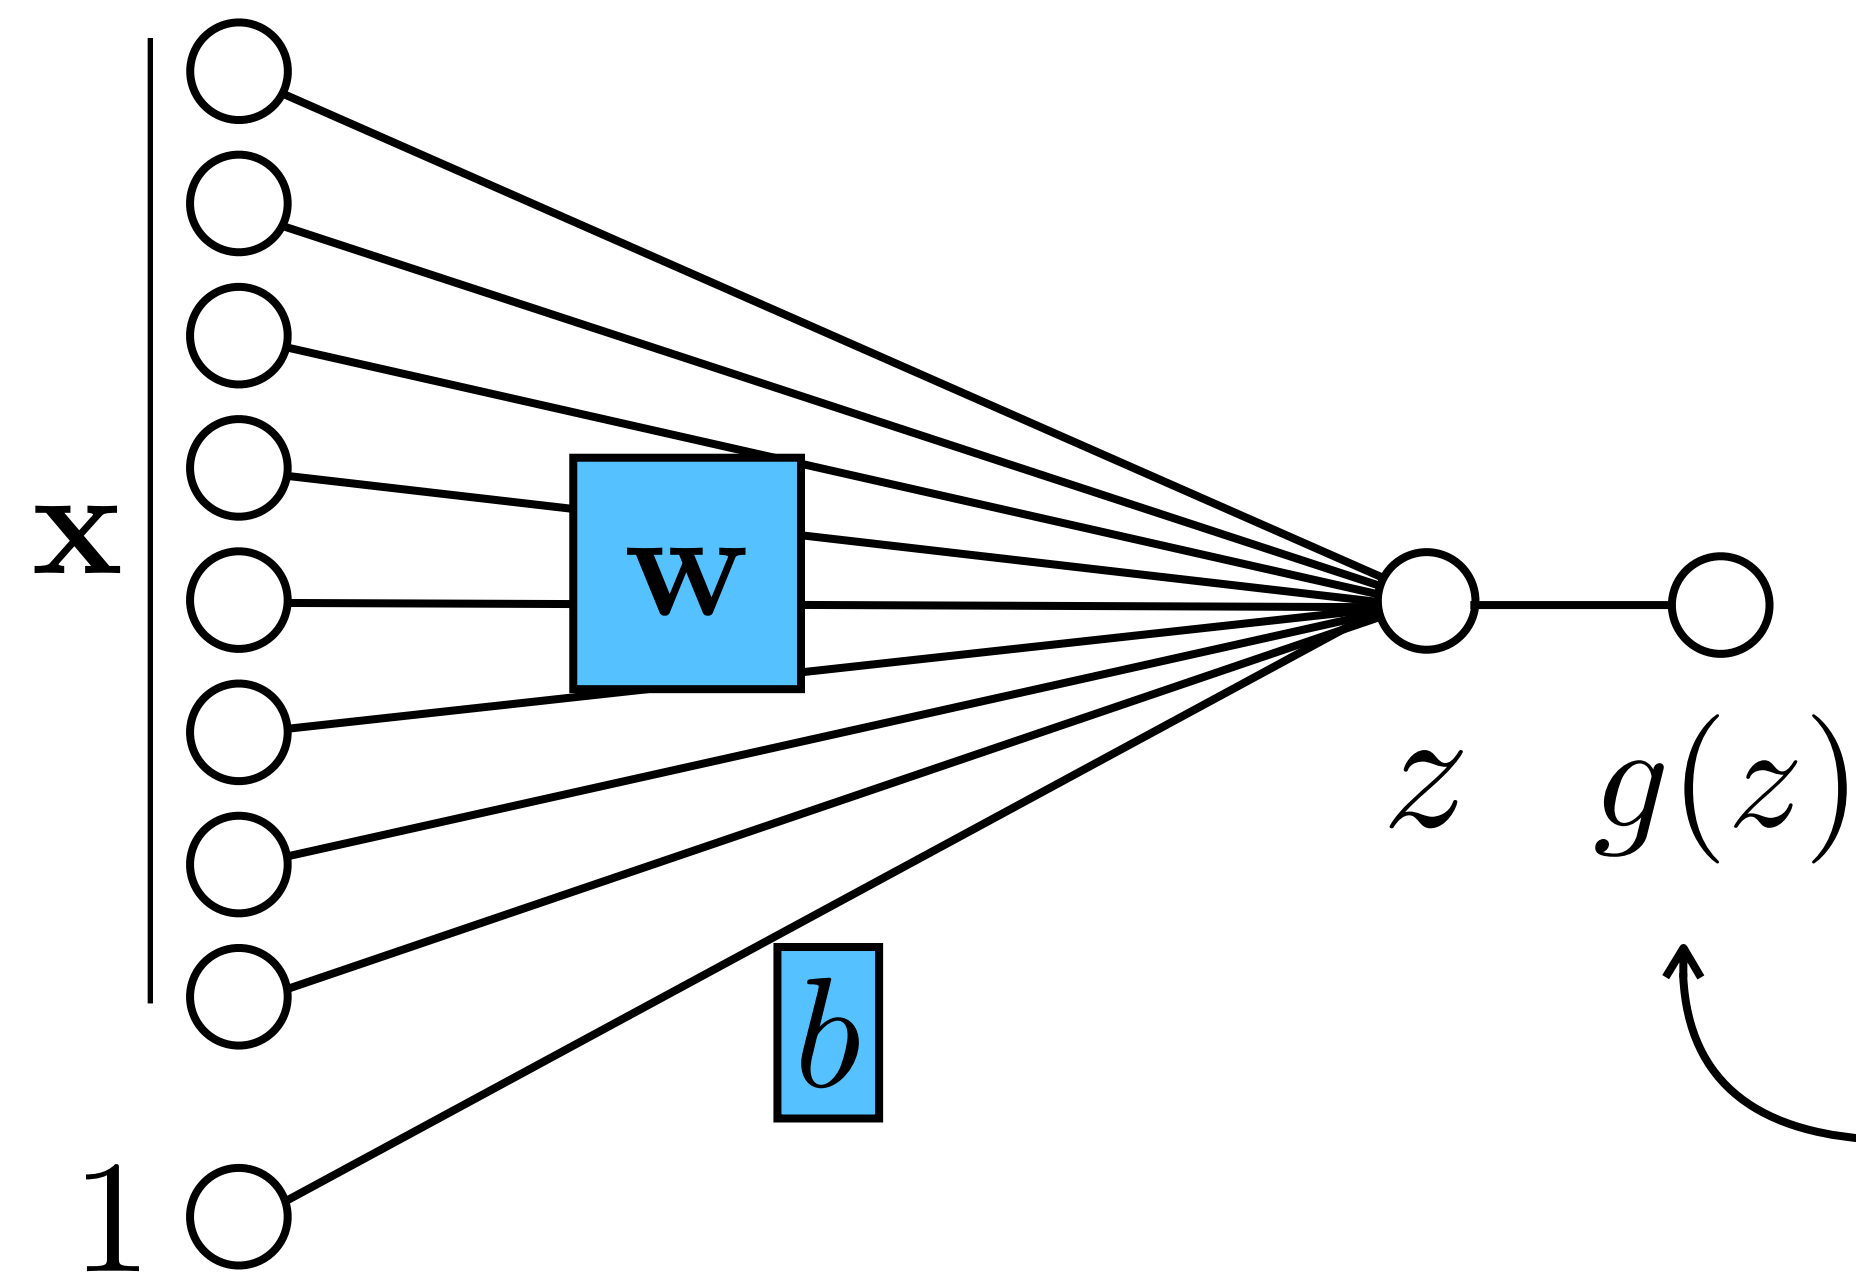


**Pointwise
Non-linearity**

$$g(z) = \begin{cases} 1, & \text{if } z > 0 \\ 0, & \text{otherwise} \end{cases}$$


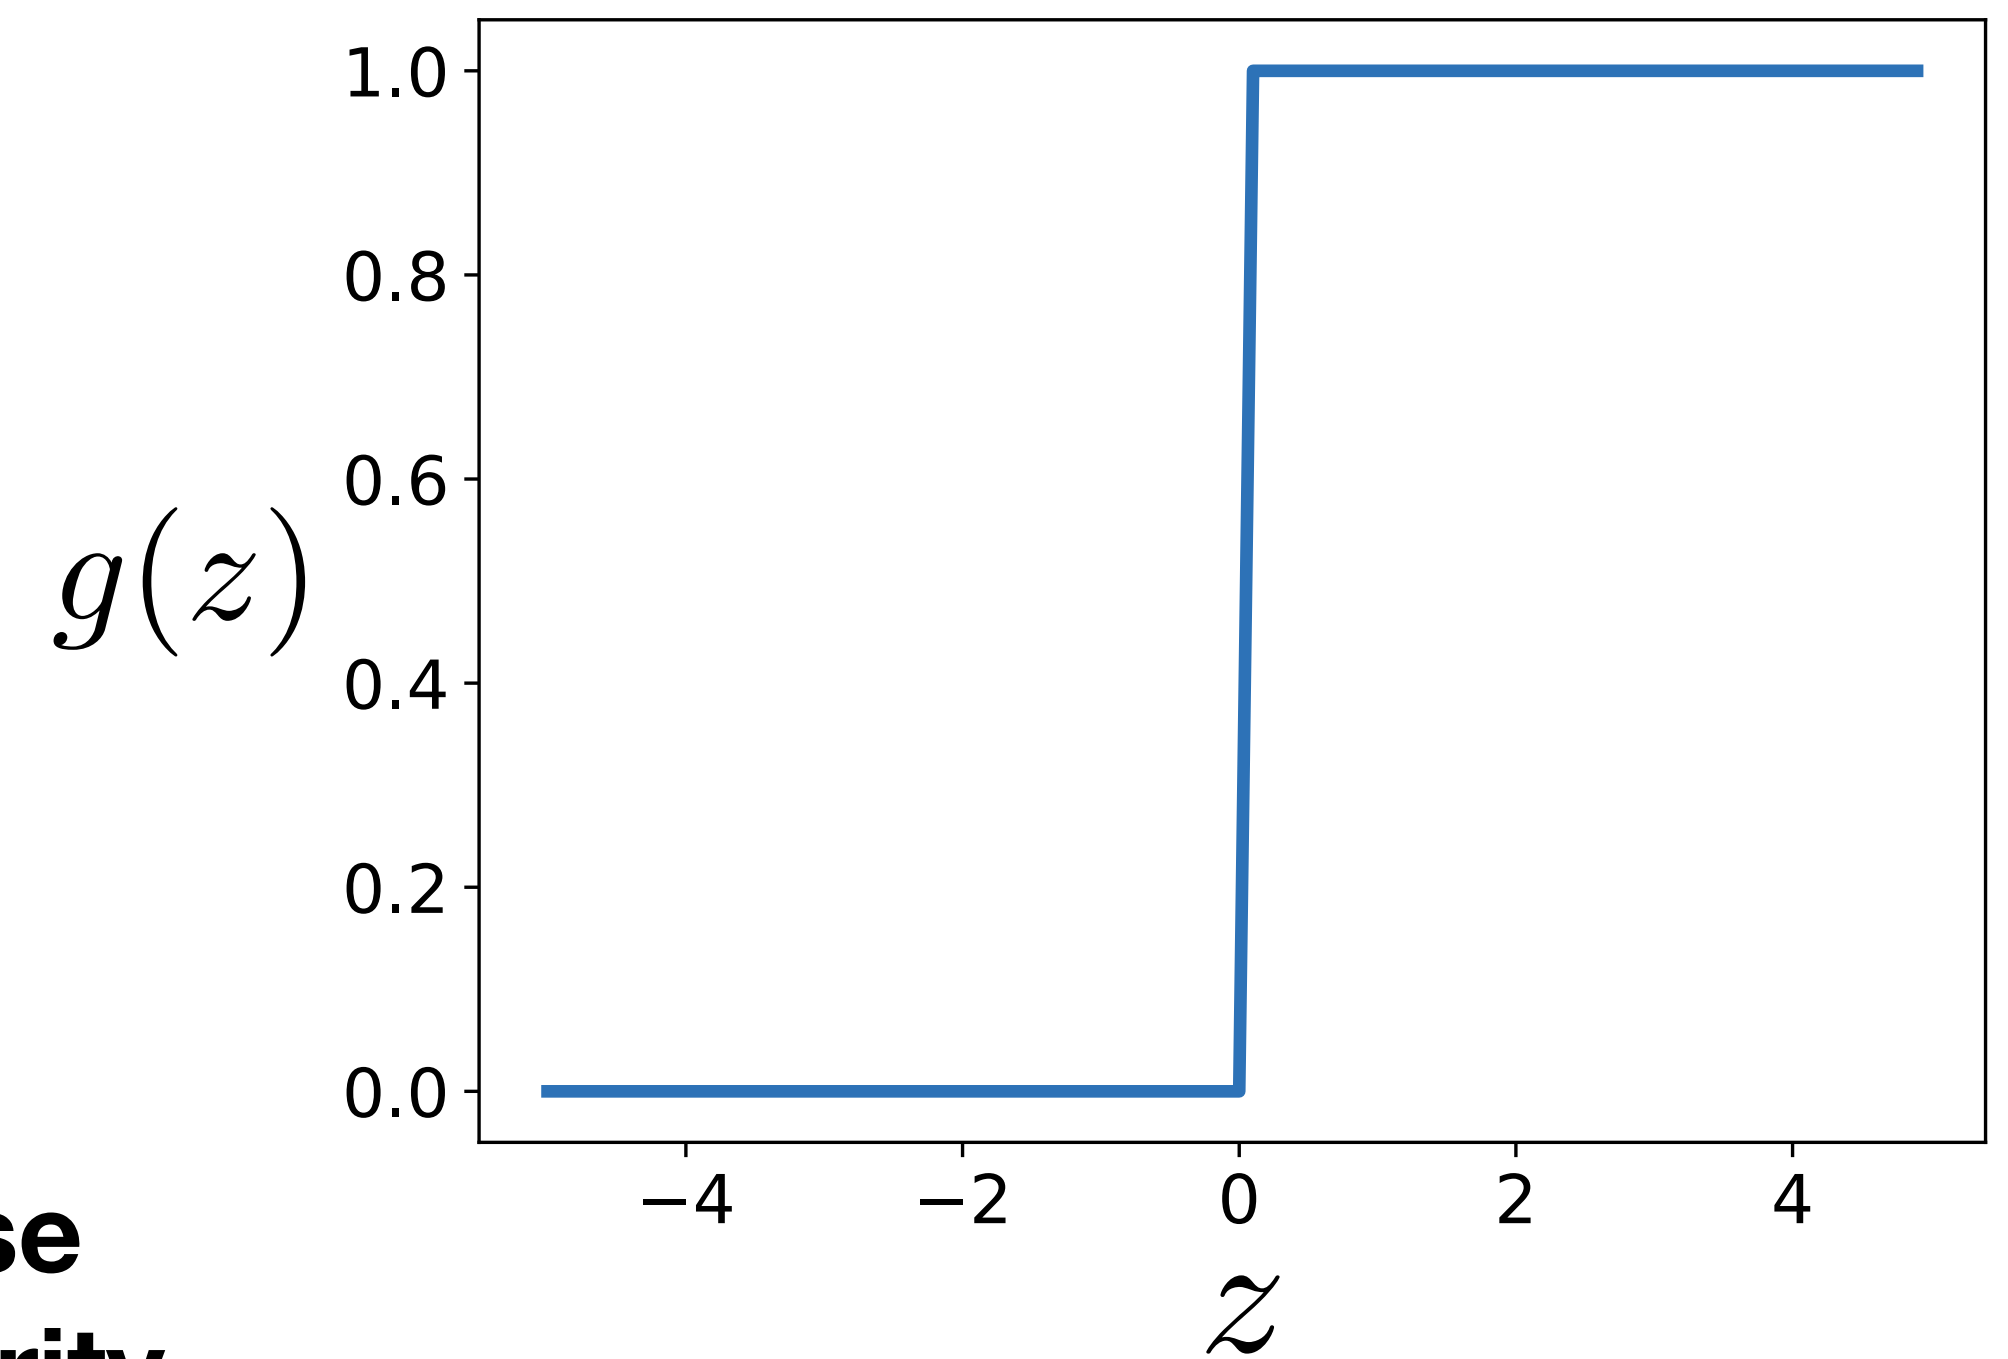


Example: linear classification with a perceptron

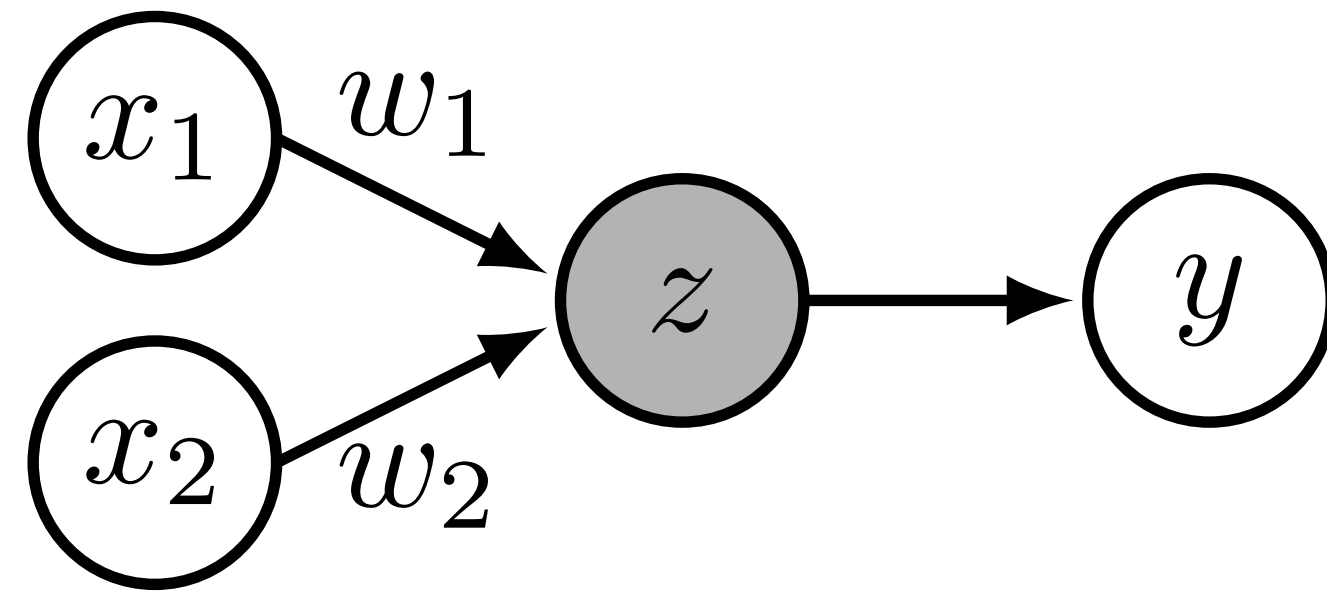


$$z = \mathbf{x}^T \mathbf{w} + b$$

$$y = g(z)$$

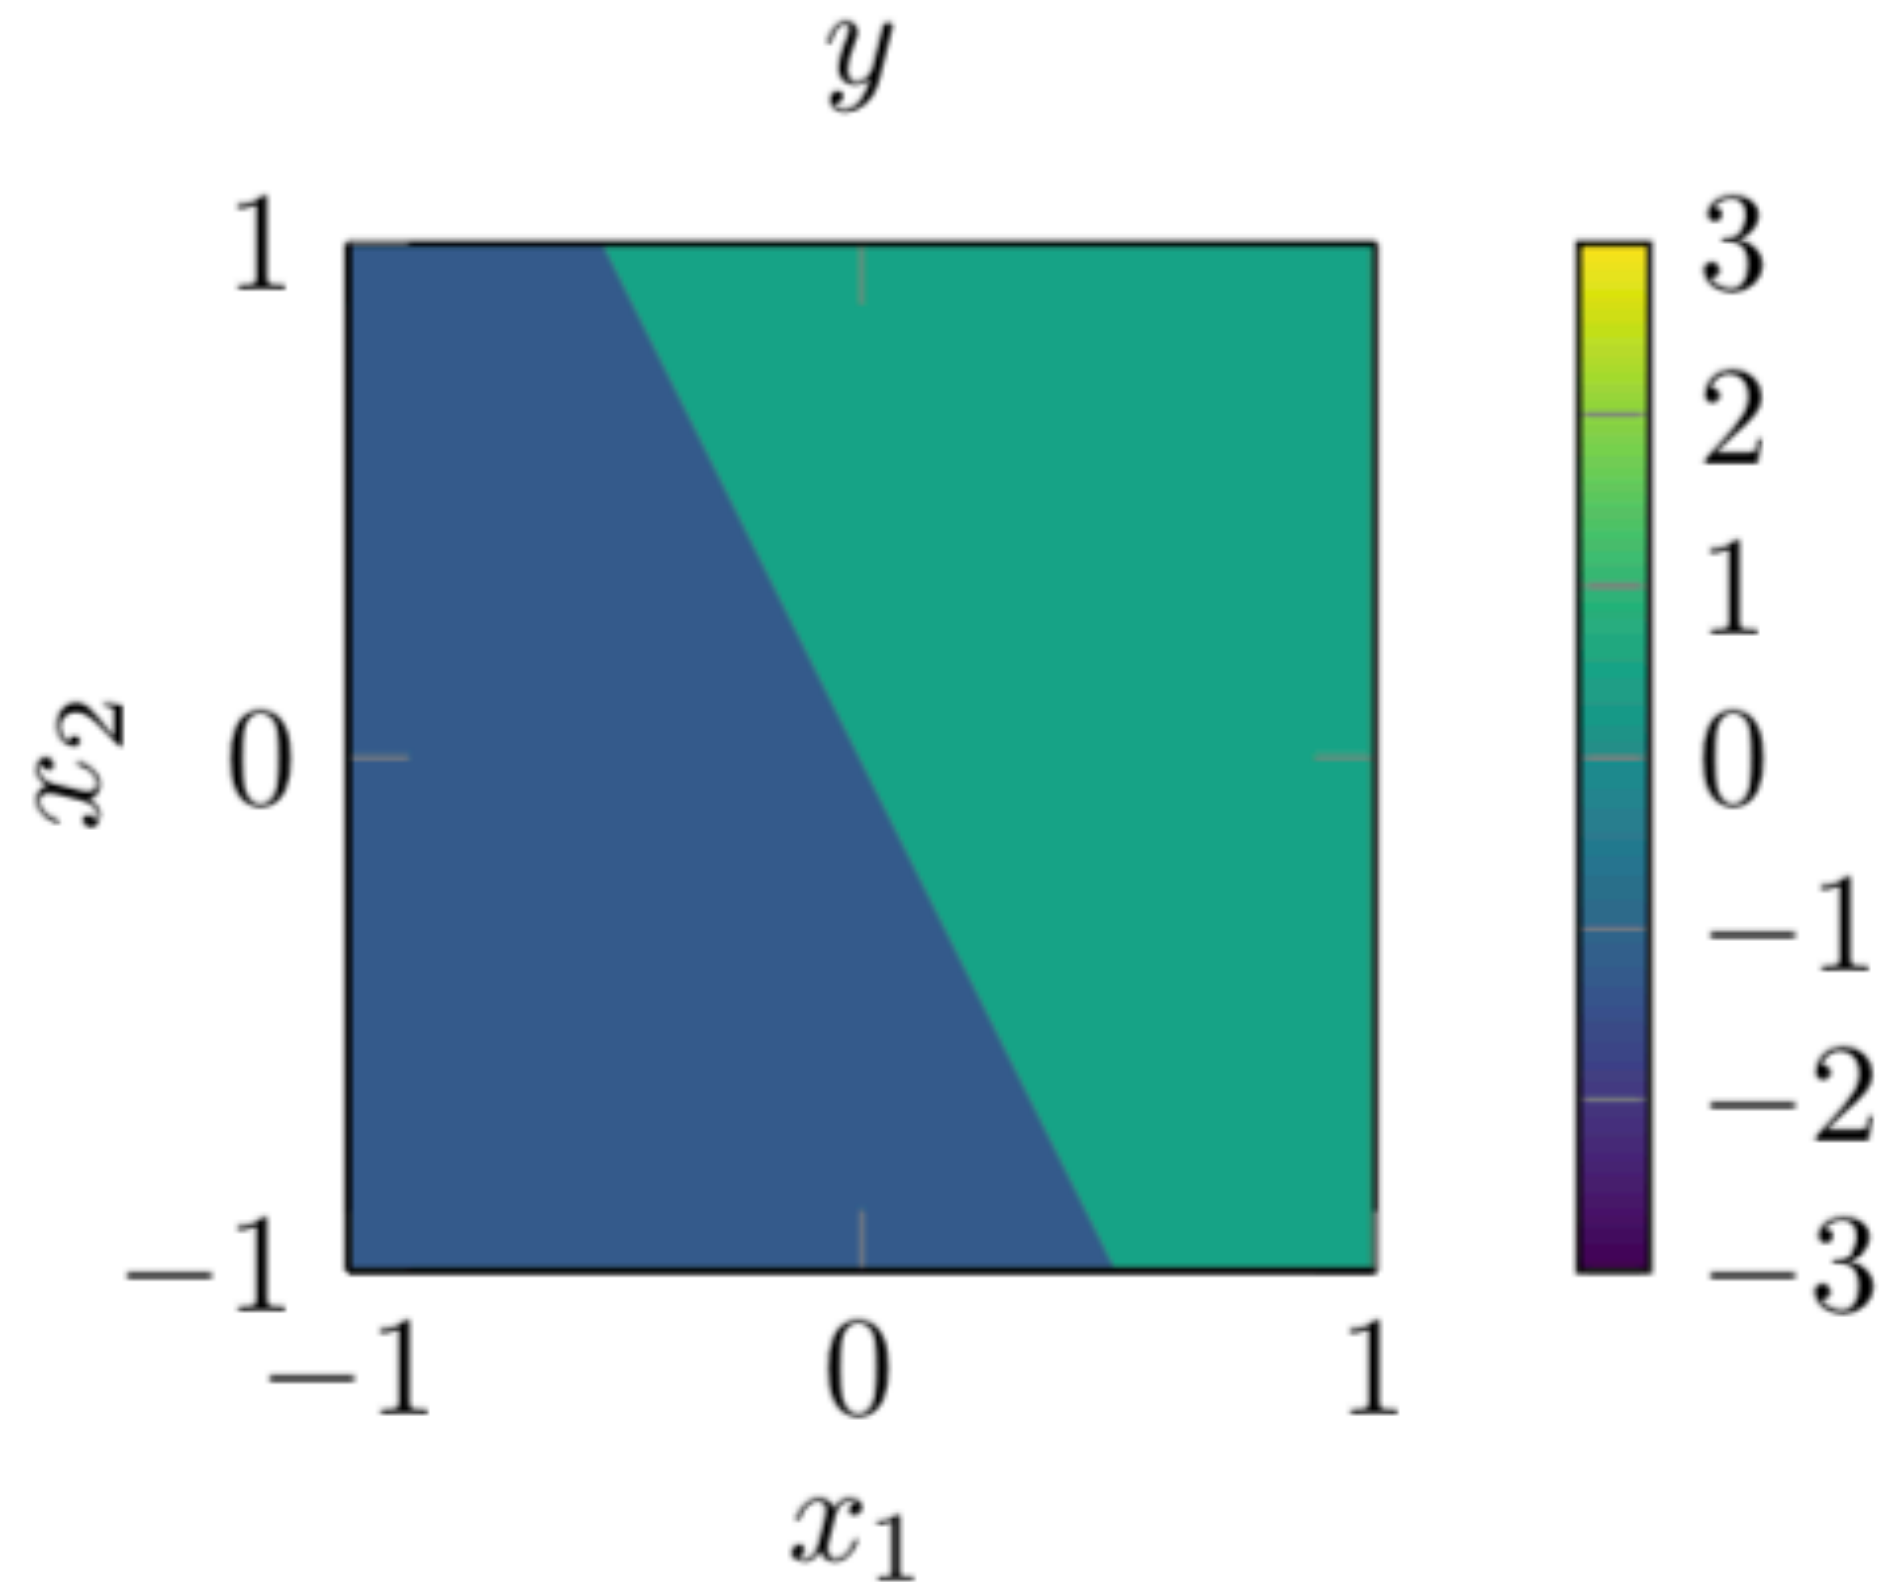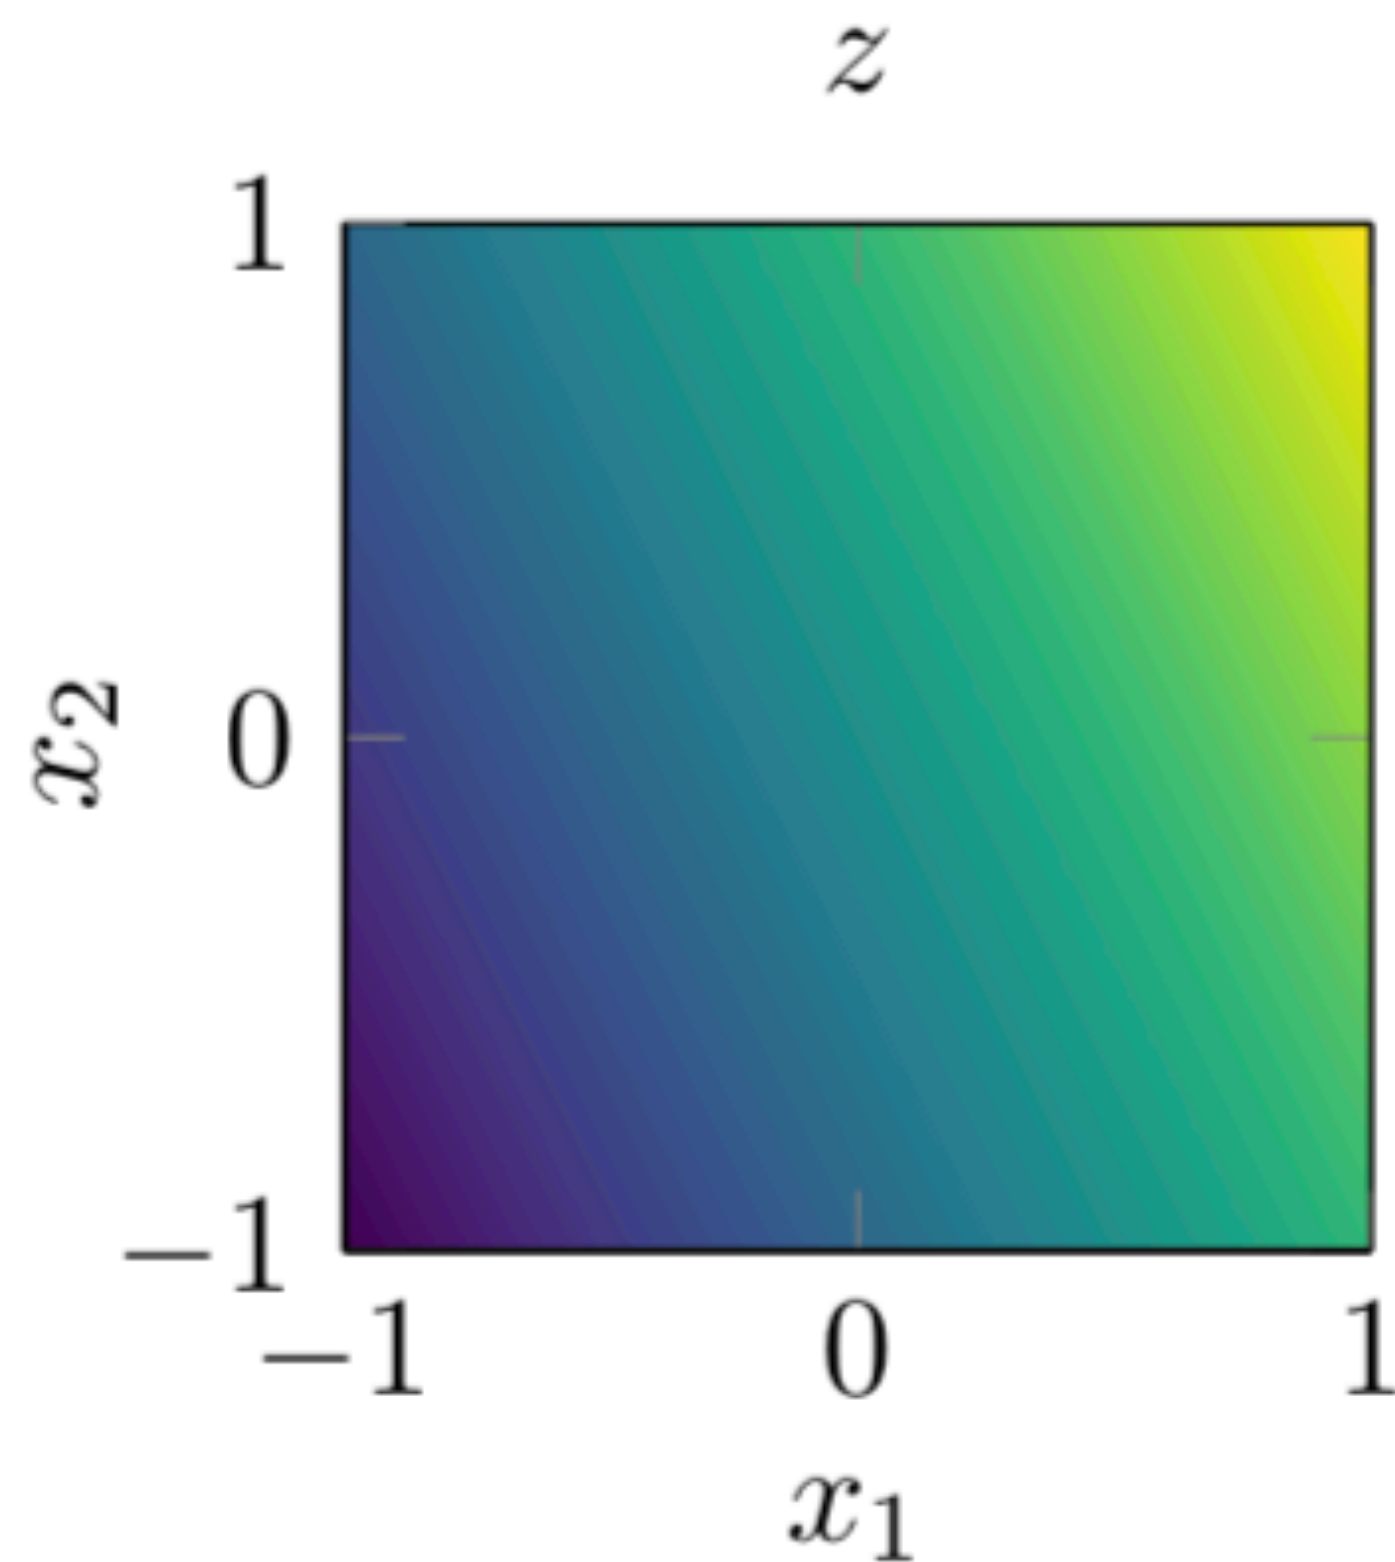


One layer neural net
(perceptron) can
perform linear
classification!

Training data

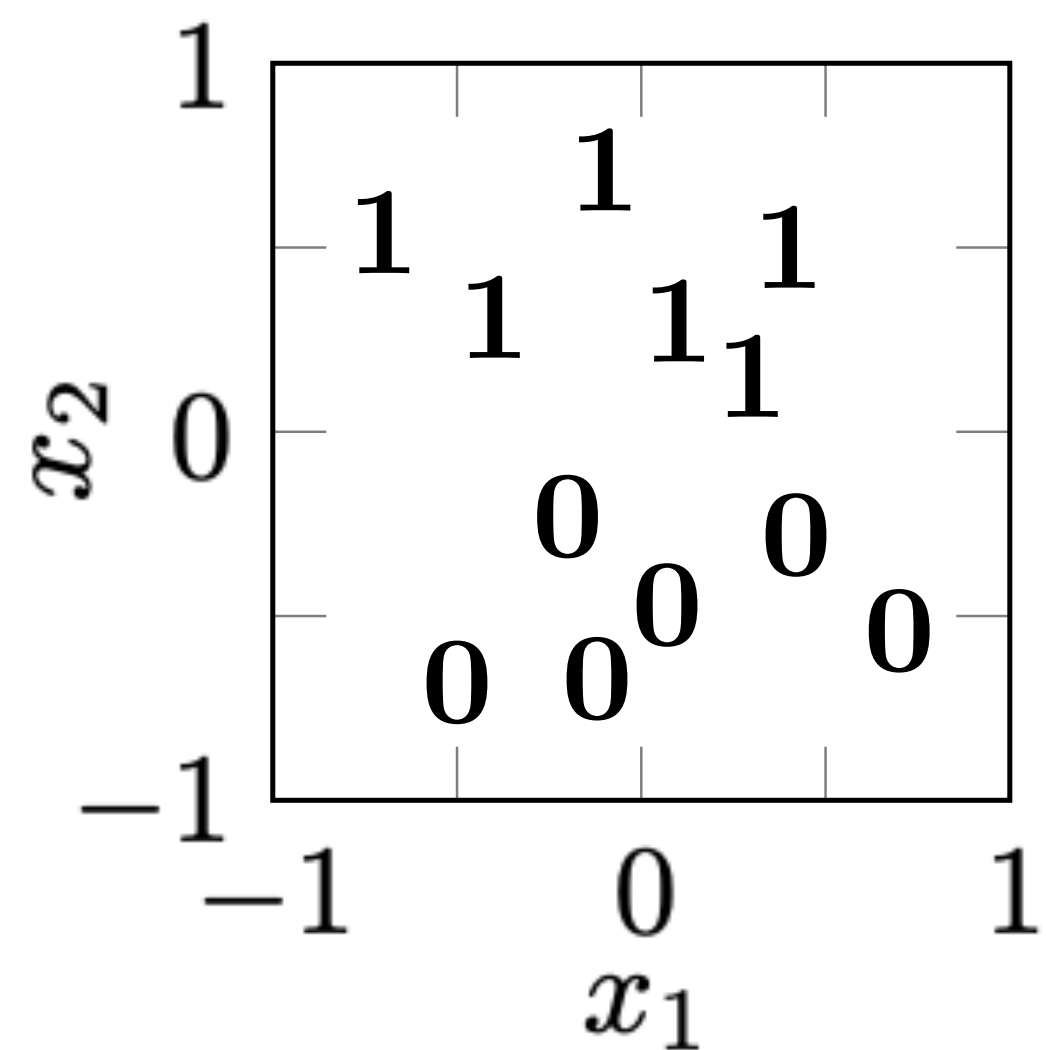


Bad fit

7 misclassifications

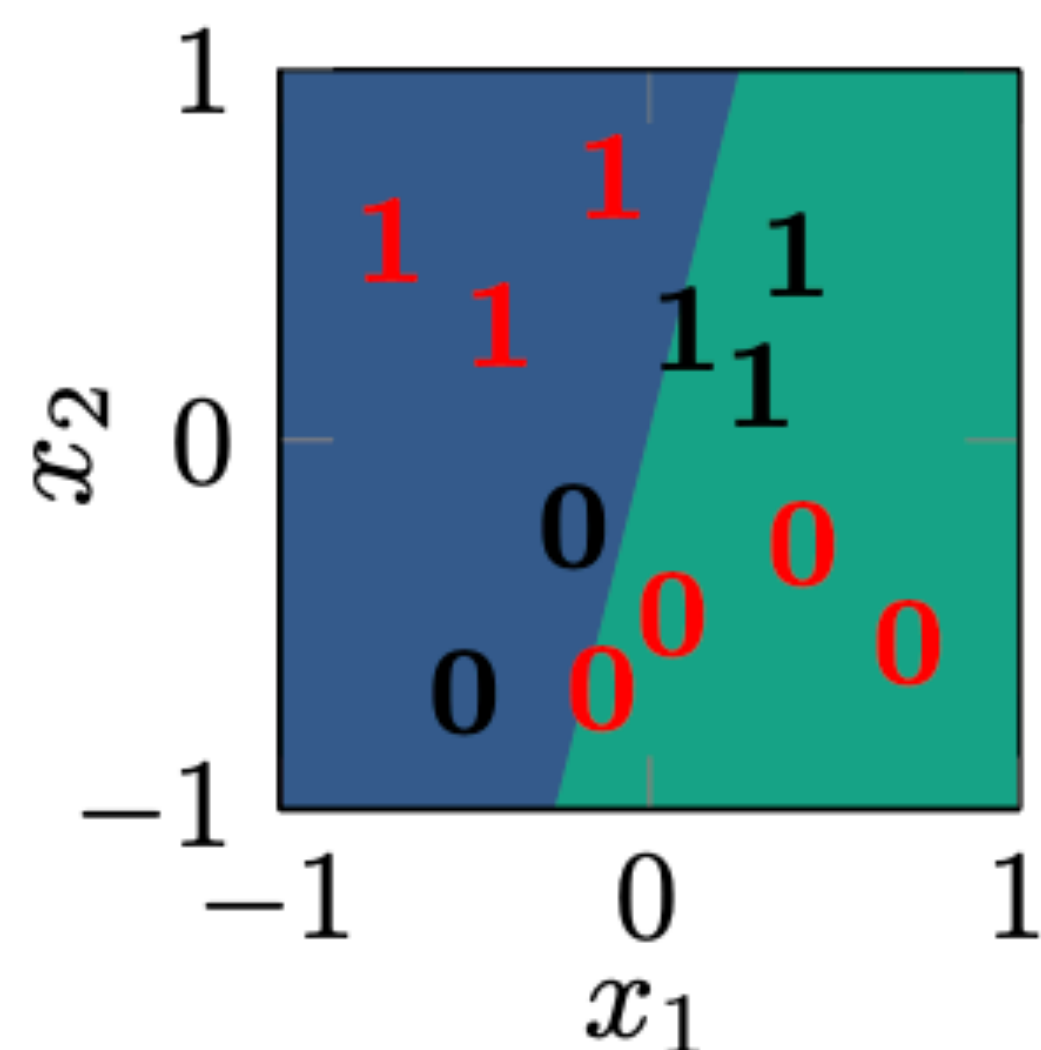


Okay fit

4 misclassifications

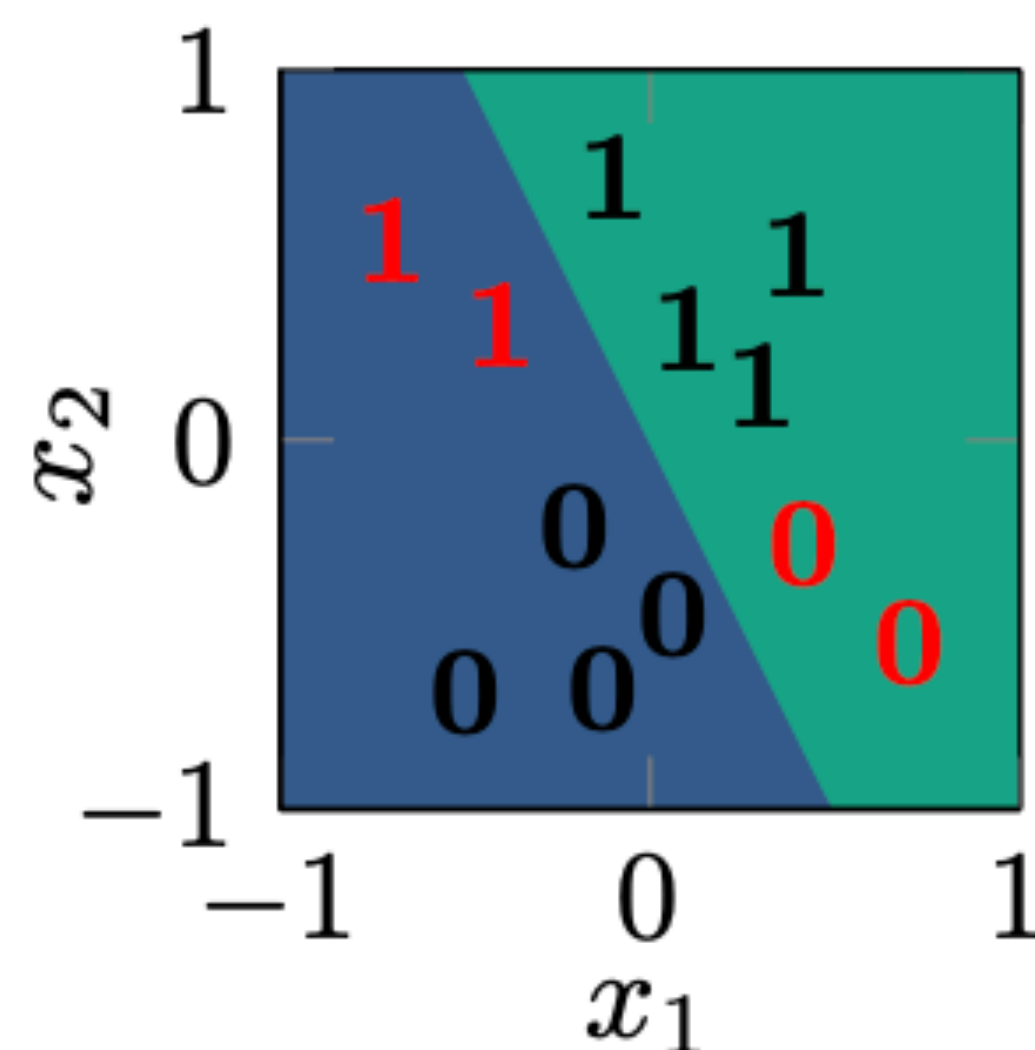

Good fit


0 misclassifications

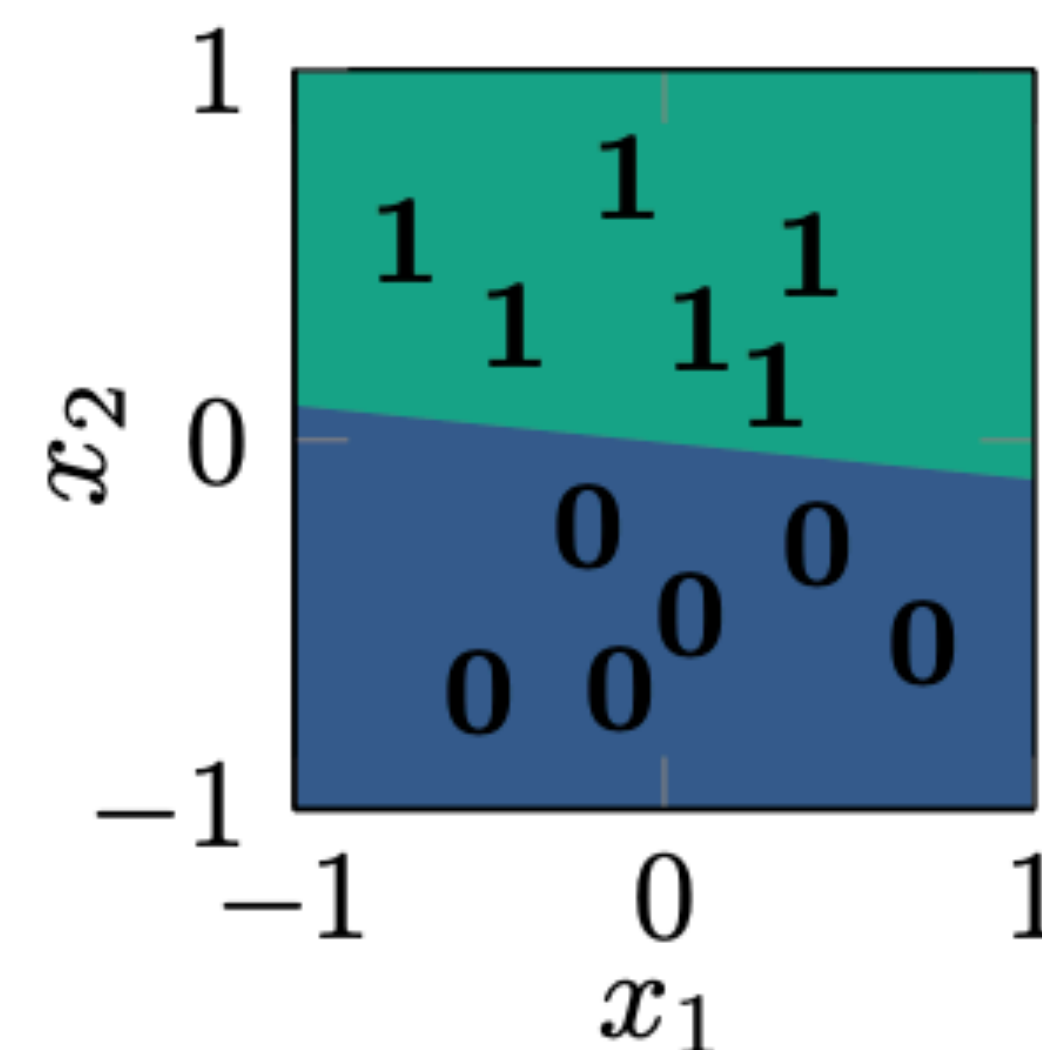

$$\mathbf{w}^*, b^* = \arg \min_{\mathbf{w}, b} \sum_{i=1}^N \mathcal{L}(g(z^{(i)}), y^{(i)})$$


Computation in a neural net

Input
representation

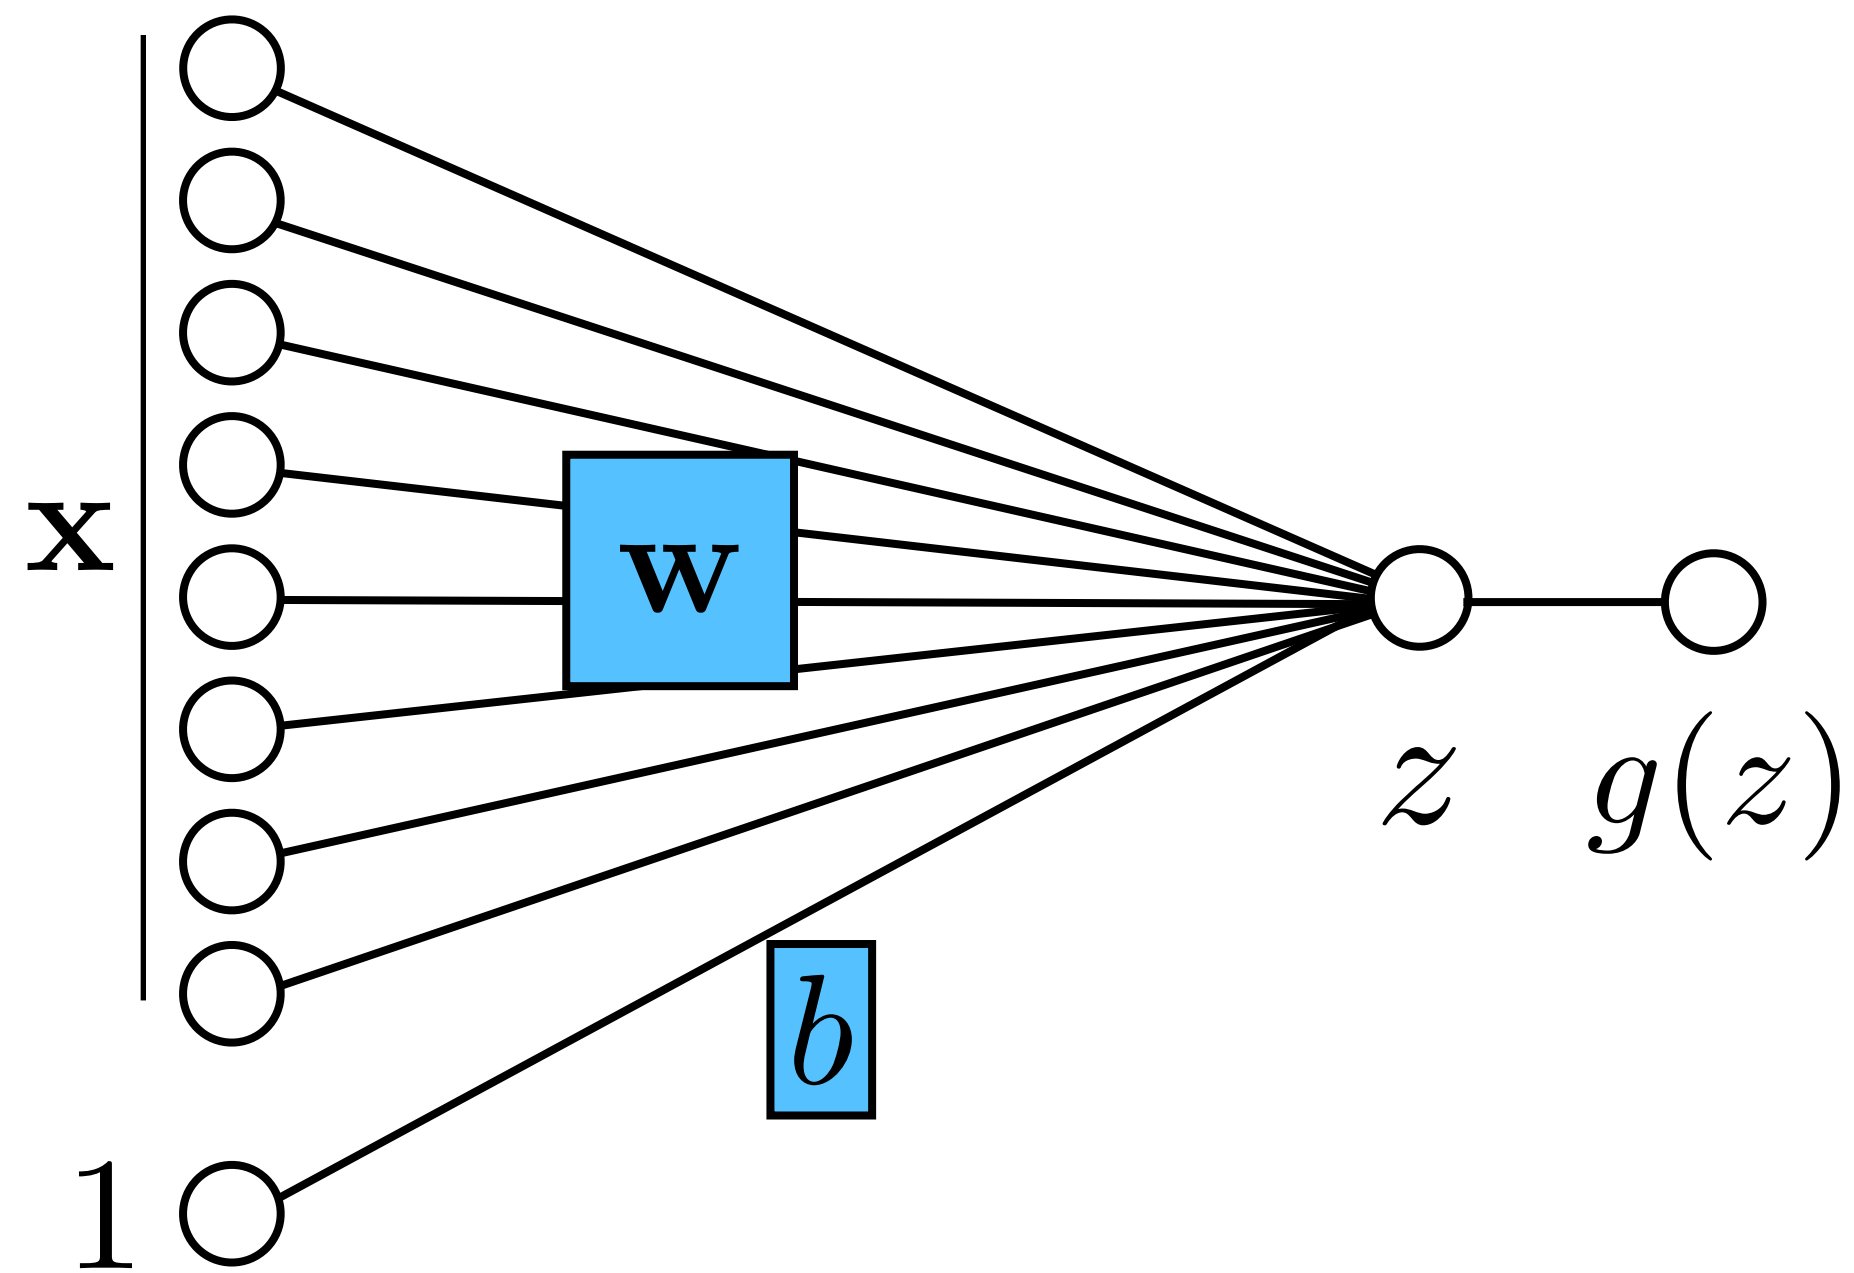


Output
representation

$$g(z) = \begin{cases} 1, & \text{if } z > 0 \\ 0, & \text{otherwise} \end{cases}$$

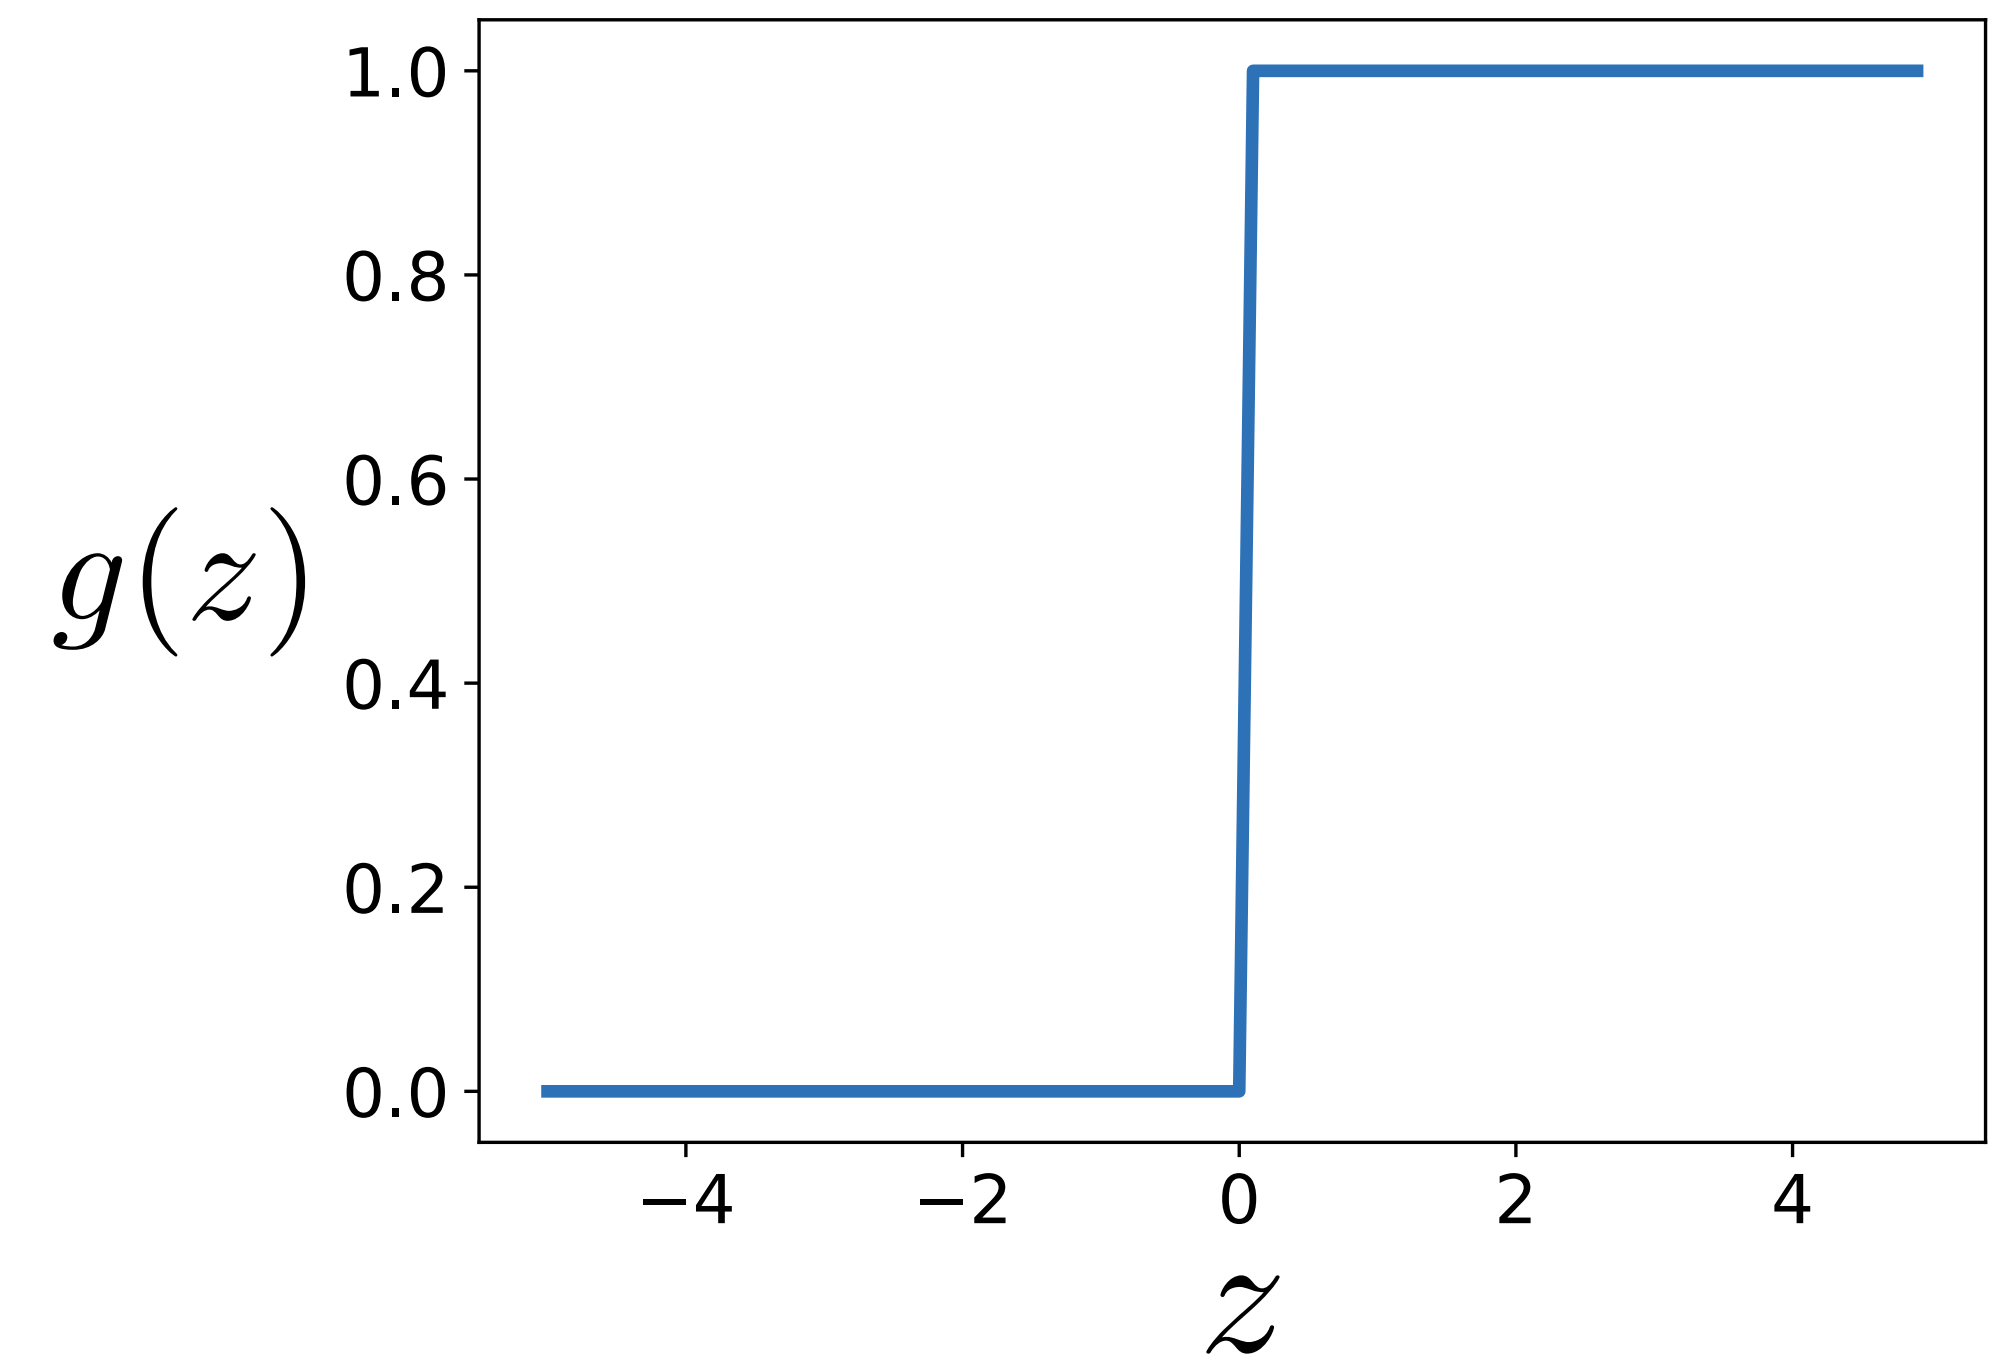


Computation in a neural net — nonlinearity

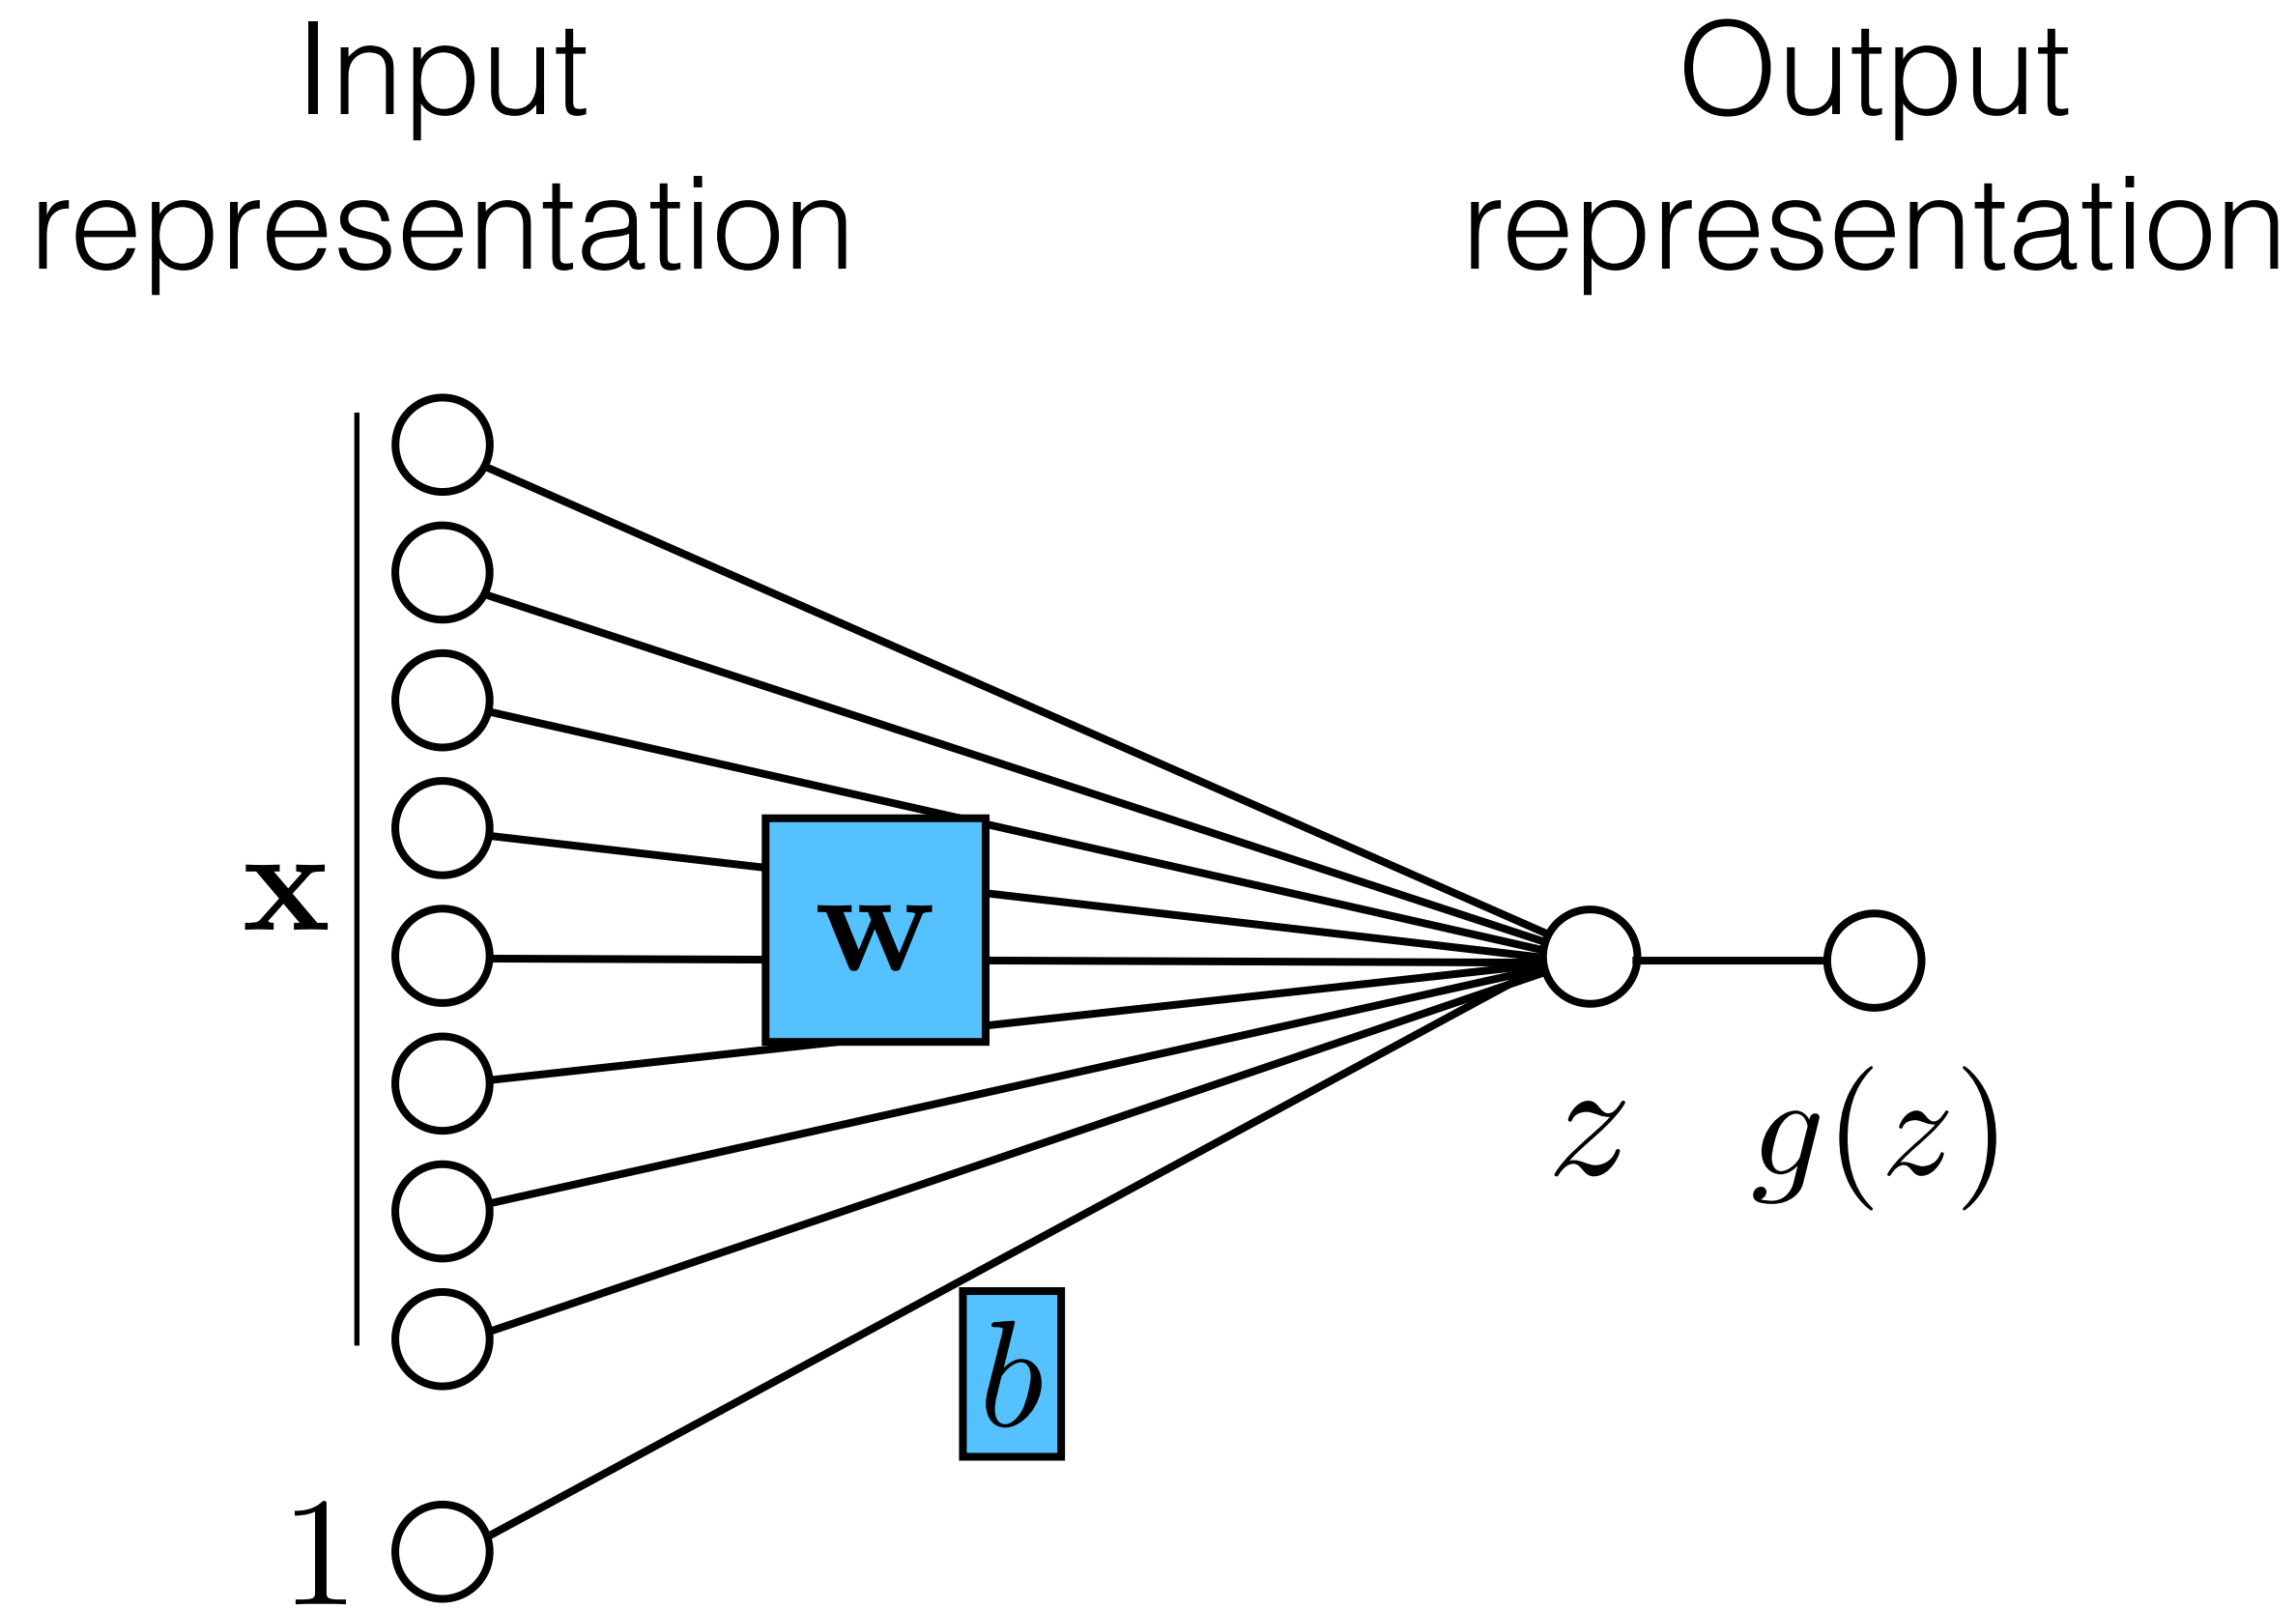

Tanh

$$g(z) = \frac{e^z - e^{-z}}{e^z + e^{-z}}$$

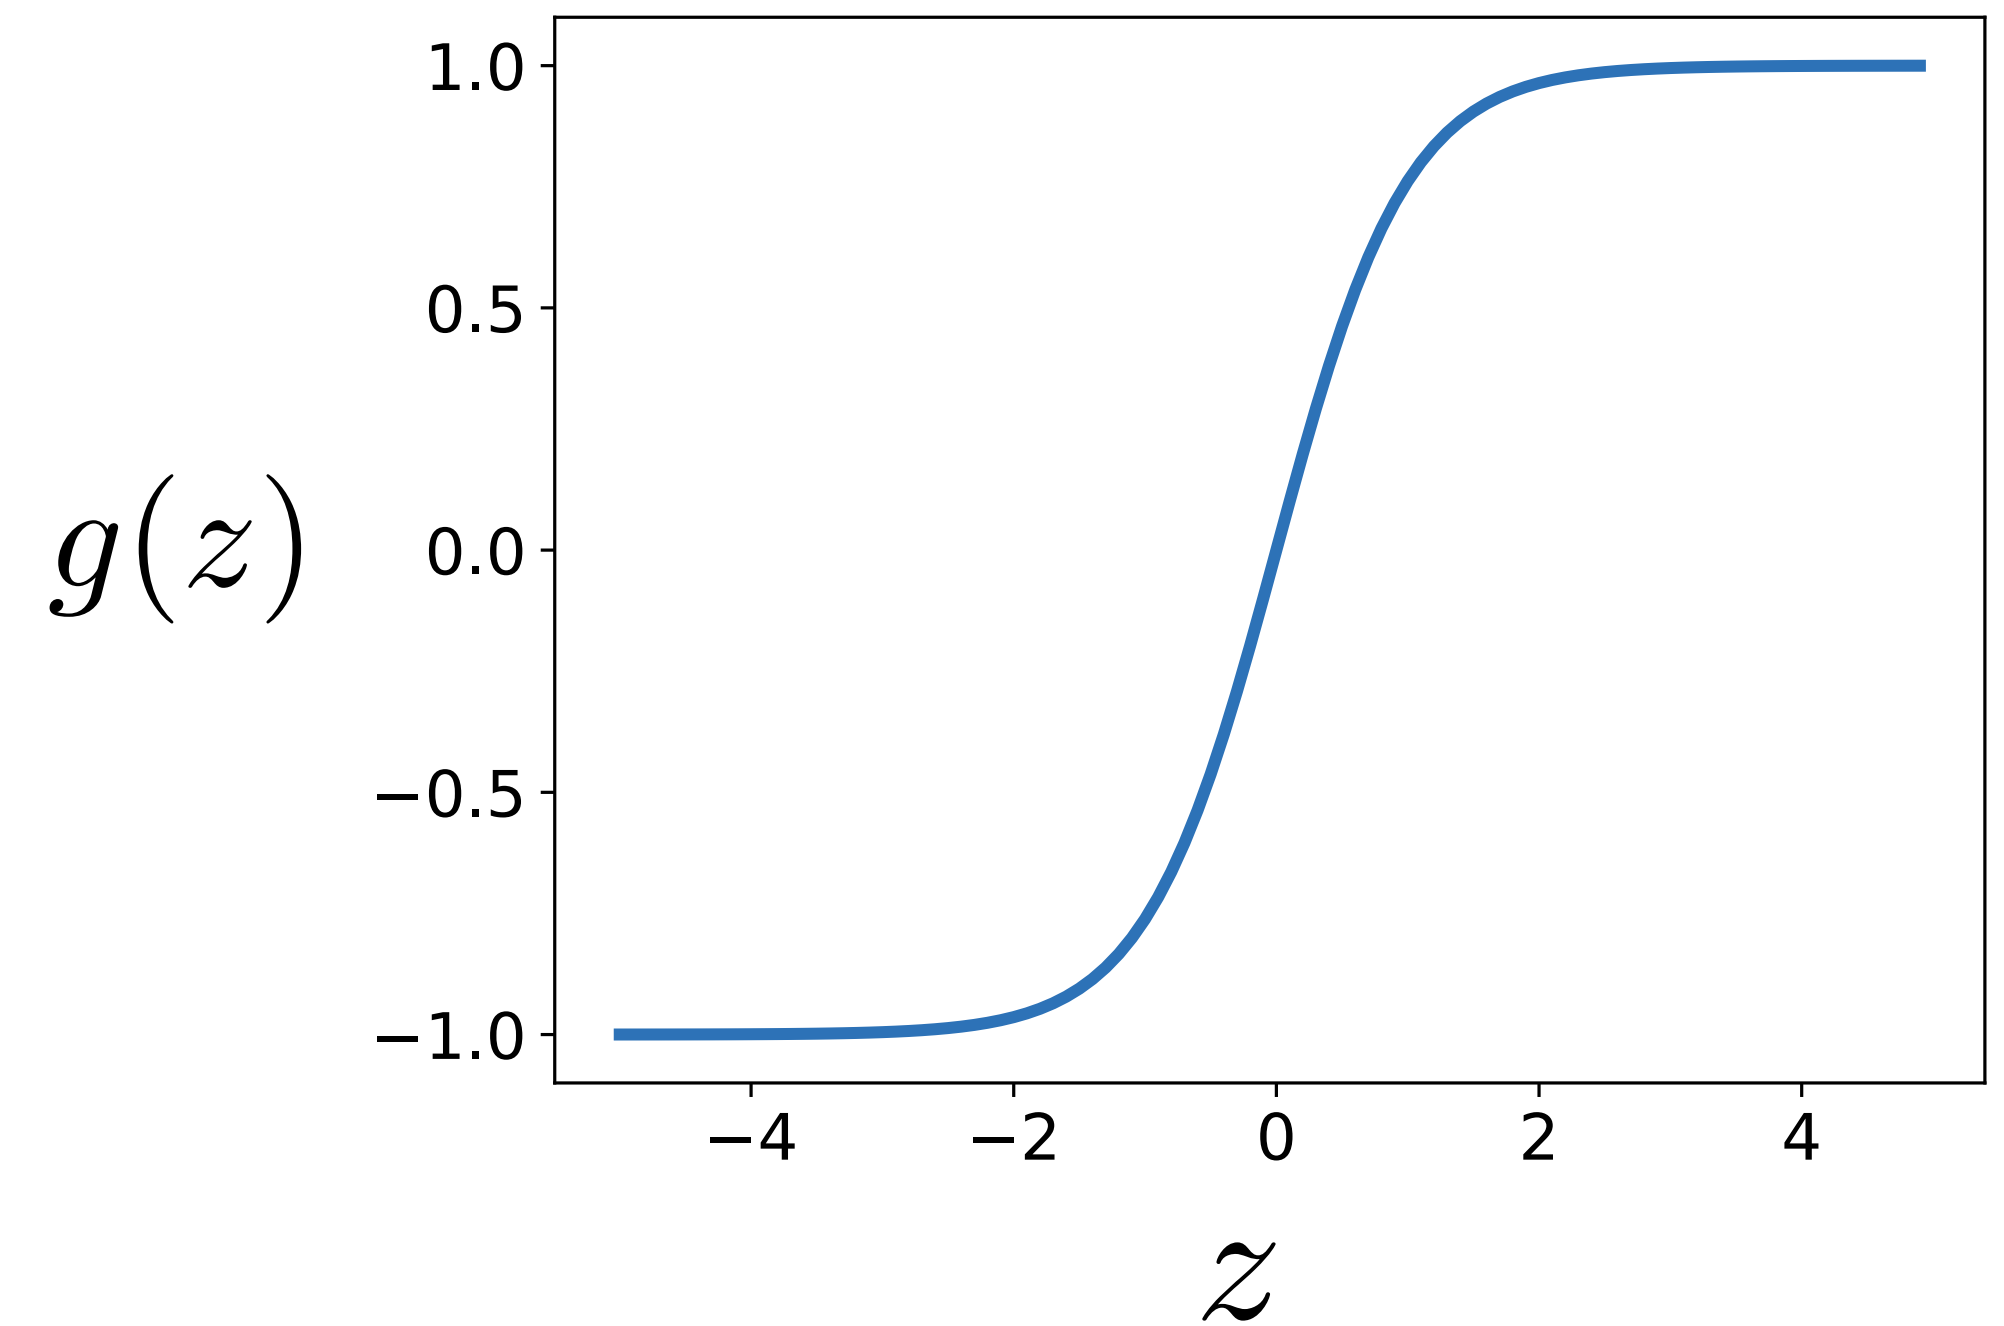


Computation in a neural net — nonlinearity

Tanh

$$g(z) = \frac{e^z - e^{-z}}{e^z + e^{-z}}$$

- Bounded between $[-1, +1]$
- Saturation for large +/- inputs
- Gradients go to zero
- Outputs centered at 0
- $\tanh(z) = 2 \text{ sigmoid}(2z) - 1$

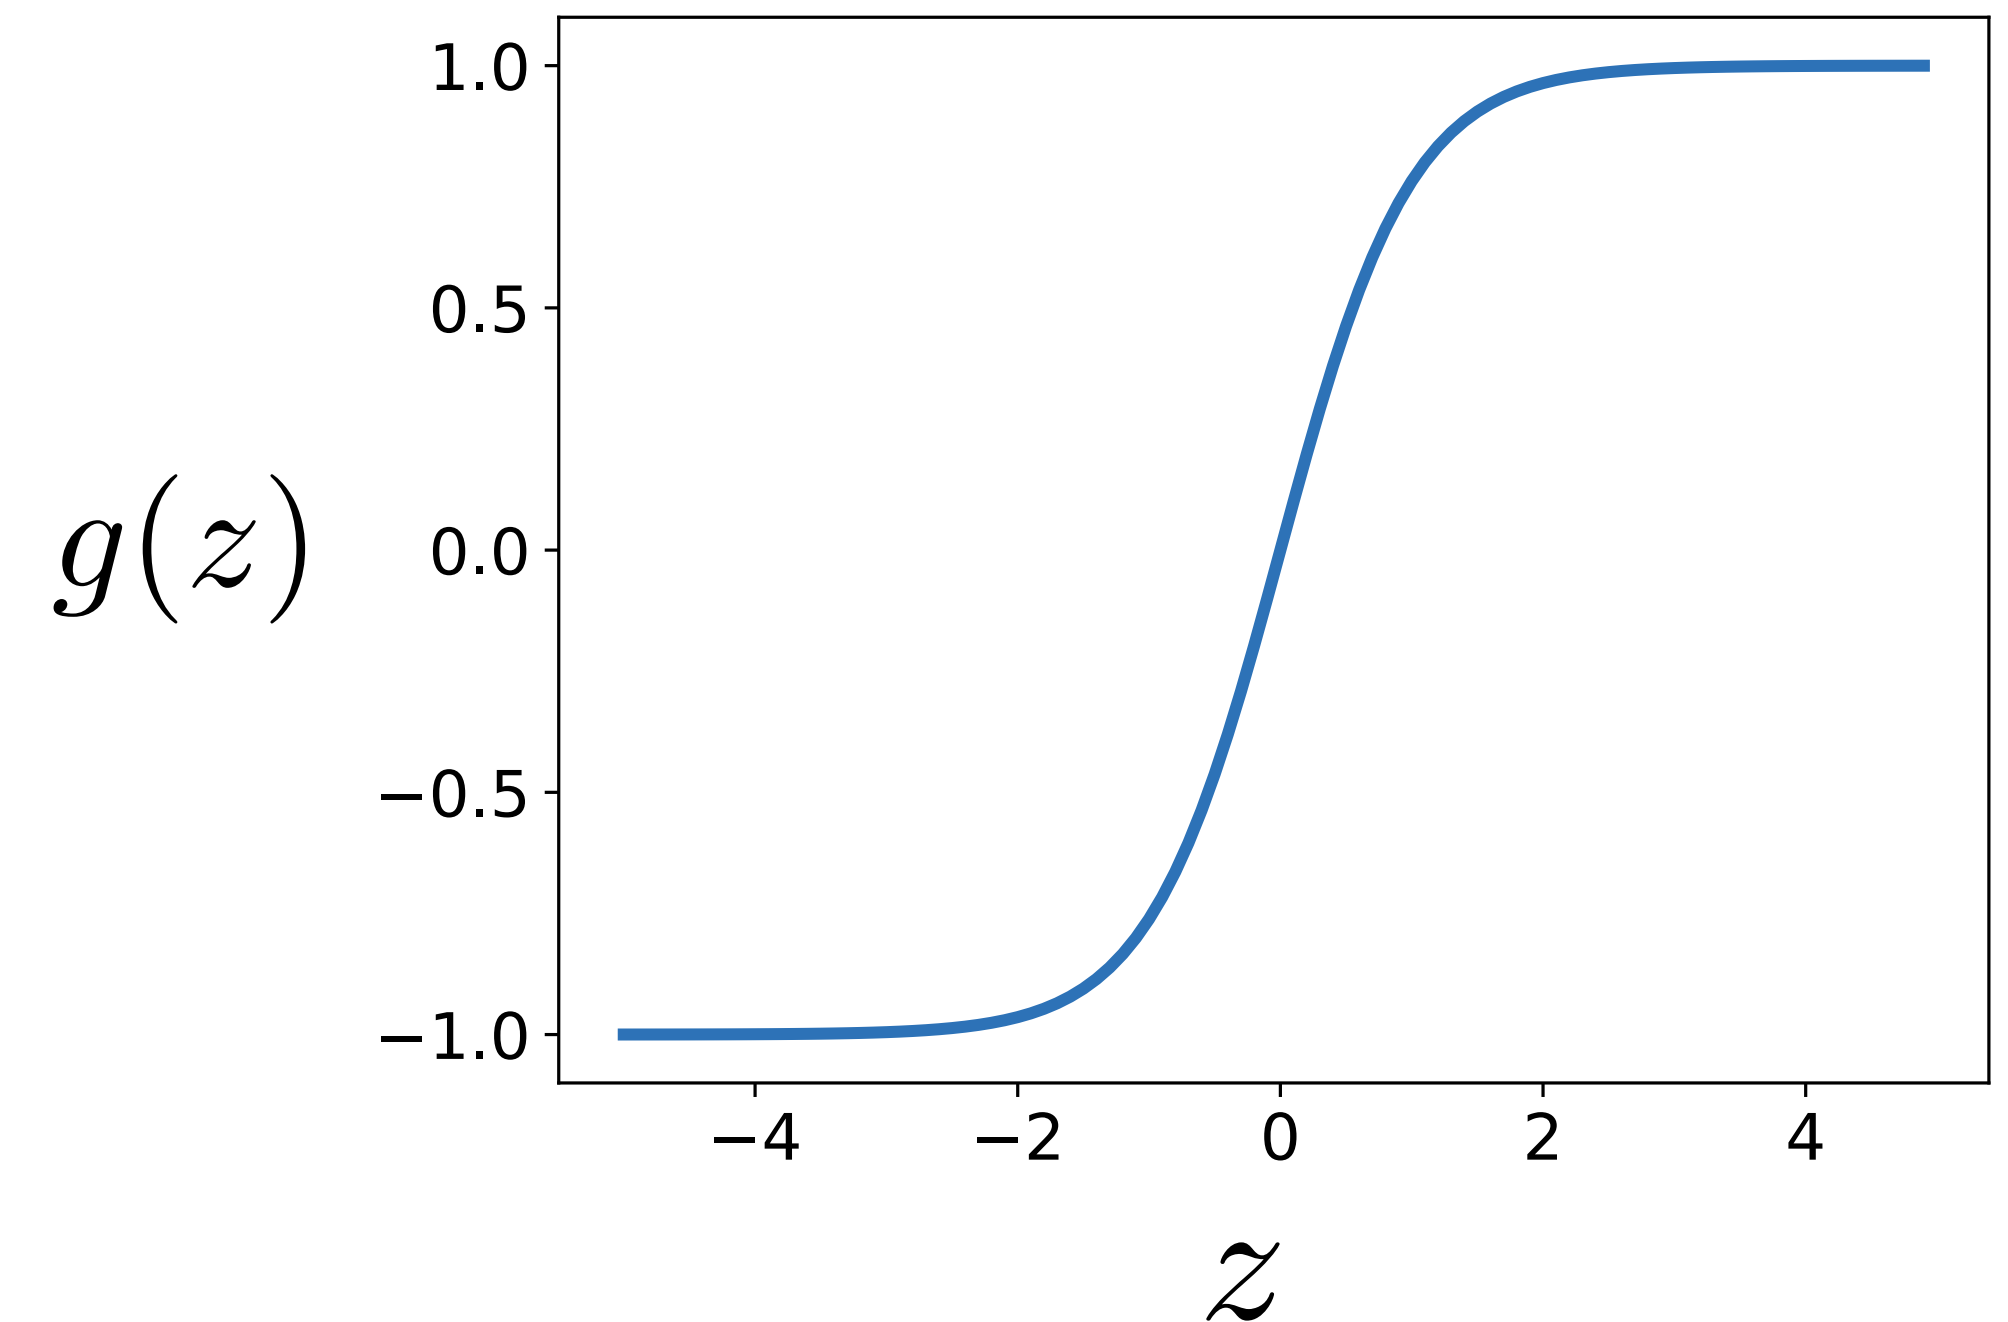


Computation in a neural net — nonlinearity

- Interpretation as firing rate of neuron
- Bounded between $[0,1]$
- Saturation for large +/- inputs
- Gradients go to zero
- Outputs centered at 0.5
(poor conditioning)
- Not used in practice

Sigmoid

$$g(z) = \frac{1}{1 + e^{-h}}$$

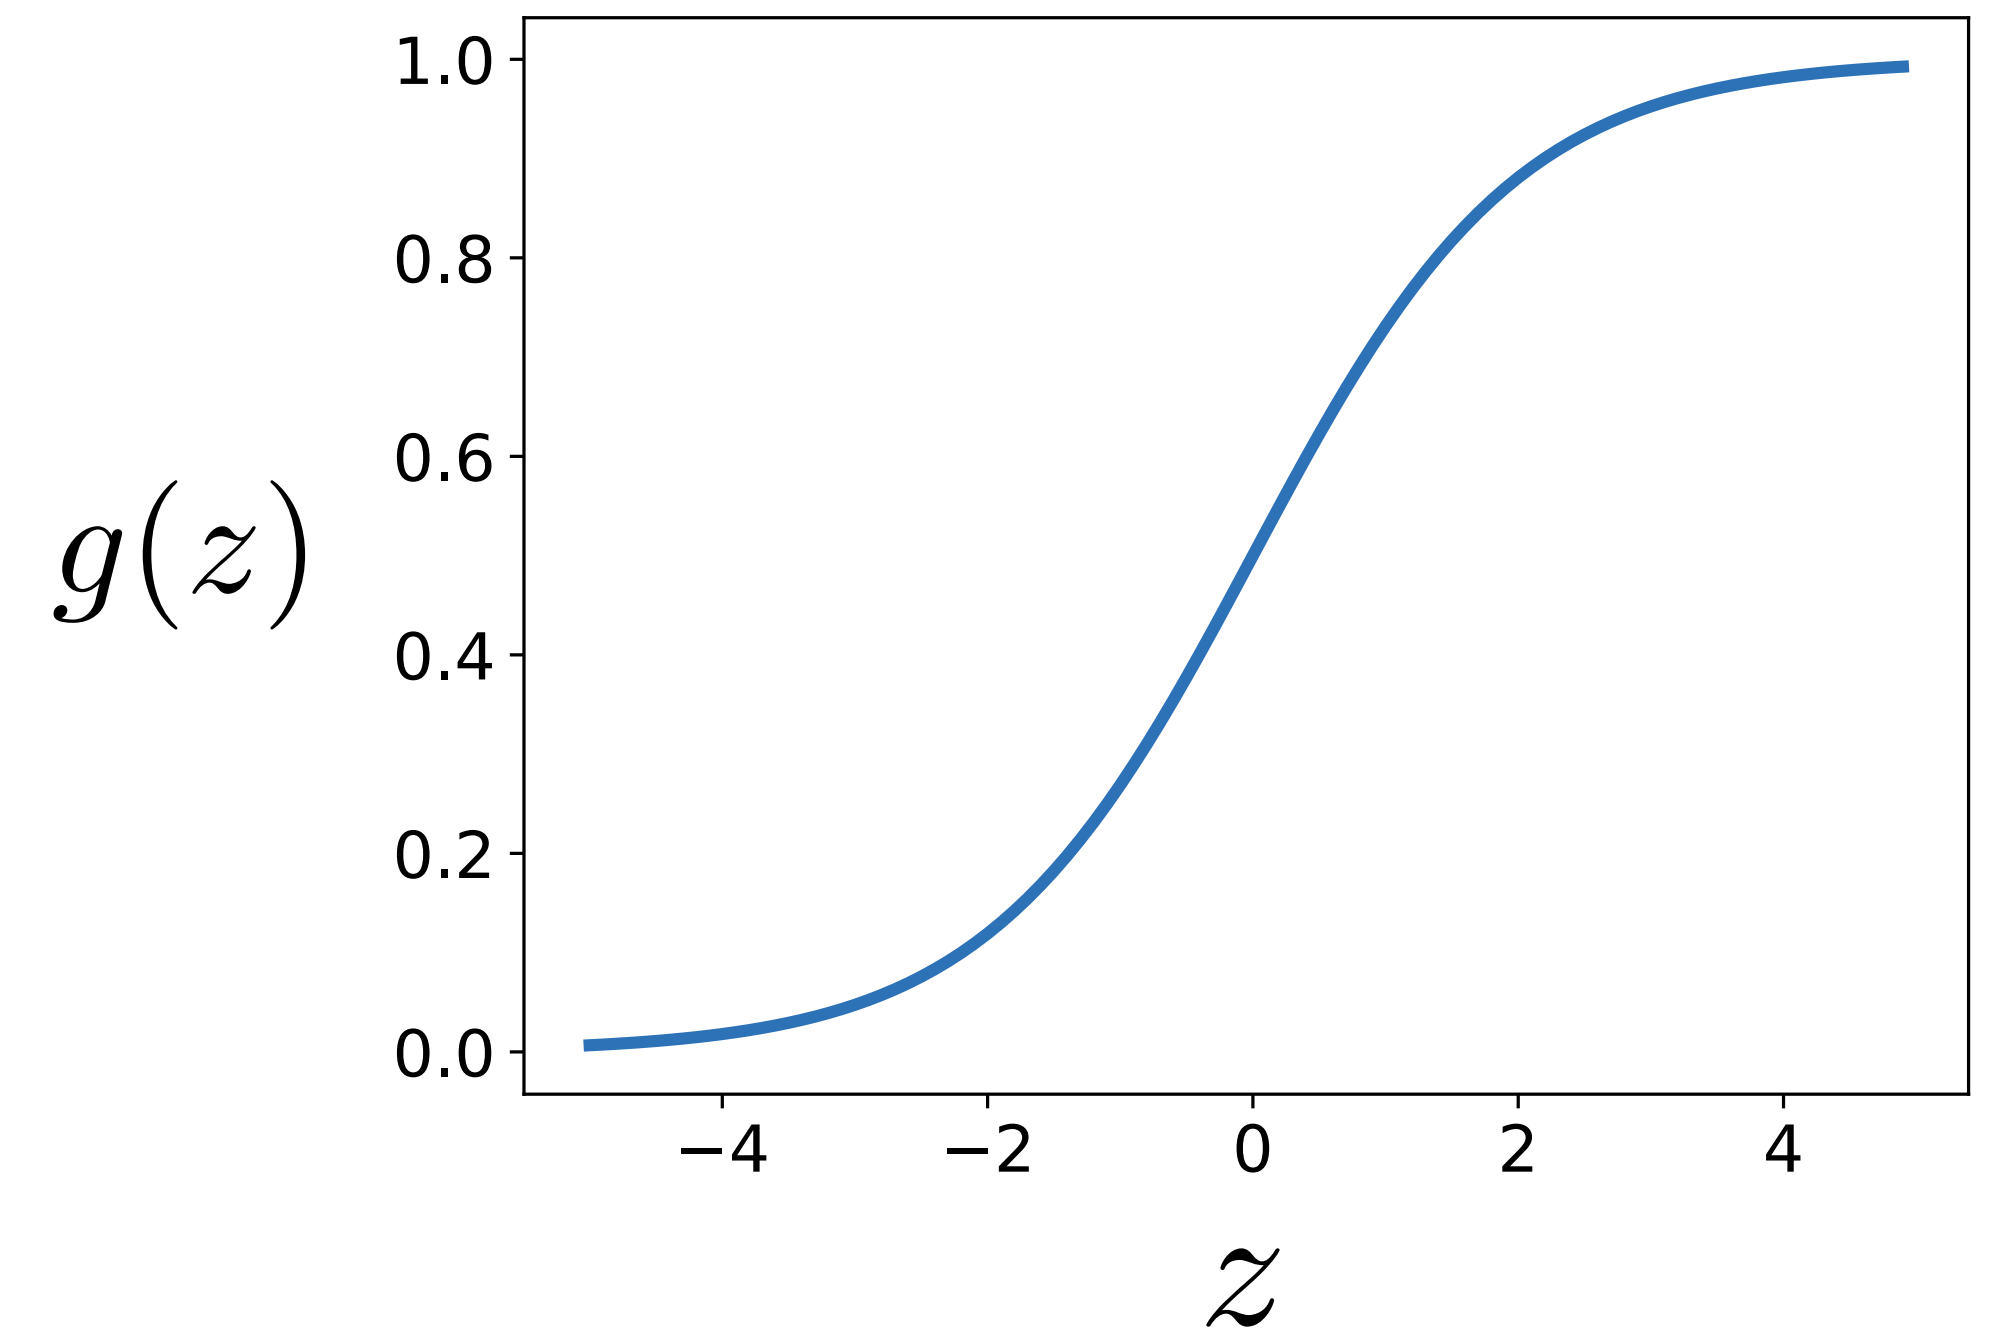


Computation in a neural net — nonlinearity

- Unbounded output (on positive side)
- Efficient to implement: $\frac{\partial g}{\partial z} = \begin{cases} 0, & \text{if } z < 0 \\ 1, & \text{if } z \geq 0 \end{cases}$
- Also seems to help convergence (see 6x speedup vs tanh in [Krizhevsky et al.])
- Drawback: if strongly in negative region, unit is dead forever (no gradient).
- Default choice: widely used in current models.

Rectified linear unit (ReLU)

$$g(z) = \max(0, z)$$

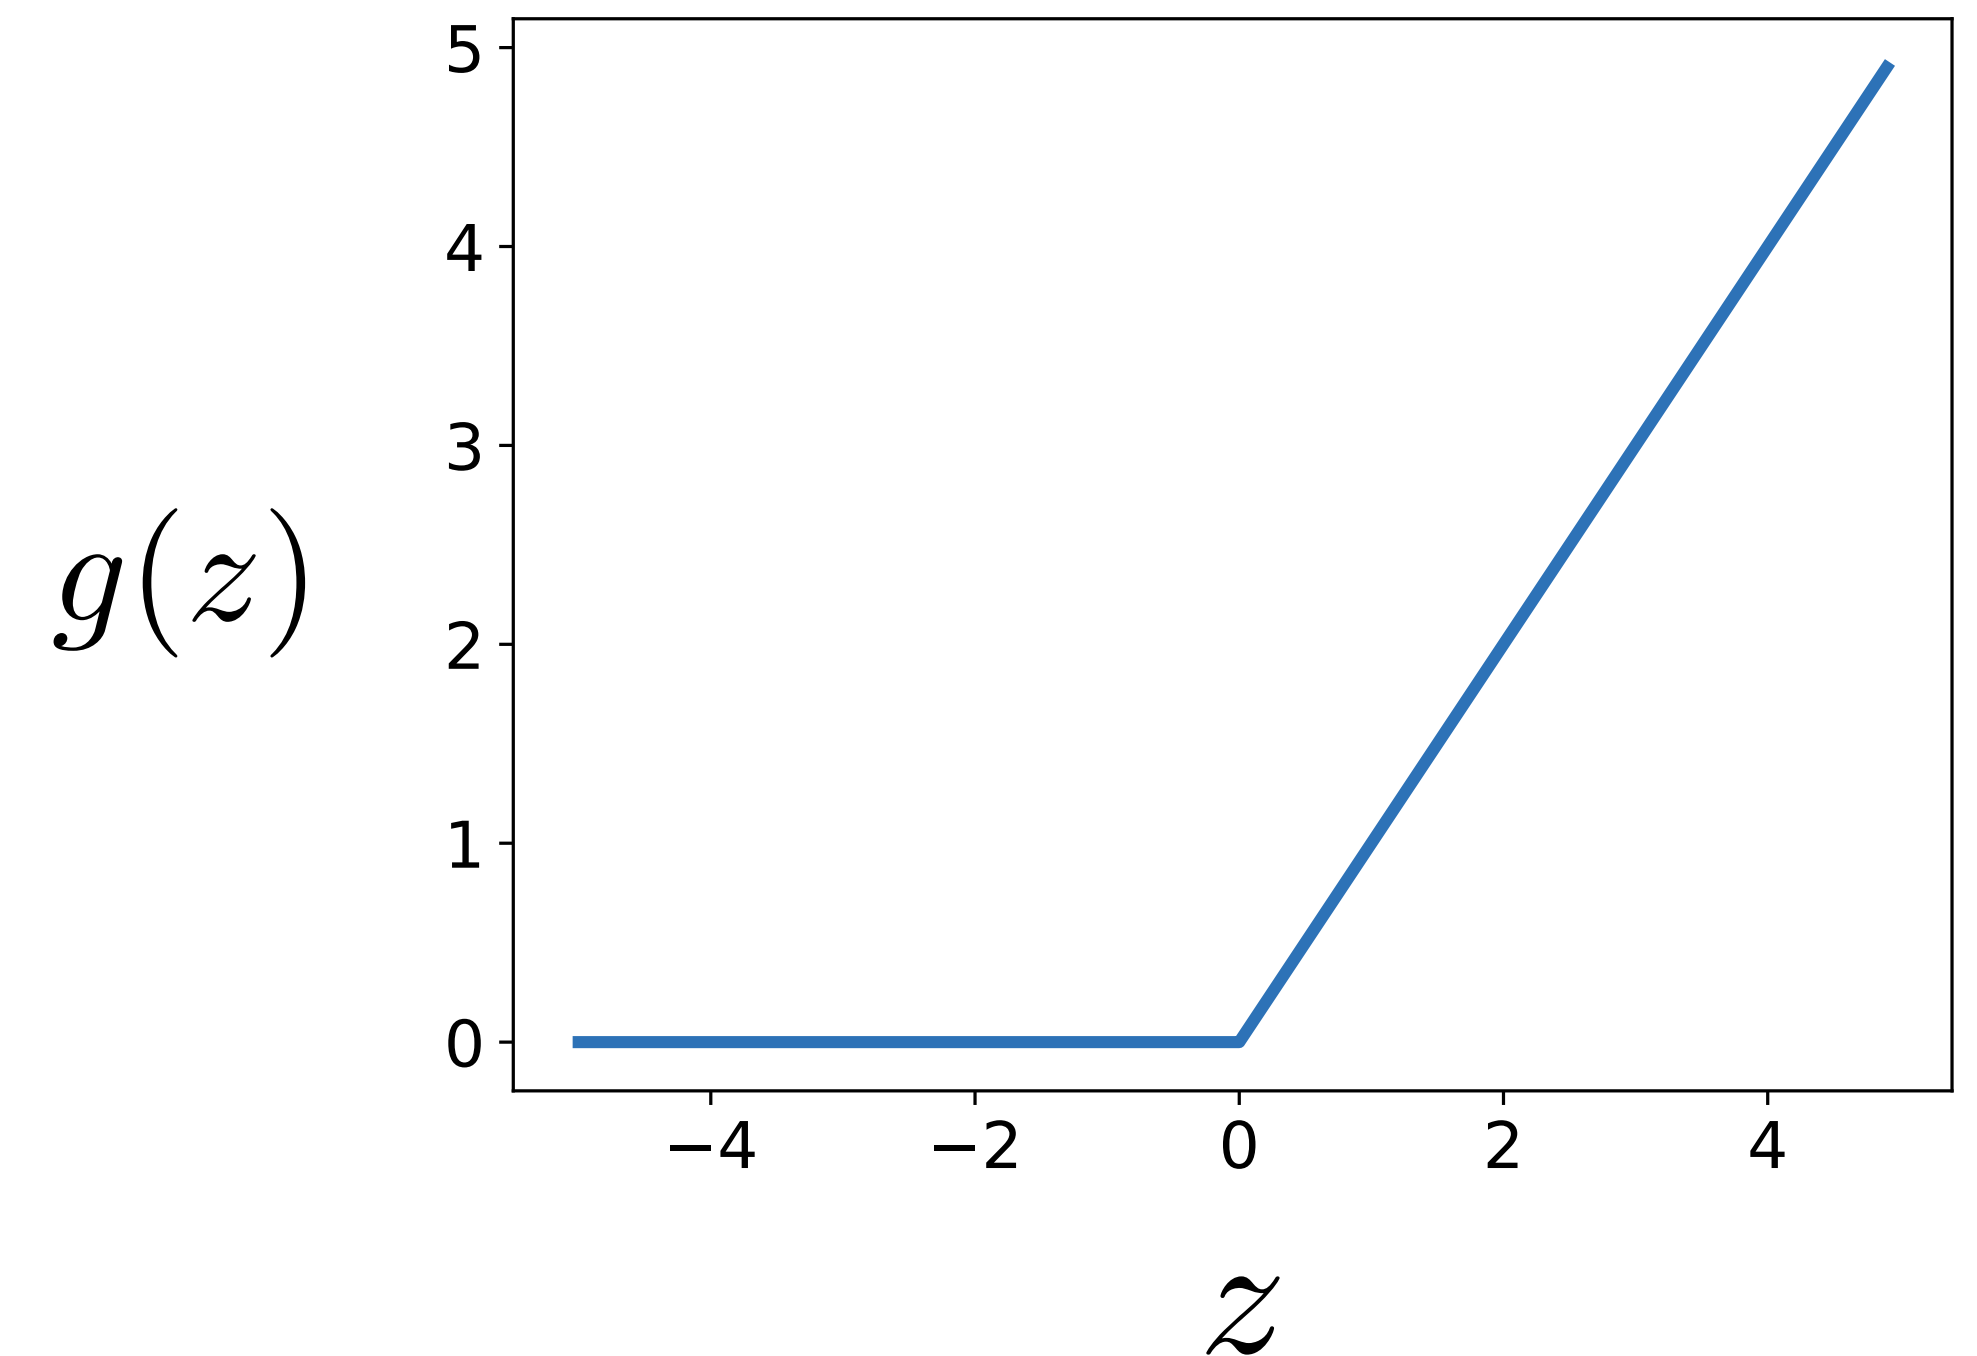


Stacking layers

Input
representation


Intermediate
representation

Output
representation

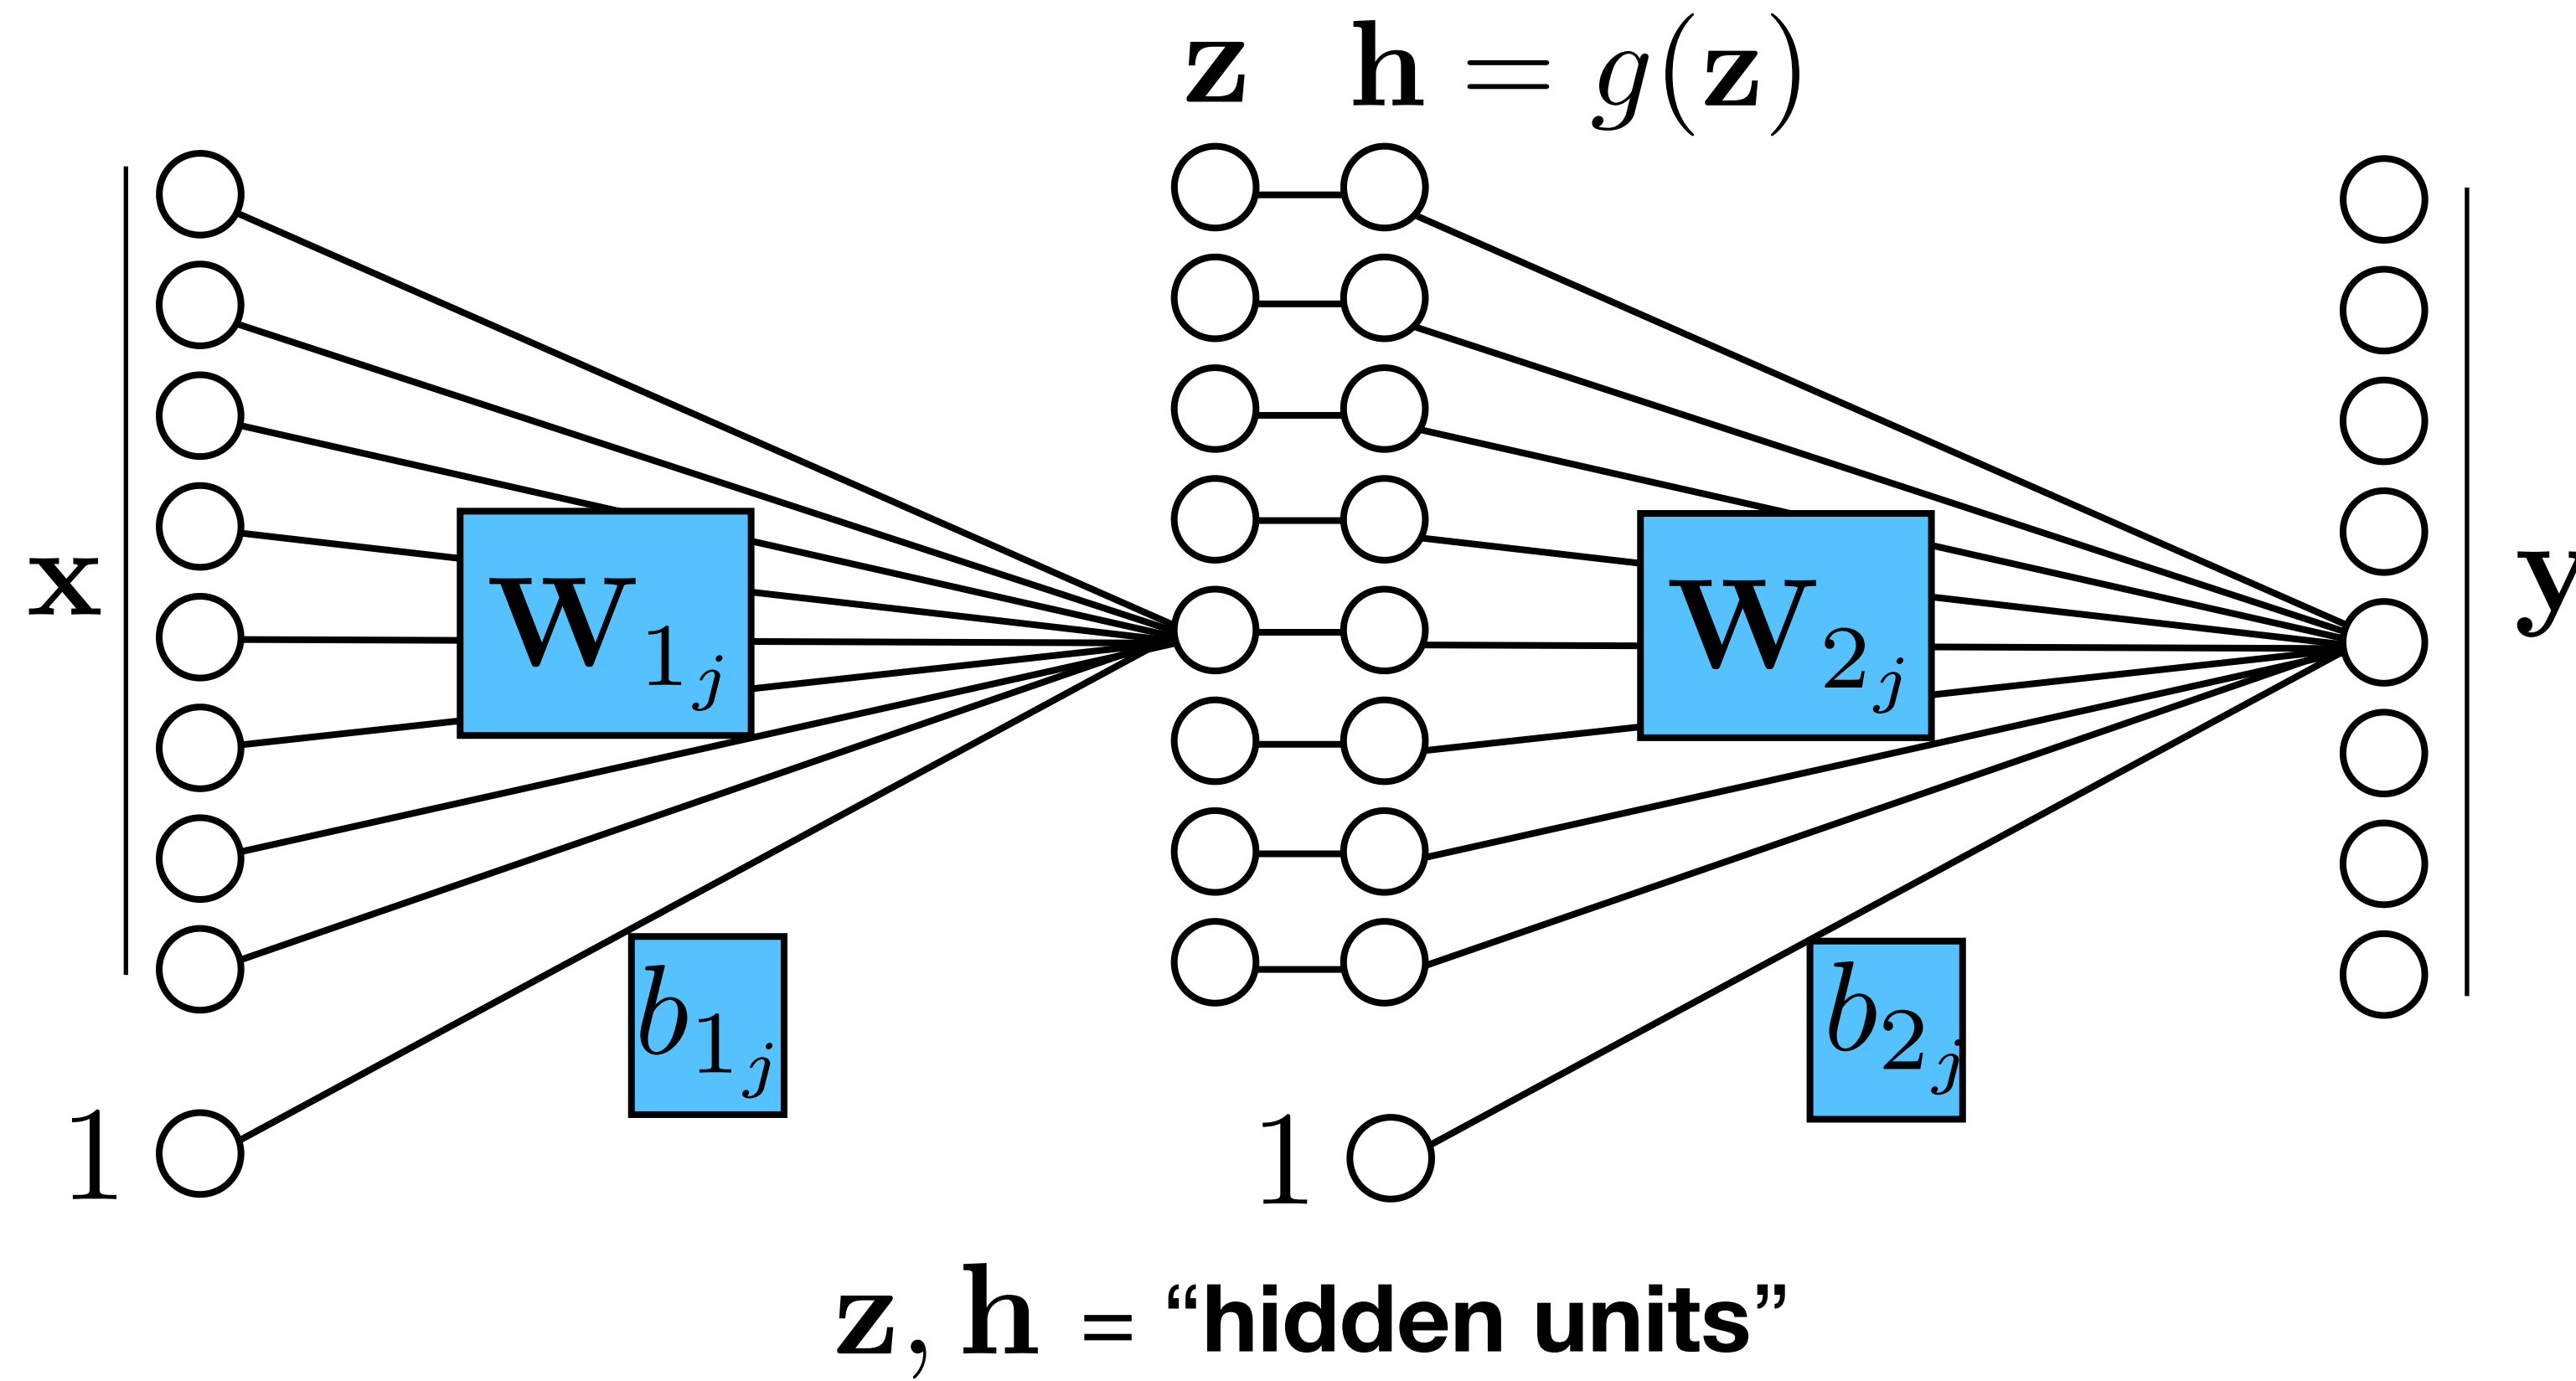

Stacking layers

Input representation Intermediate representation Output representation

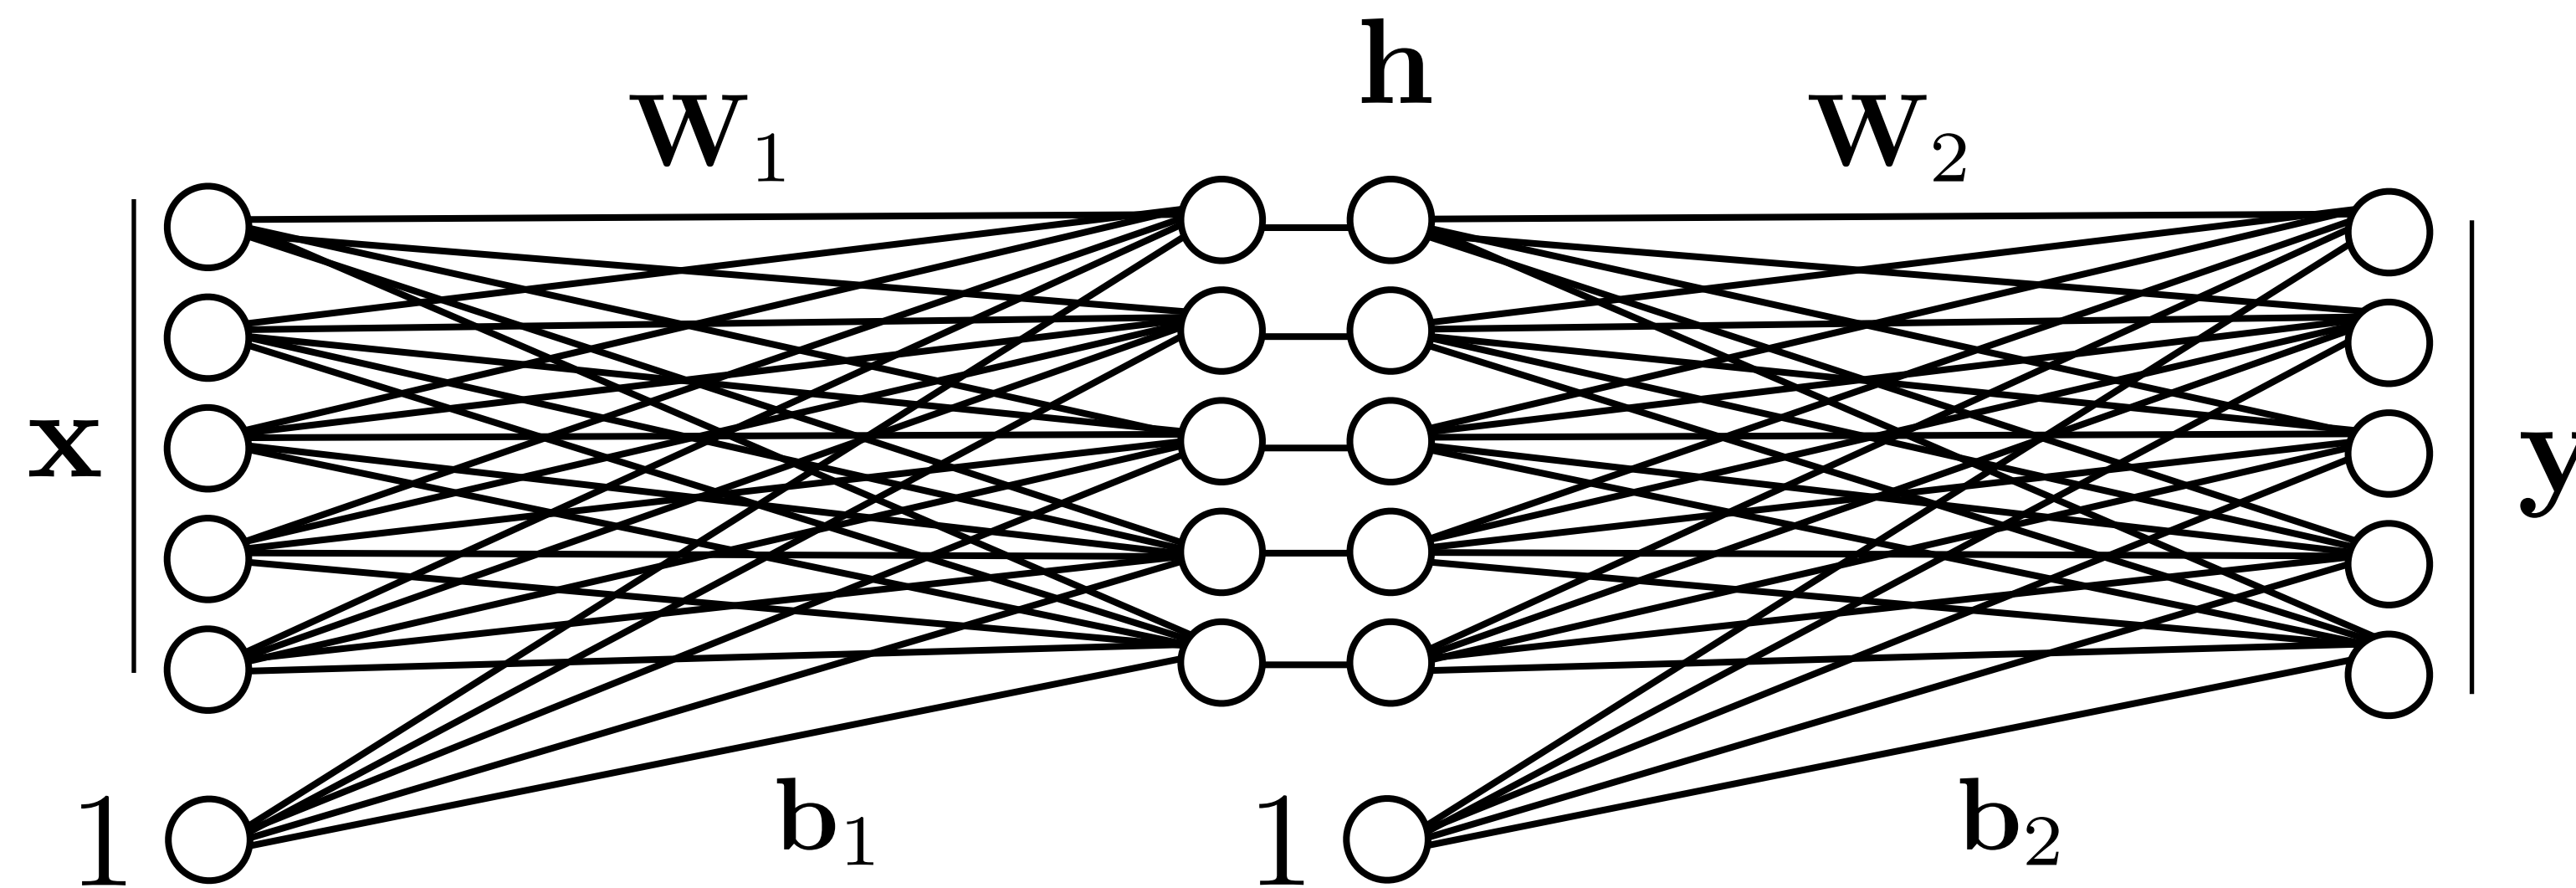


$$\mathbf{h} = g(\mathbf{W}_1 \mathbf{x} + \mathbf{b}_1)$$

$$\mathbf{y} = g(\mathbf{W}_2 \mathbf{h} + \mathbf{b}_2)$$



$$\theta = \{\mathbf{W}_1, \dots, \mathbf{W}_L, \mathbf{b}_1, \dots, \mathbf{b}_L\}$$

Example: linear classification with a perceptron

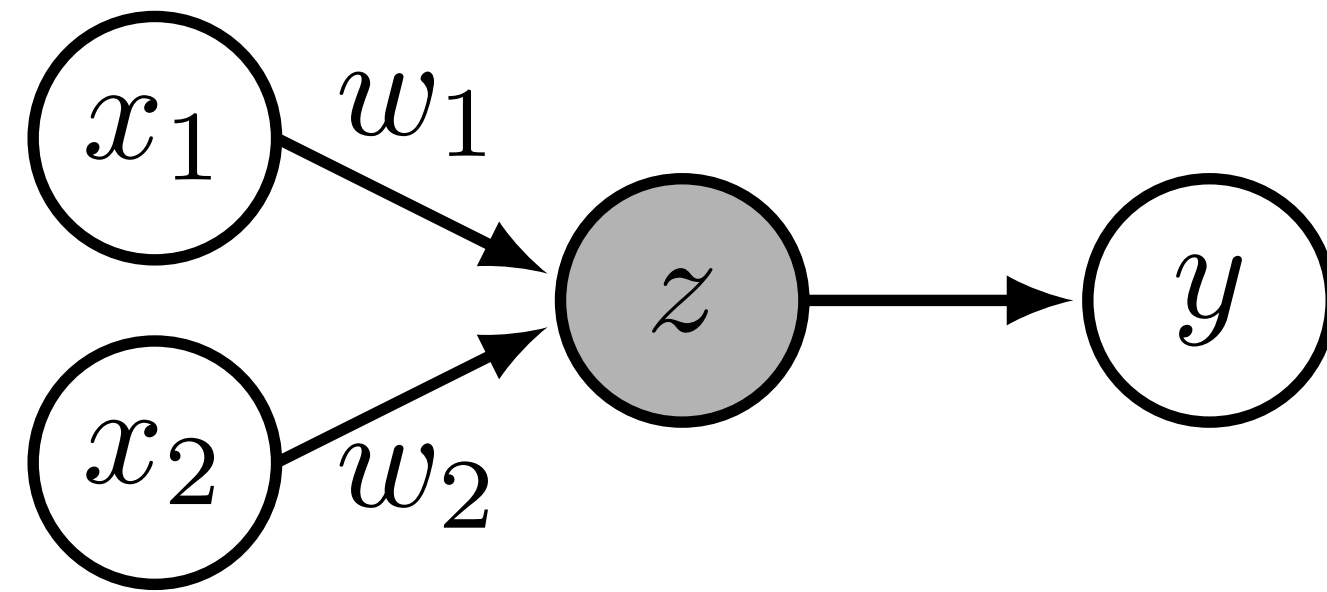


$$z = \mathbf{x}^T \mathbf{w} + b$$

$$y = g(z)$$

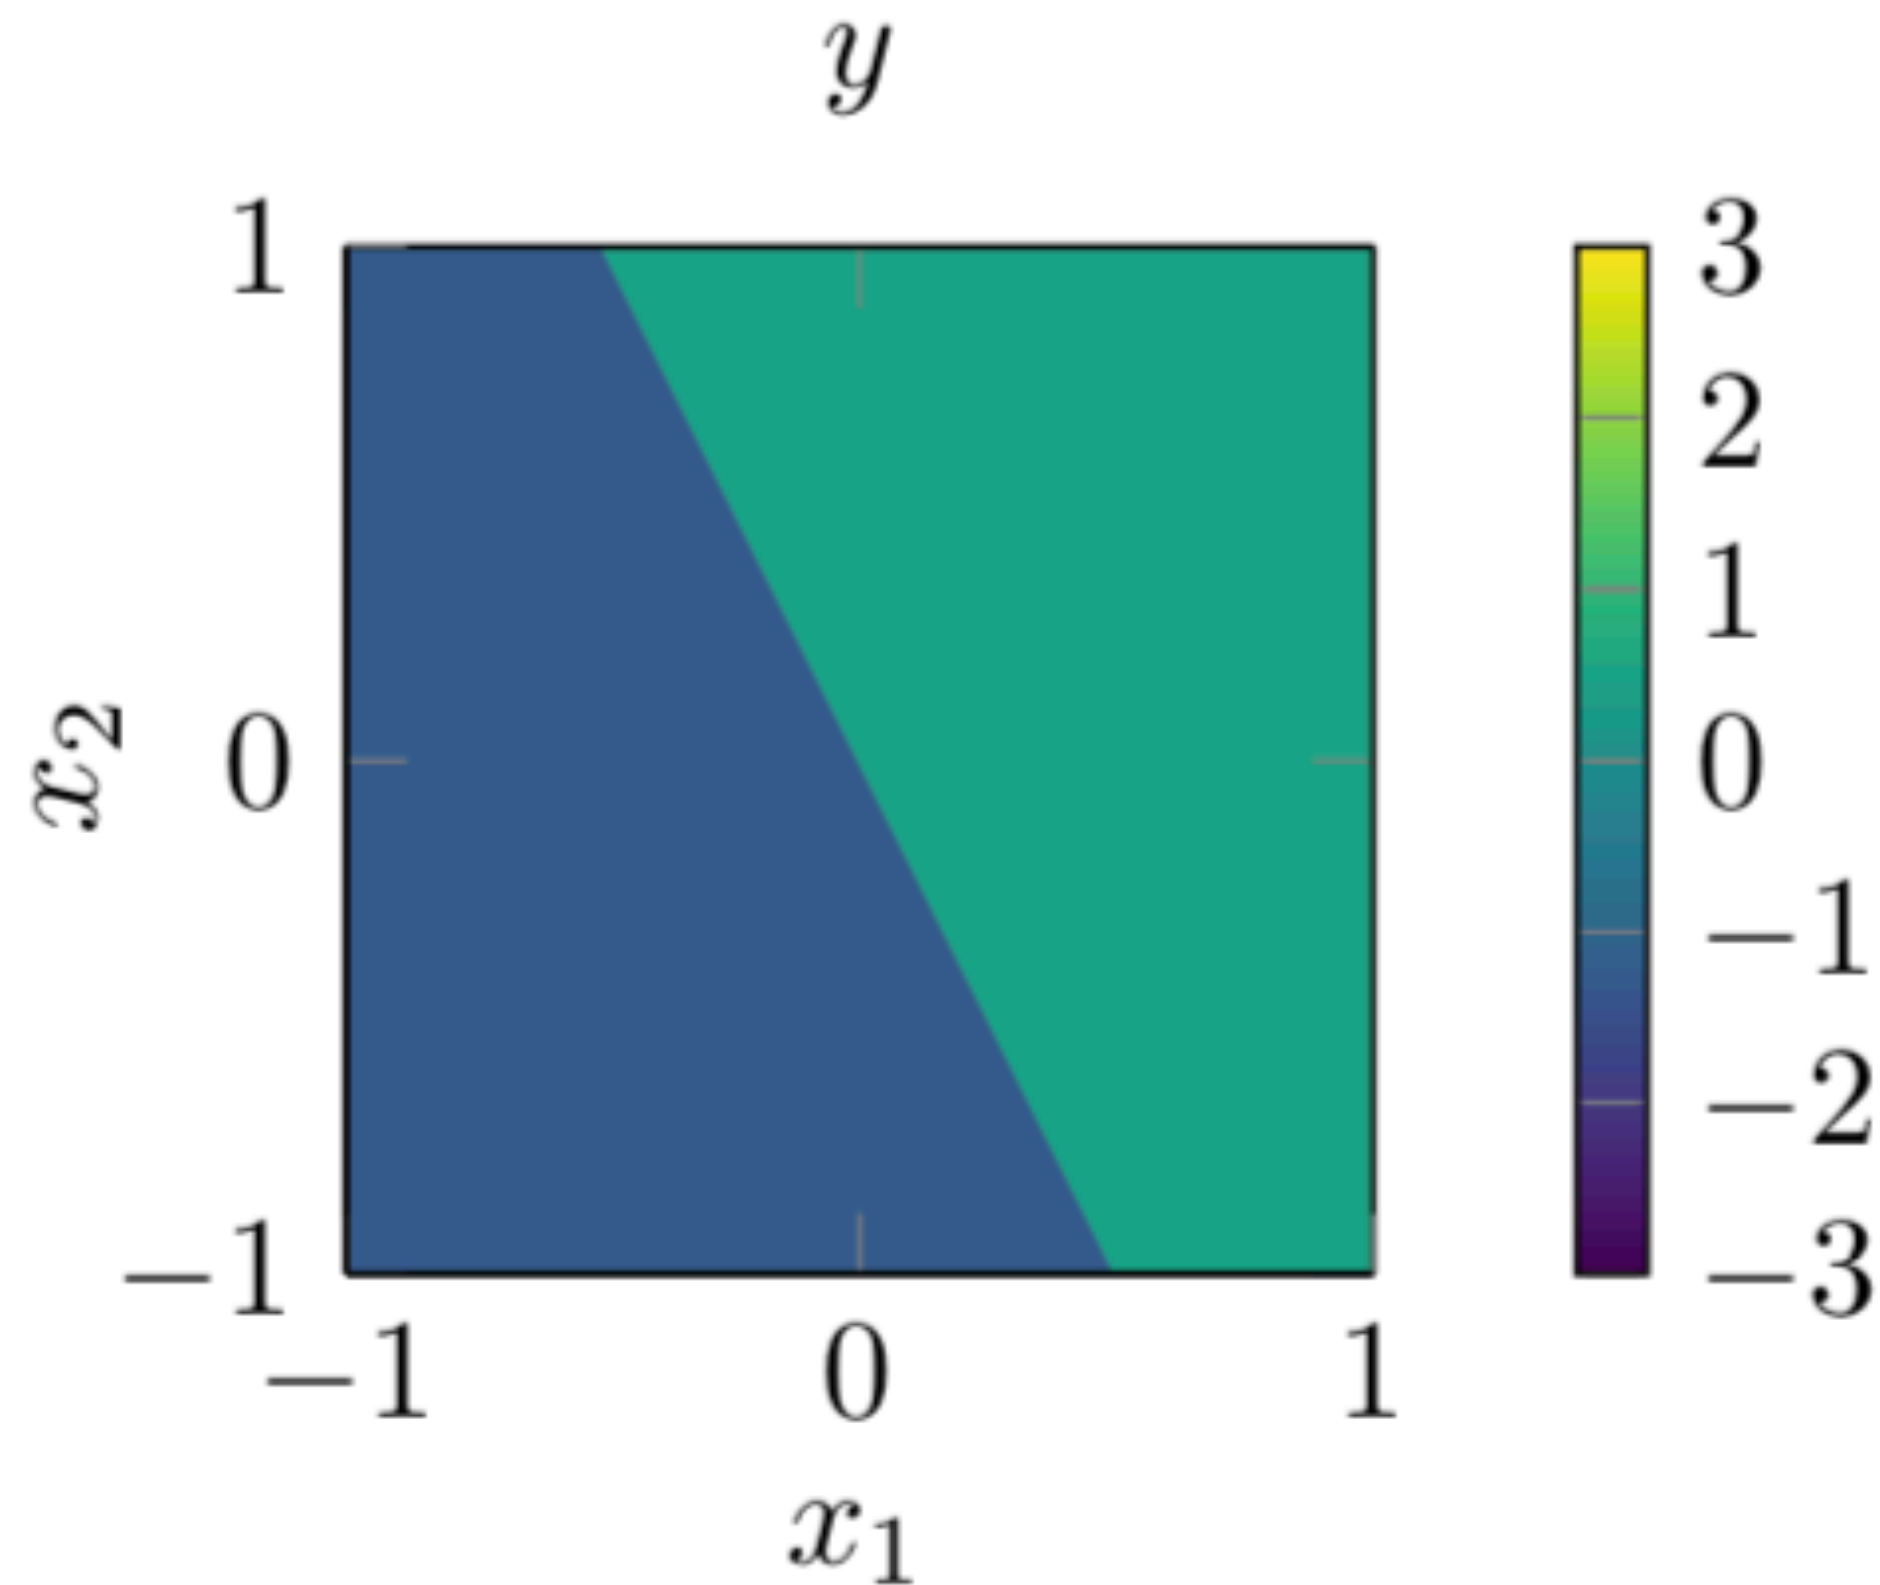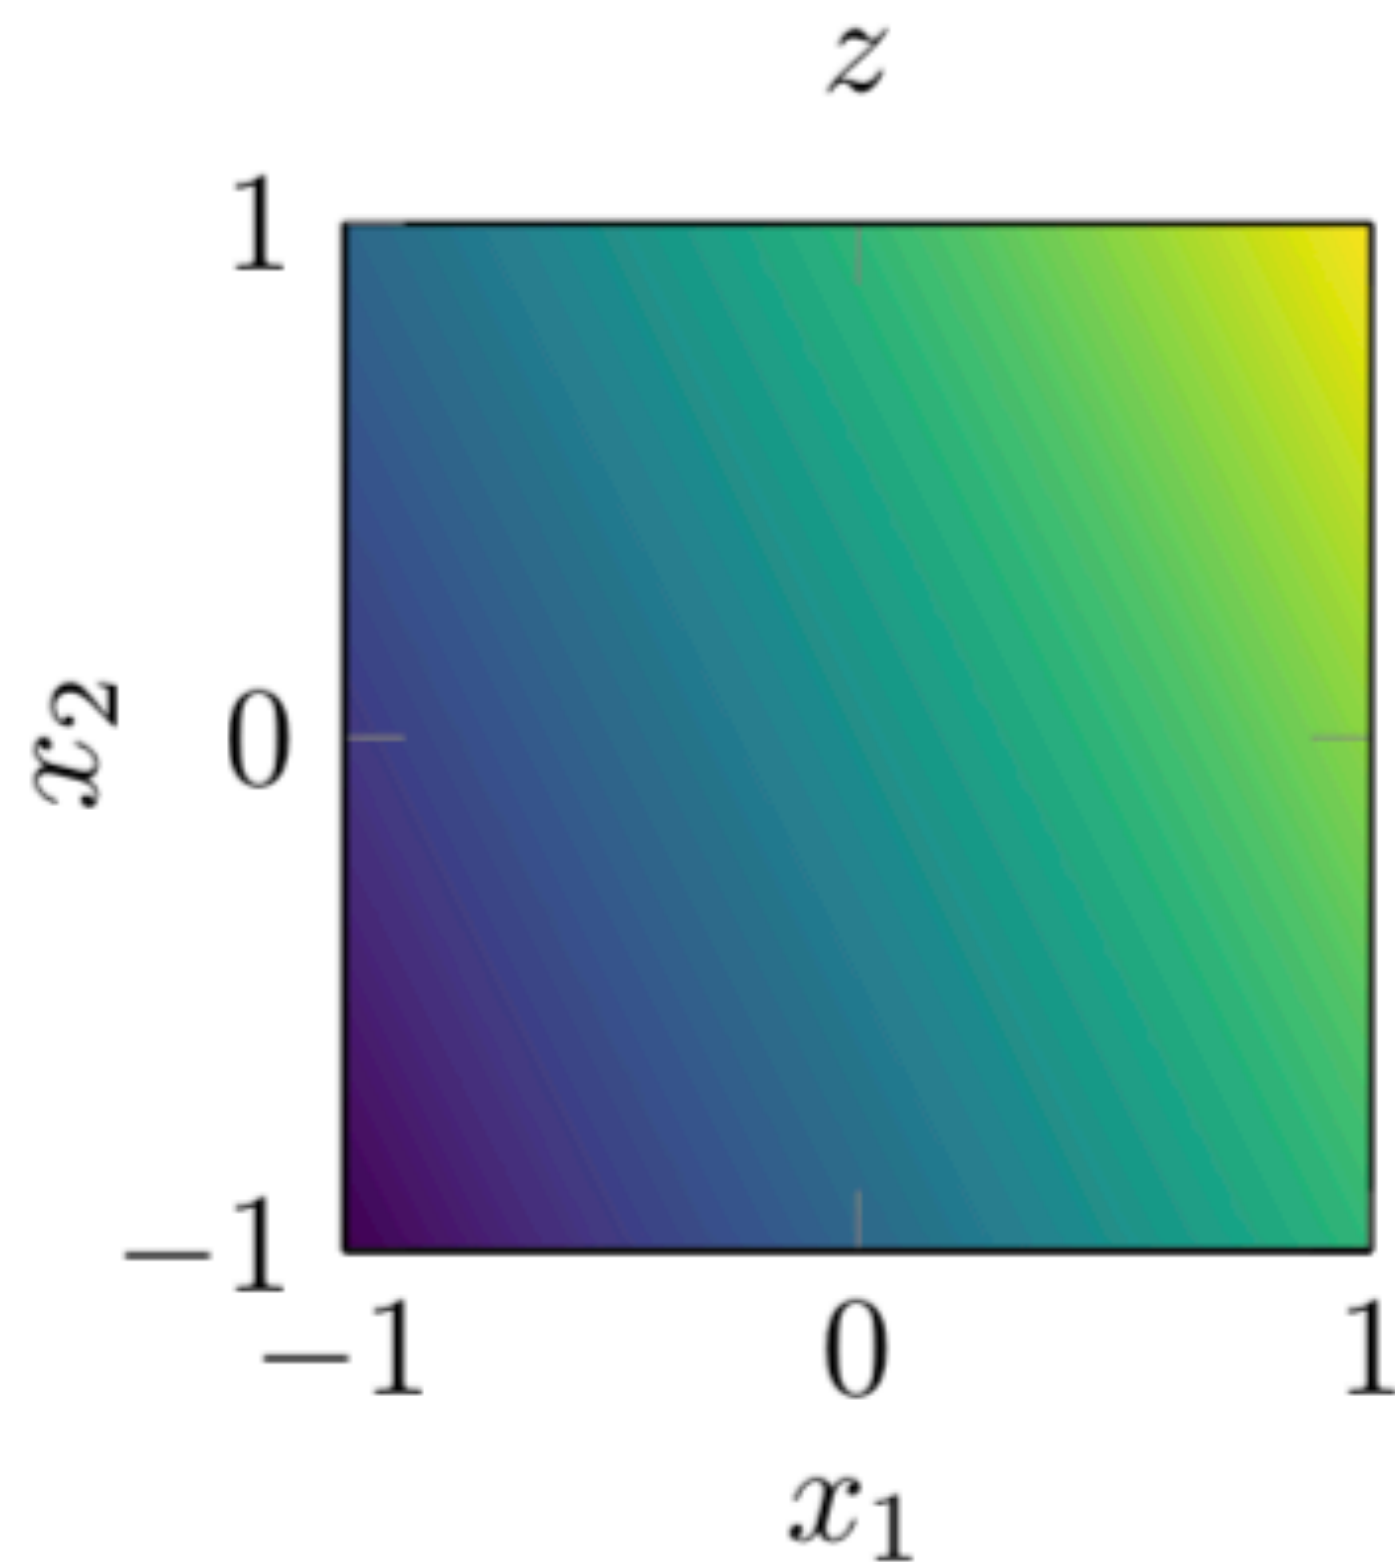

One layer neural net (perceptron) can perform linear classification!

Example: nonlinear classification with a deep net net

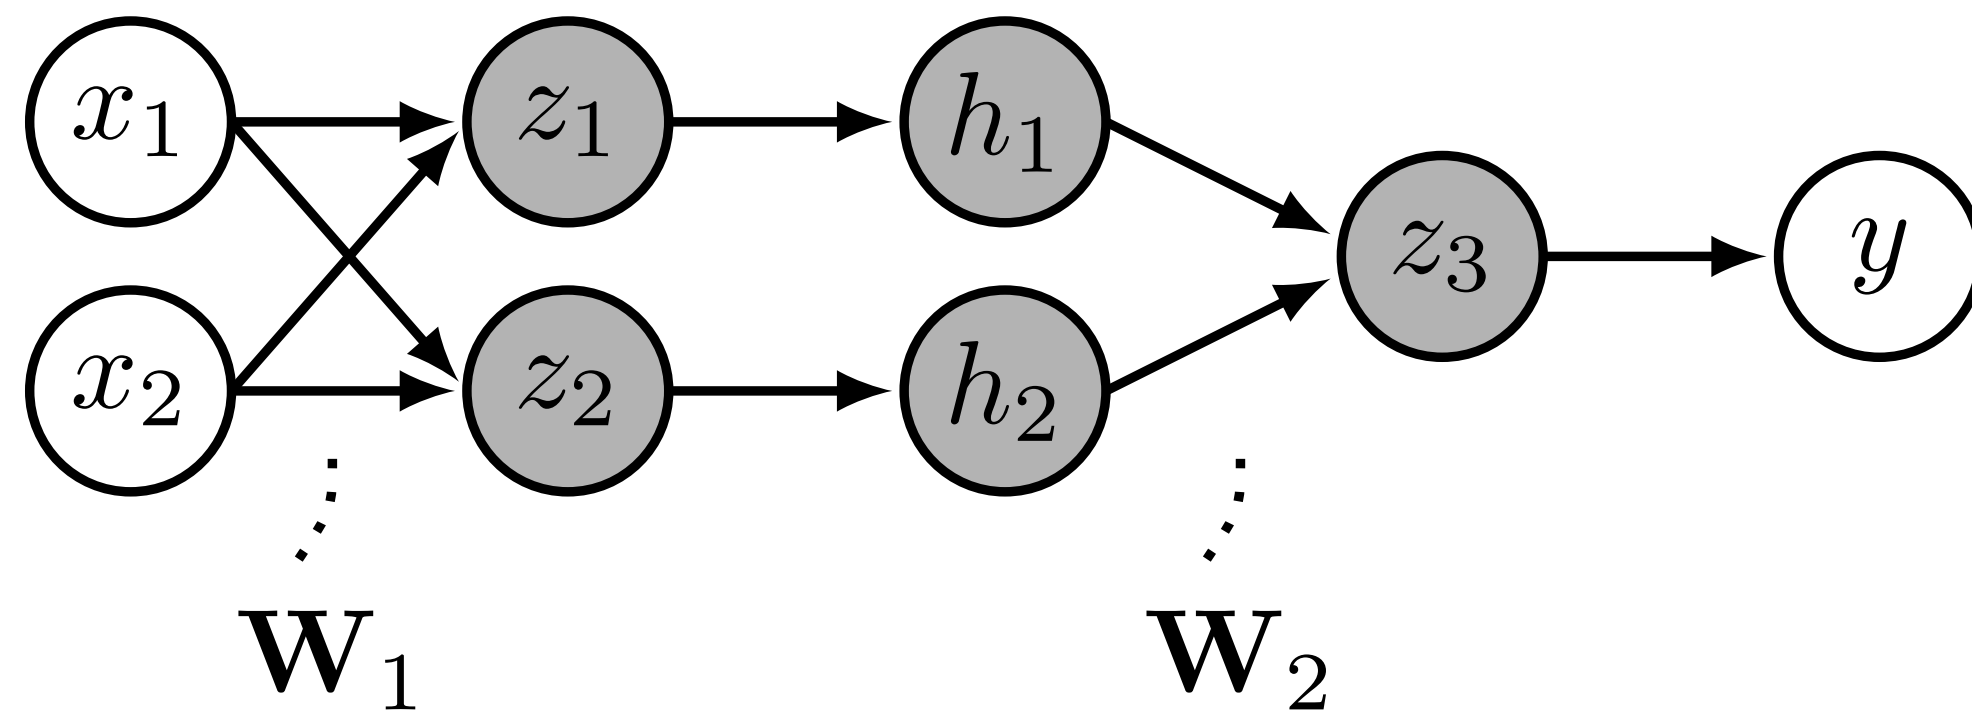


$$\mathbf{z} = \mathbf{W}_1 \mathbf{x} + \mathbf{b}_1$$

$$\mathbf{h} = g(\mathbf{z})$$


$$z_3 = \mathbf{W}_2 \mathbf{h} + b_2$$

$$y = 1(z_3 > 0)$$

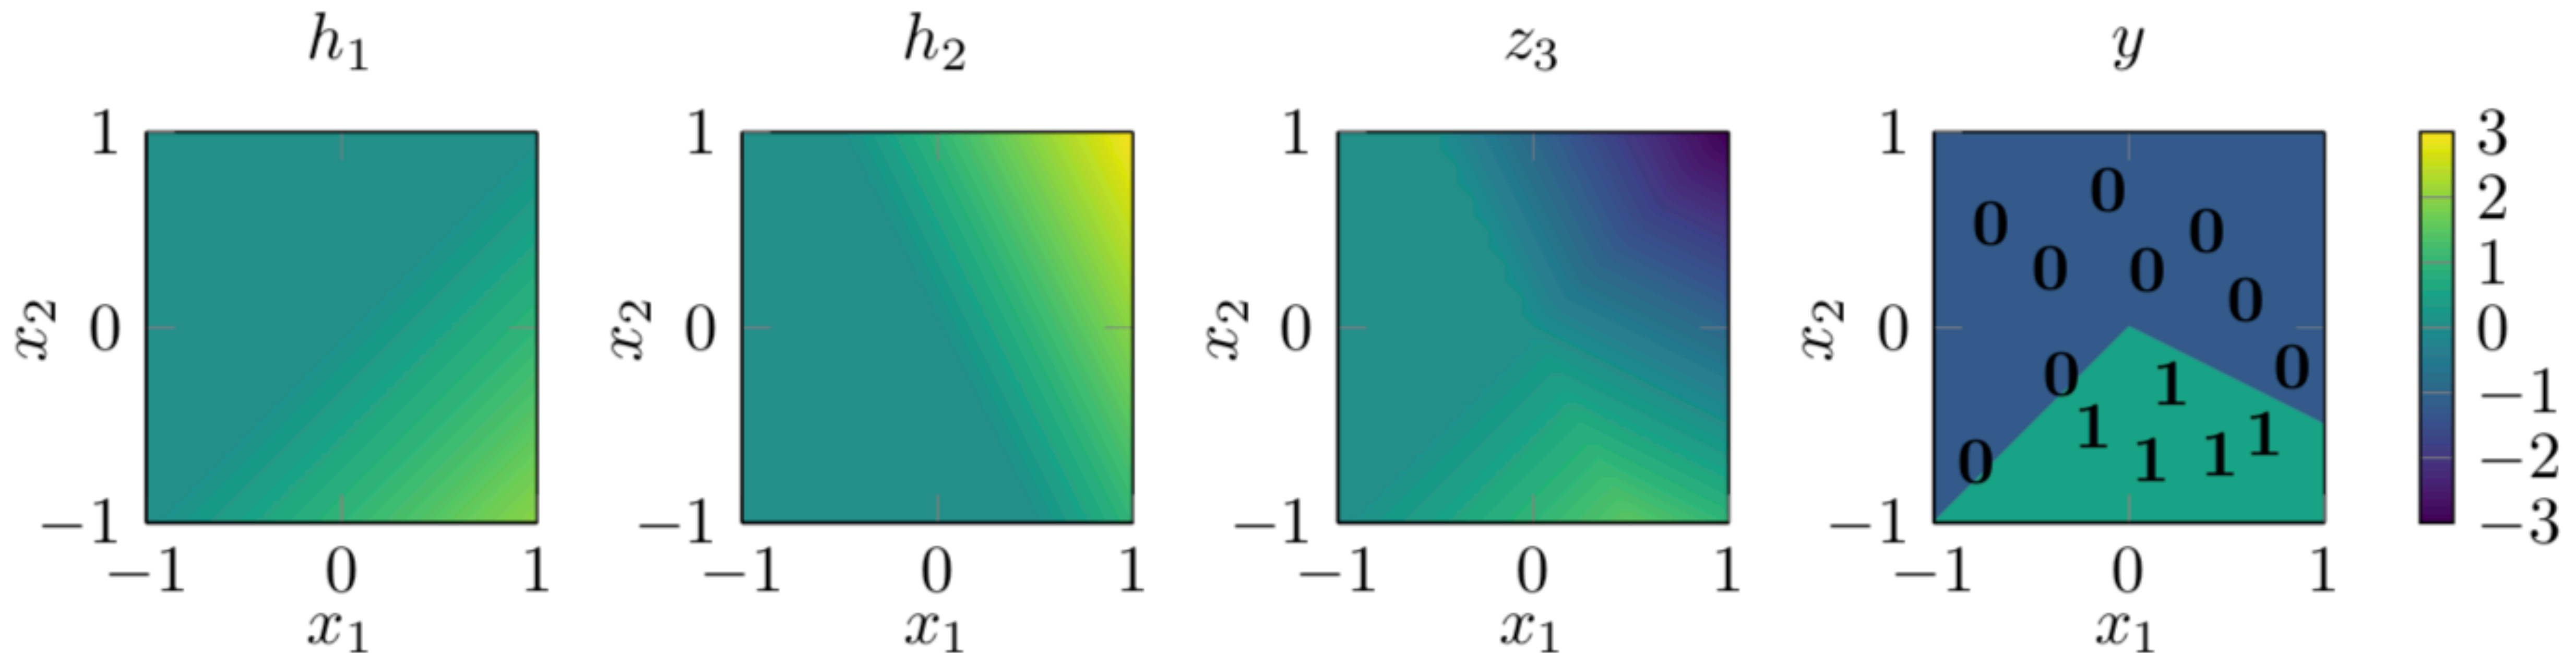

What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate


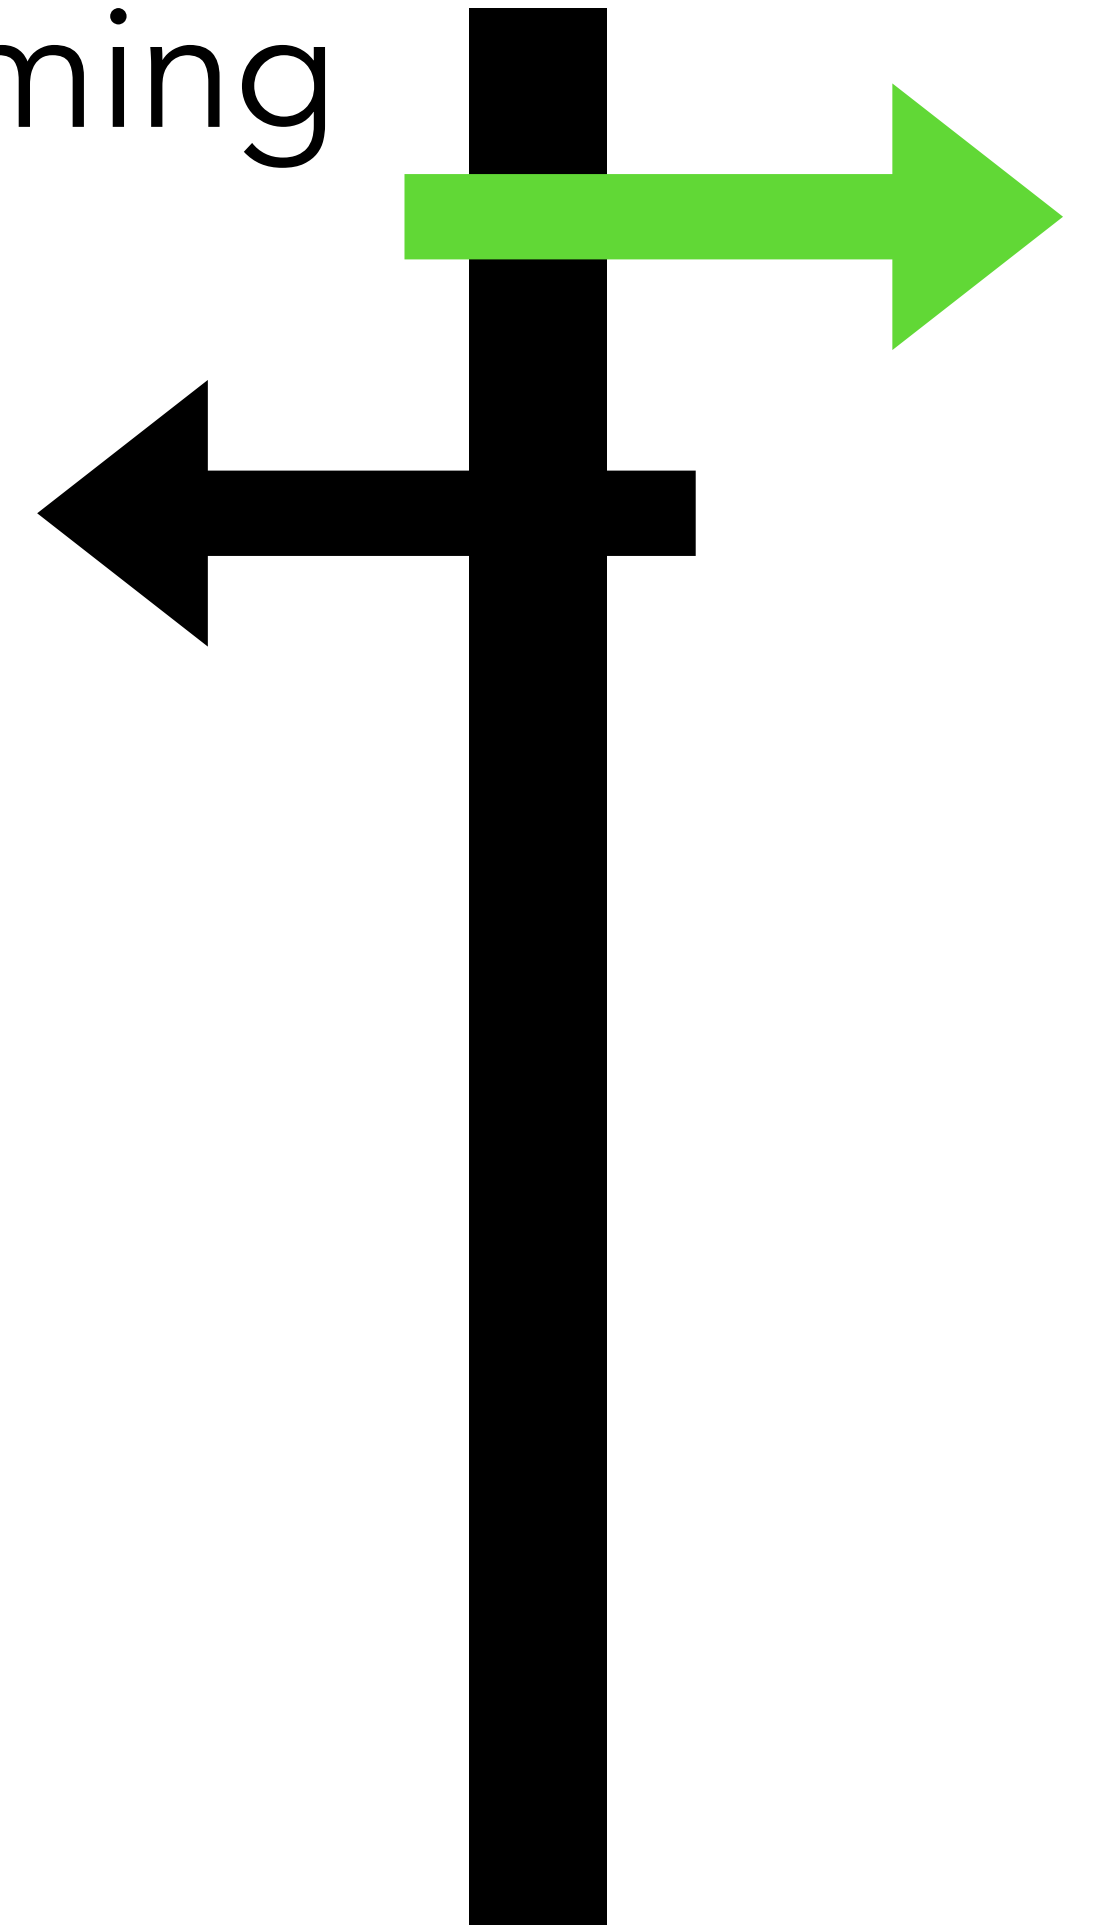


Representational power

- 1 layer? Linear decision surface.
- 2+ layers? In theory, can represent any function.

Assuming non-trivial non-linearity


Lecture 3: Approximation theory

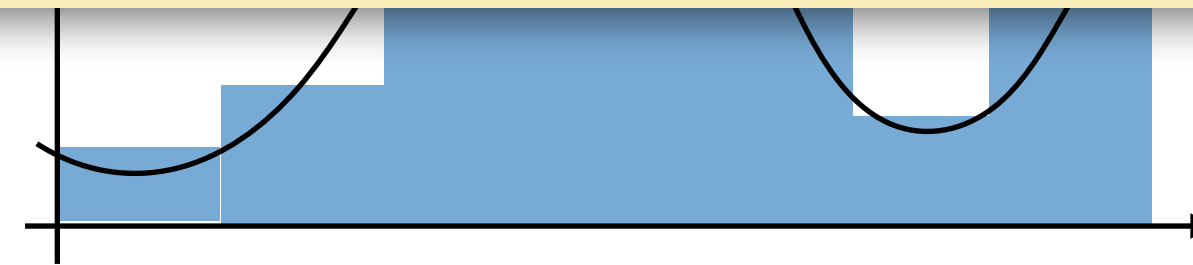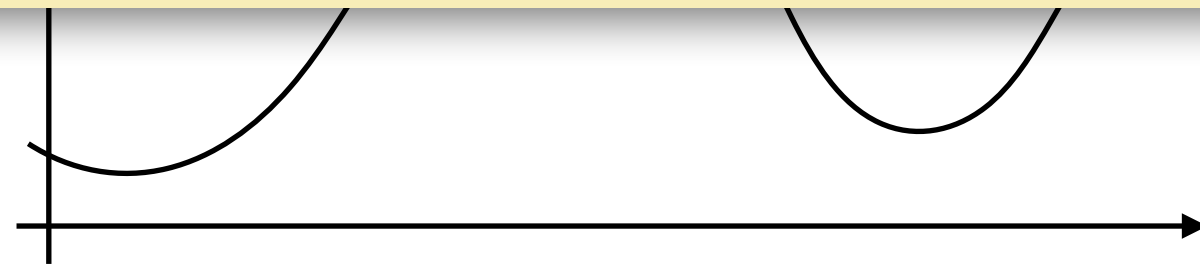

- But issue is efficiency: very wide two layers vs narrow deep model? In practice, more layers helps.

What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures

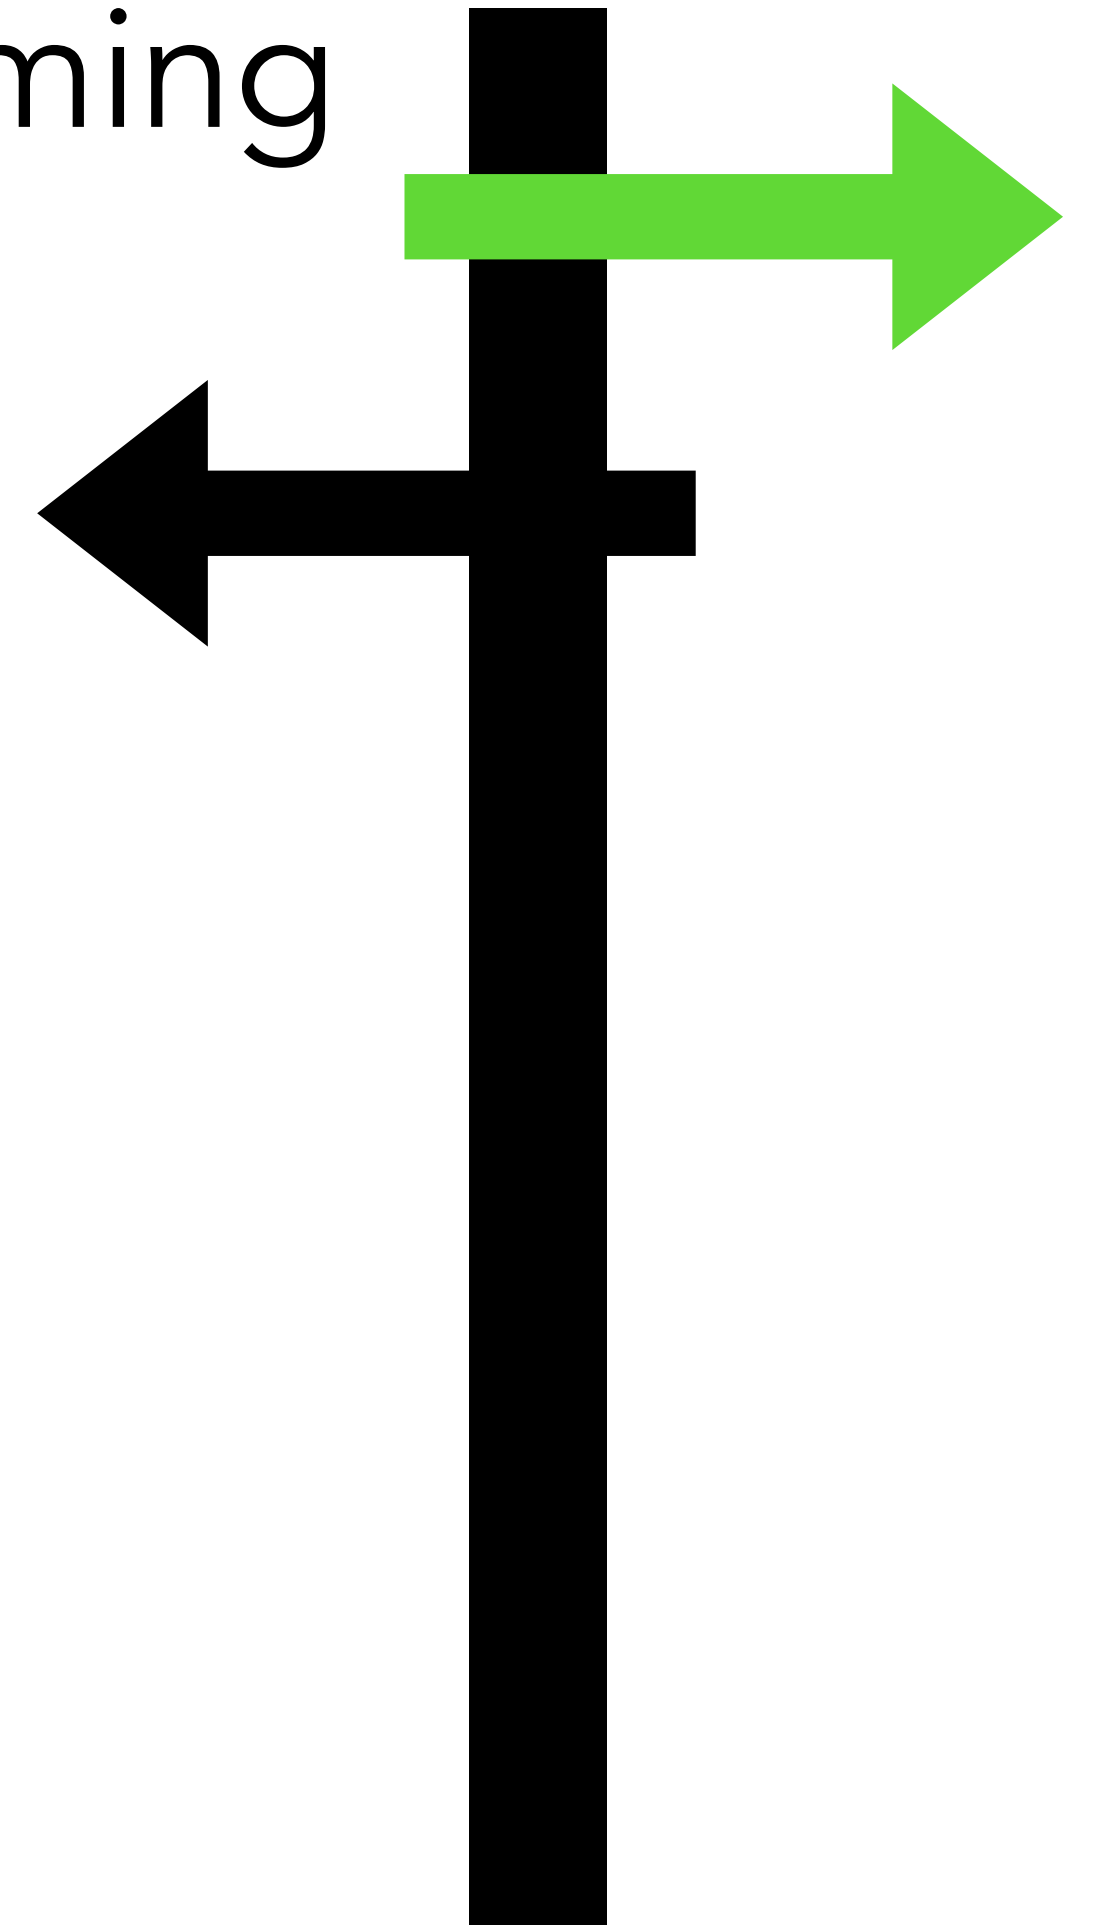

Deep nets

Linear
Non-linearity

Classify

Architectures

Lecture 4: CNNs


Lecture 5: GNNs

Lecture 11: Transformers

Lecture 12: RNNs



What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures
- When and why can we generalize

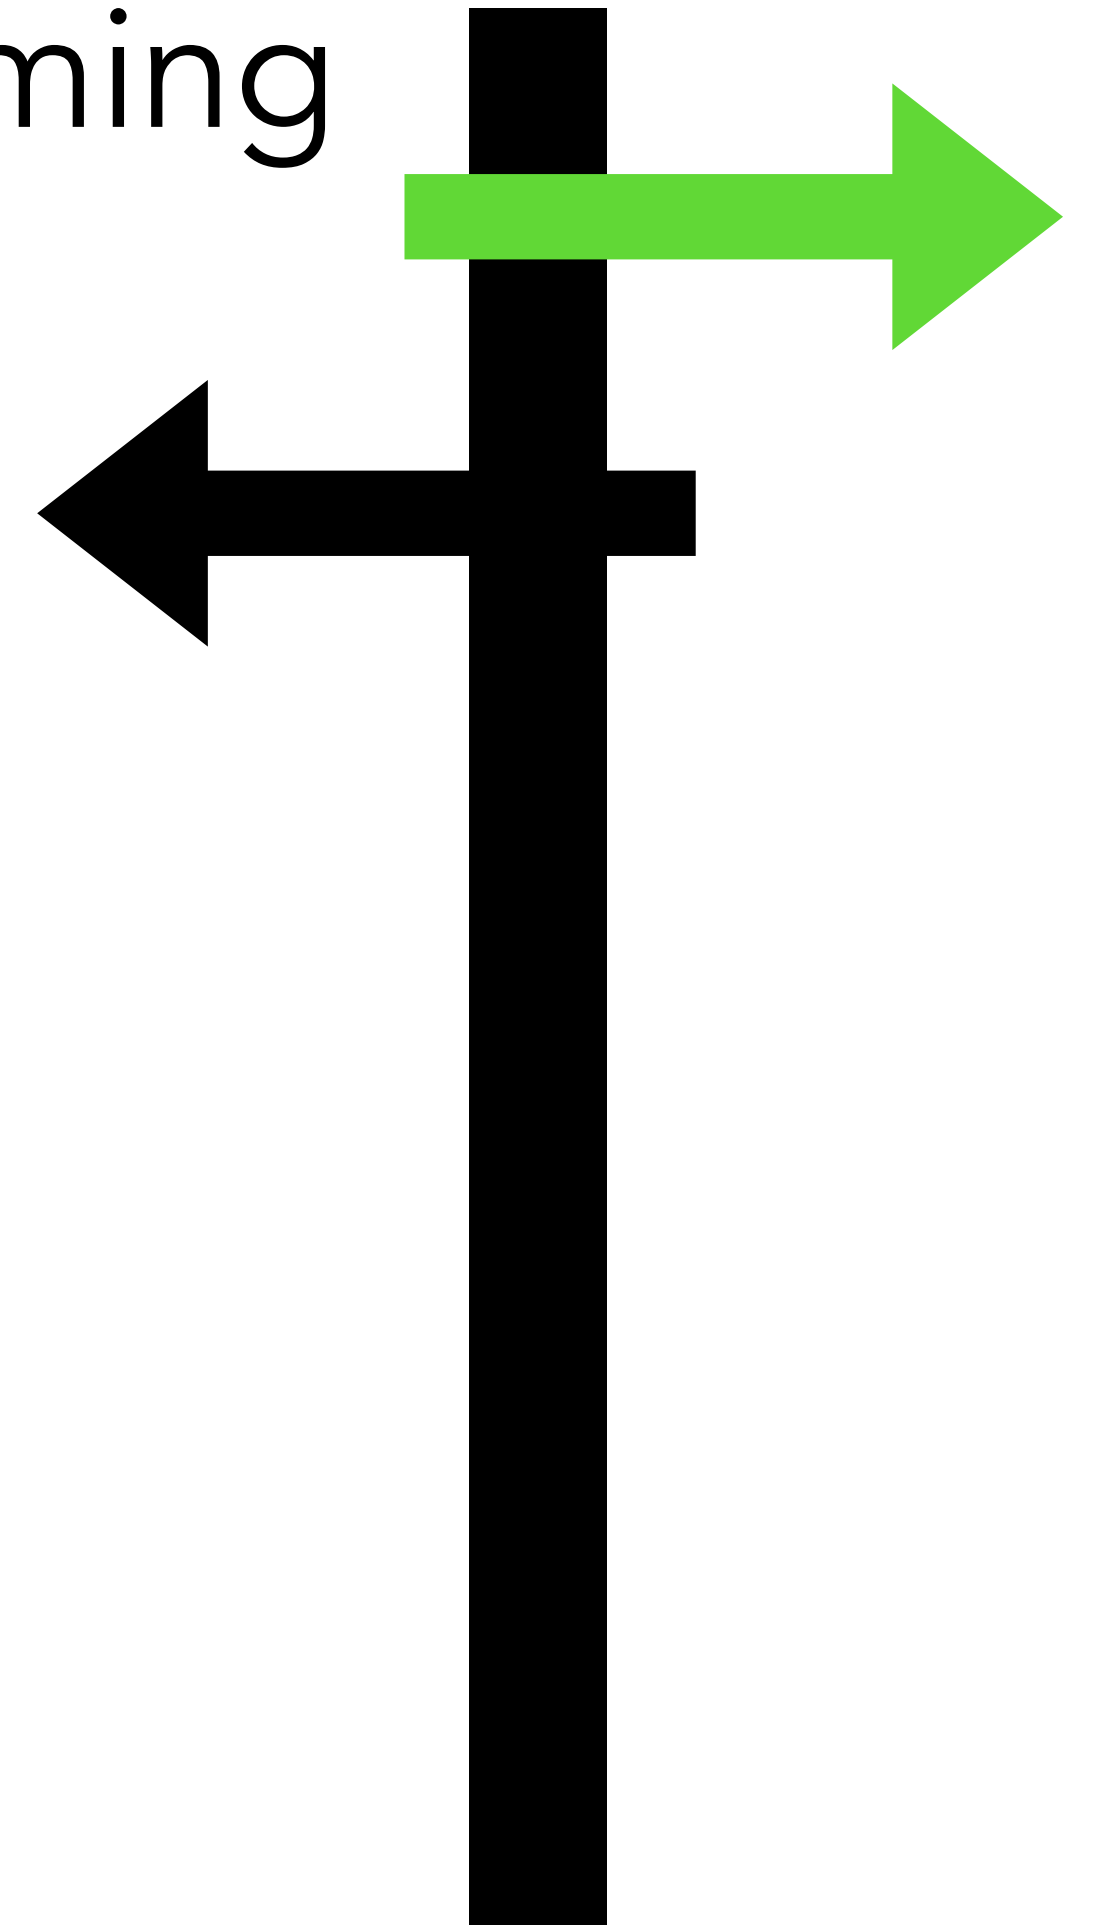

Why do deep nets generalize?

- Deep nets have so many parameters they could just act like look up tables, regurgitating their training data
- Instead, they learn rules that generalize
- Defies classical theory!

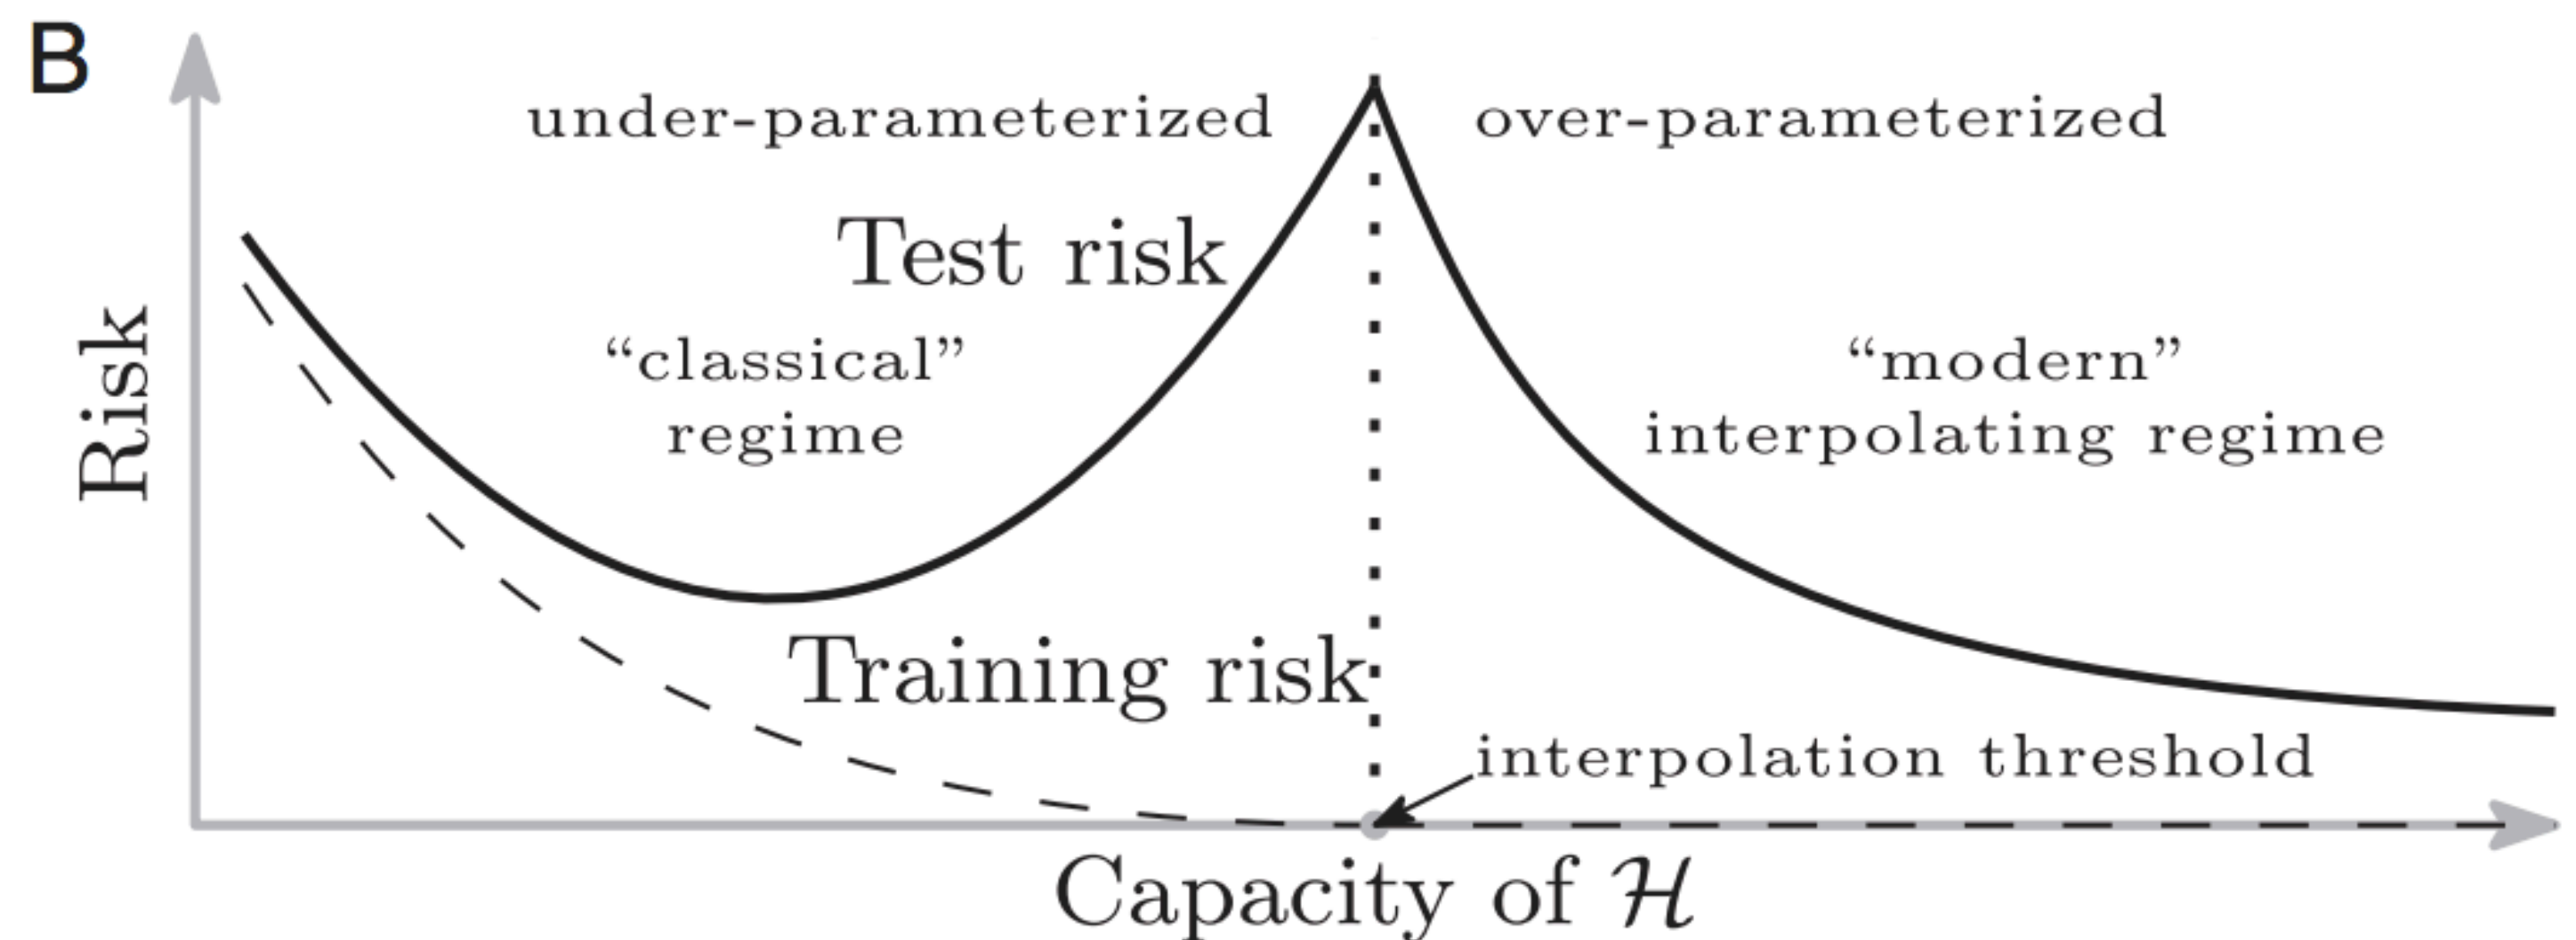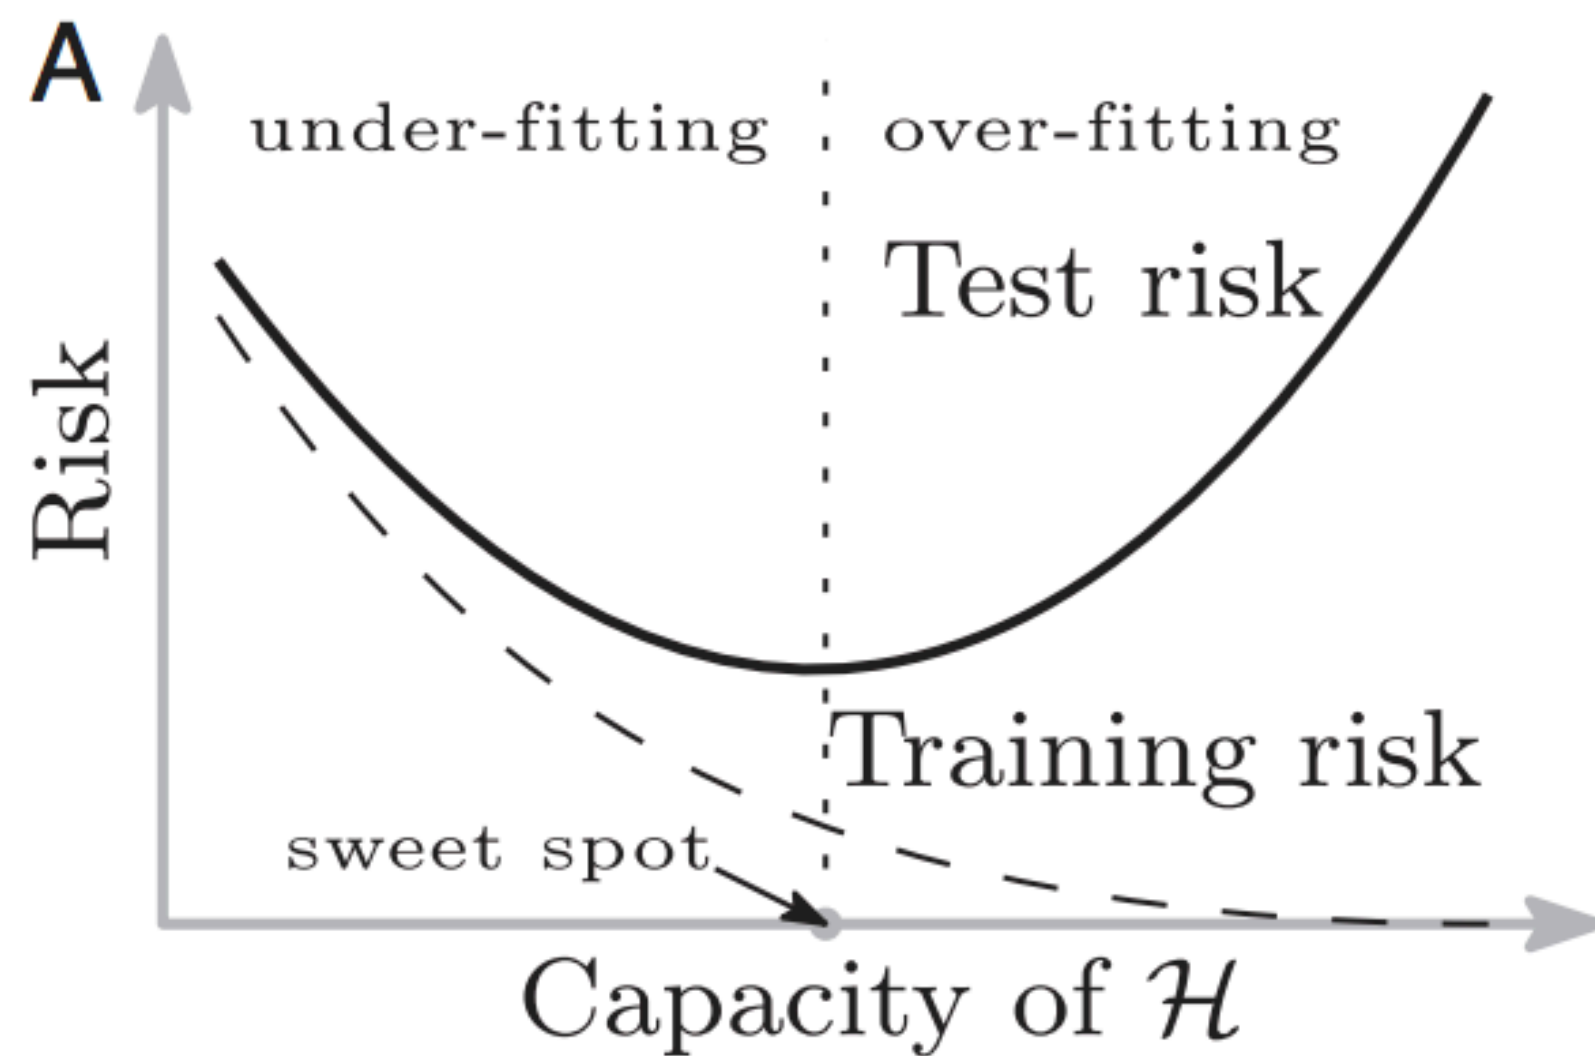

[Double-descent: Belkin, Hsu, Ma, Mandal, PNAS 2019]

The simplicity hypothesis

Classical theory:


Lecture 4: Bayesian Generalization
Lecture 19: OOD generalization

Emerging theory.


deep nets learn *simple* functions that generalize

What we expect you to have seen before

- Gradient descent
- MLPs, Nonlinearities (ReLU)
- Softmax, cross-entropy loss

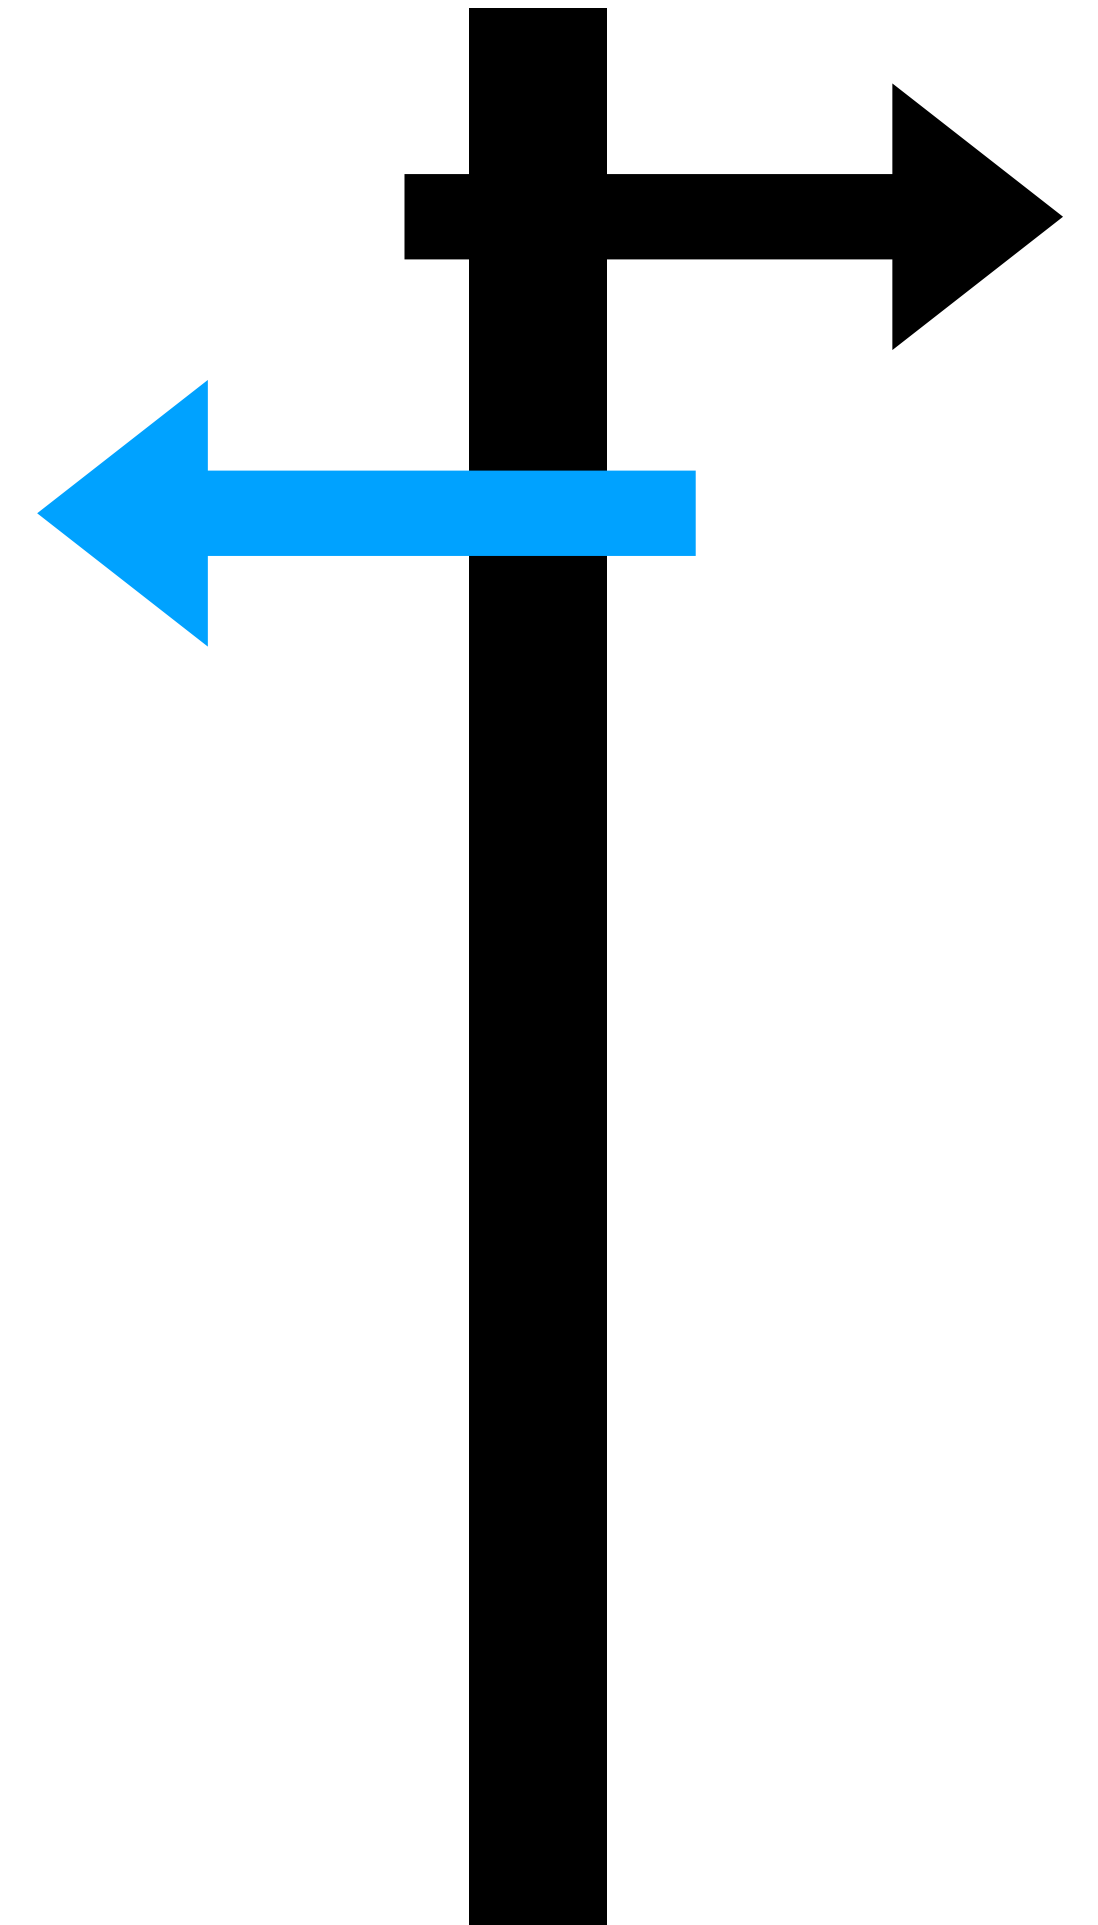


Deep nets

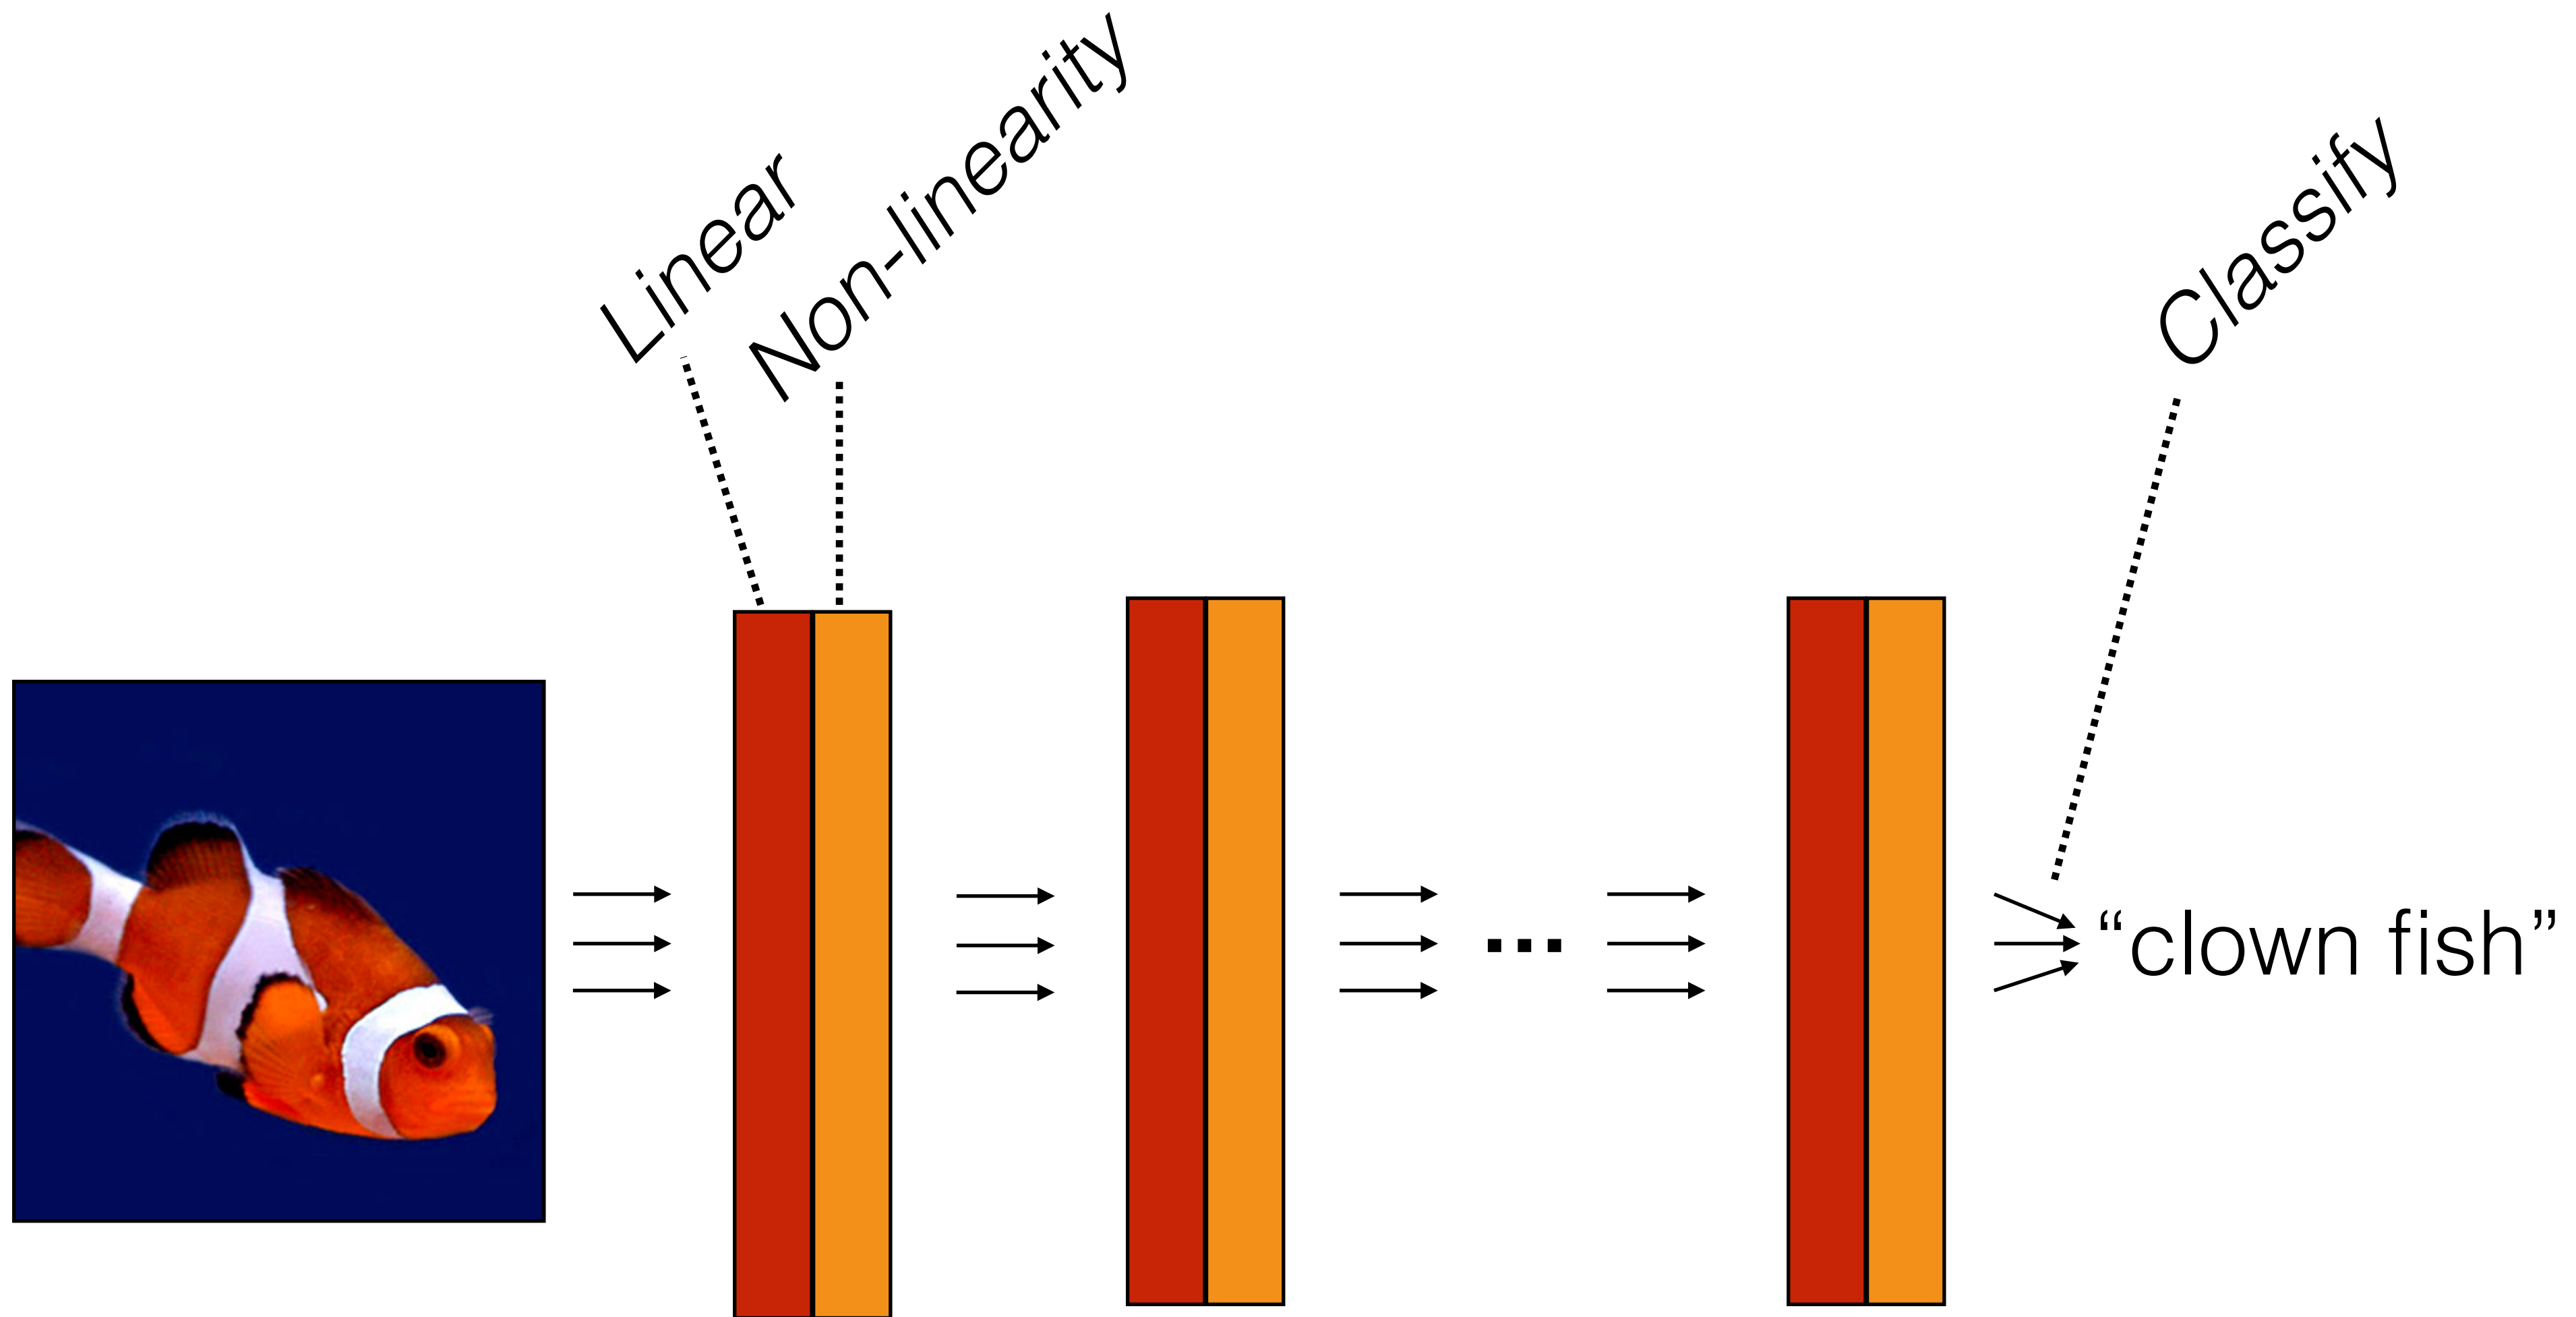

$$f(\mathbf{x}) = f_L(f_{L-1}(\dots f_2(f_1(\mathbf{x}))))$$

Classifier layer


Last layer

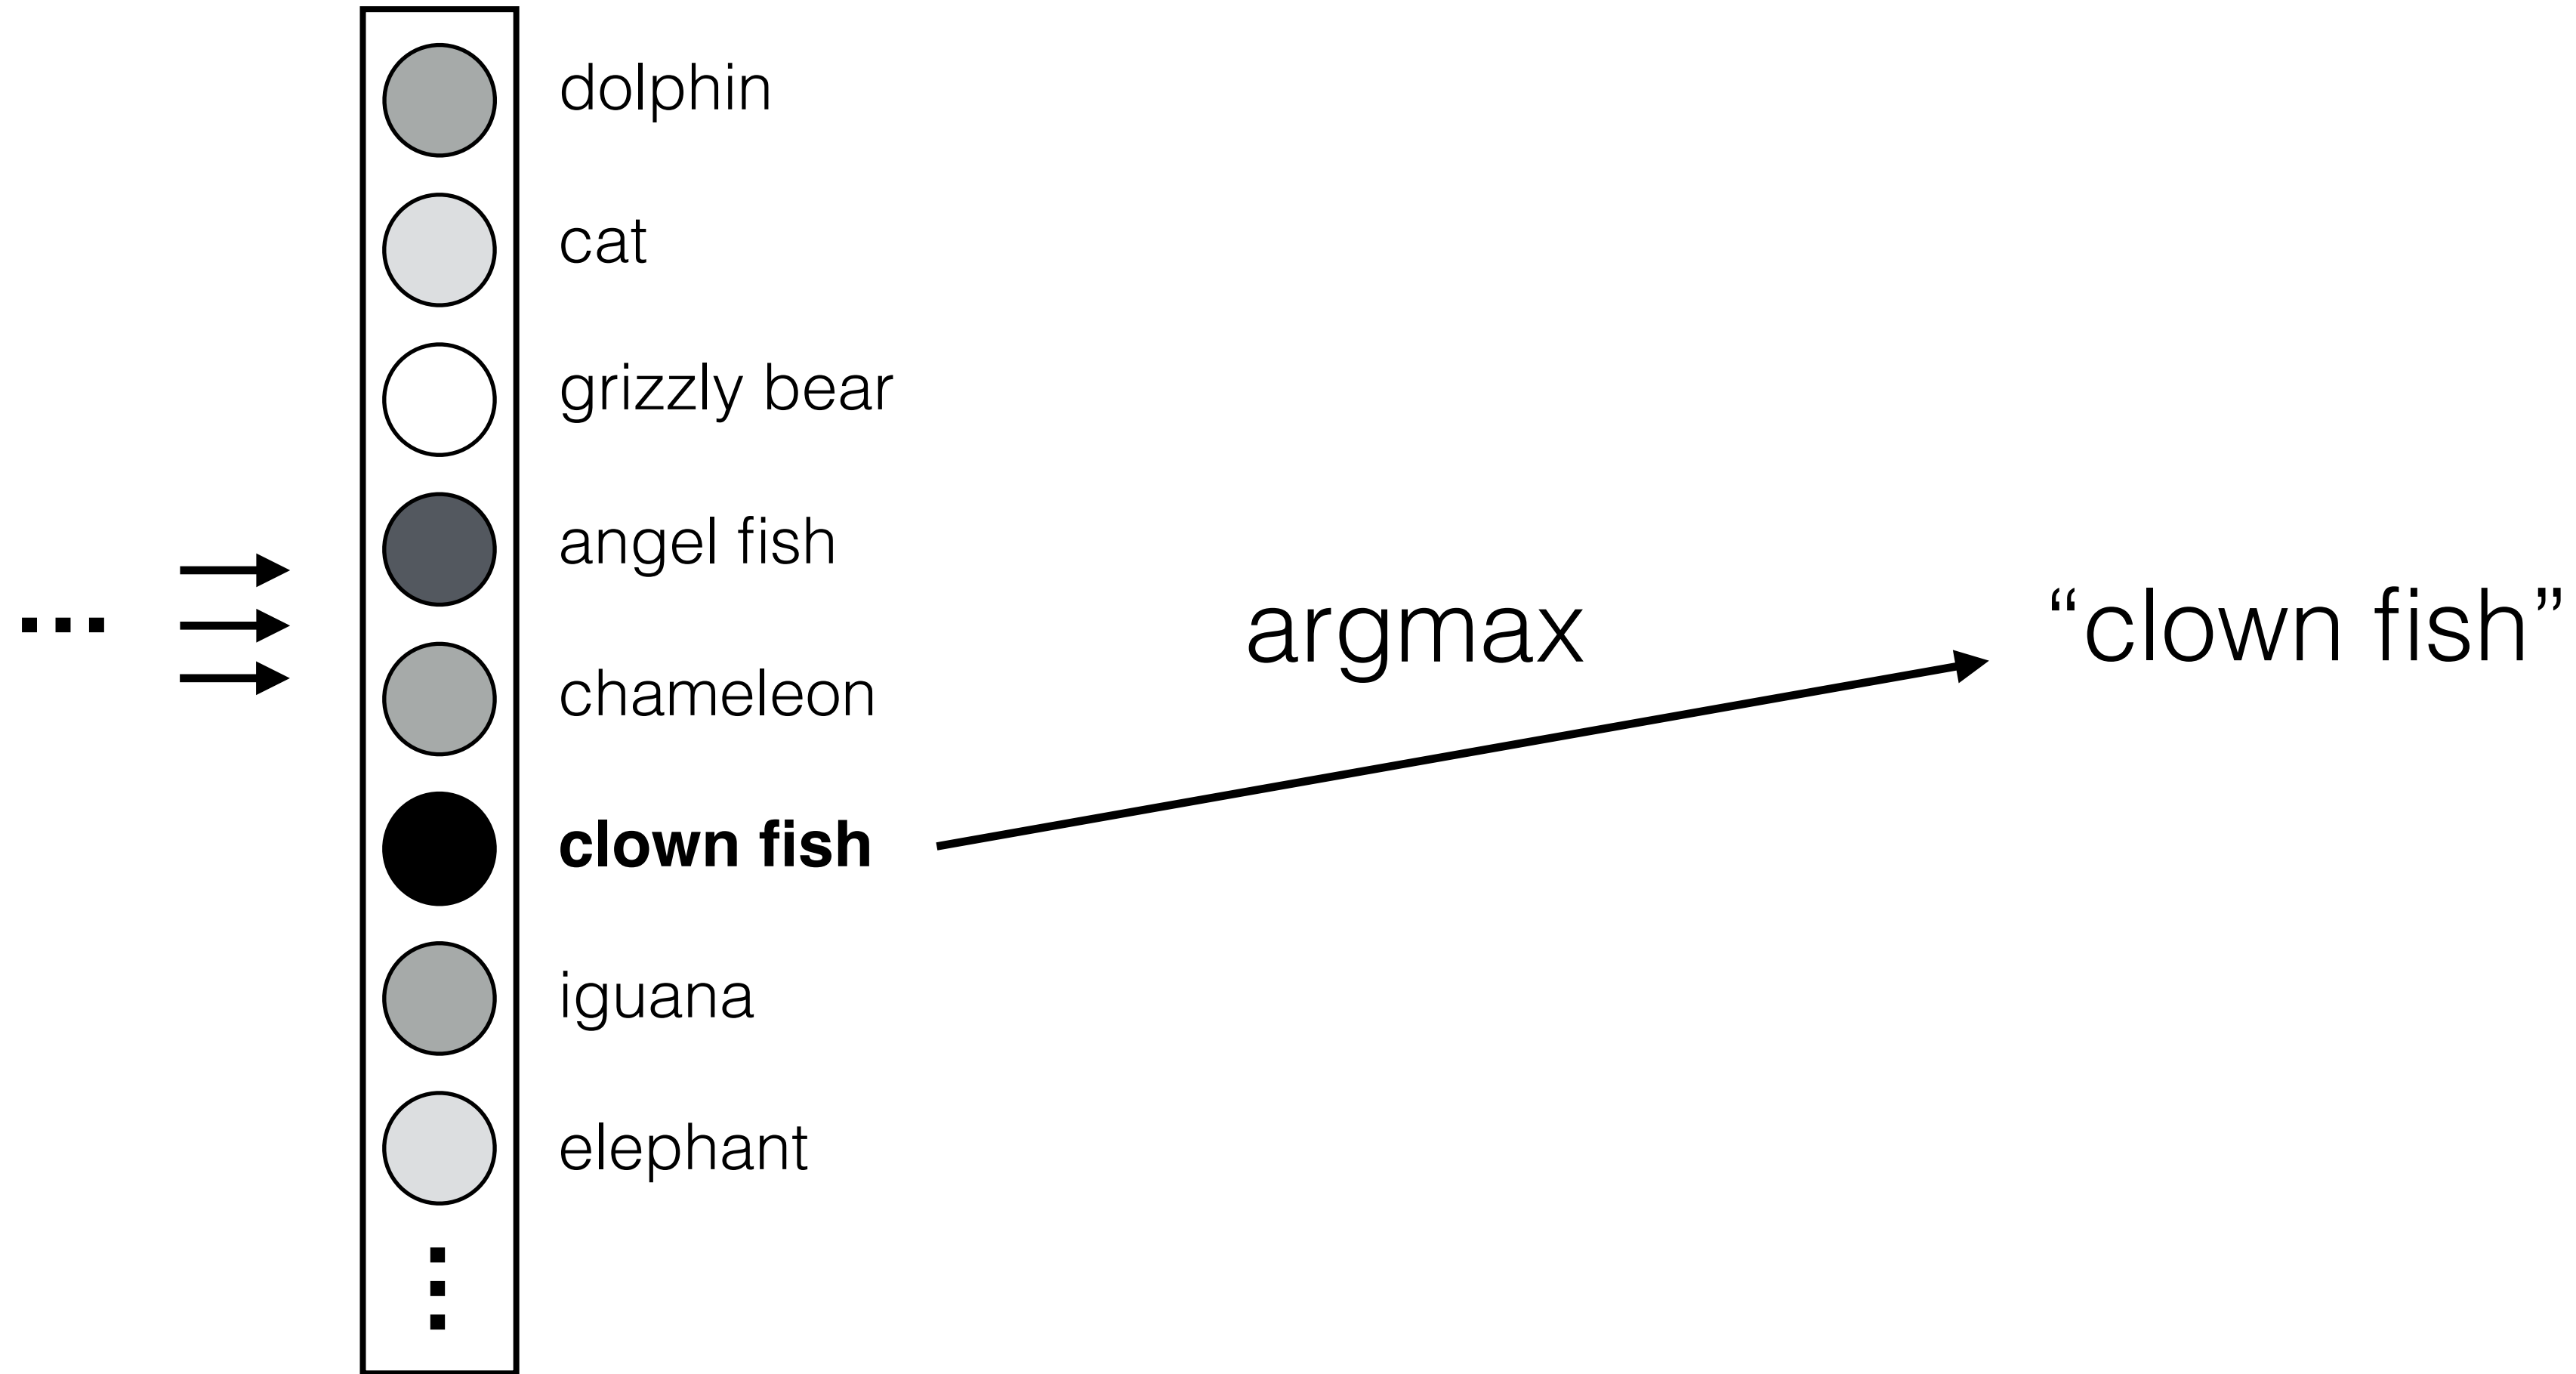

Loss function

Network output


Ground truth label

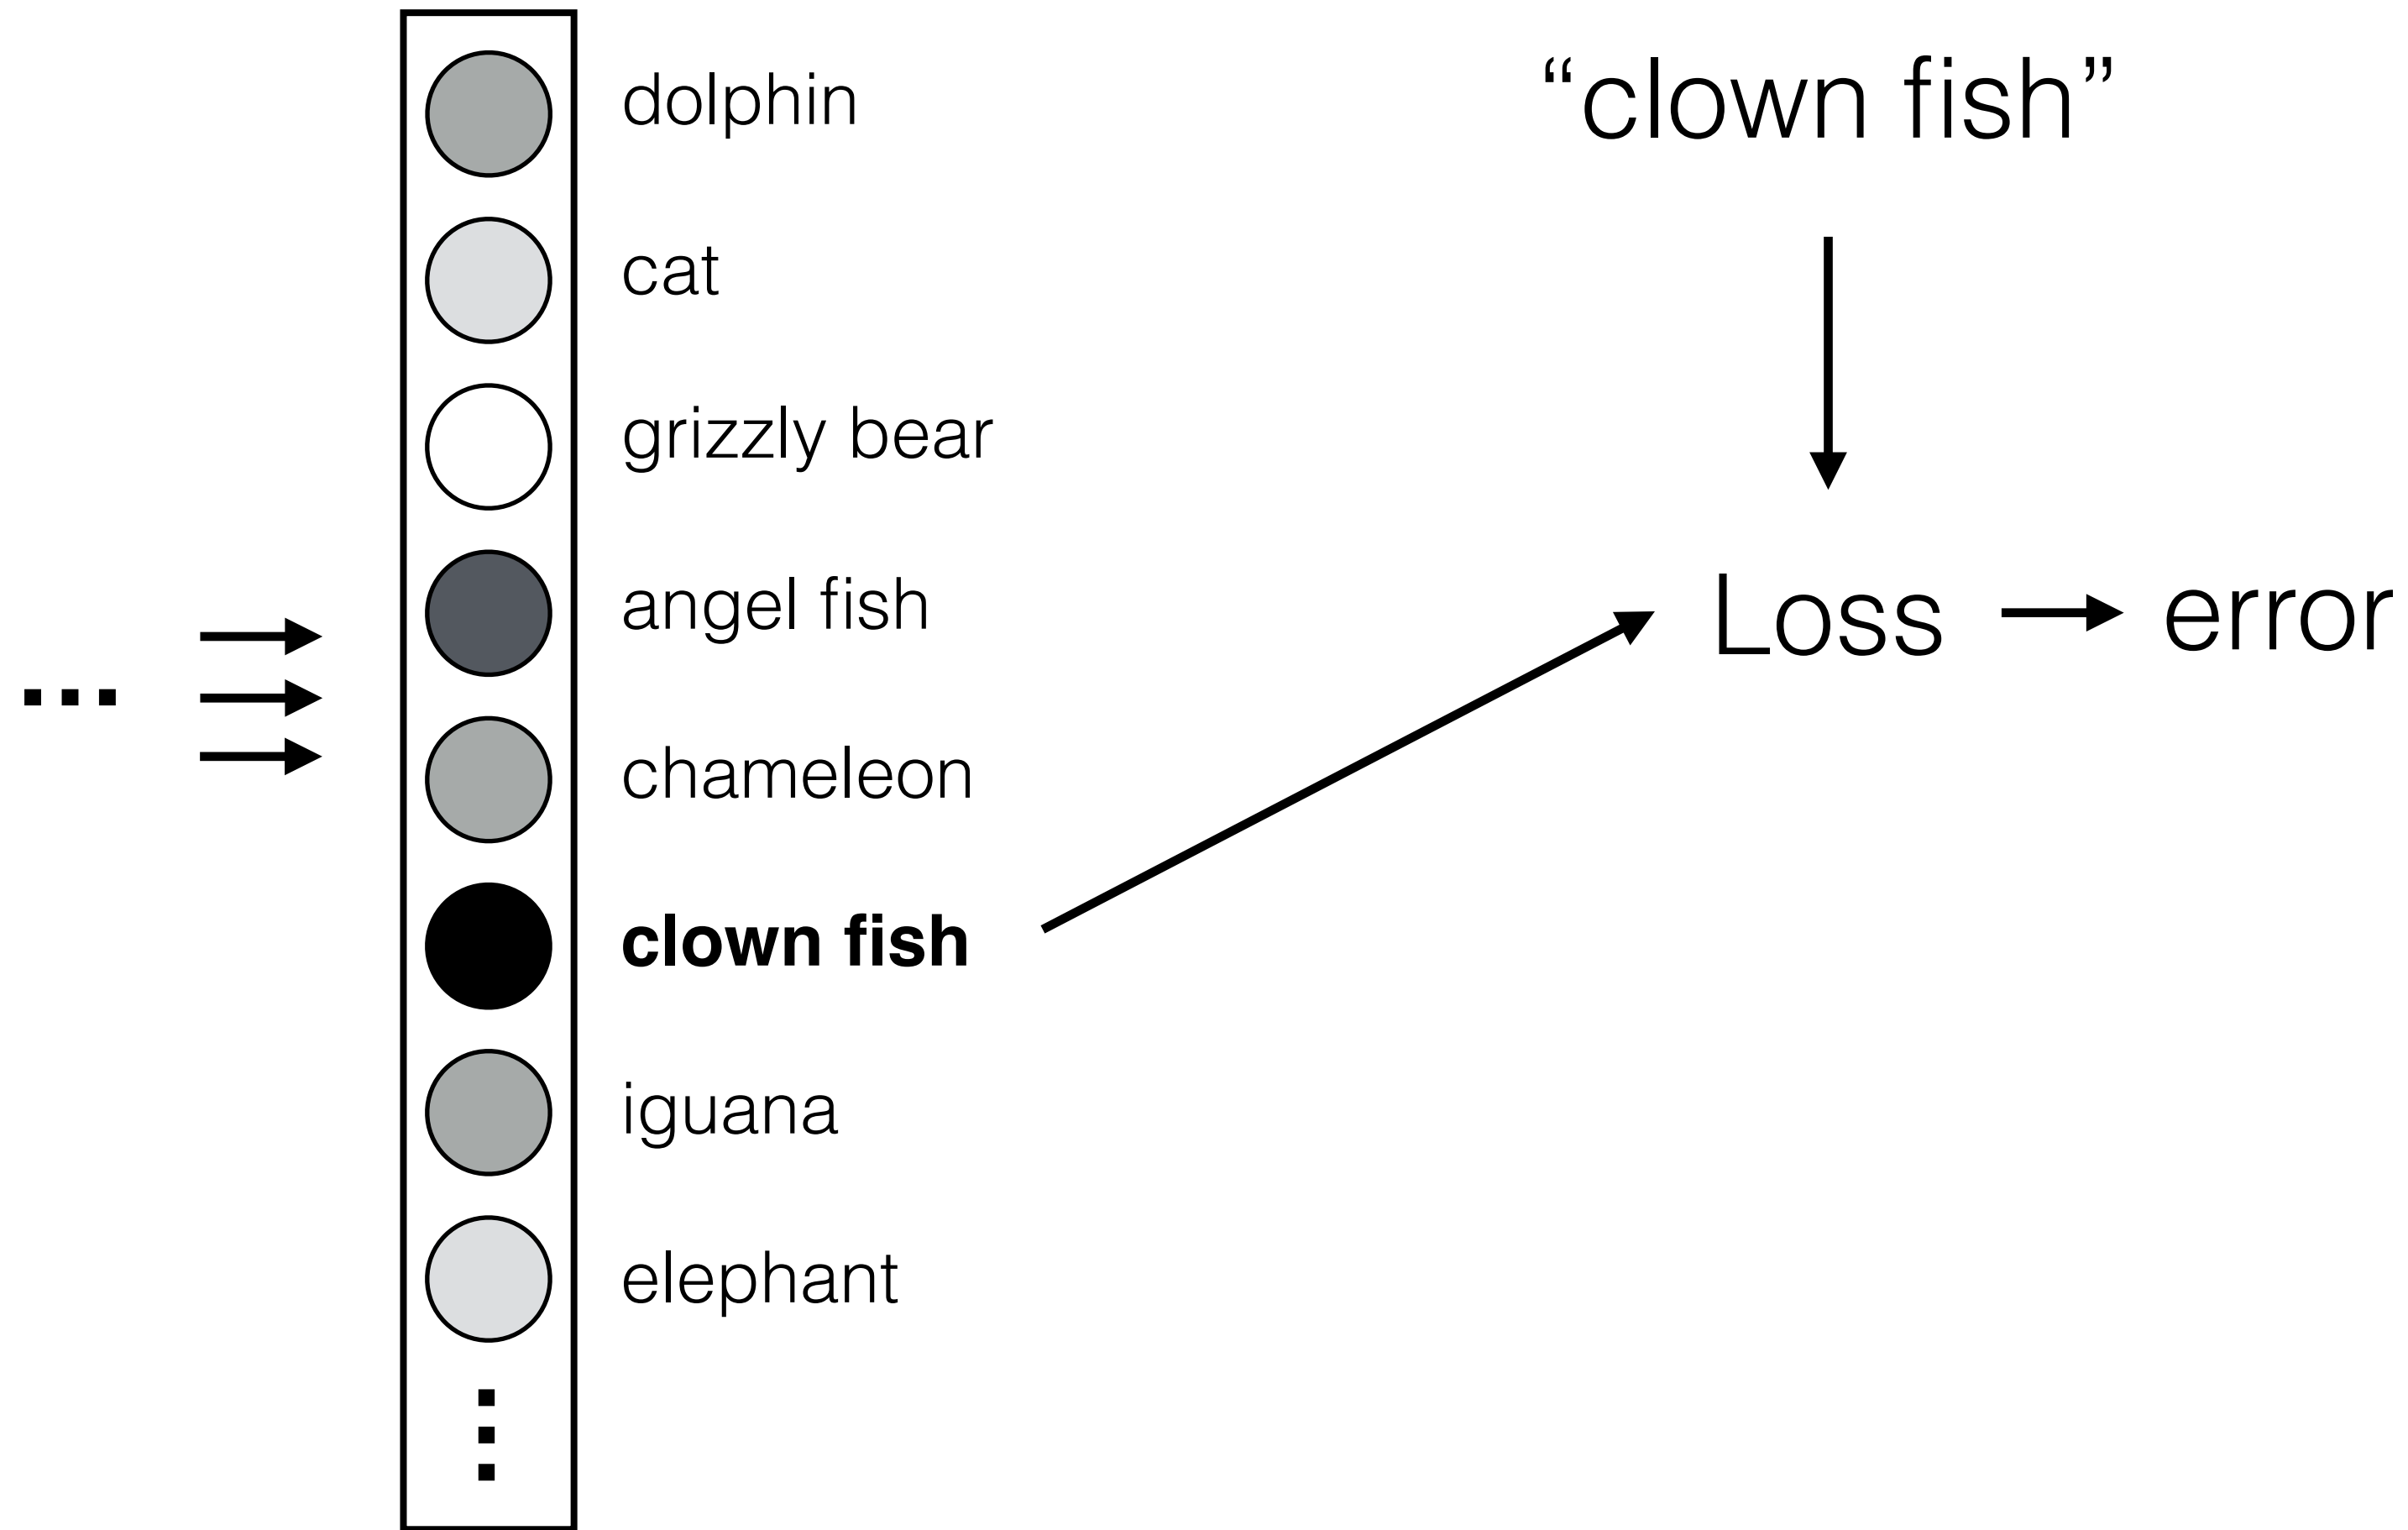

Loss function

Network output

Ground truth label

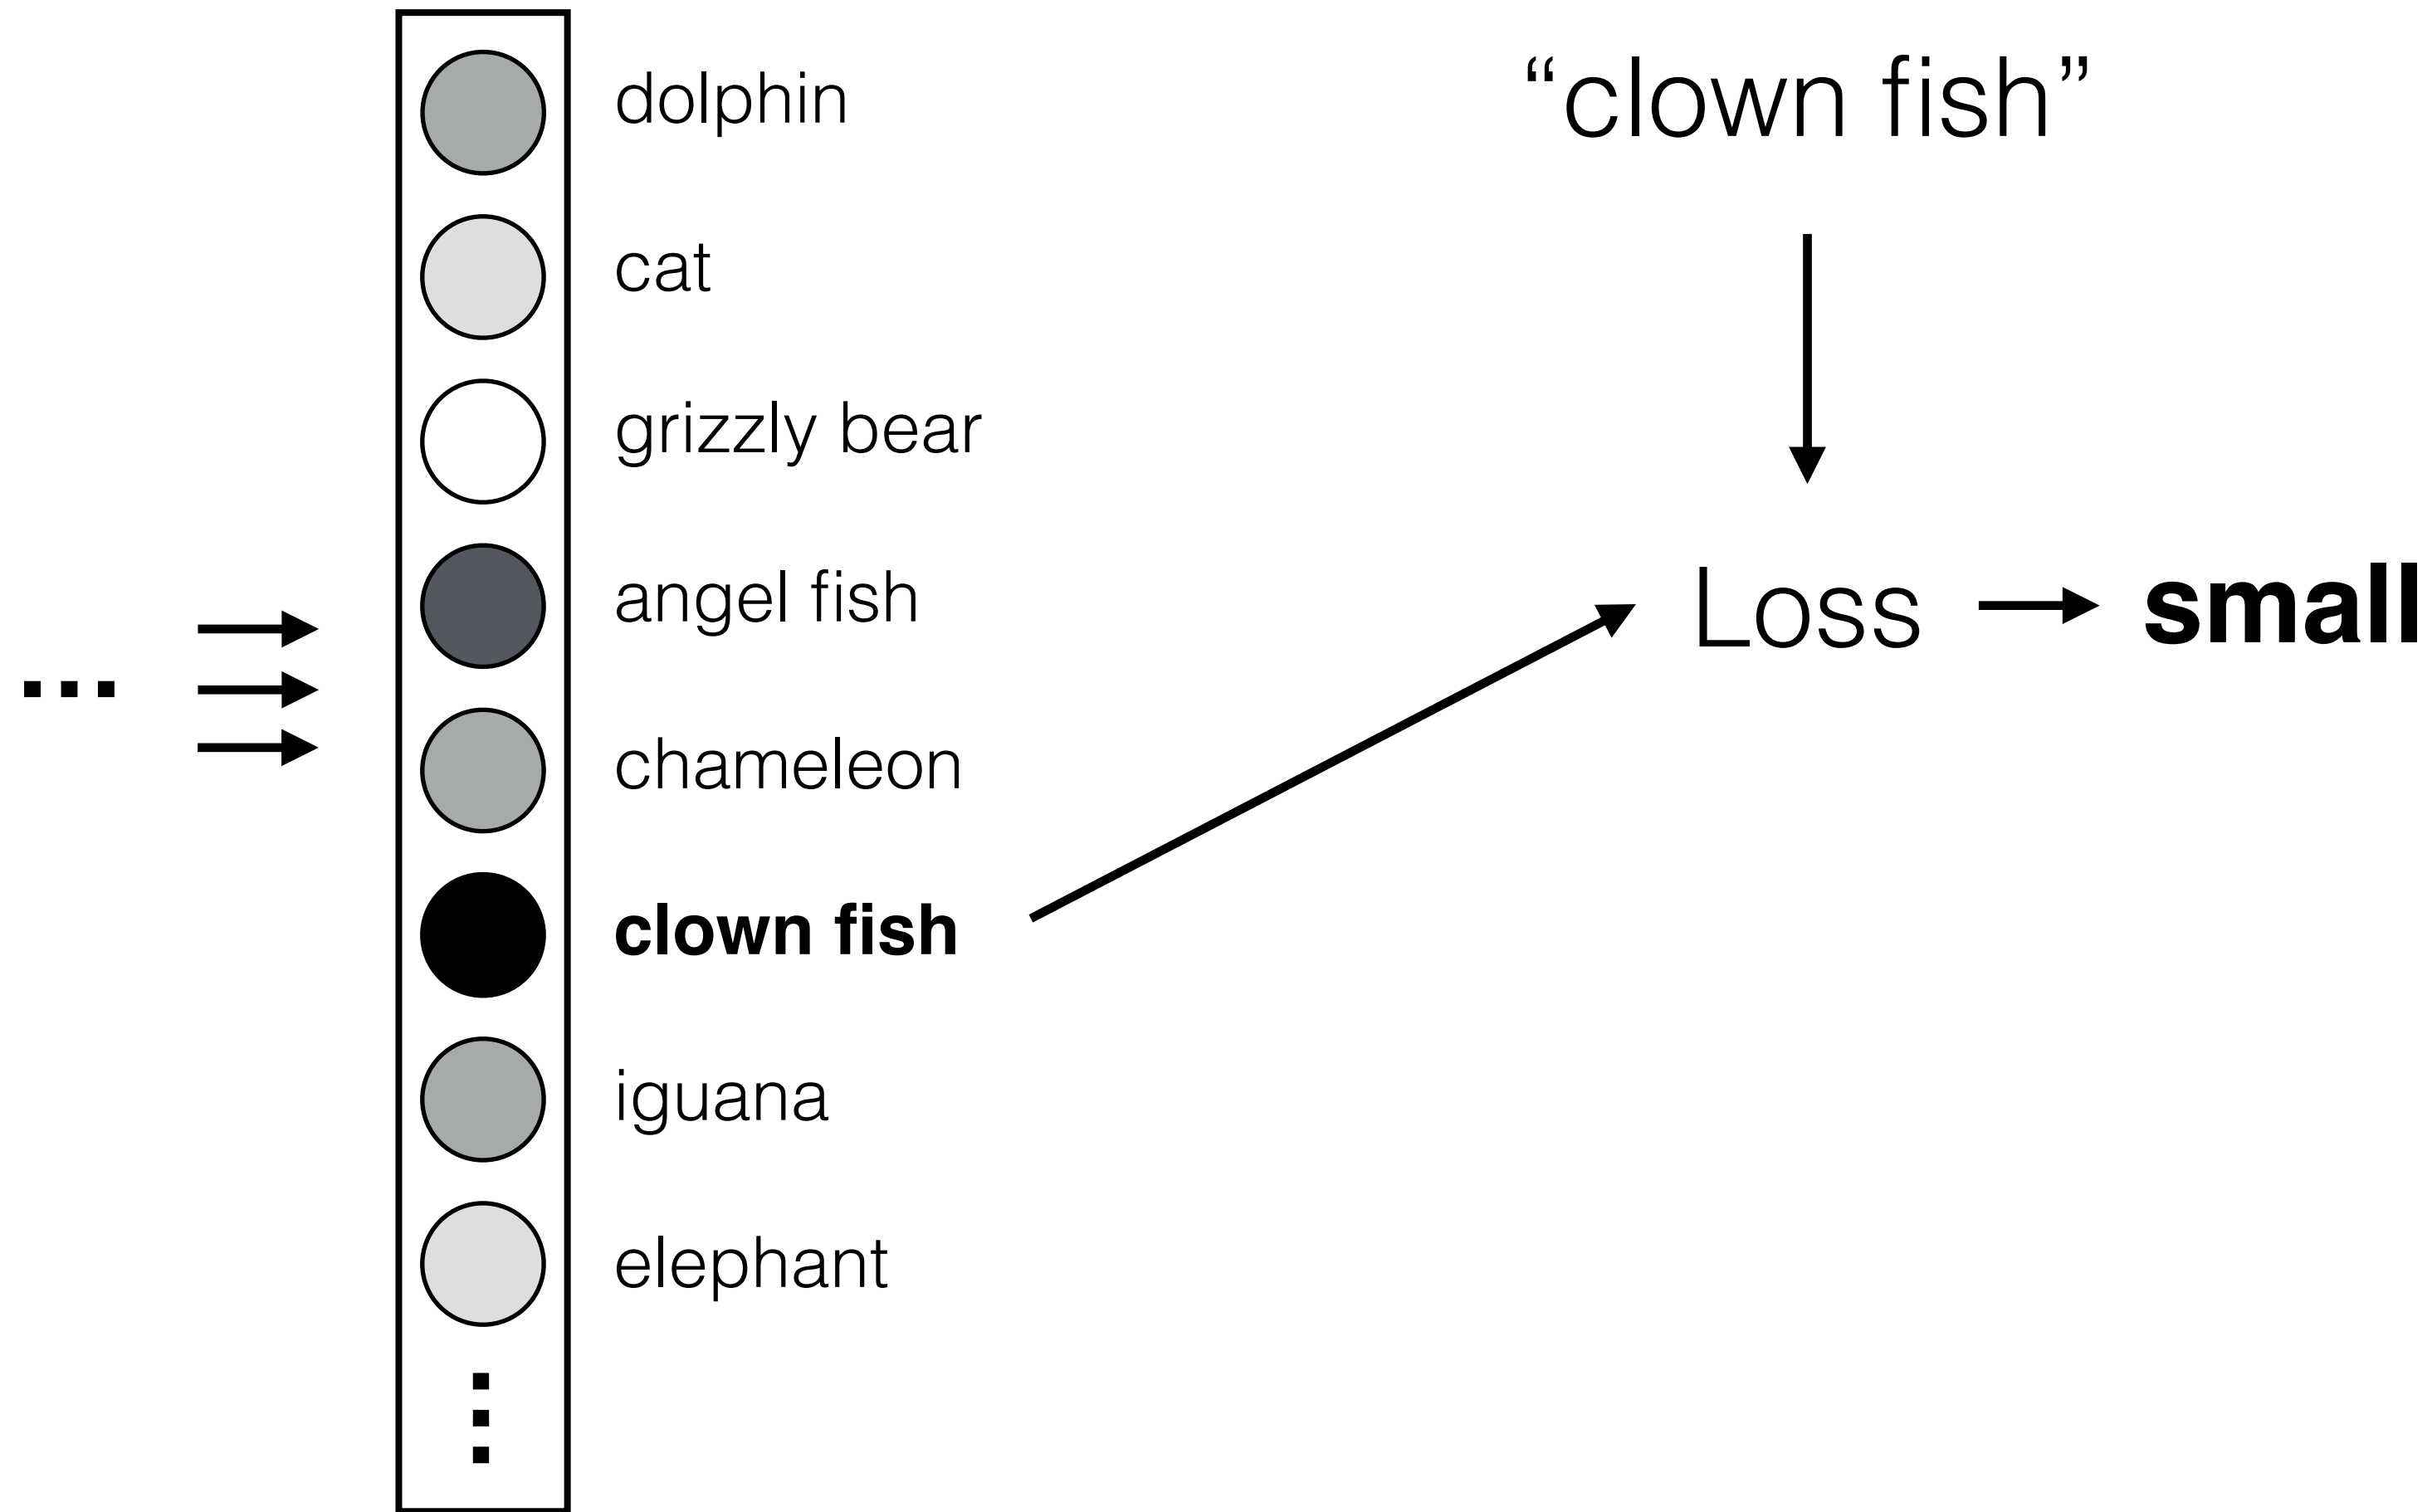

Loss function


Network output

Ground truth label






Network output


Ground truth label

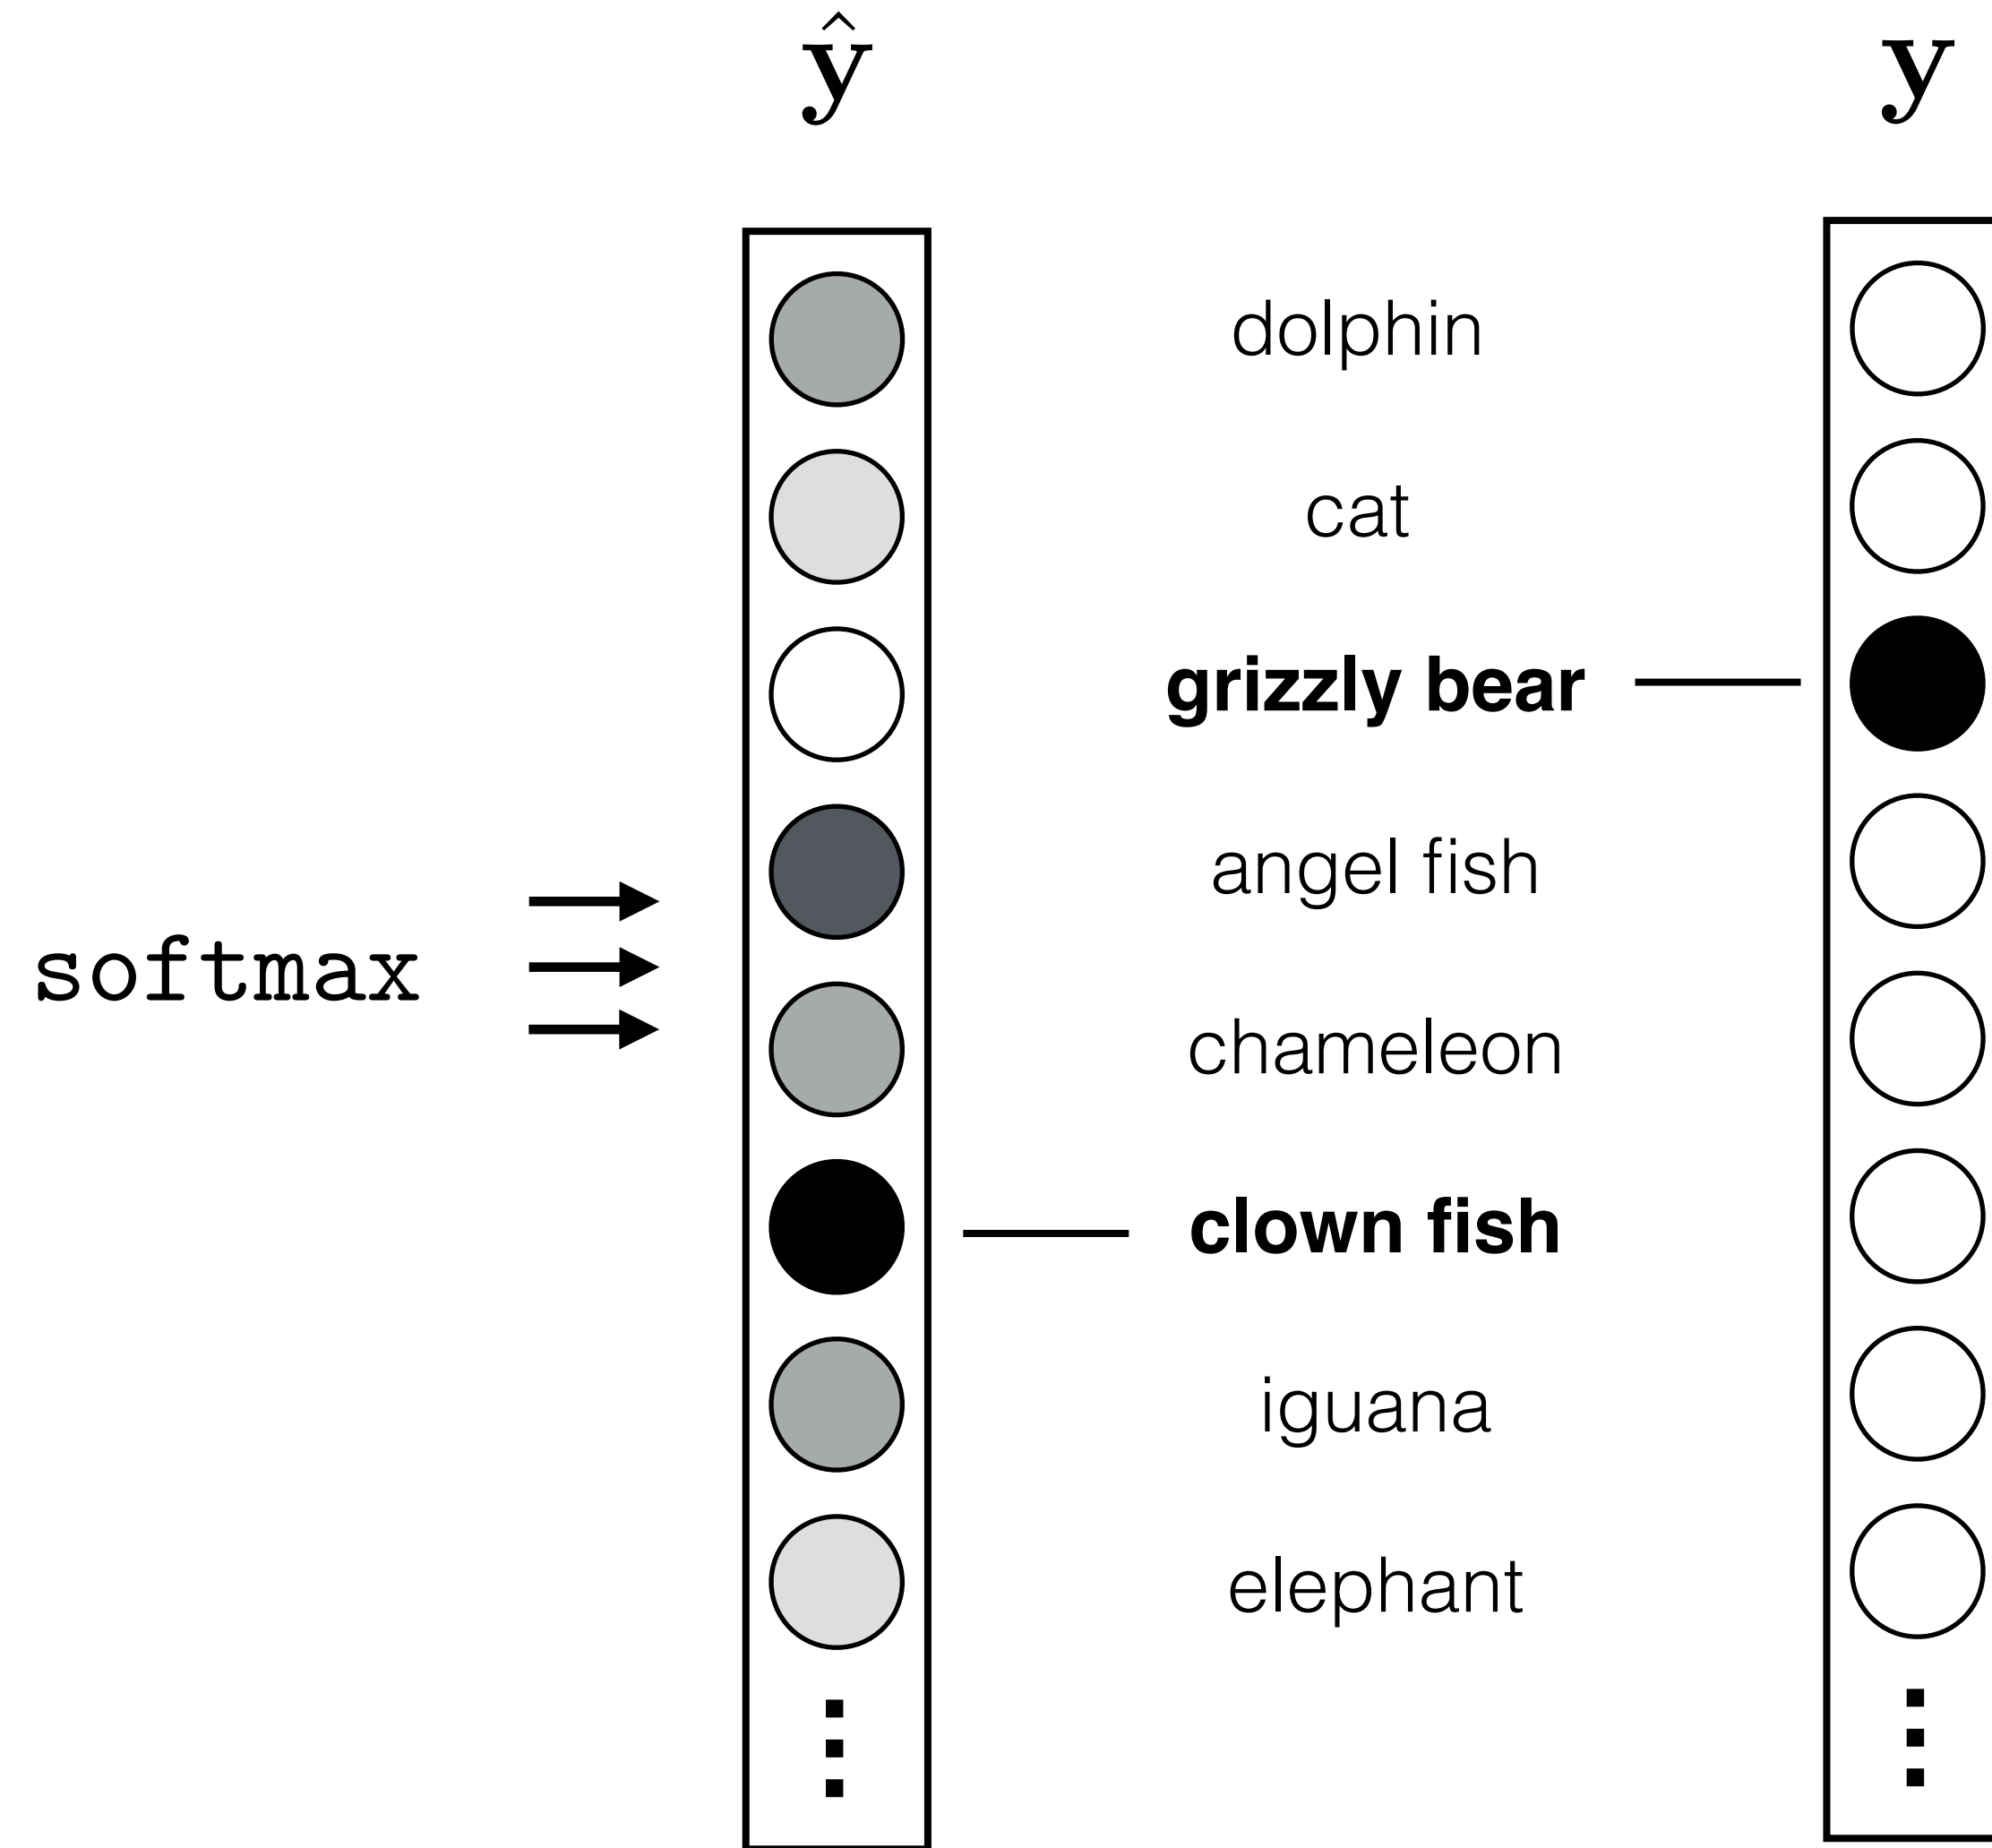

Probability of the observed
data under the model




$$H(\mathbf{y}, \hat{\mathbf{y}}) = - \sum_{k=1}^K y_k \log \hat{y}_k$$


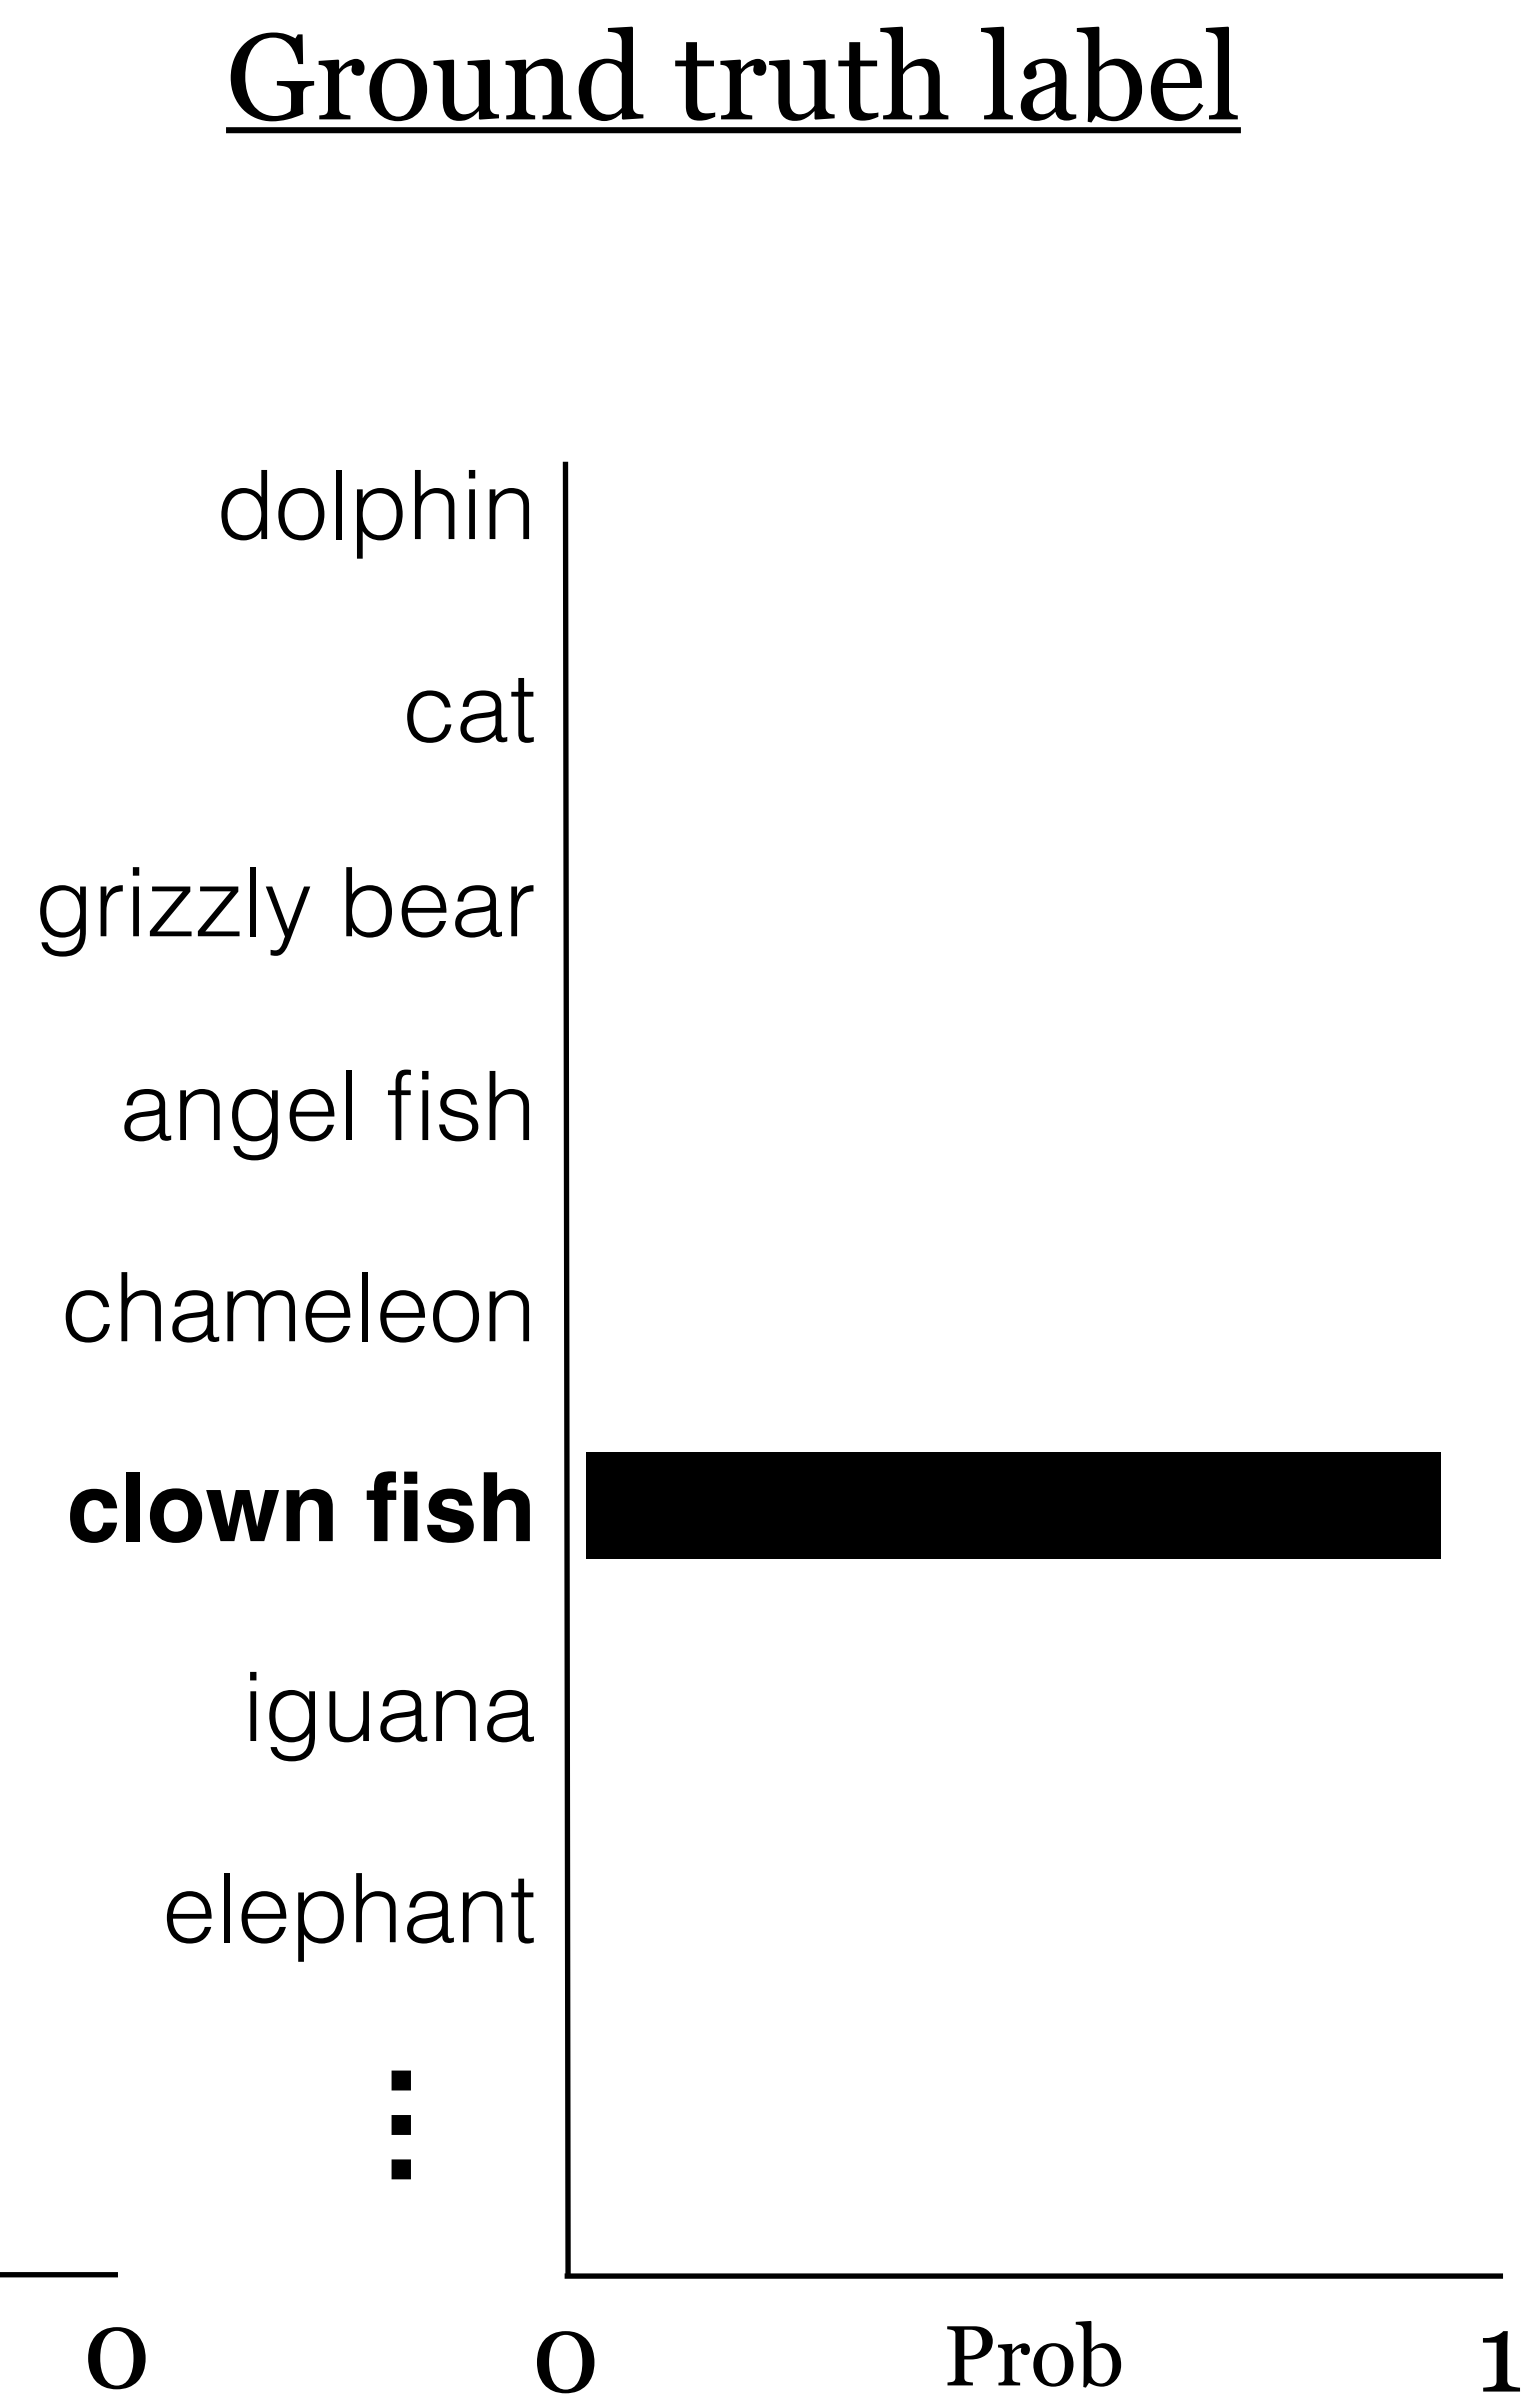
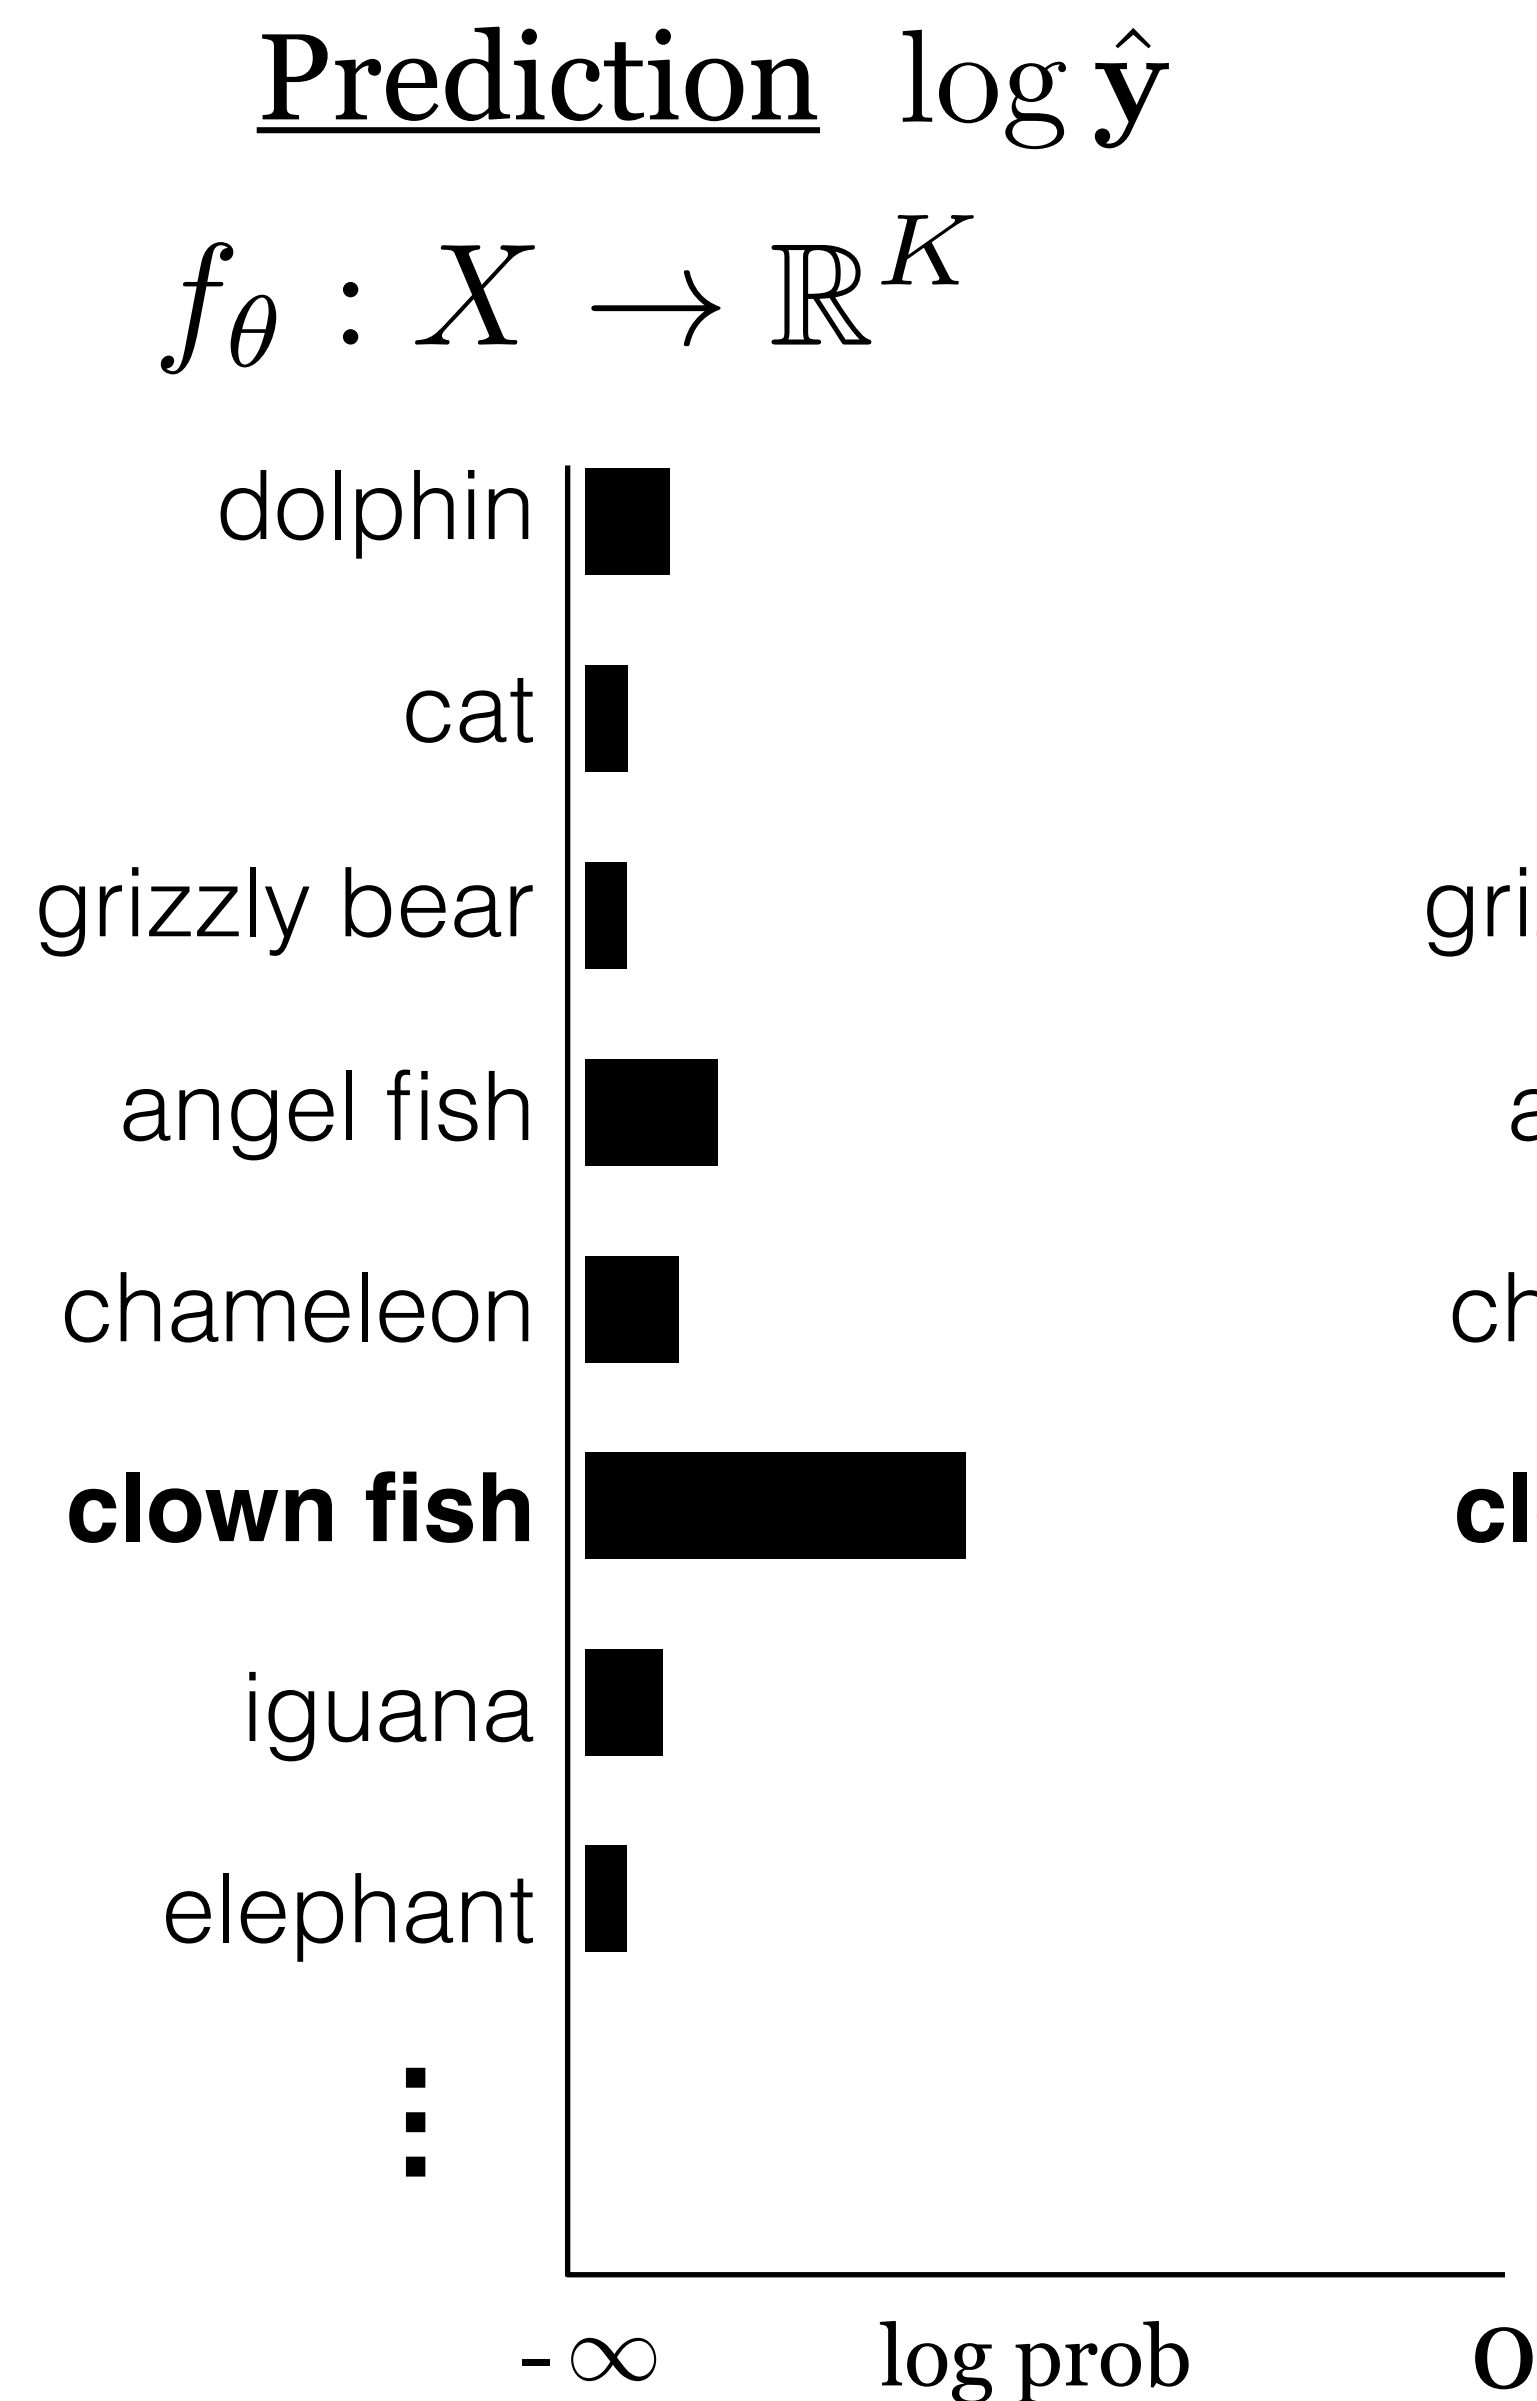
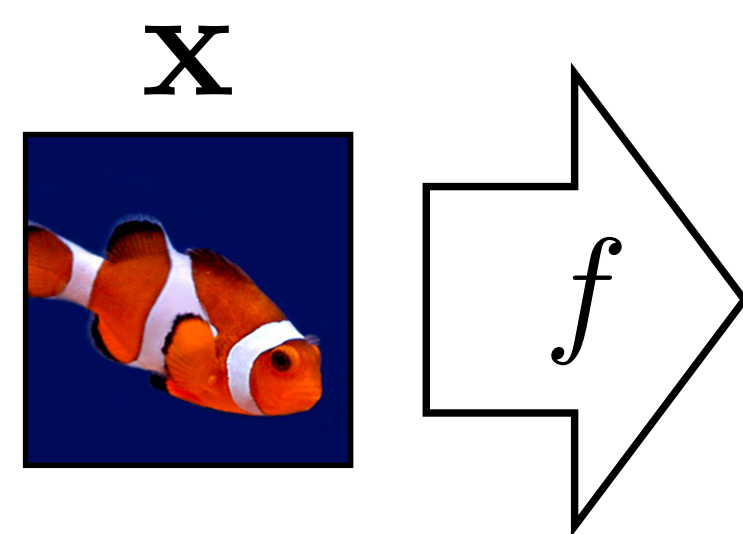


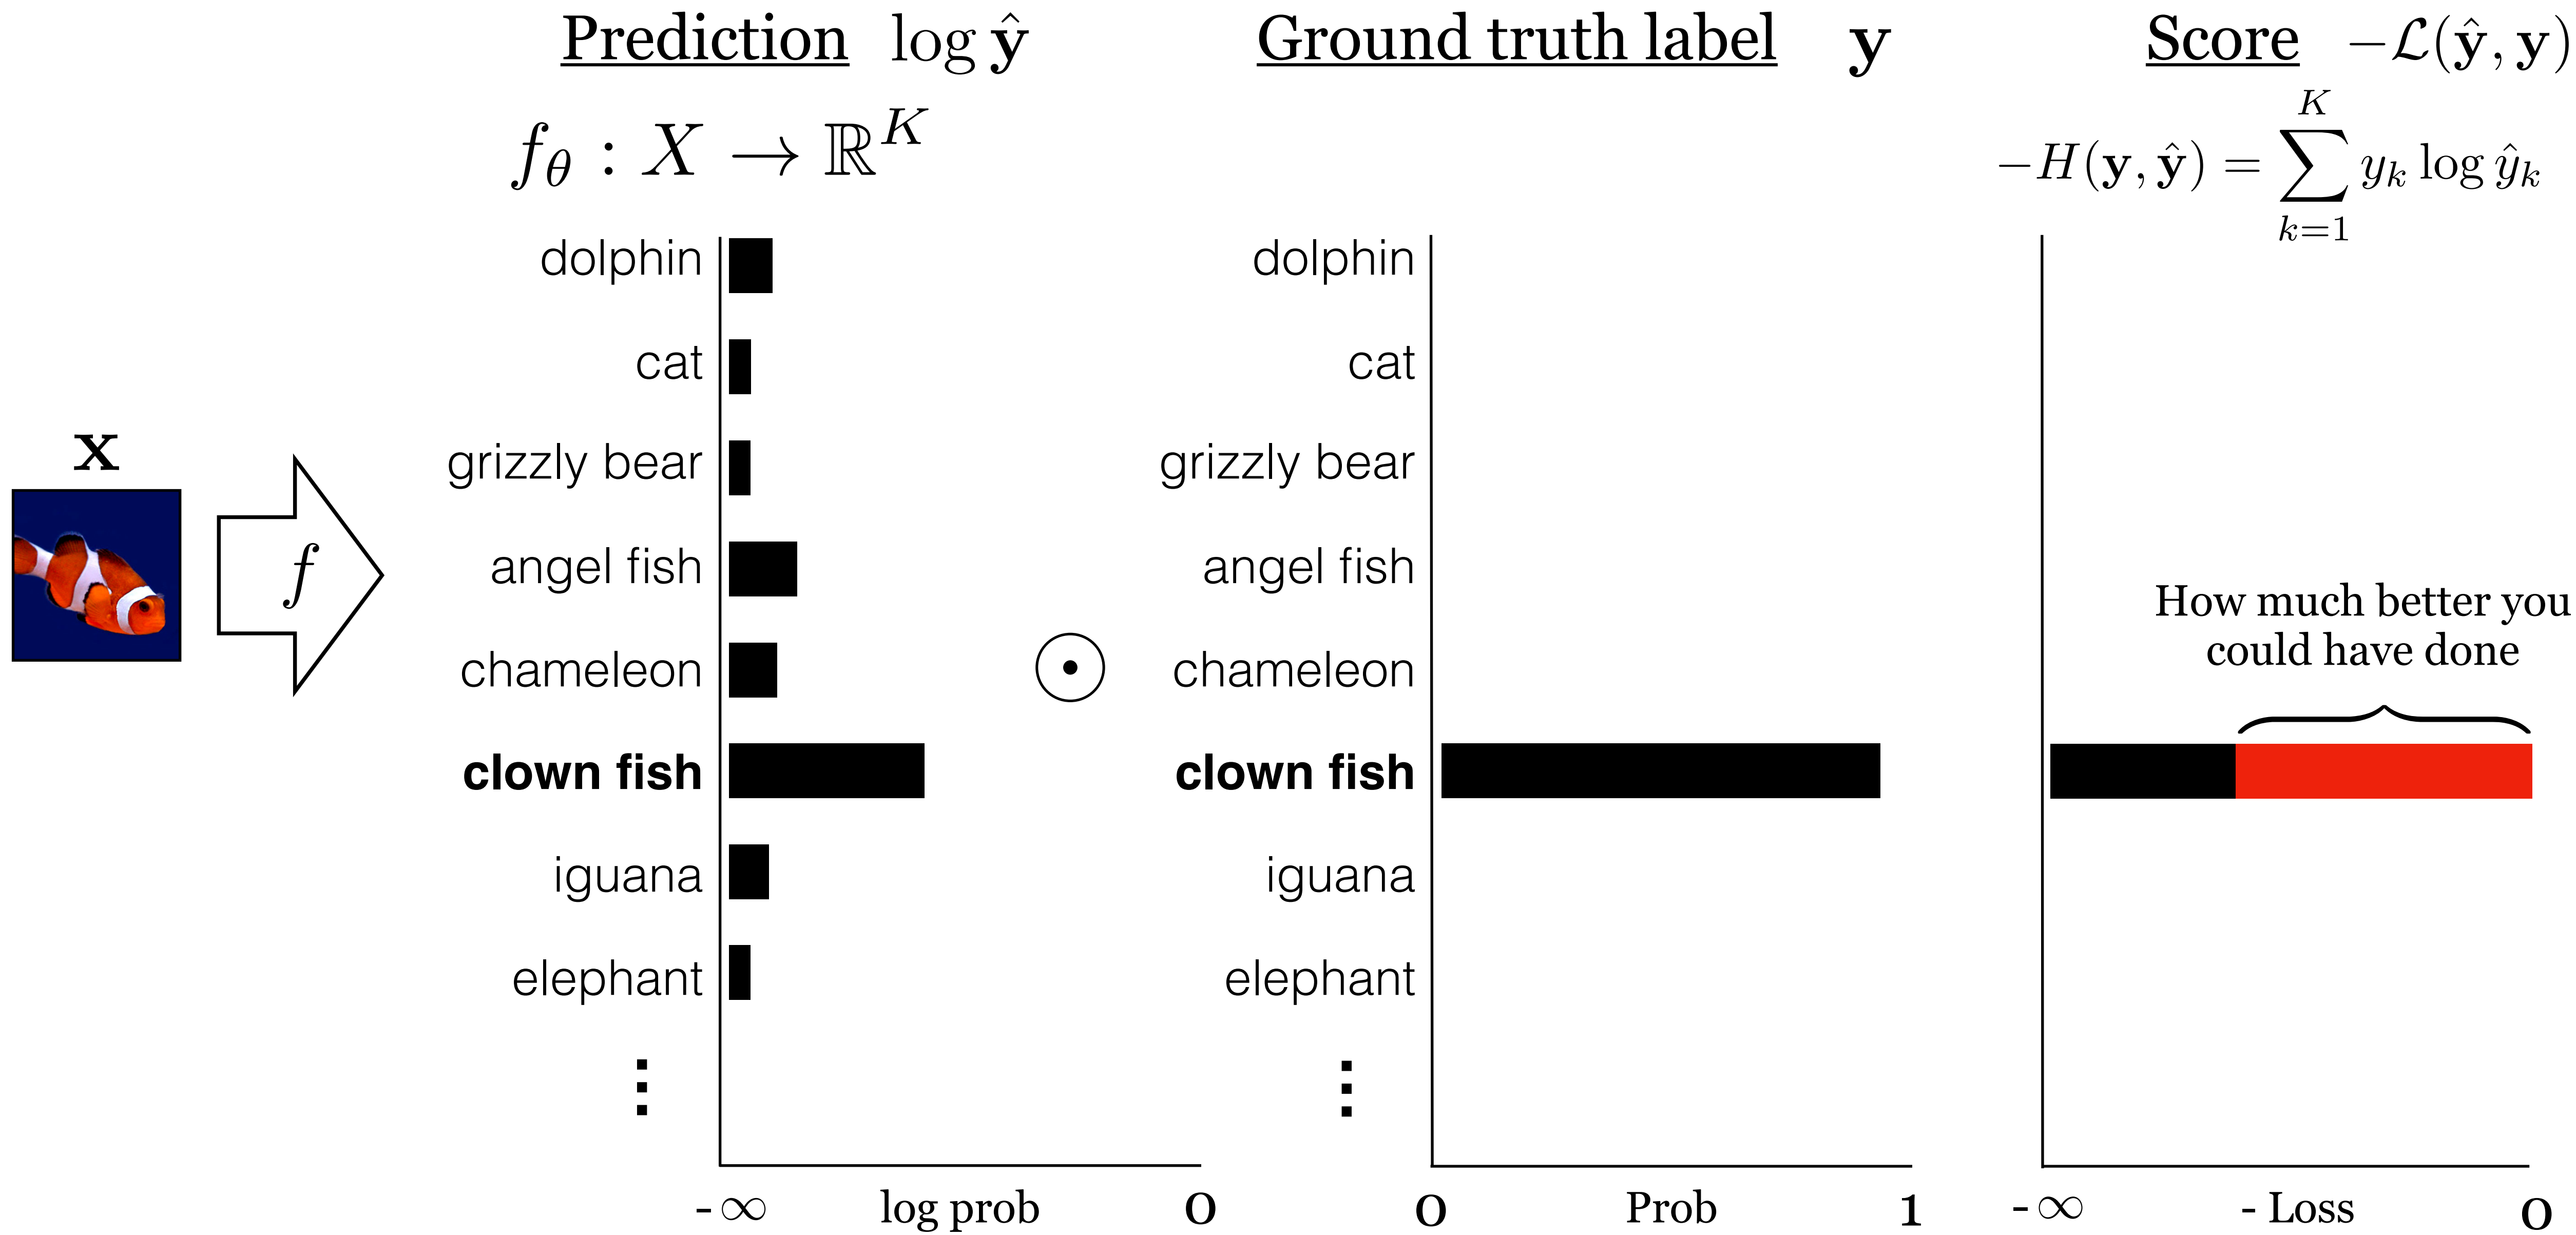



X

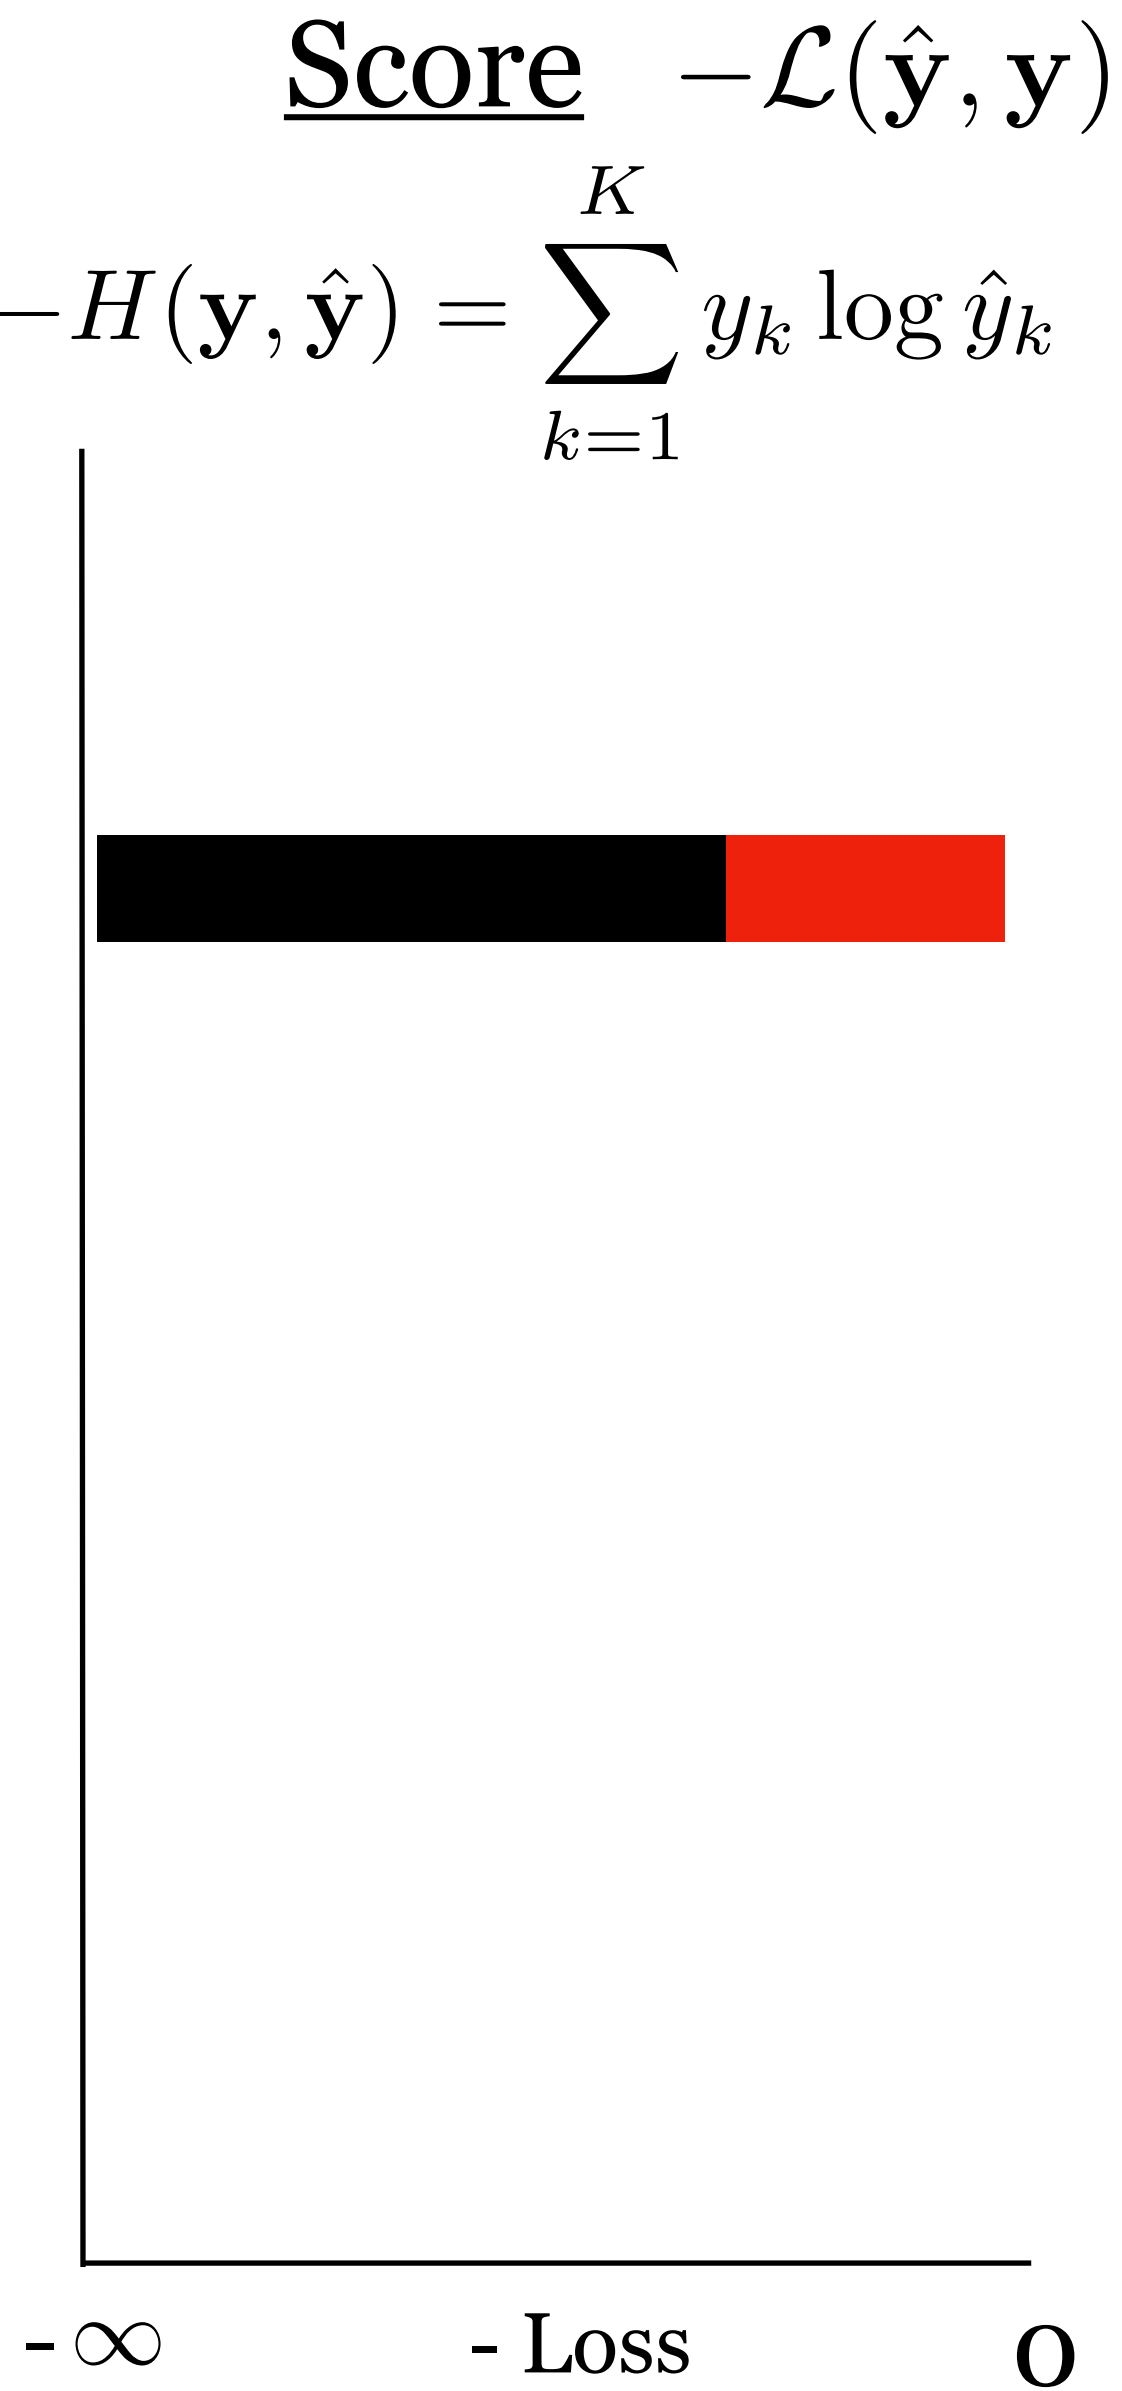
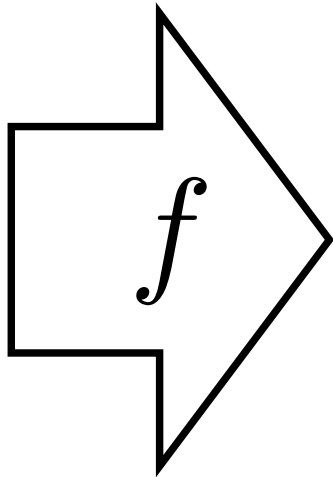


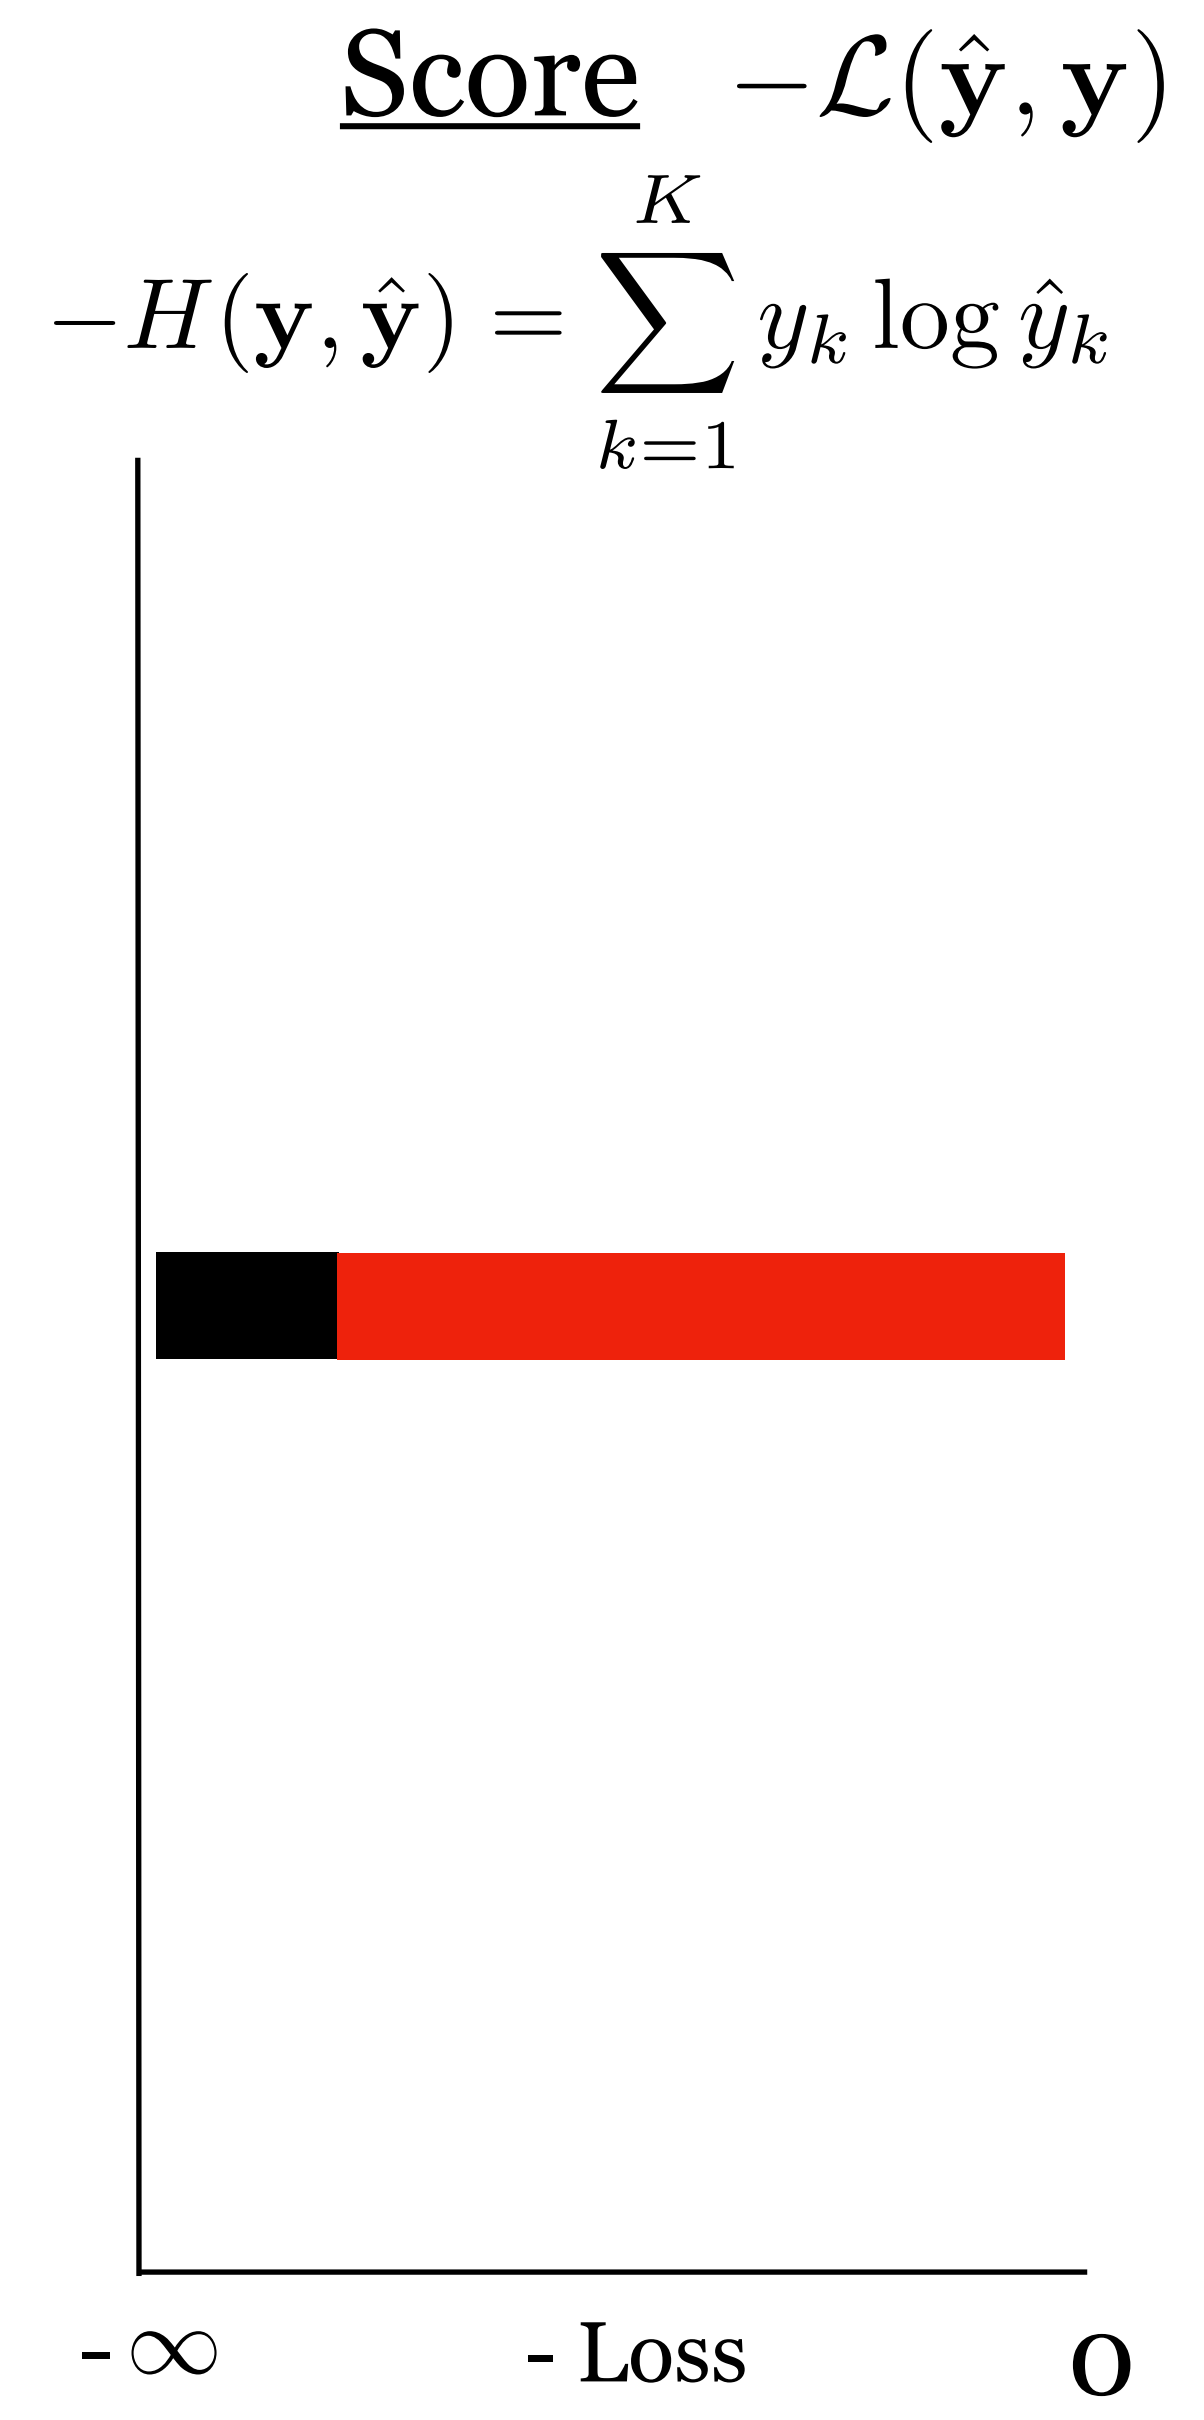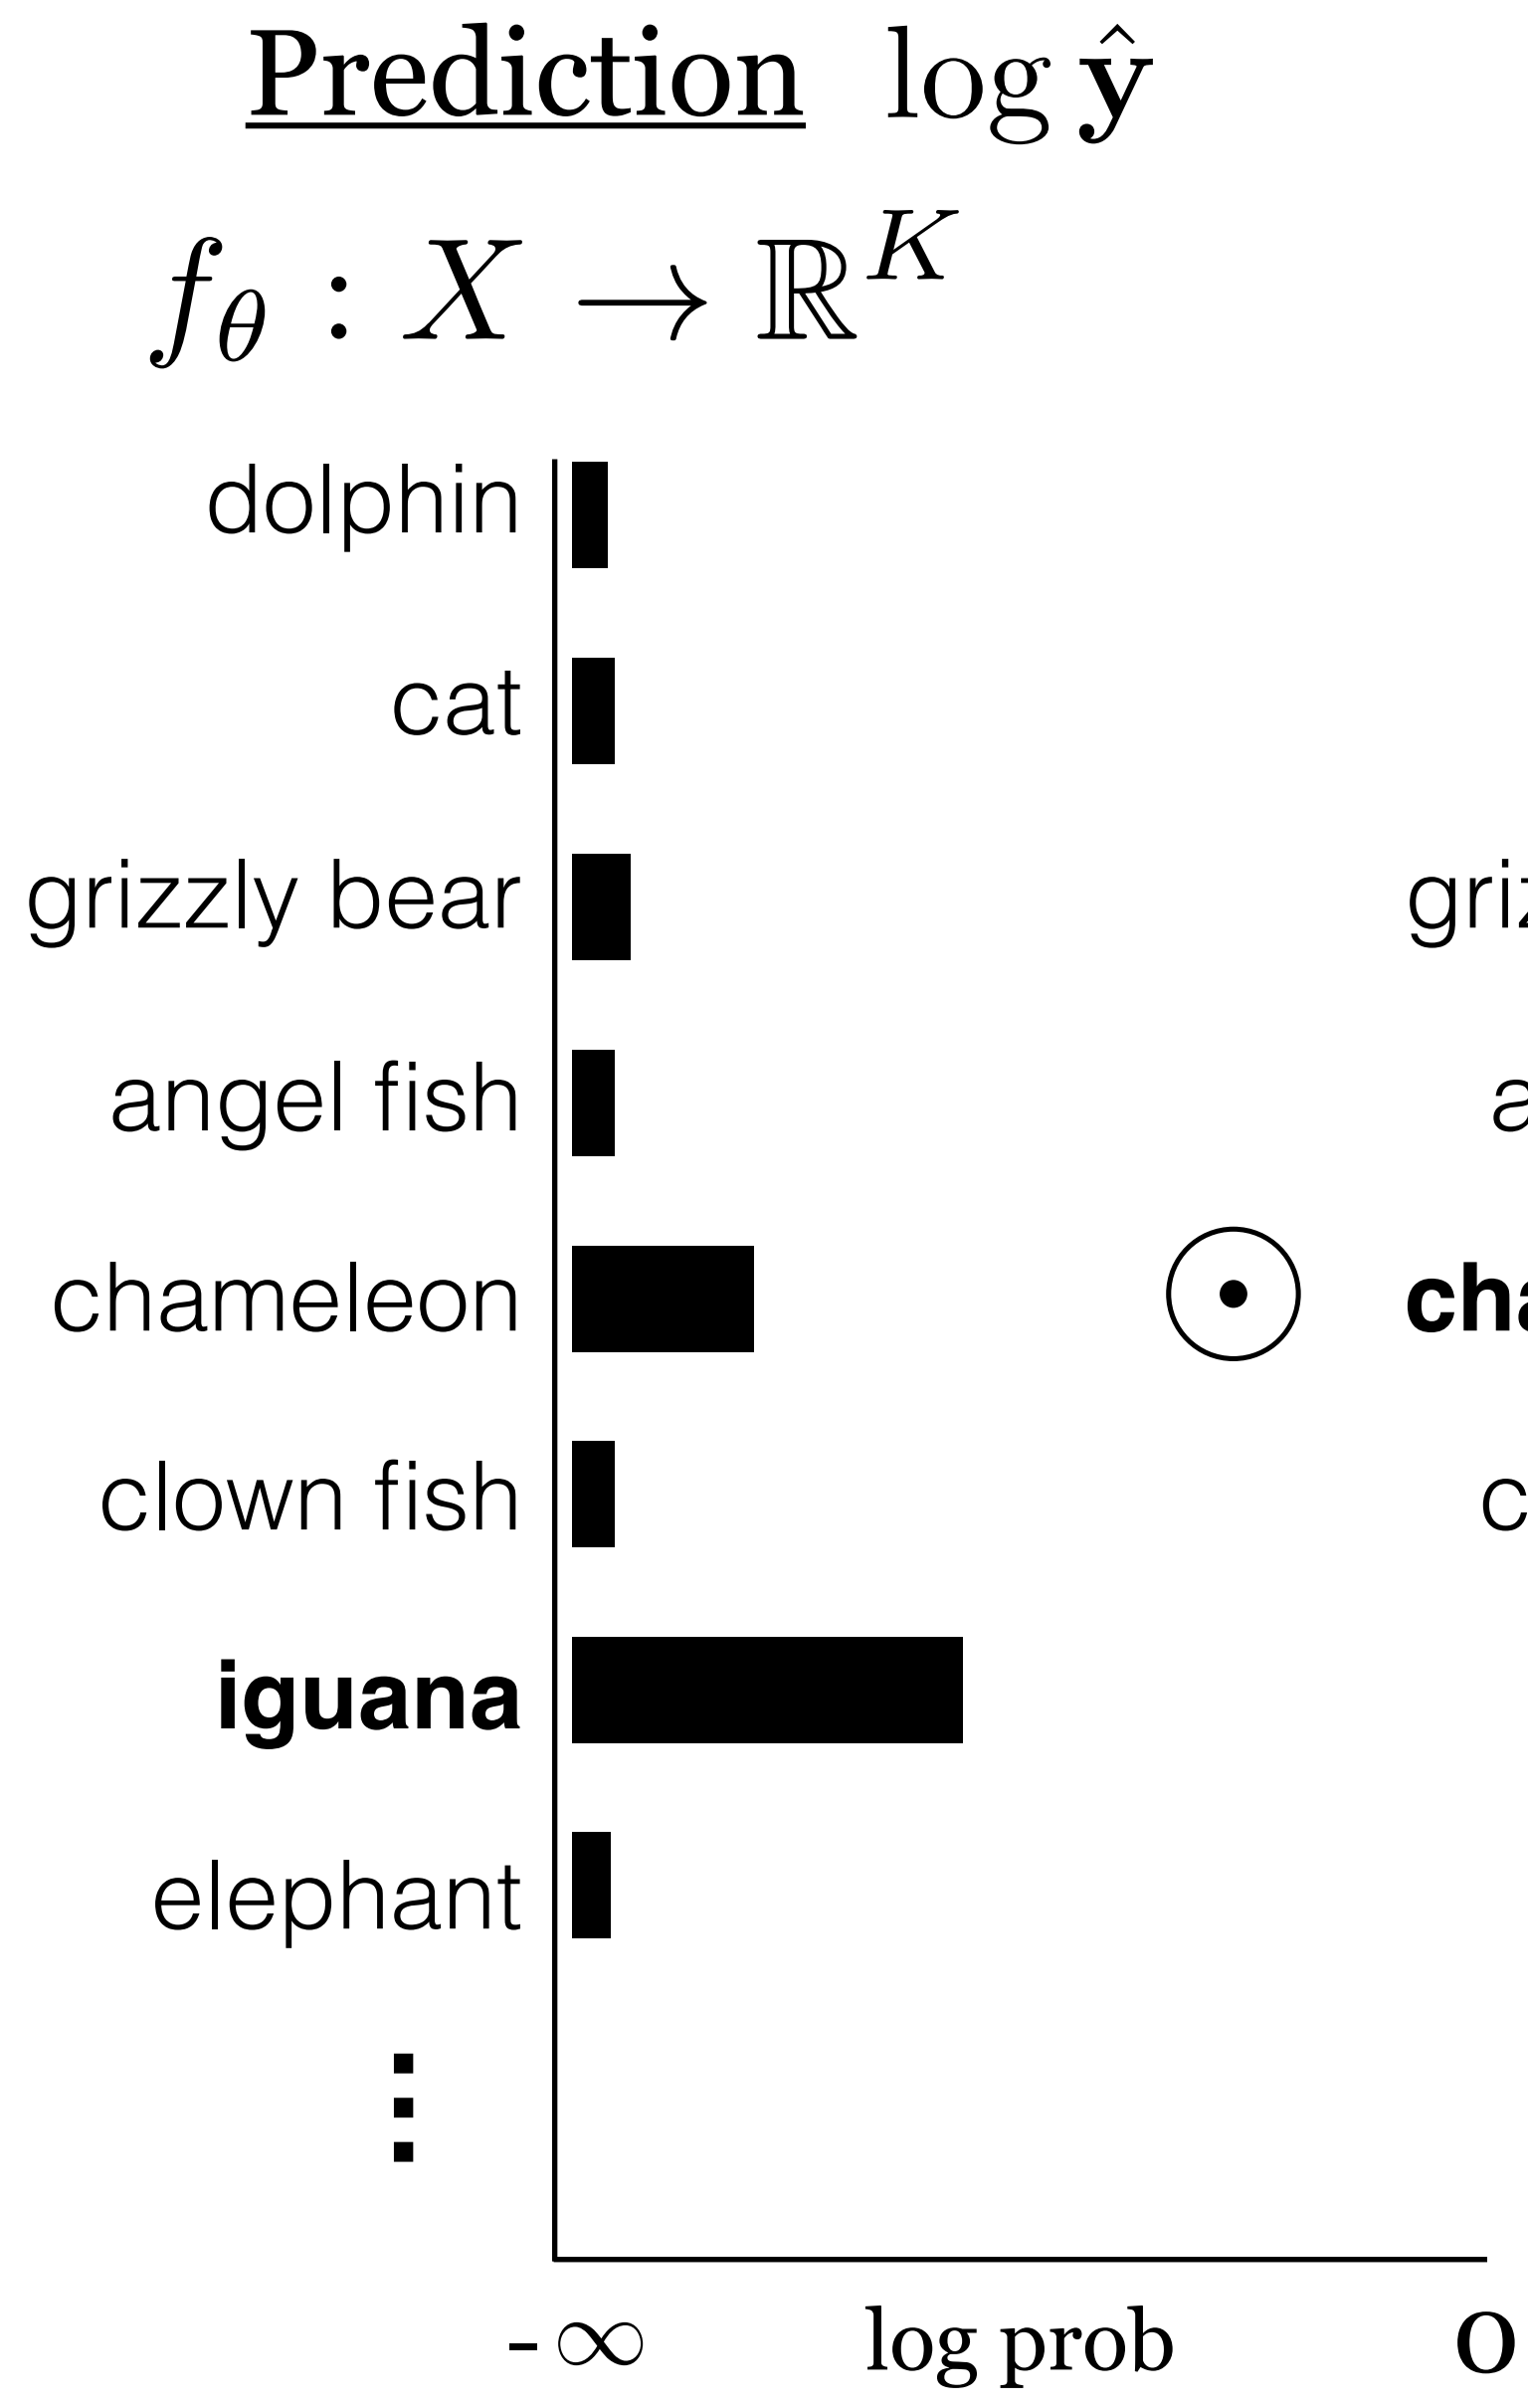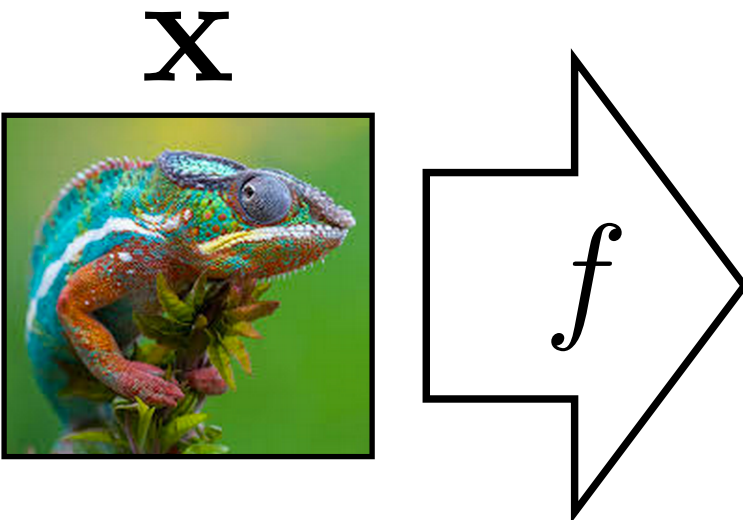

Deep learning


$\mathbf{y}^{(1)}$
“clown fish”

Learned

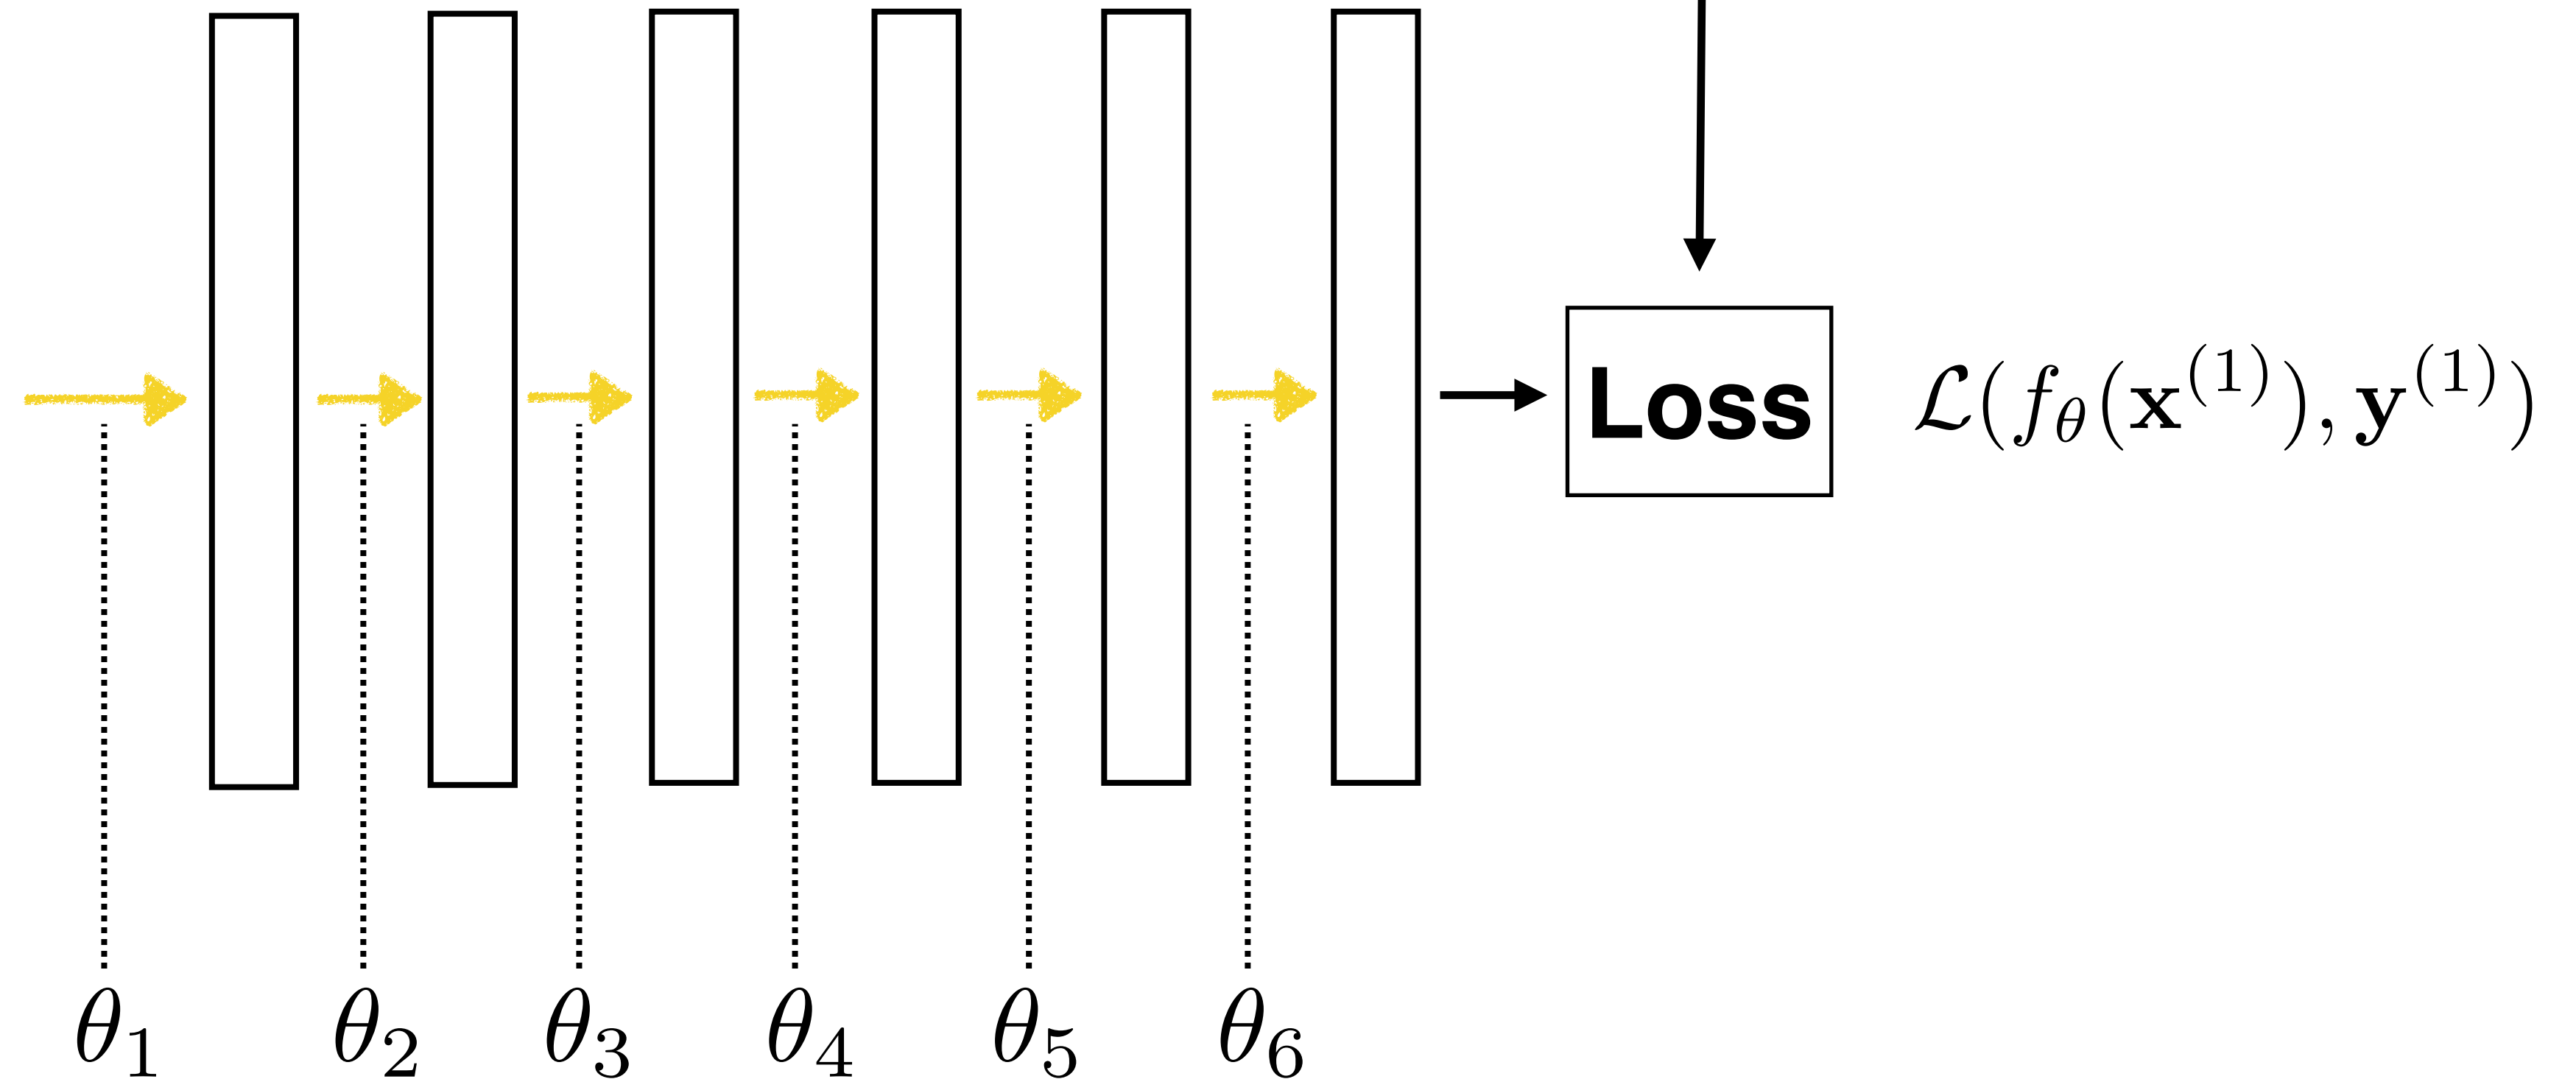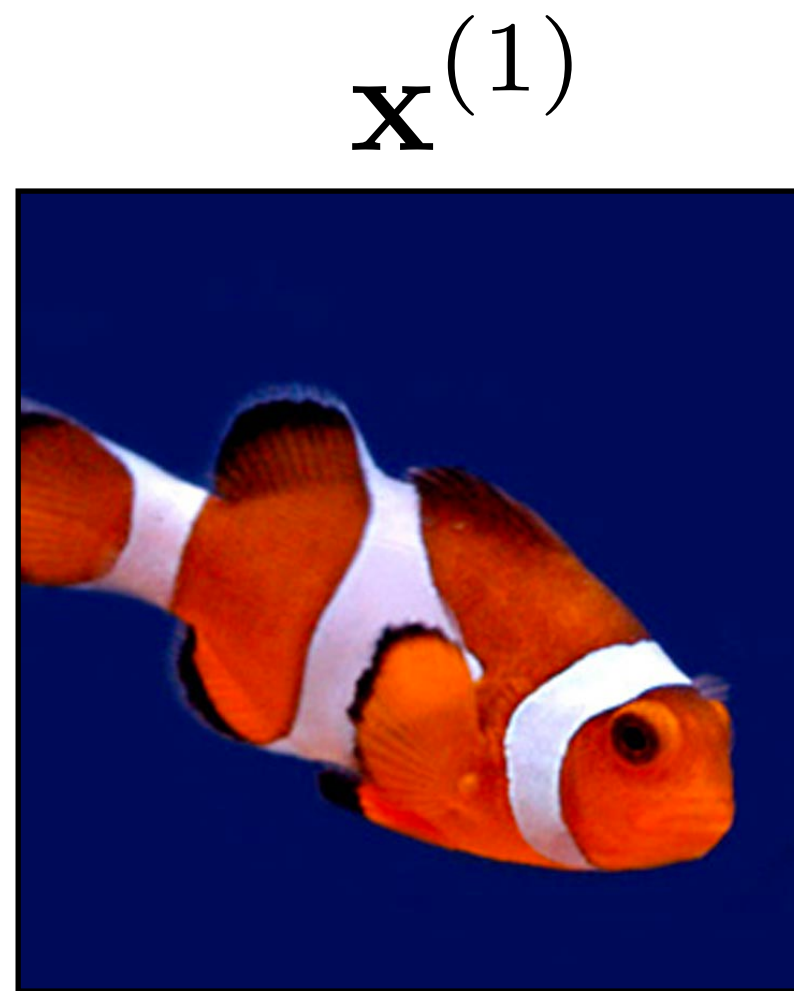


$$\theta^* = \arg \min_{\theta} \sum_{i=1}^N \mathcal{L}(f_{\theta}(\mathbf{x}^{(i)}), \mathbf{y}^{(i)})$$

Deep learning

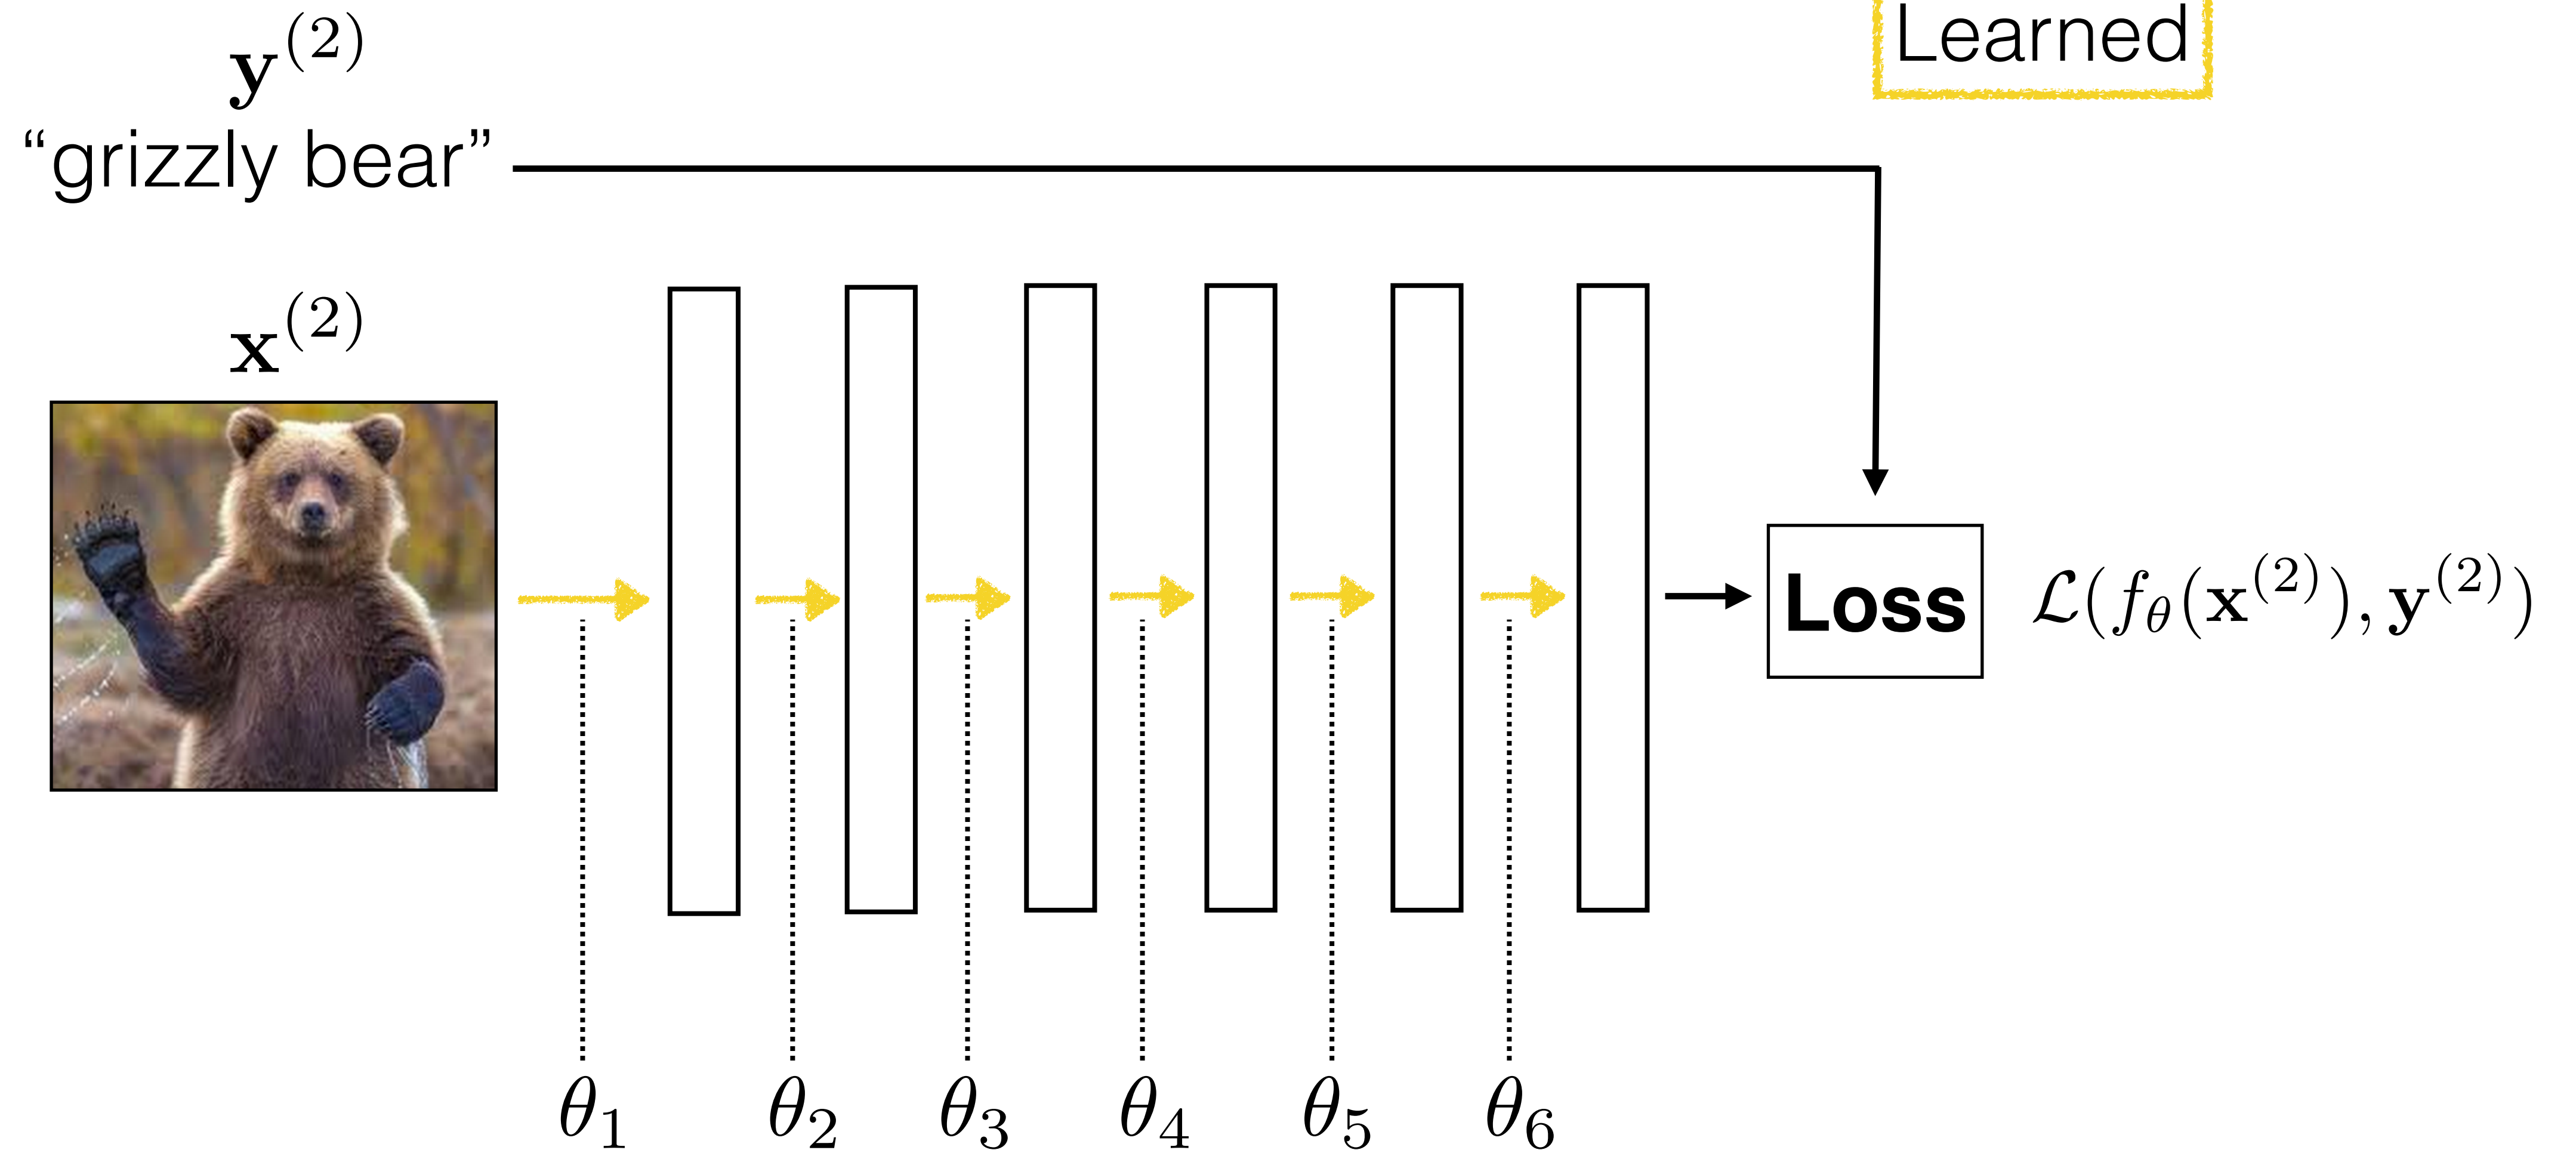

$$\theta^* = \arg \min_{\theta} \sum_{i=1}^N \mathcal{L}(f_{\theta}(\mathbf{x}^{(i)}), \mathbf{y}^{(i)})$$


Deep learning

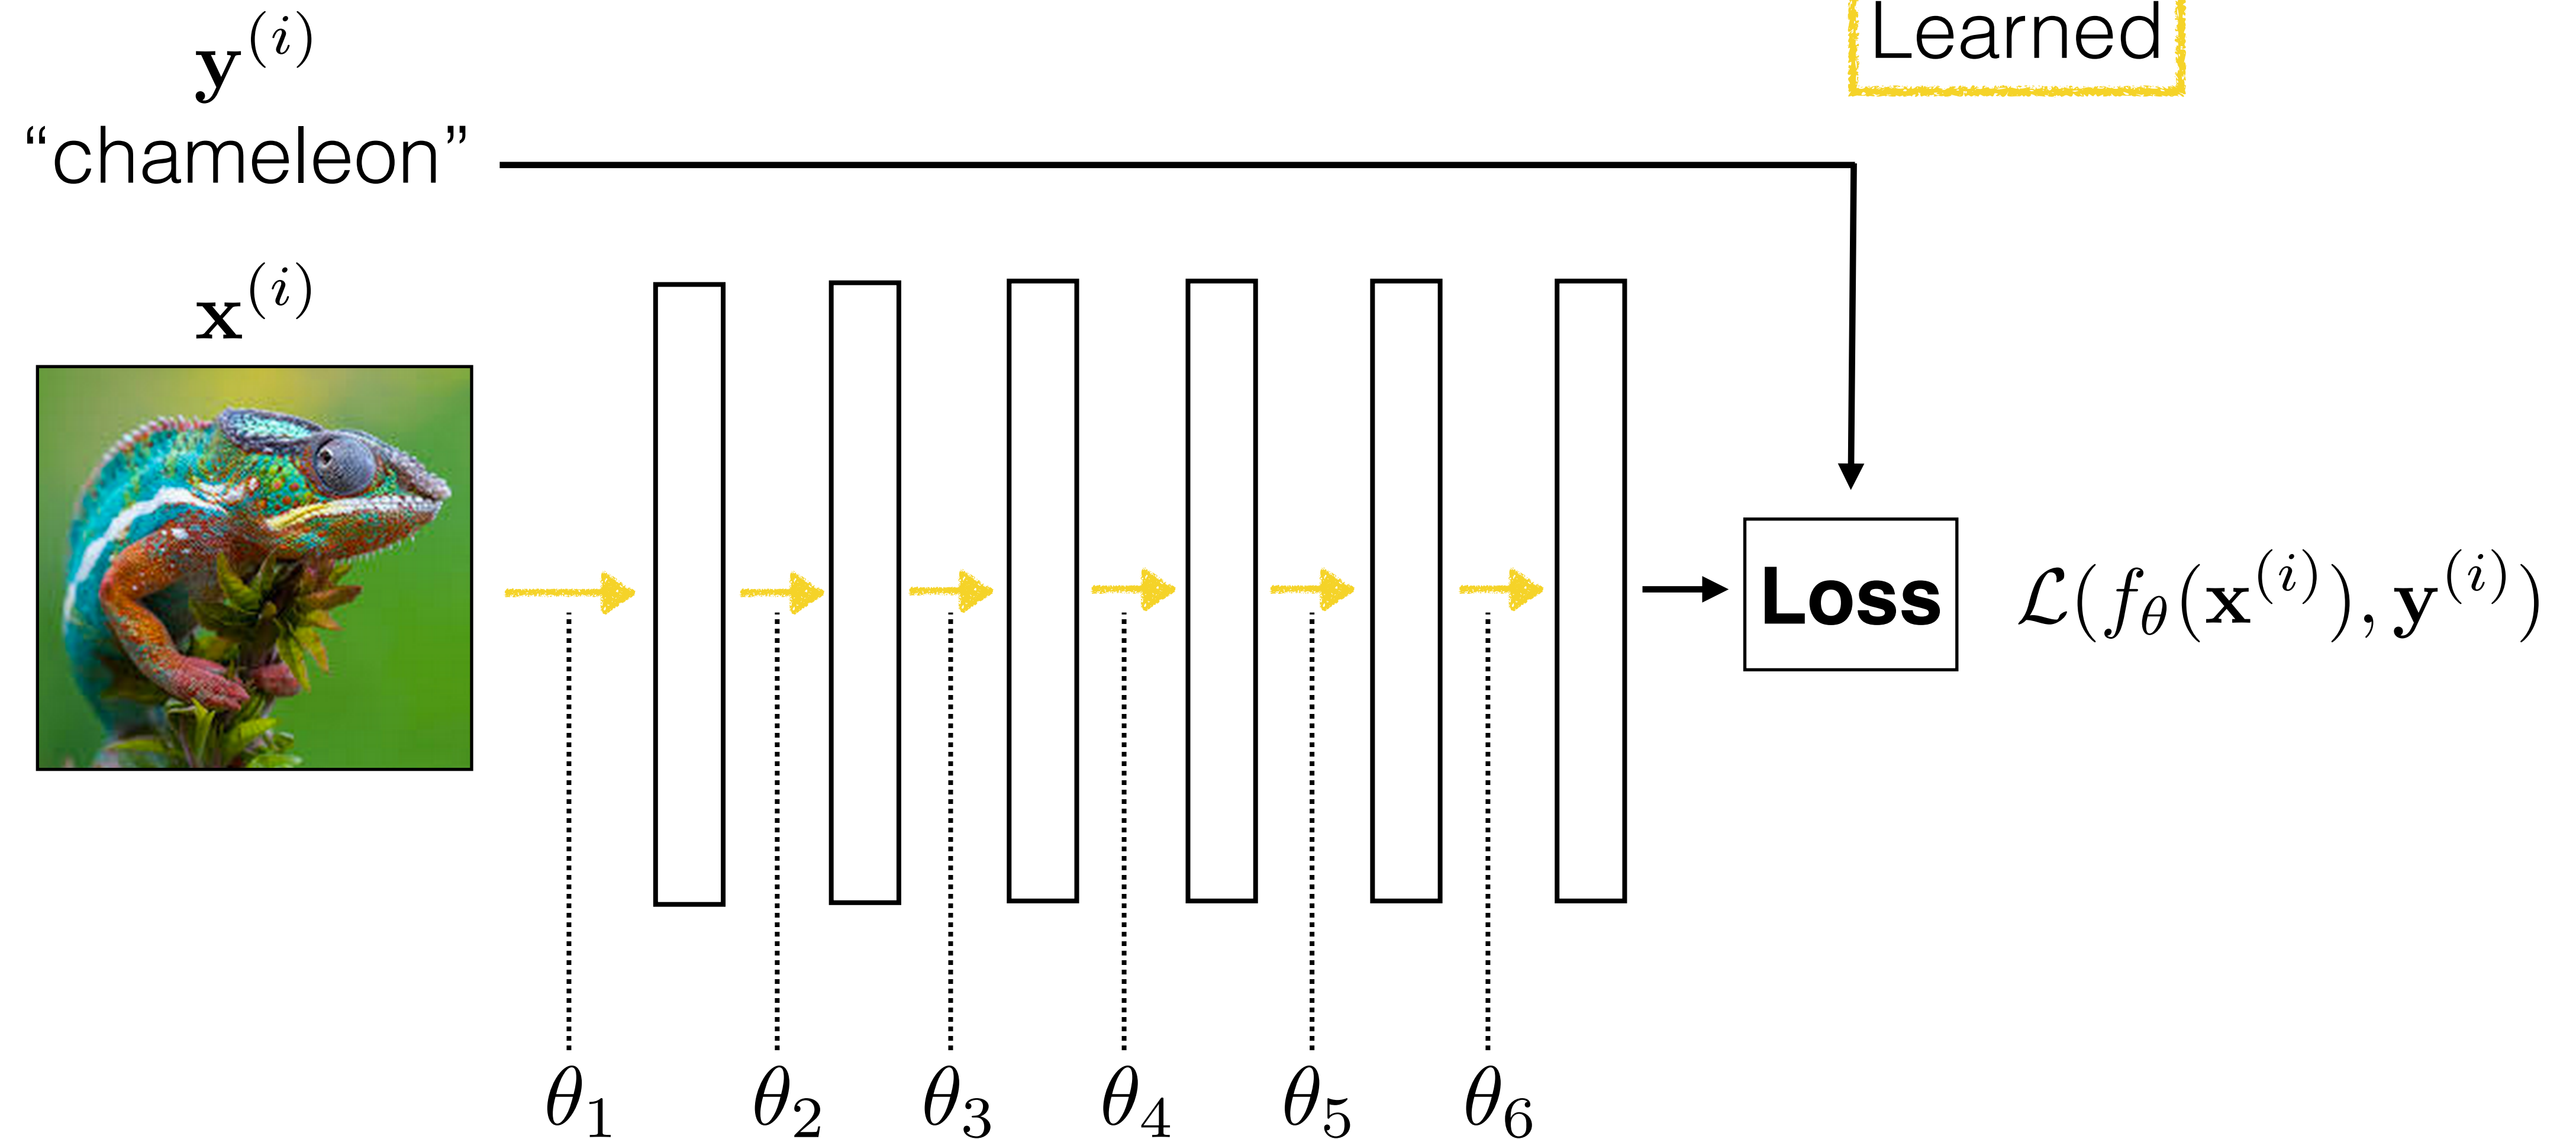


$$\theta^* = \arg \min_{\theta} \sum_{i=1}^N \mathcal{L}(f_{\theta}(\mathbf{x}^{(i)}), \mathbf{y}^{(i)})$$

What we expect you to have seen before

- Gradient descent
- MLPs, Nonlinearities (ReLU)
- Softmax, cross-entropy loss
- Parallel processing, tensors

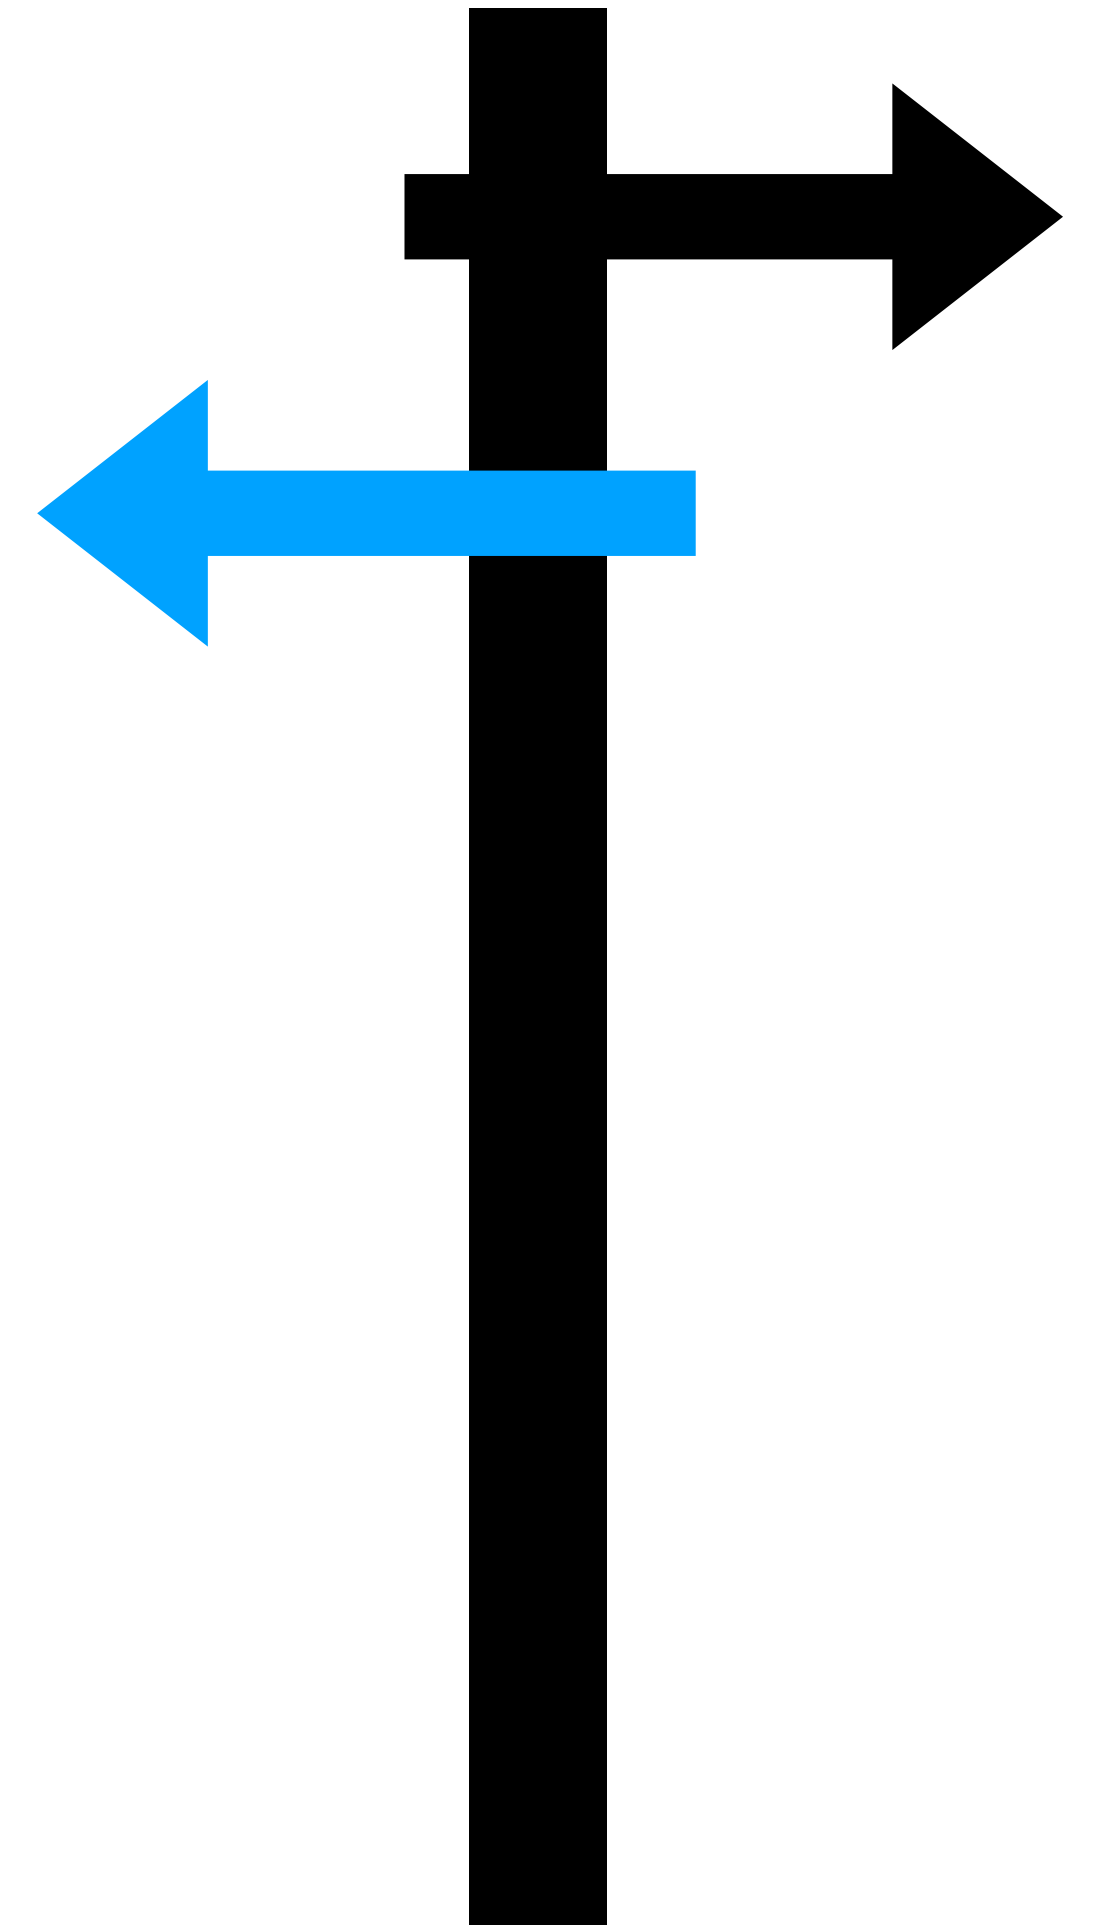


Batch (parallel) processing

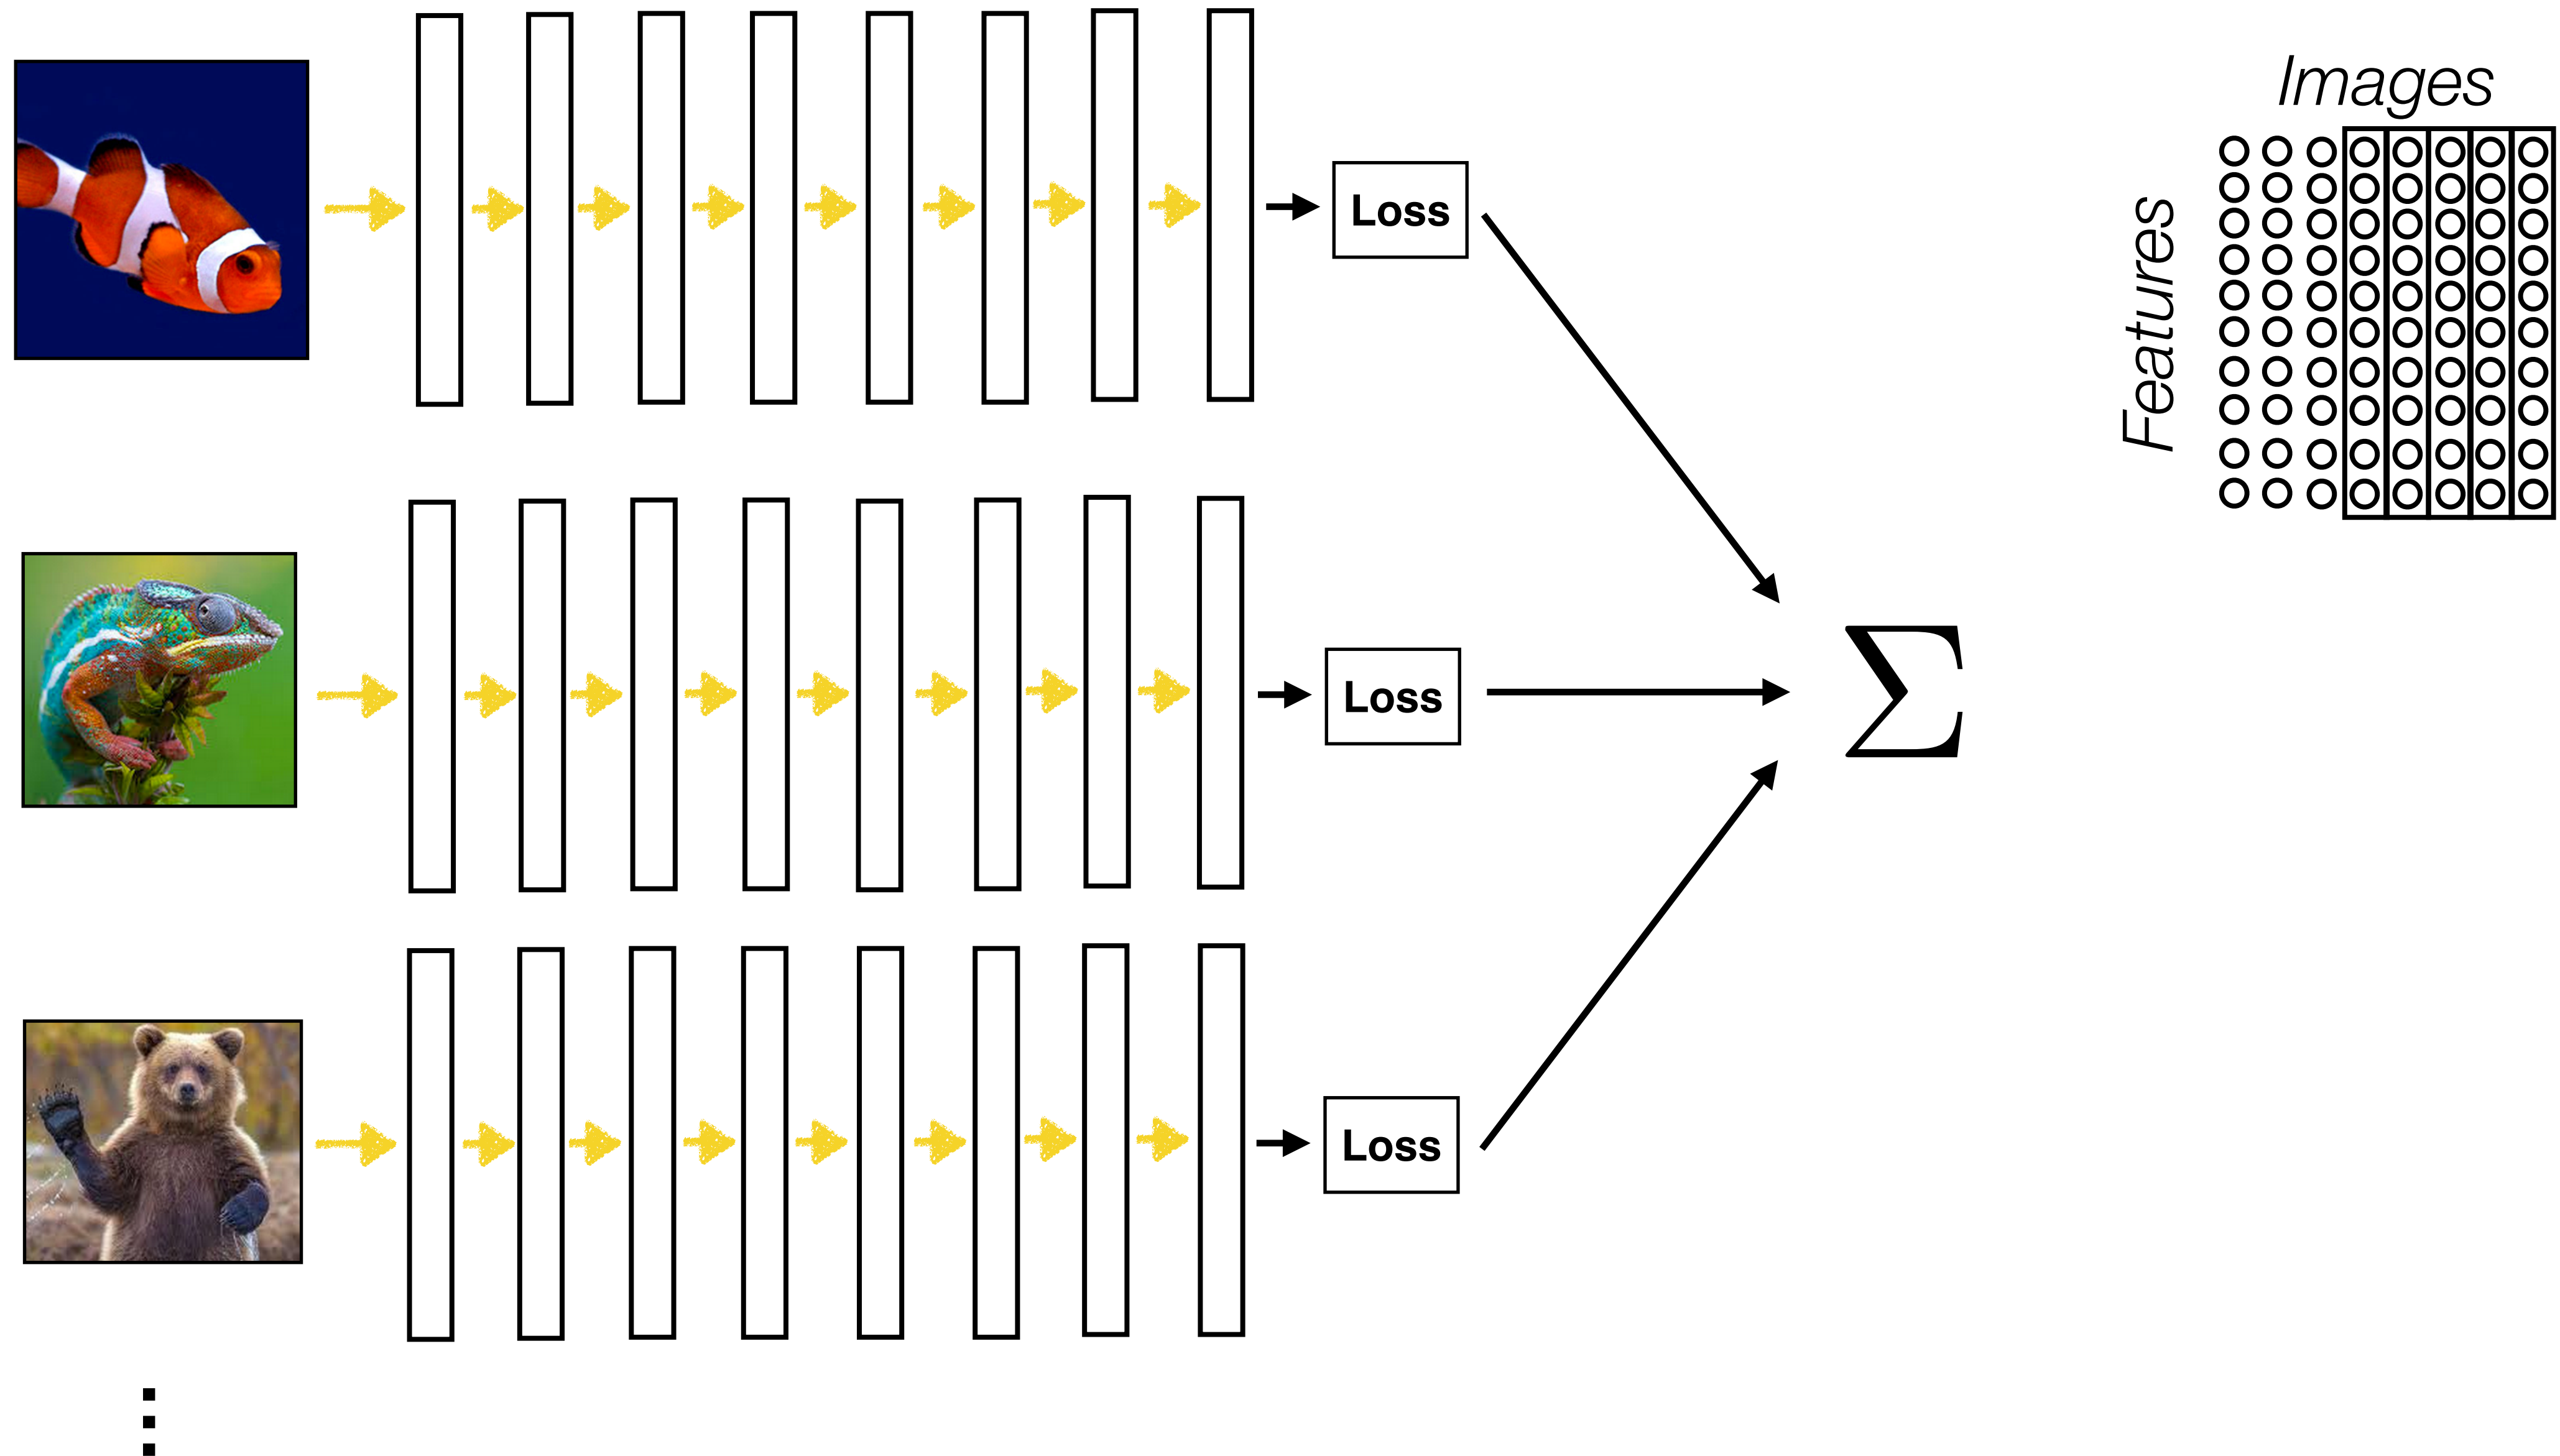


Tensors

(multi-dimensional arrays)

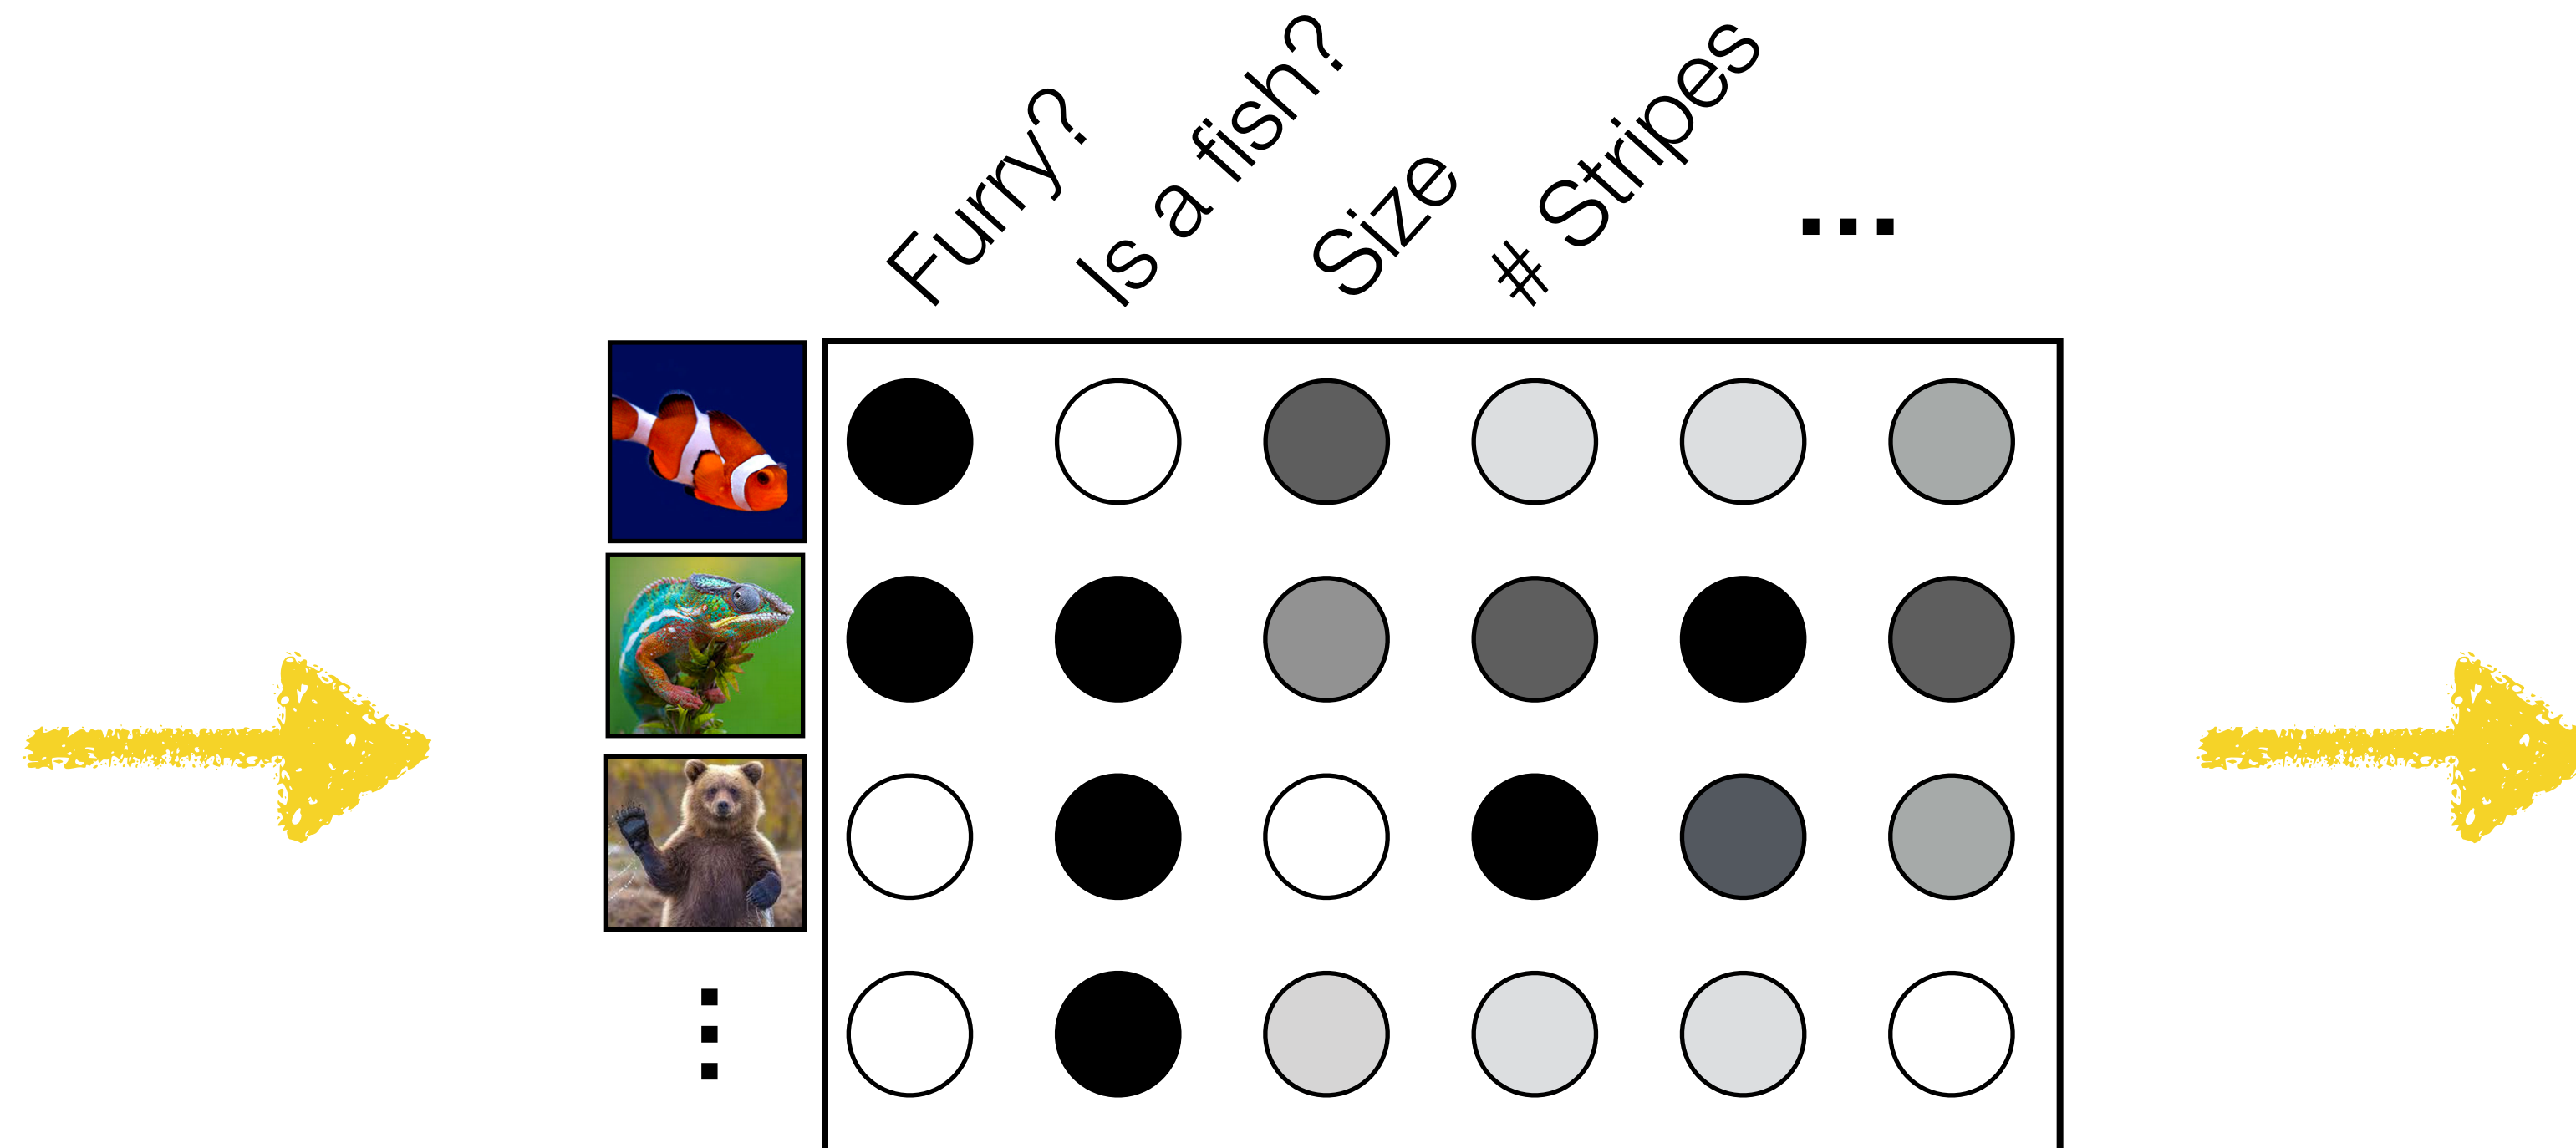

Each layer is a representation of the data

Everything is a tensor

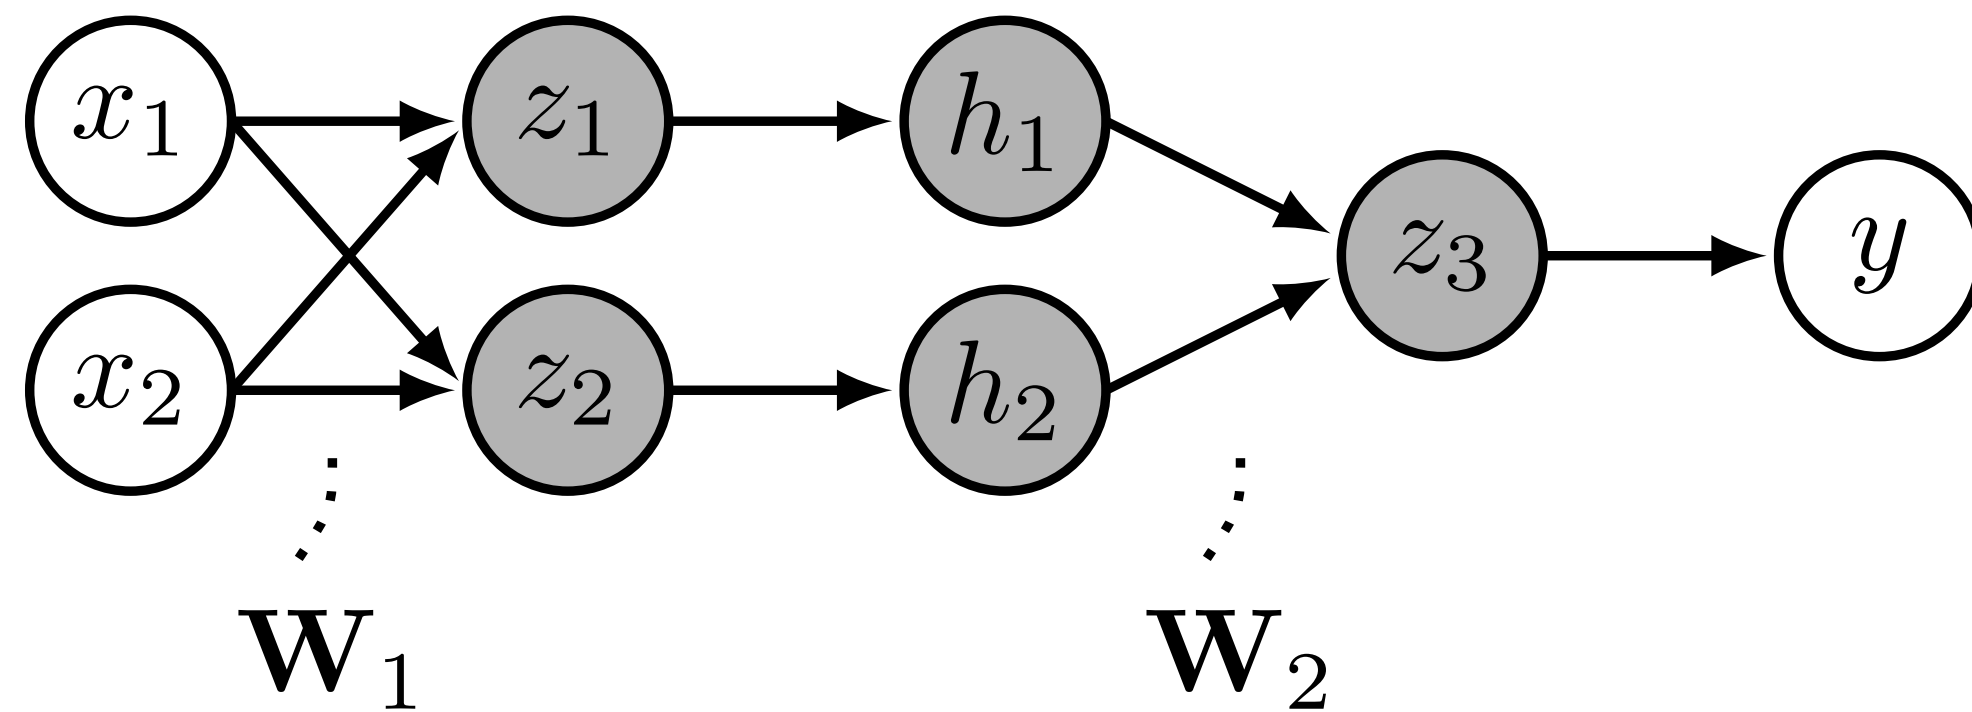


$$\mathbf{z} = \mathbf{W}_1 \mathbf{x} + \mathbf{b}_1$$

$$\mathbf{h} = g(\mathbf{z})$$

$$z_3 = \mathbf{W}_2 \mathbf{h} + b_2$$


$$y = 1(z_3 > 0)$$

Tensor processing with batch size = 3:

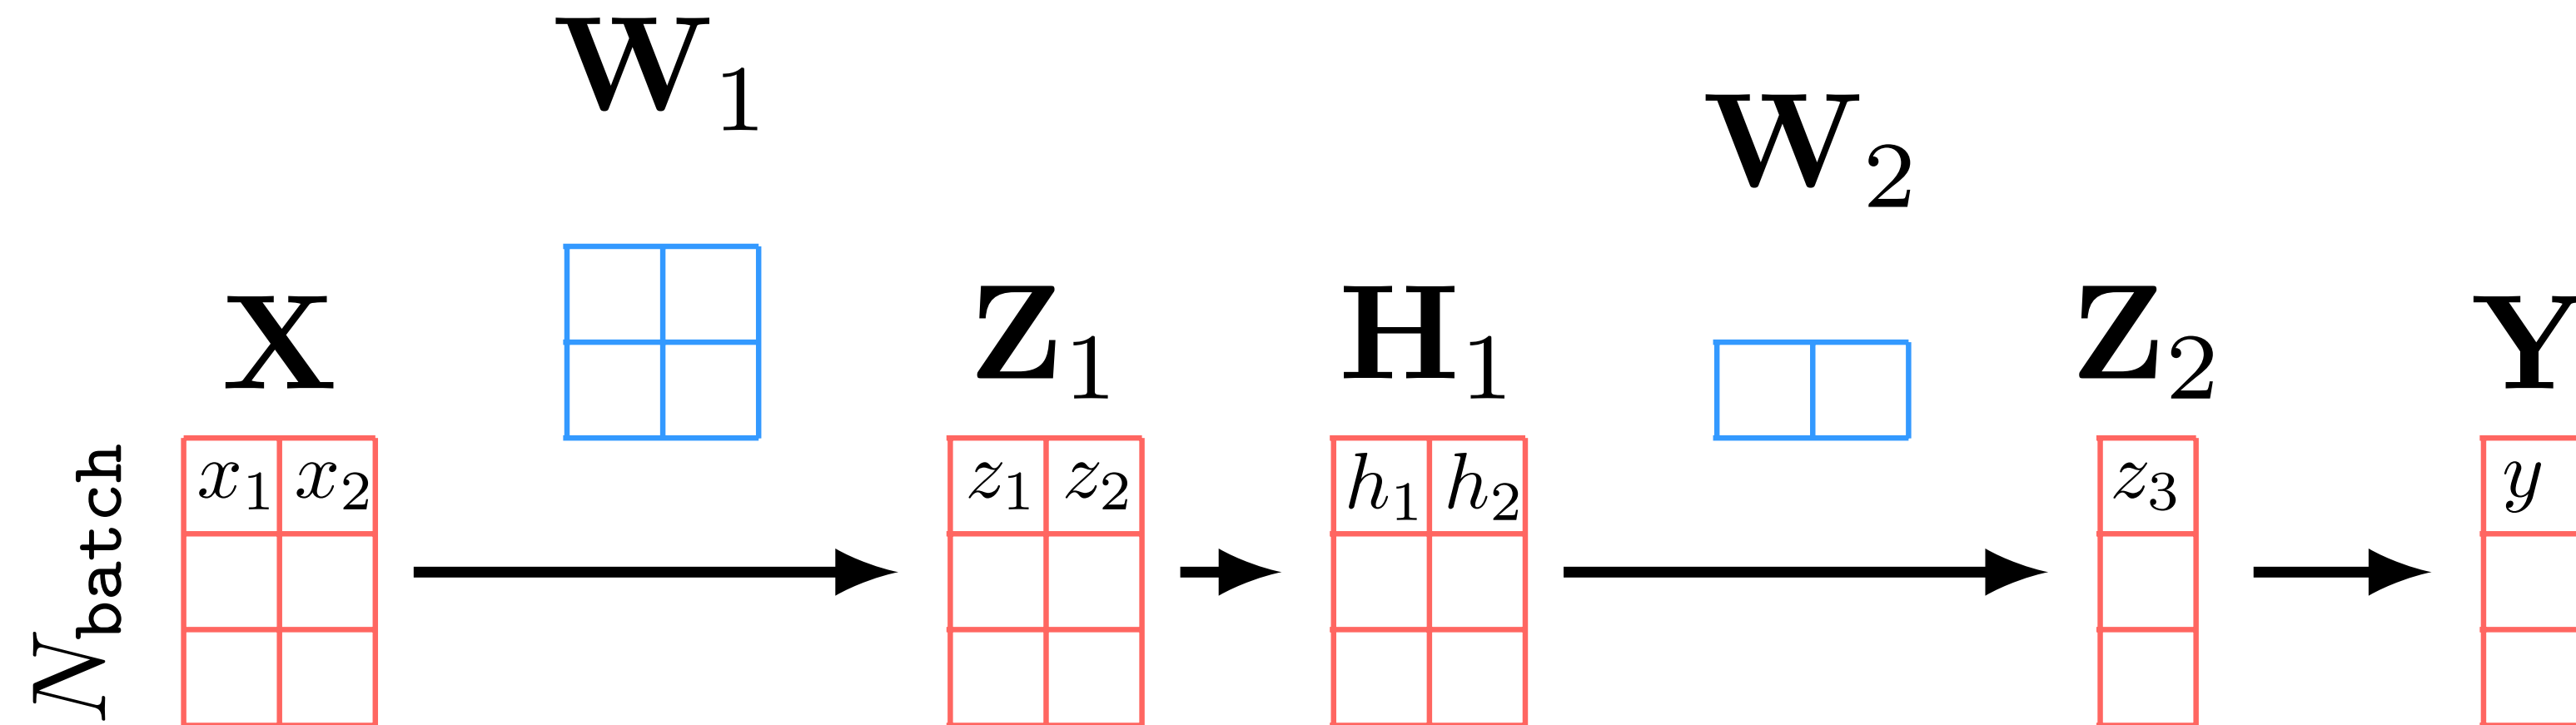


What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures
- When and why can we generalize
- How deep networks represent data

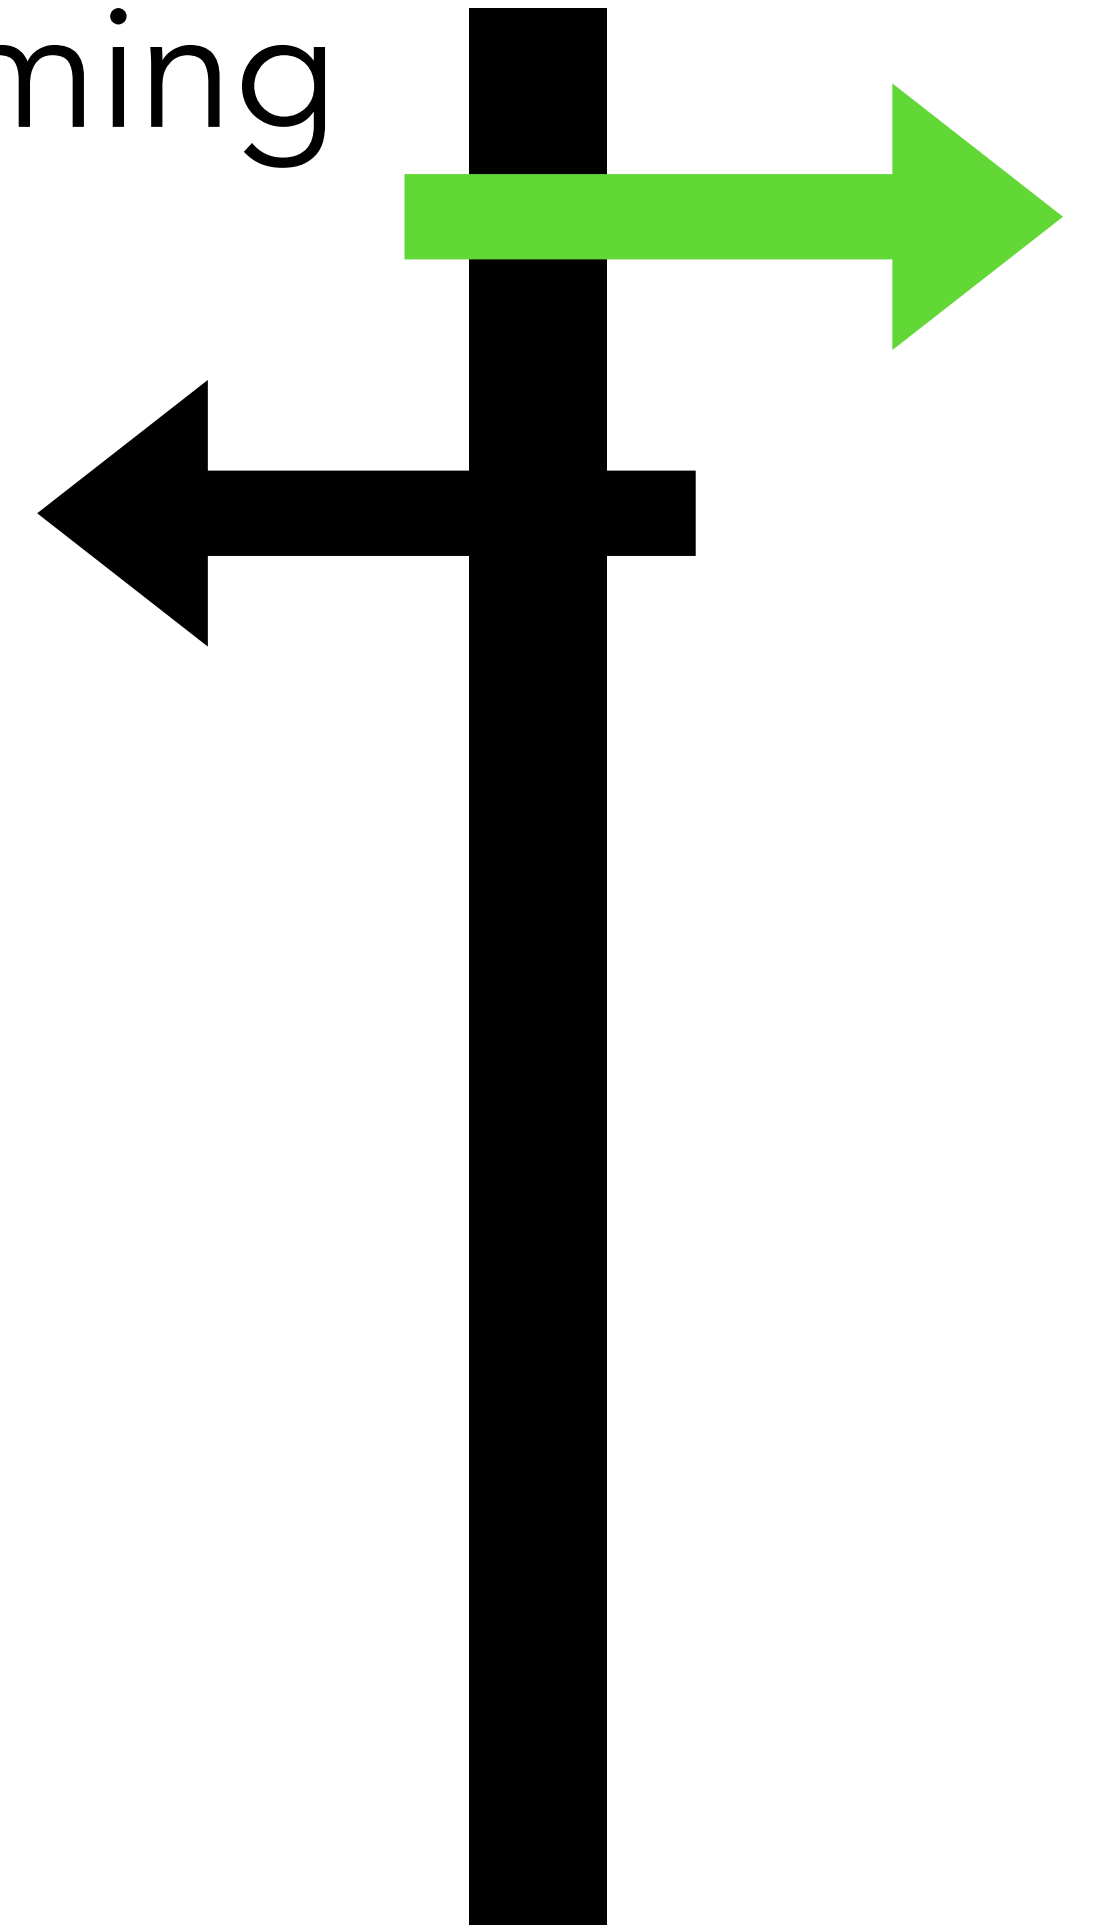



Classification
units

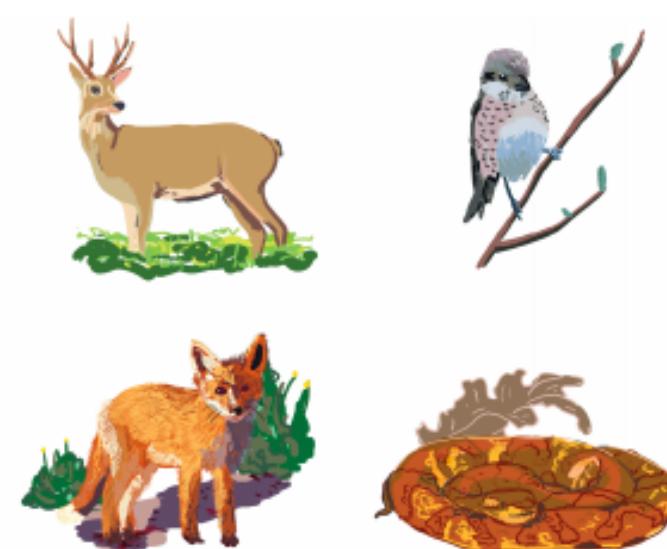


PIT/AIT




V4/PIT







V2/V4

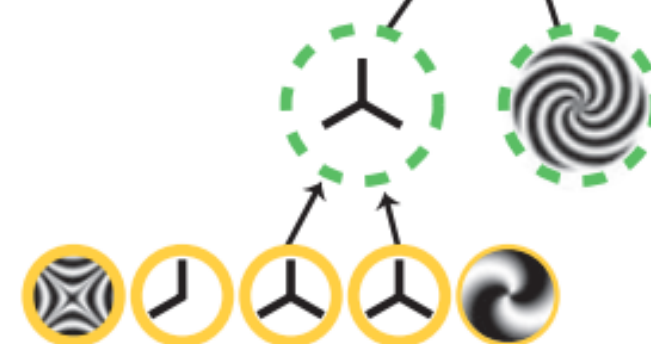

V1/V2

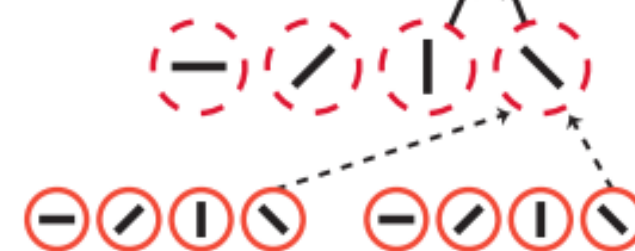


- structure, construction
- covering
- commodity, trade good, good
- conveyance, transport
- invertebrate
- bird
- hunting dog

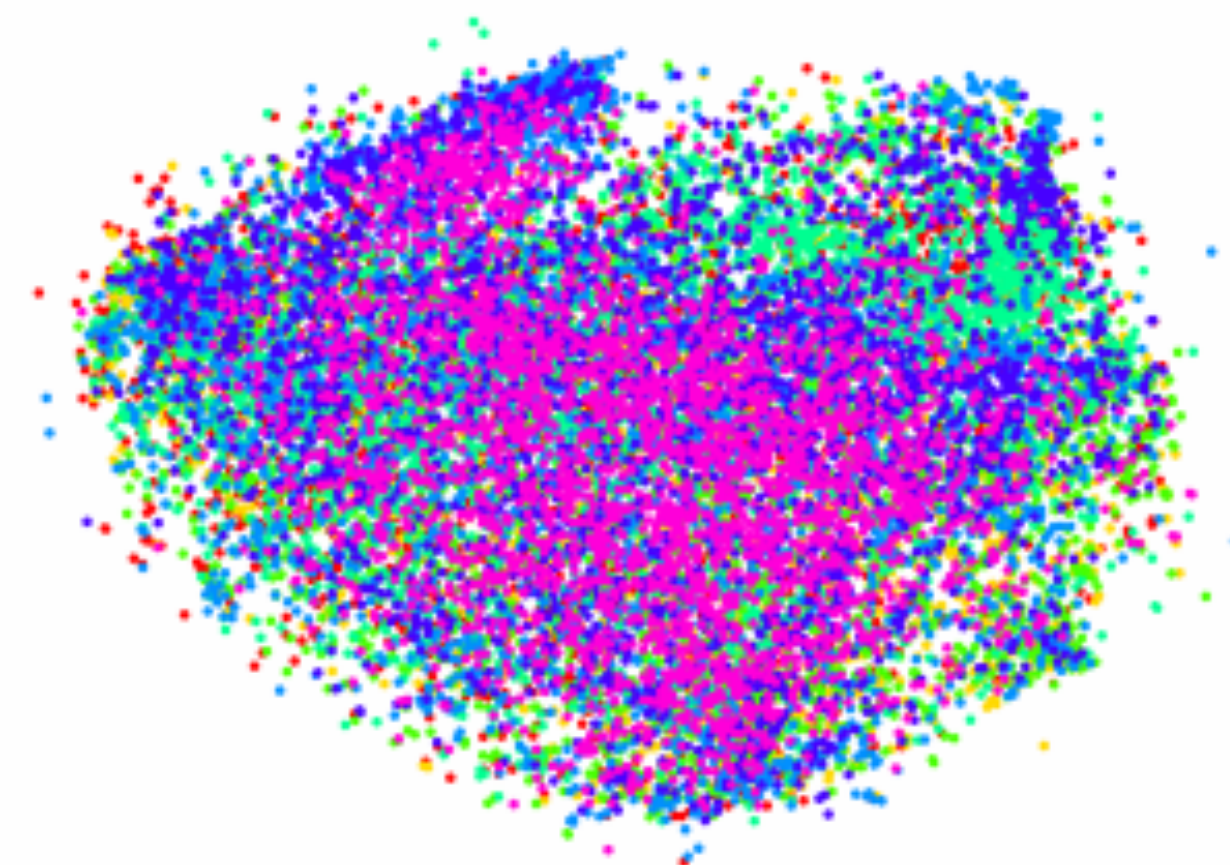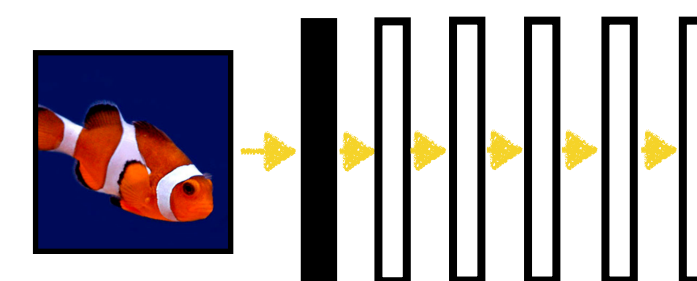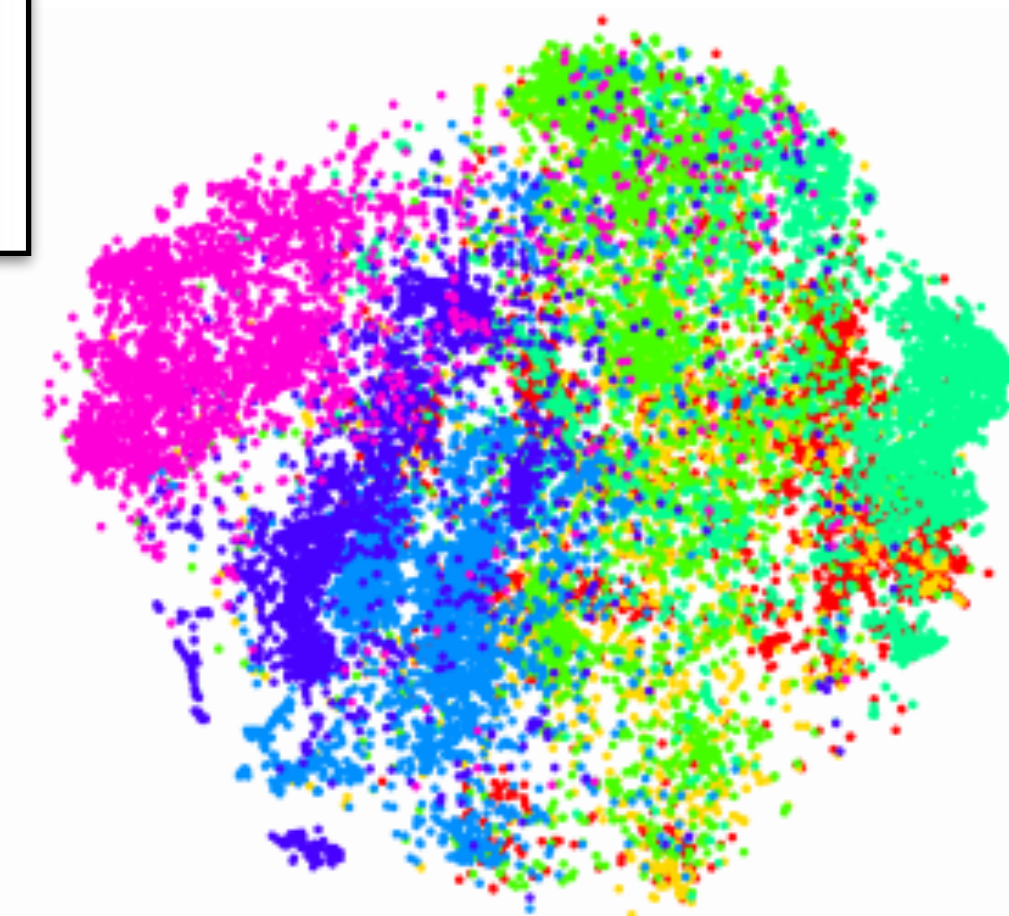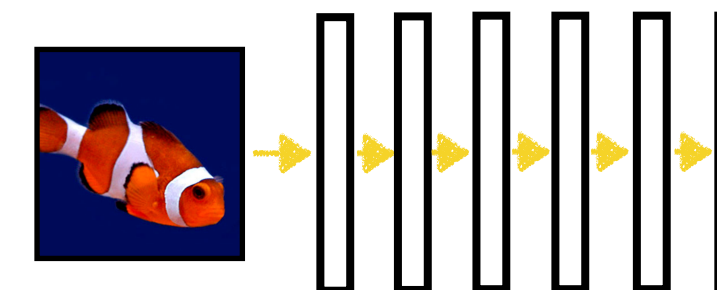

Serre, 2014

Donahue, 2013

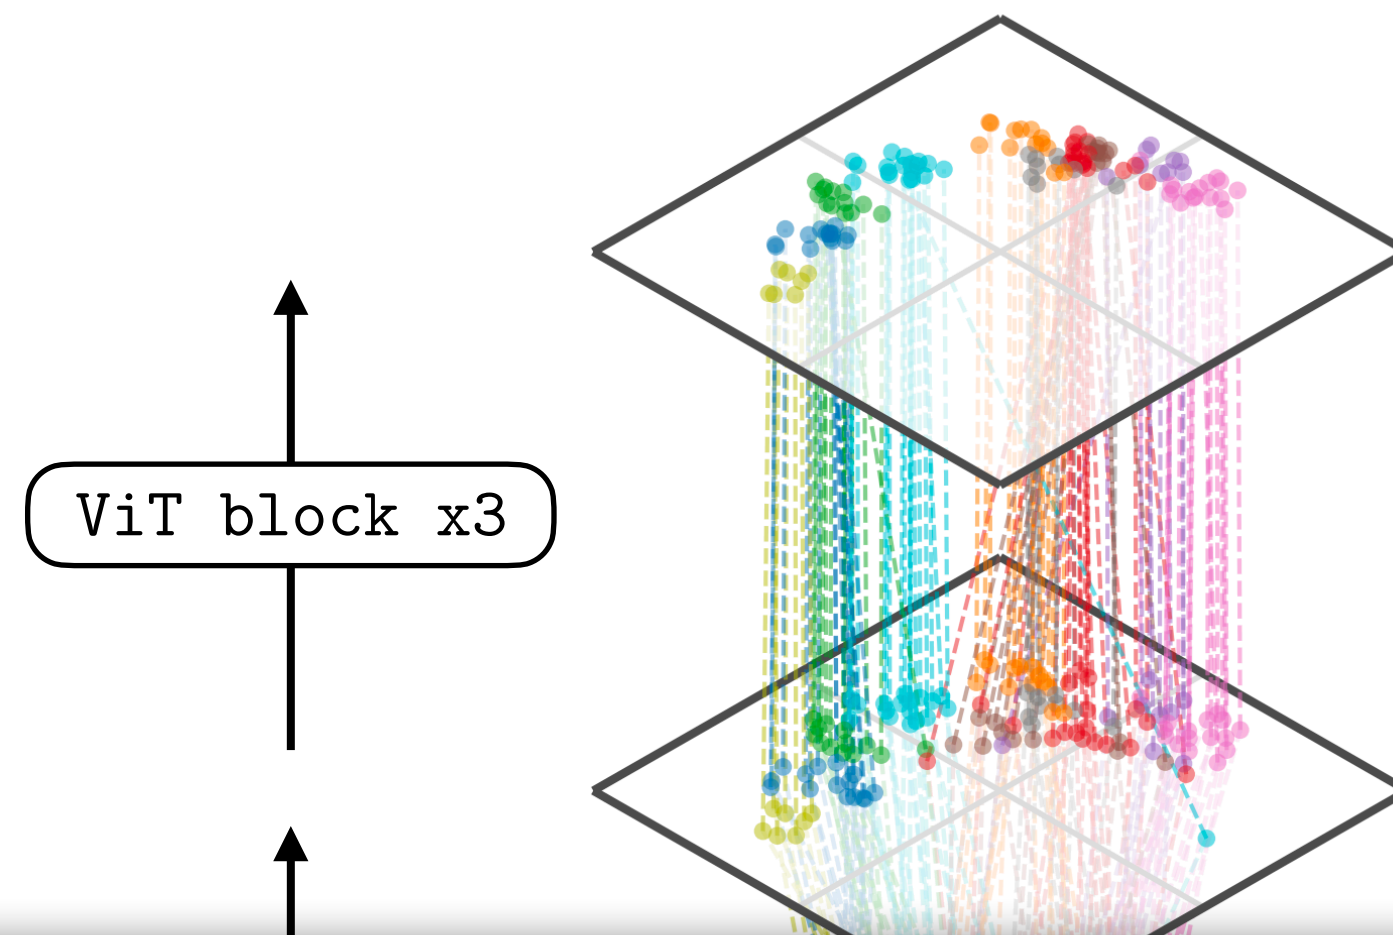


Representation Learning

Lecture 12: Reconstruction-based


Lecture 13: Similarity-based

Lecture 14: Theory

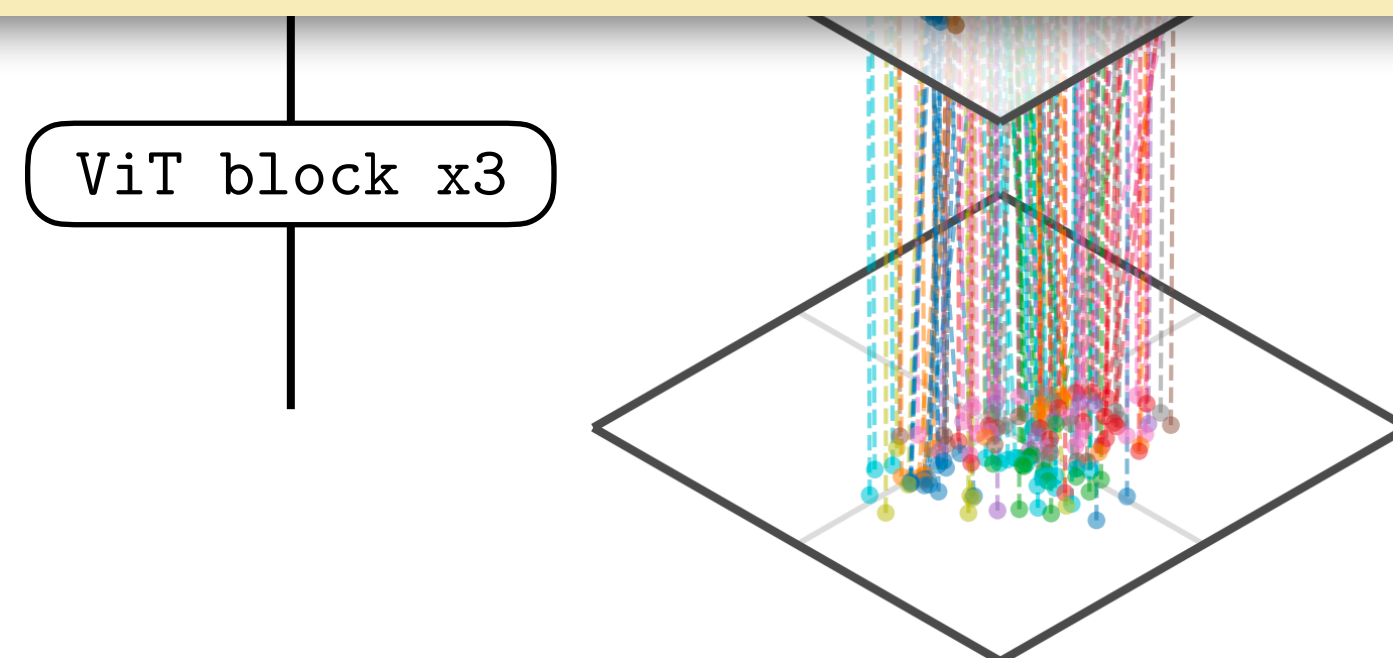

What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures
- When and why can we generalize
- How deep networks represent data
- Generative Models

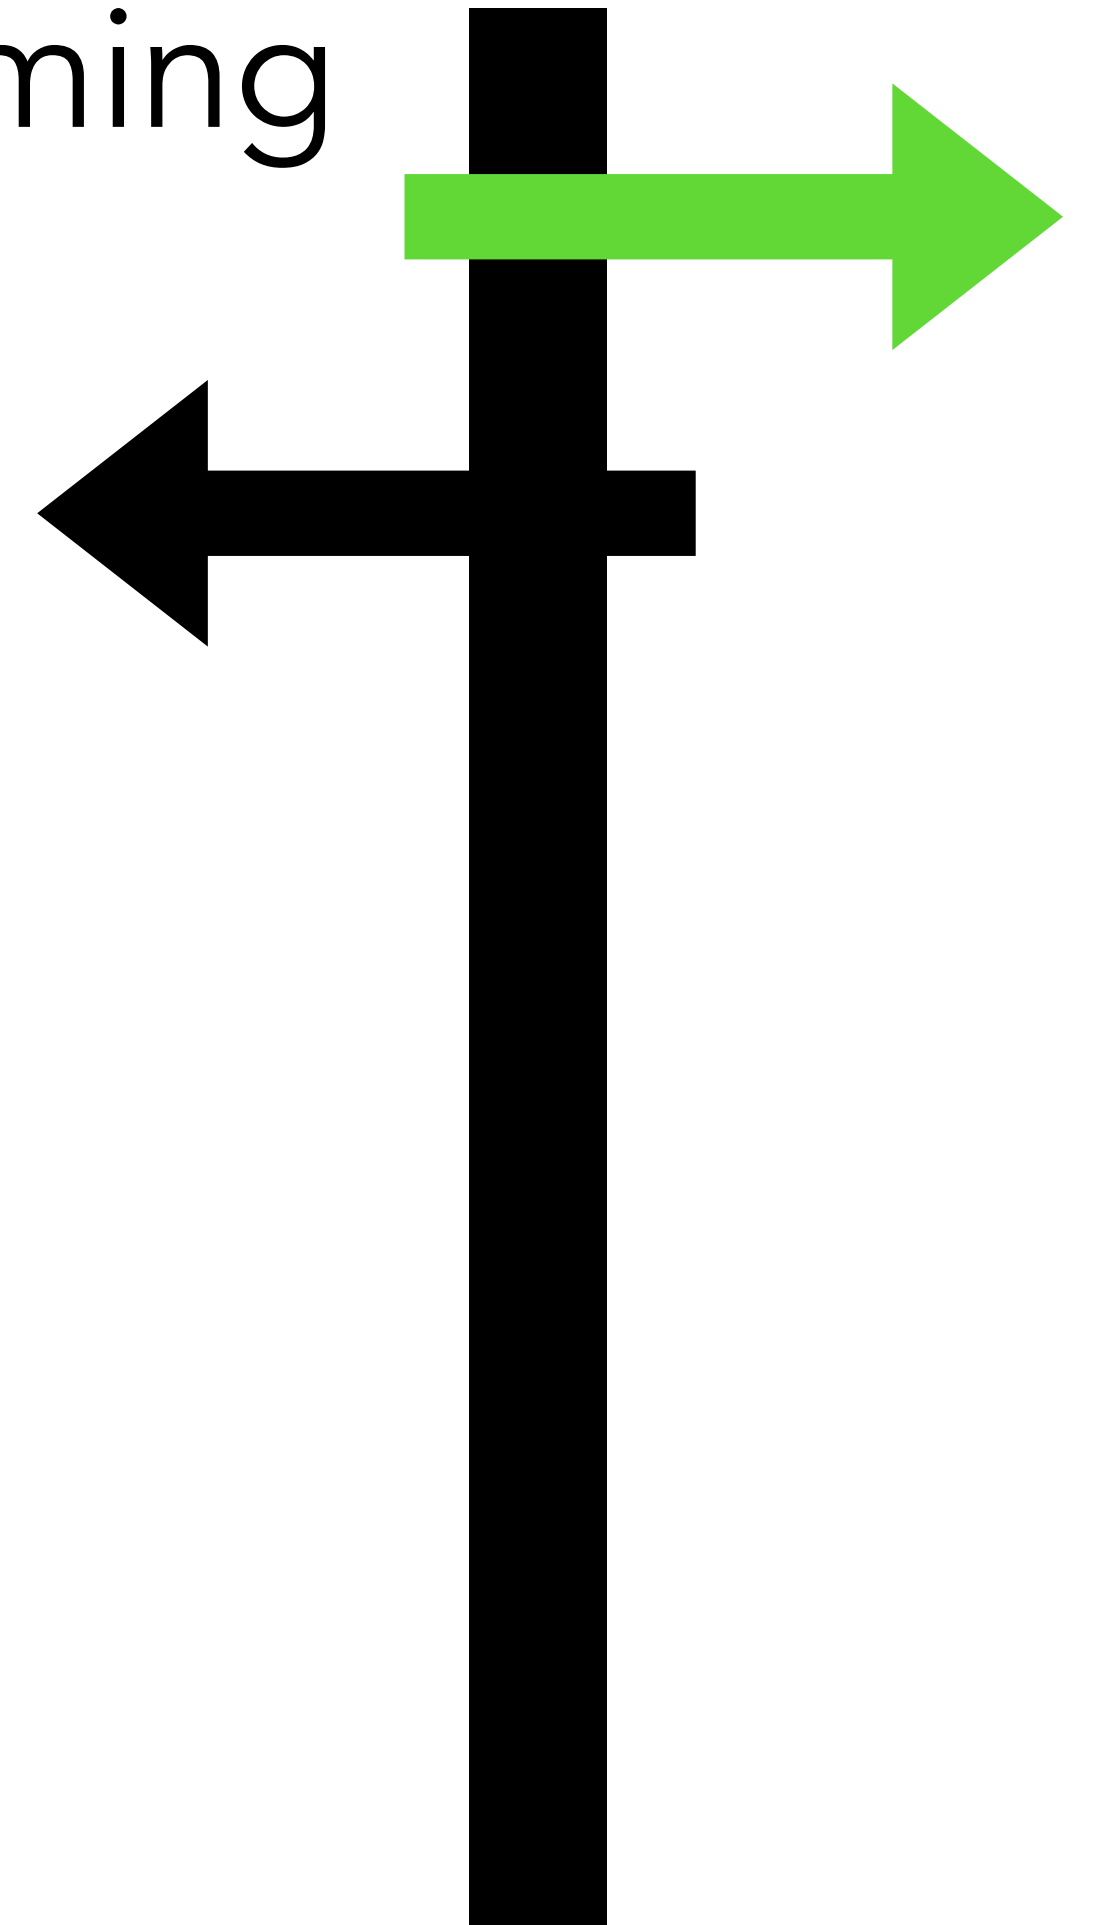

Generative Models





Generative Models

Lecture 15: Basics


Lecture 16: Representations + Generation

Lecture 17: Conditional Models

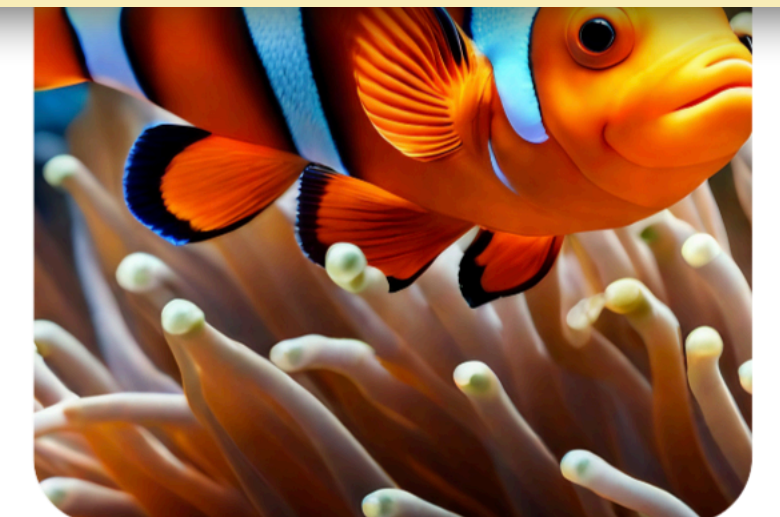
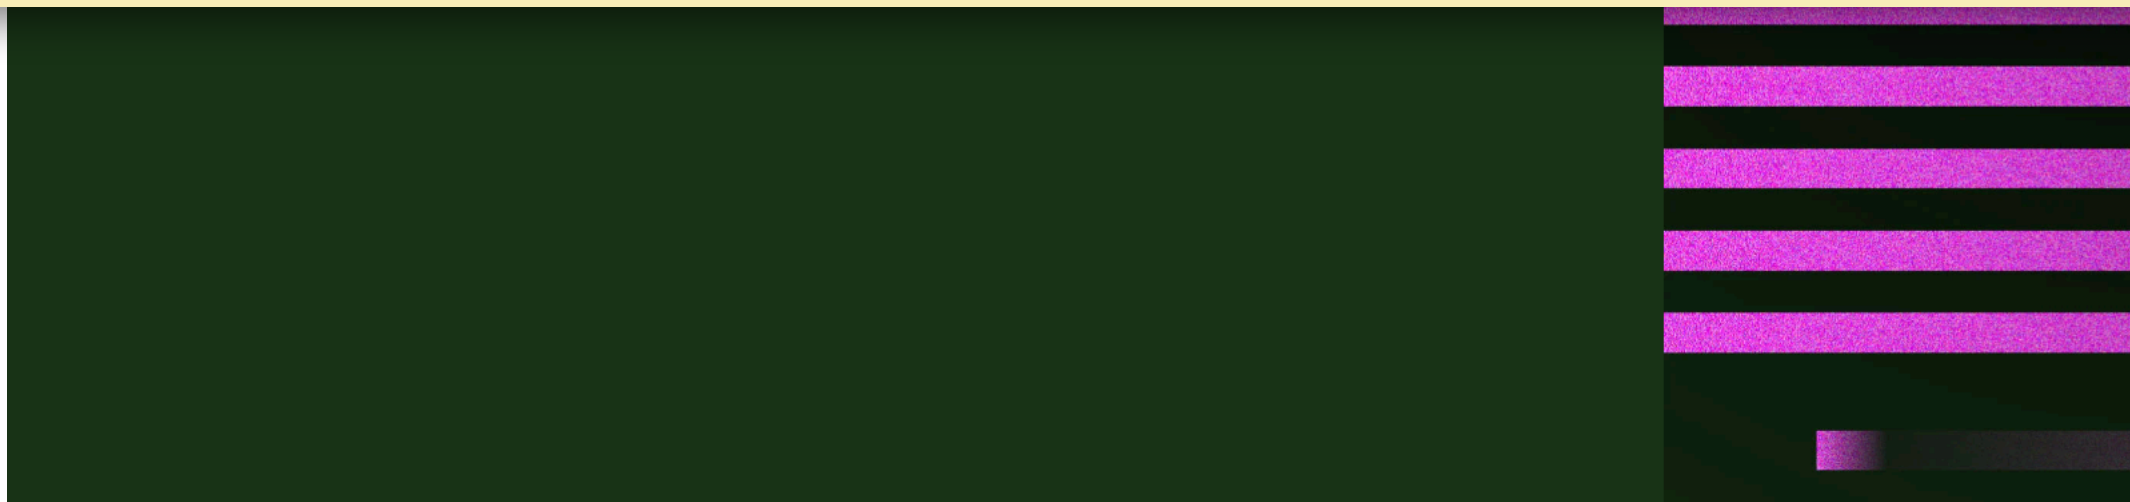


What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures
- When and why can we generalize
- How deep networks represent data
- Generative Models
- Reusing weights

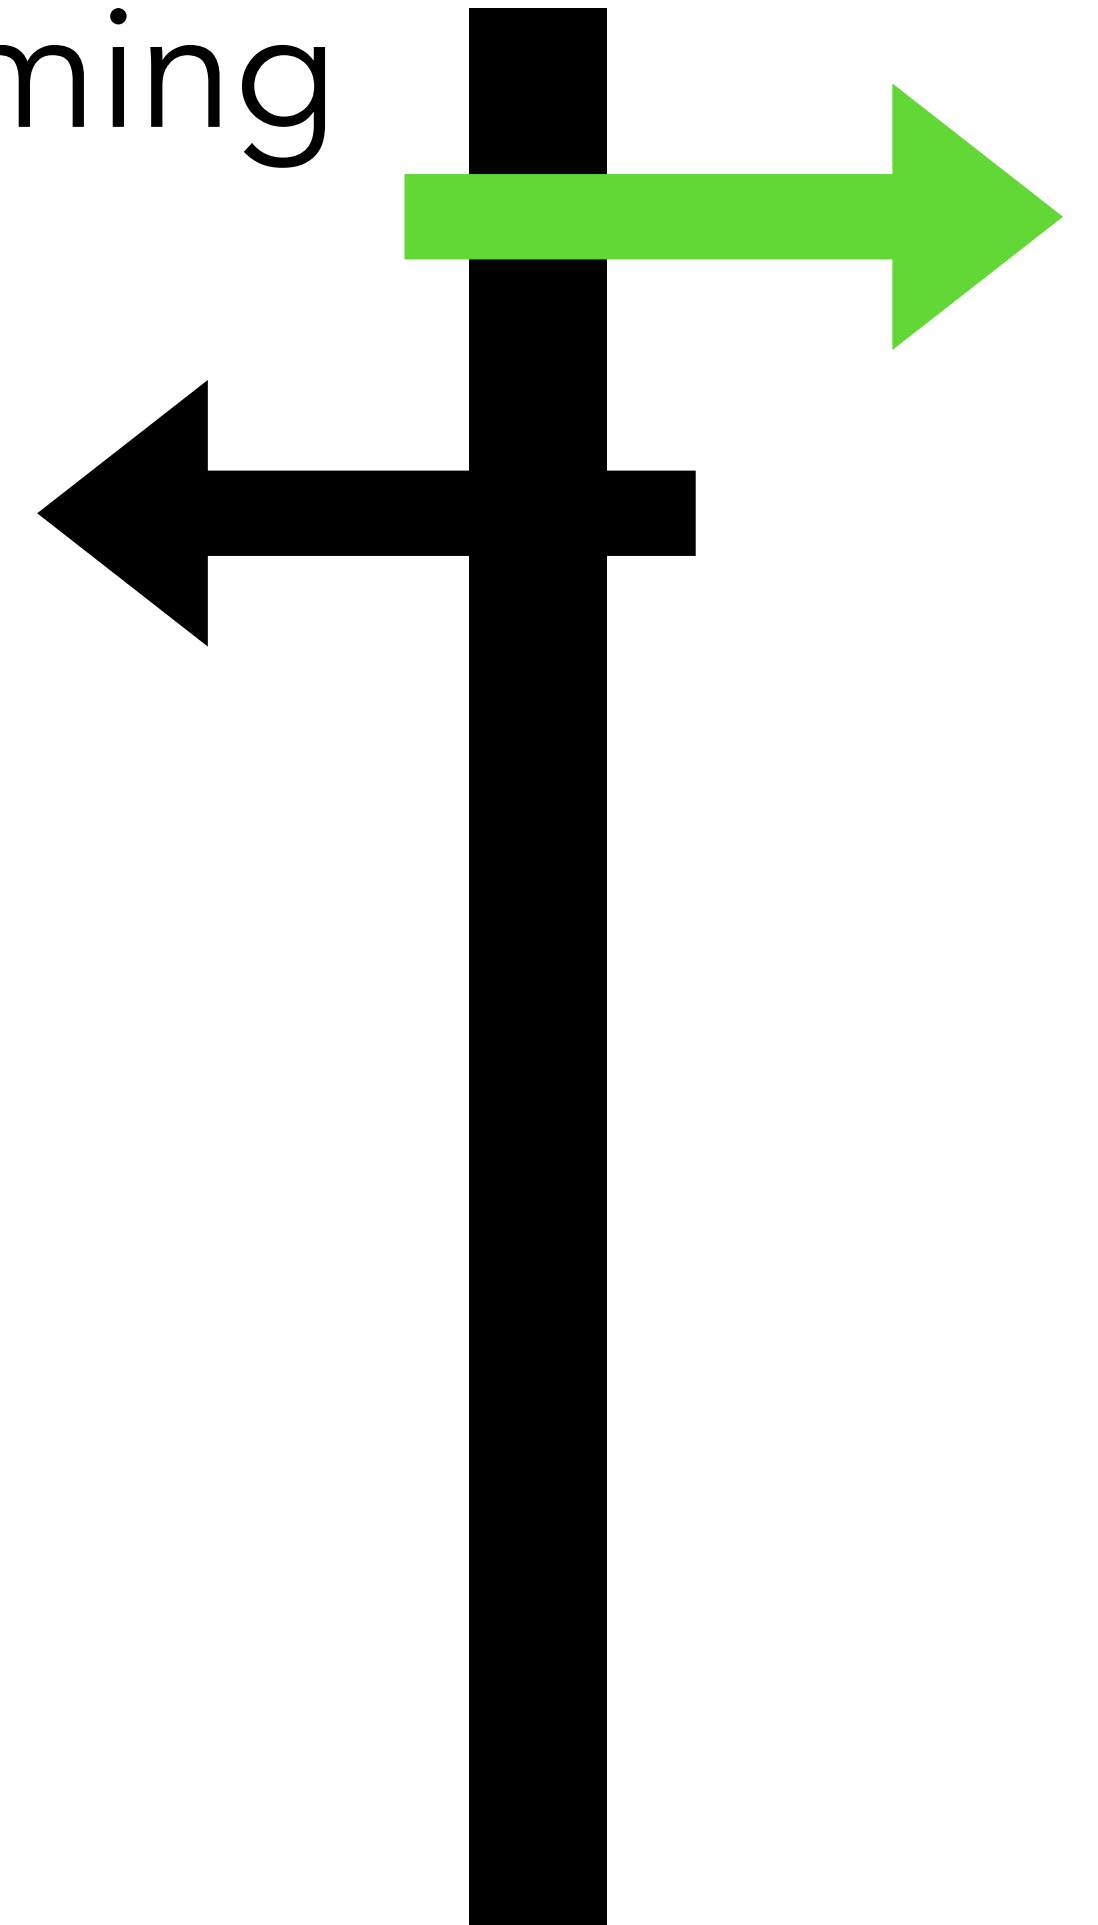


Reuse

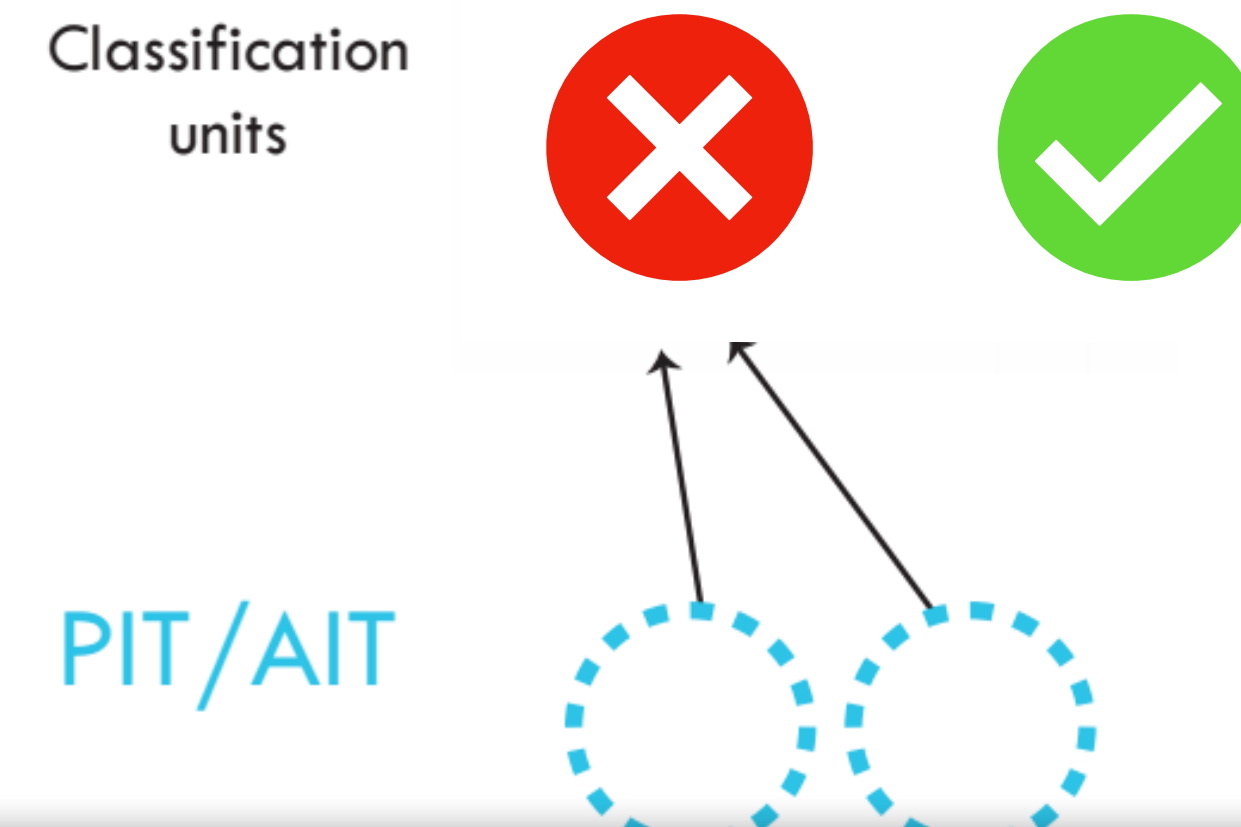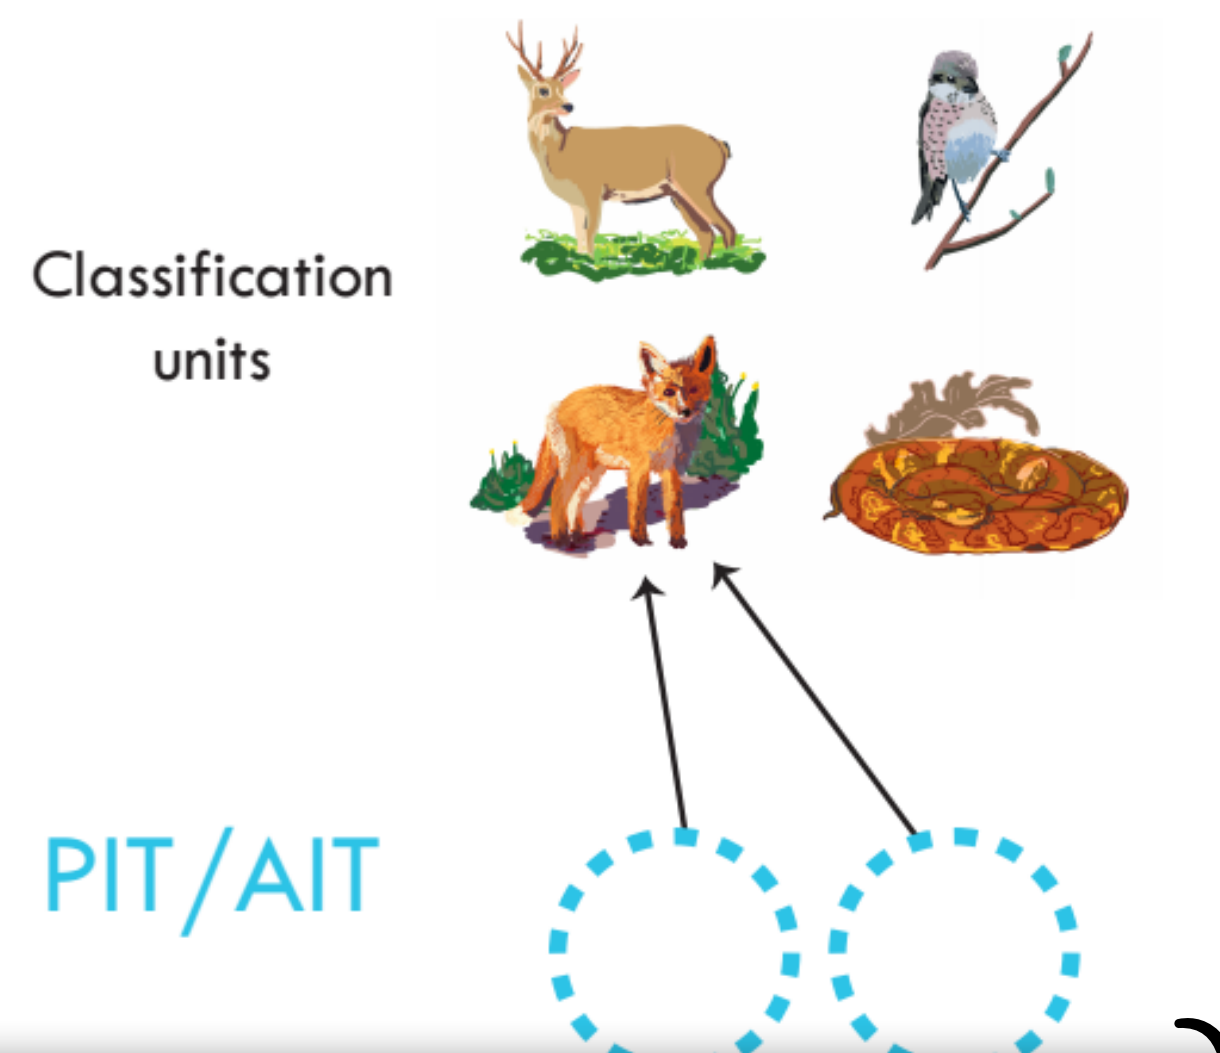

Transfer Learning


Lecture 19: Models

Lecture 20: Data

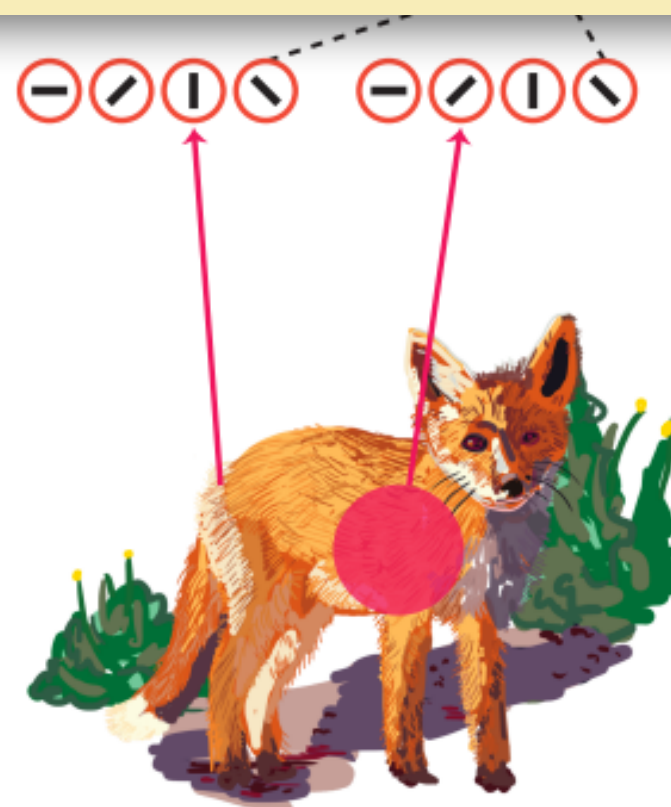

What we'll cover in this class

- Backprop and differentiable programming
- Why we can approximate
- Architectures
- When and why can we generalize
- How deep networks represent data
- Generative models
- Reusing weights
- Scaling

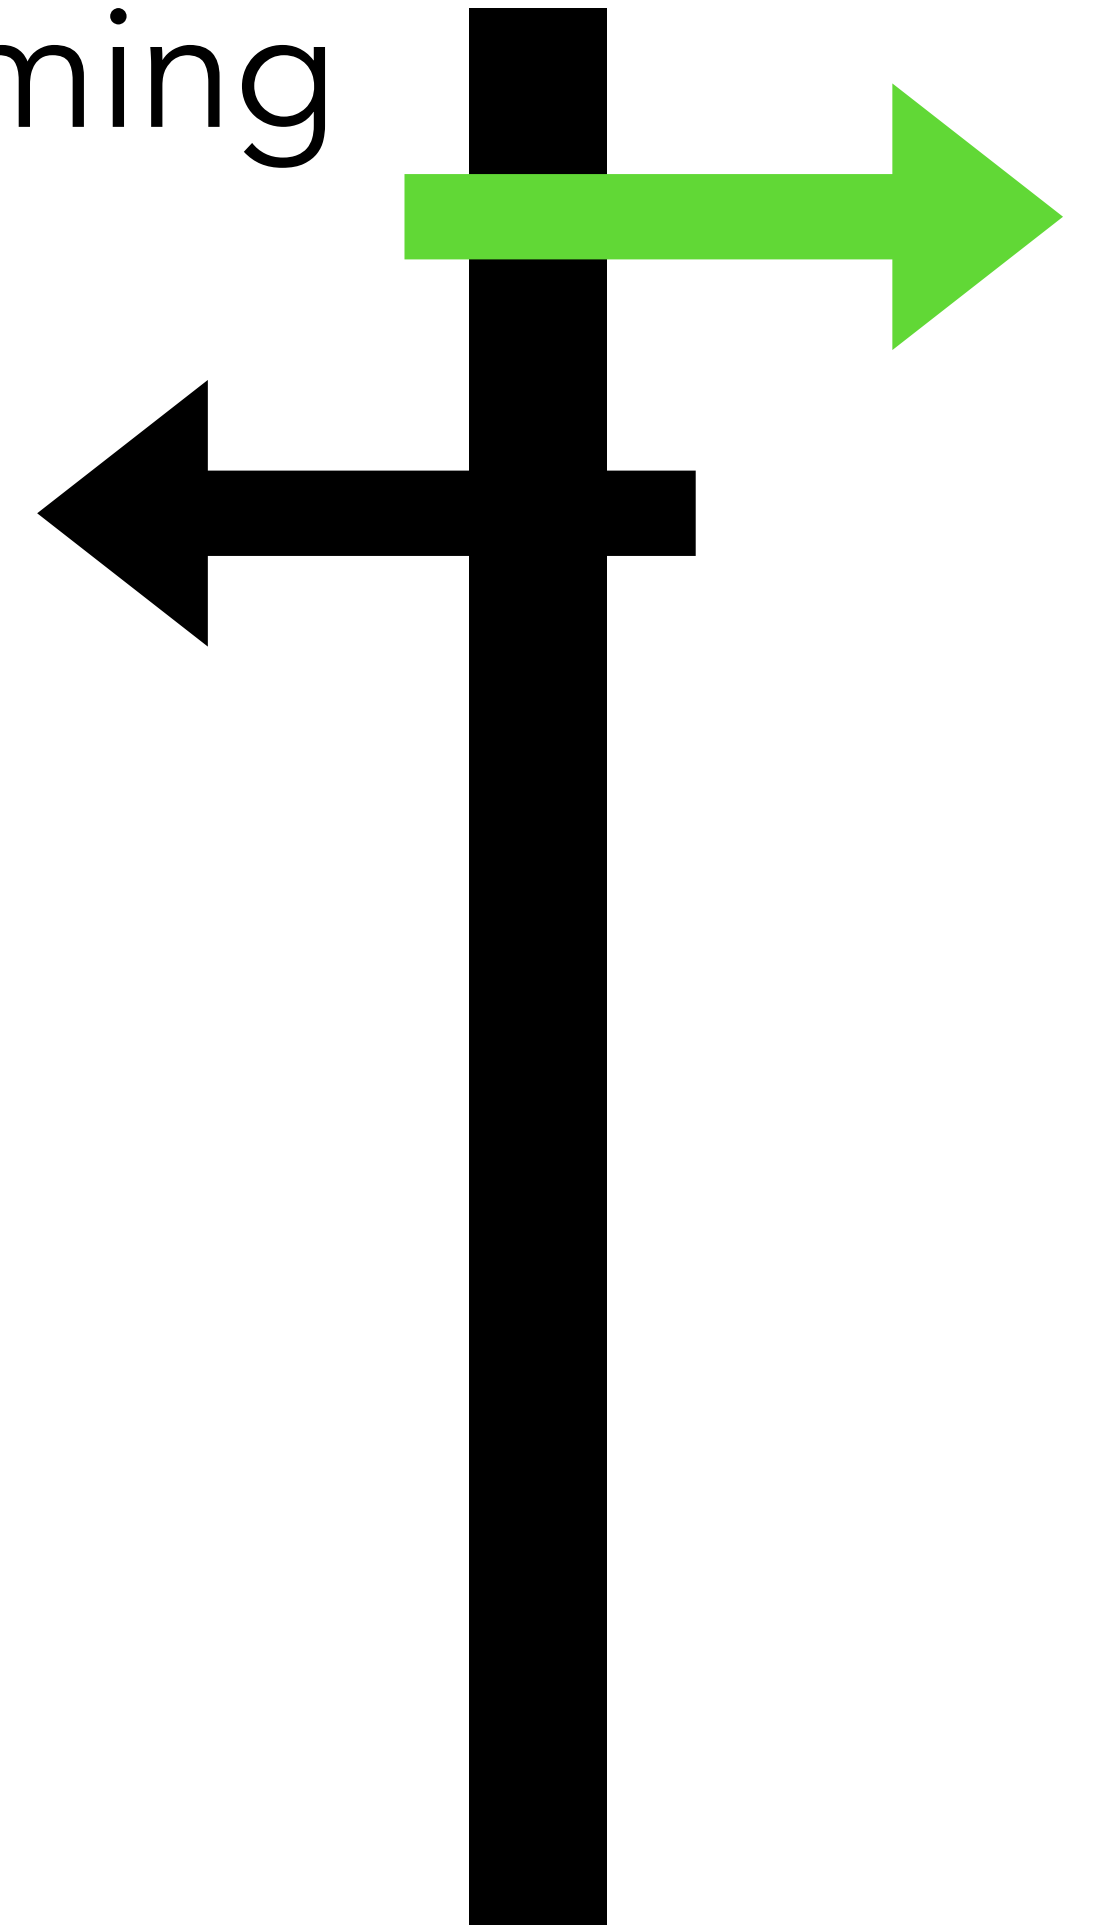

Scale

Scale in Deep Learning

Lecture 22: Architecture and Scaling

Lecture 23: Scalable Optimization

302

Neurons

15 Thousand

Neurons

100 Billion

Neurons

250 Billion

Neurons

1. Introduction to Deep Learning

- How did we get where we are today? (Brief History)
- What we expect you have seen before (ok if you haven't!)
- What we will cover in this class