

Lecture 20: Transfer Learning II


Speaker: Sara Beery




Transfer Learning II

- Transferring knowledge about the inputs
 - Generative models as data++
- Meta-learning

1. Knowledge about the mapping
2. Knowledge about the outputs
3. **Knowledge about the inputs**

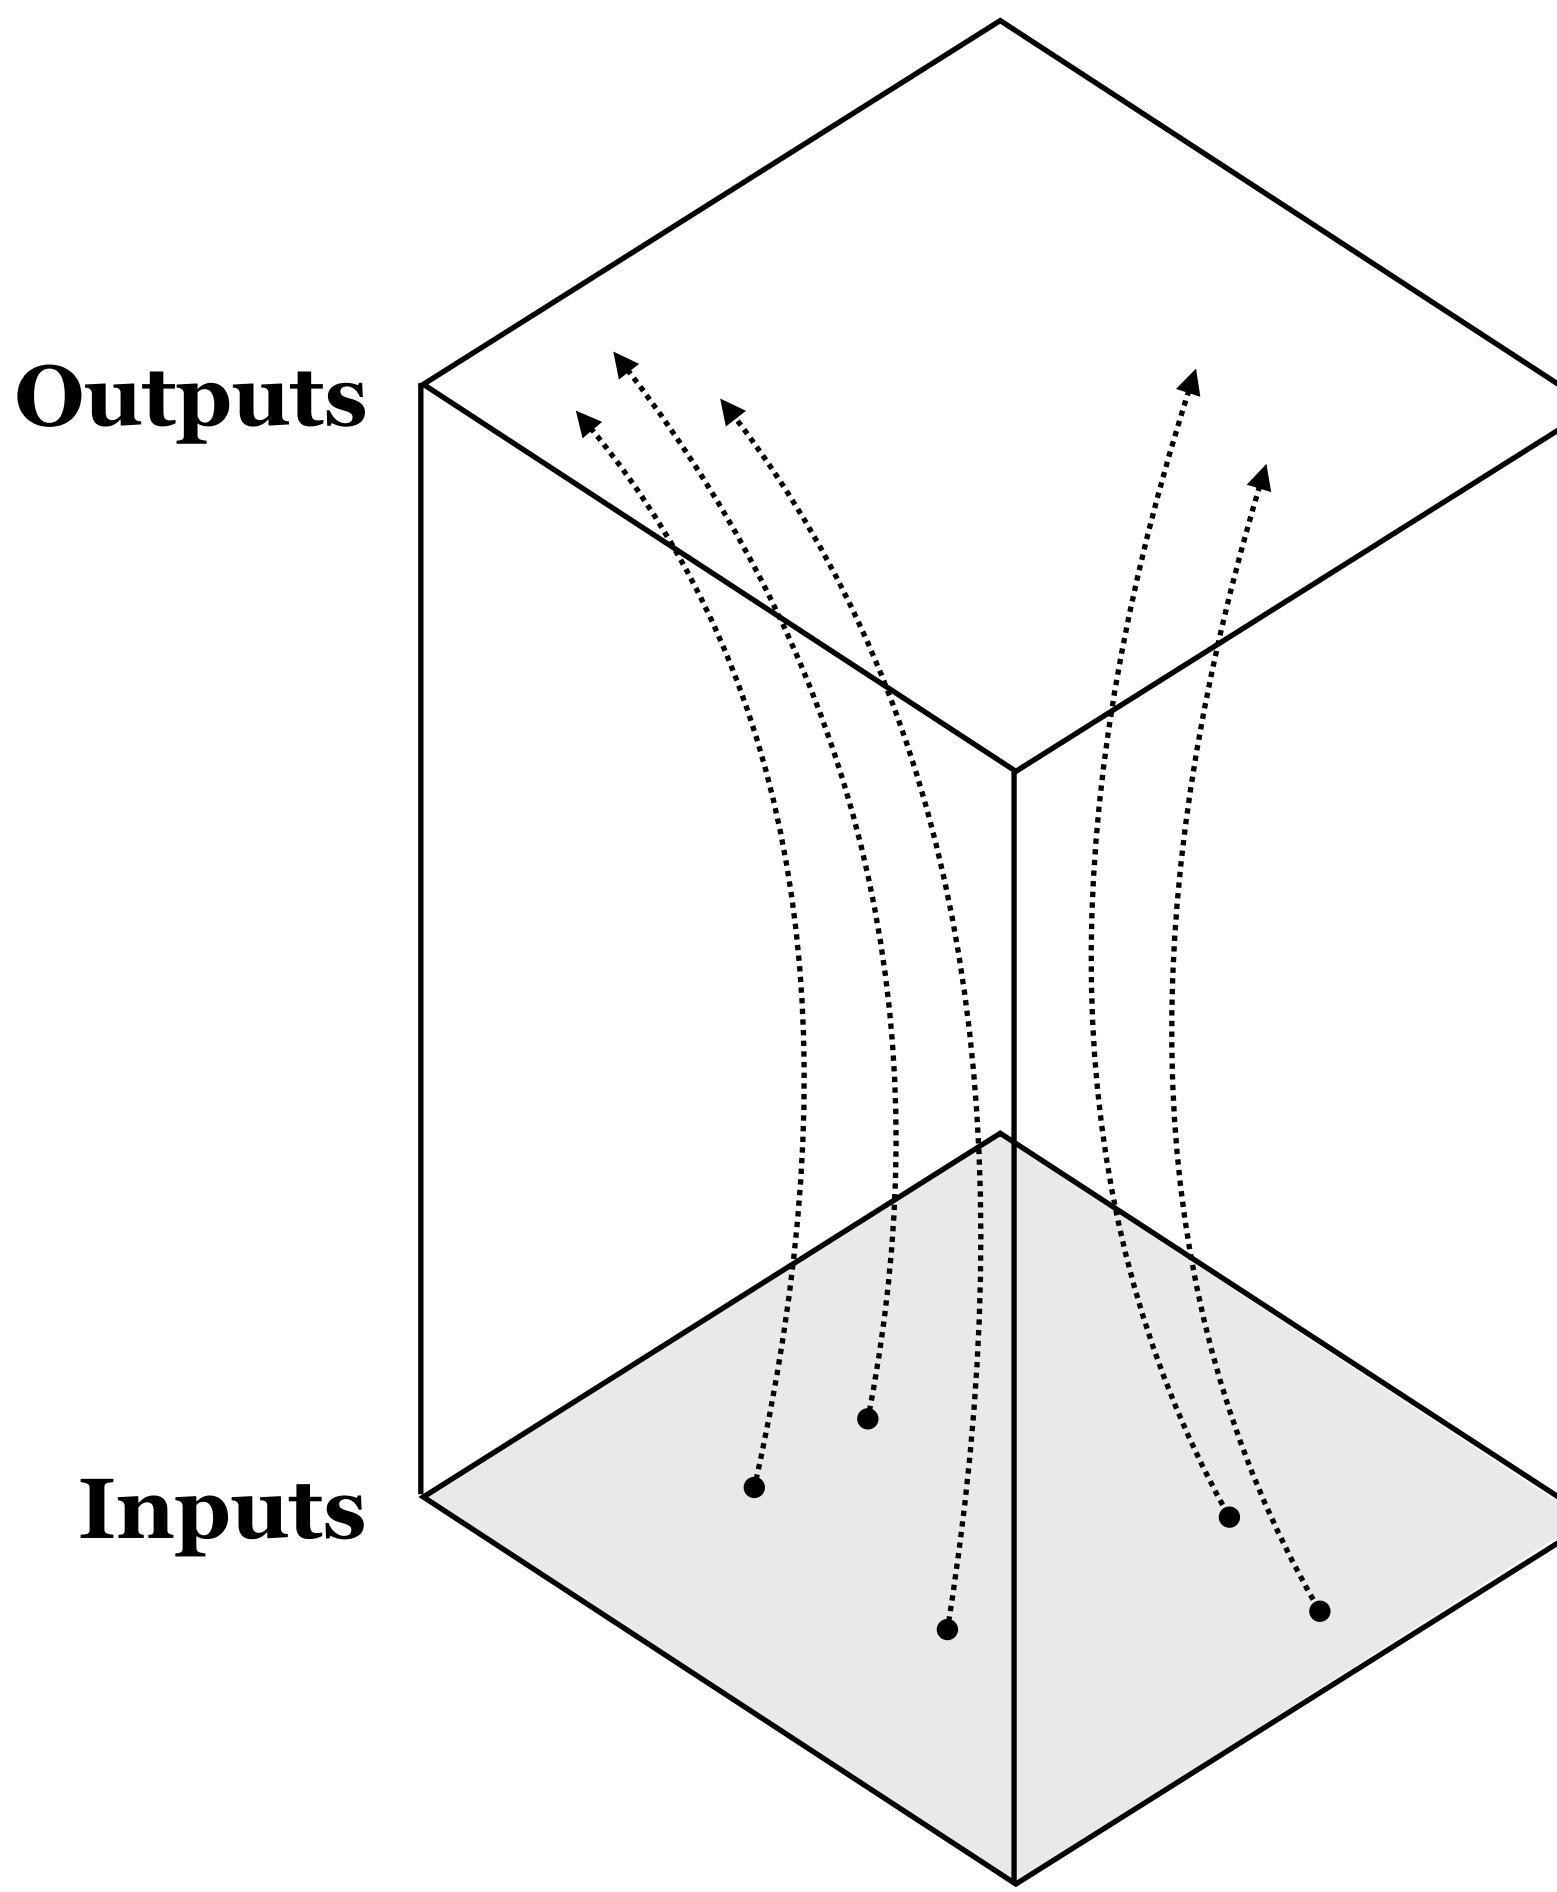

Transfer Learning

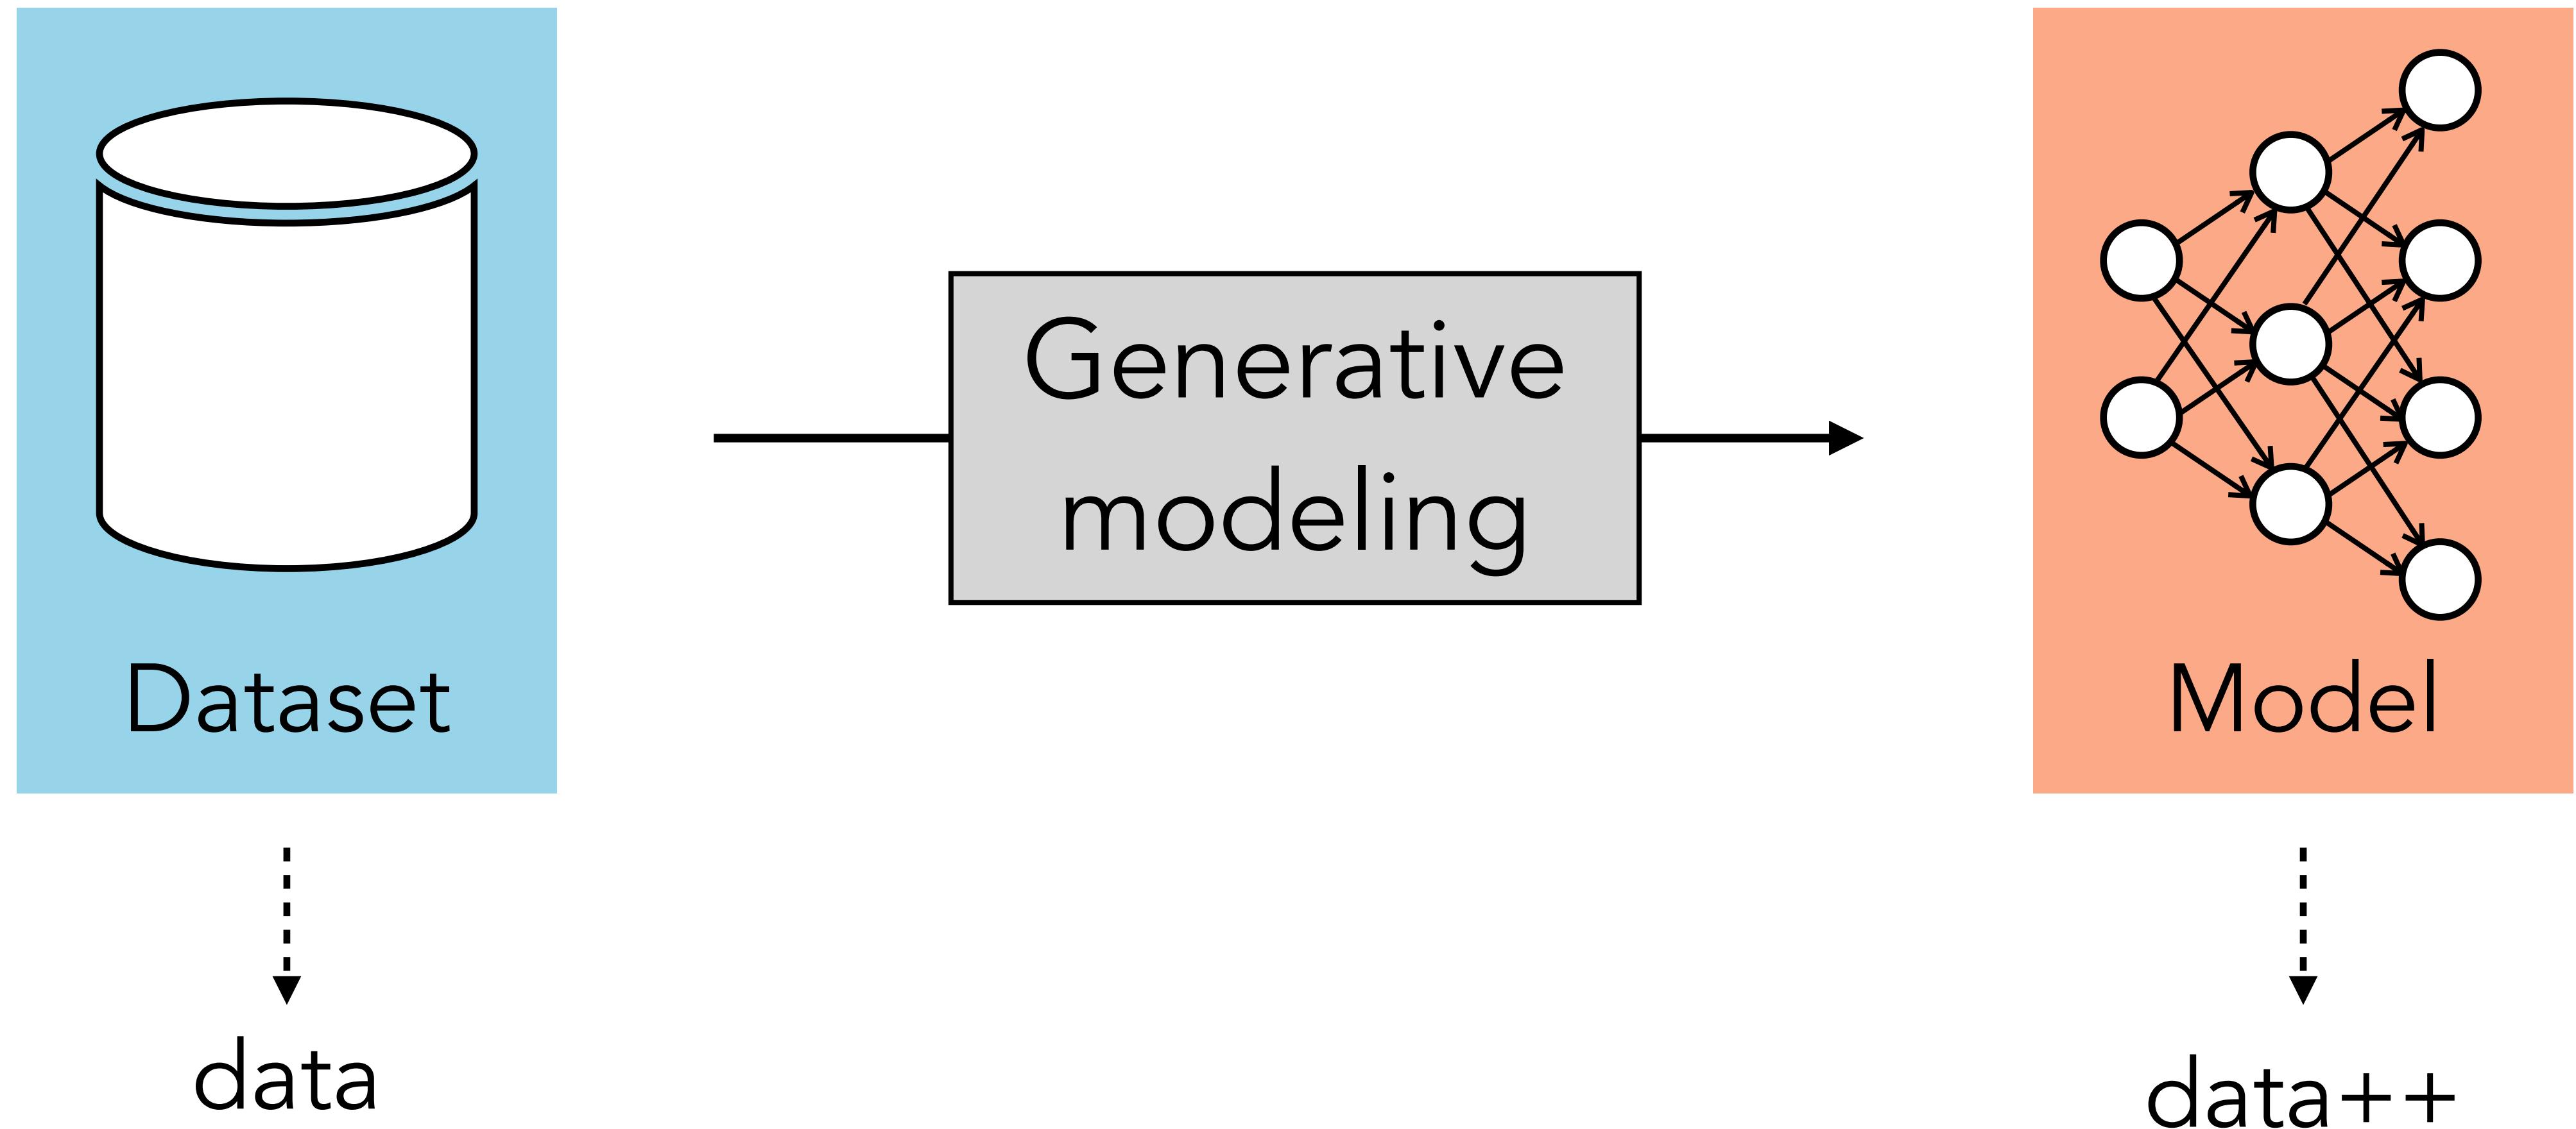

“This release is the culmination of many hours of collective effort to create a single file that compresses the visual information of humanity into a few gigabytes.”

Emad Mostaque [<https://stability.ai/blog/stable-diffusion-public-release>]

Data++: making data a first class object

$$\mathbb{X} = \{x, z, G, G^{-1}\}$$

Interpolation: $\alpha \mathbb{X}_1 + (1 - \alpha) \mathbb{X}_2 \rightarrow \mathbb{X}_3$

Manipulation: $\mathbb{X}_1 + w \rightarrow \mathbb{X}_2$

Composition: $\mathbb{X}_1[m] + \mathbb{X}_2[1 - m] \rightarrow \mathbb{X}_3$

Optimization: $\arg \min_{\mathbb{X}} f(\mathbb{X})$

[Goetschalckx*, Andonian*, Oliva, Isola, ICCV 2019]

[Jahanian*, Chai*, Isola, ICLR 2020]


[Chai, Wulff, Isola, ICLR 2021]

[Lin, Florence, Barron, et al. , IROS 2021]

→ Graphics, visualization, data aug, counterfactual reasoning, ...


Generative Models

Latent variables
(controls)

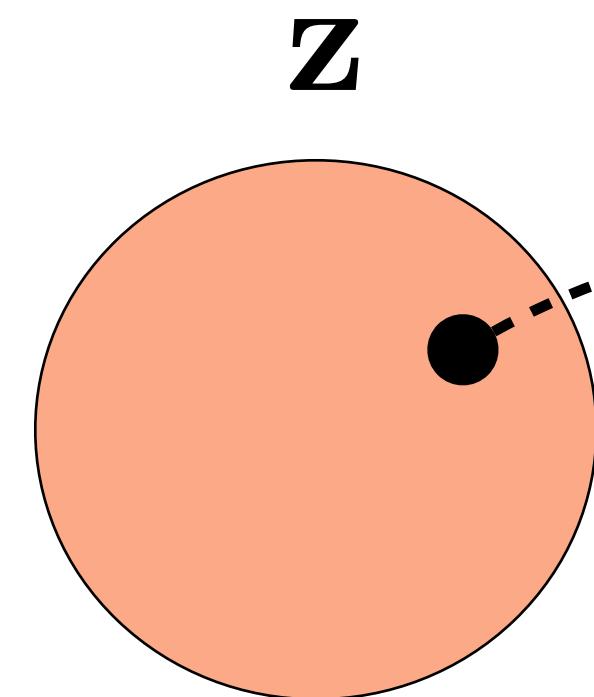


$$\mathbf{z} \sim \mathcal{N}(0, 1)$$

Synthesized Image

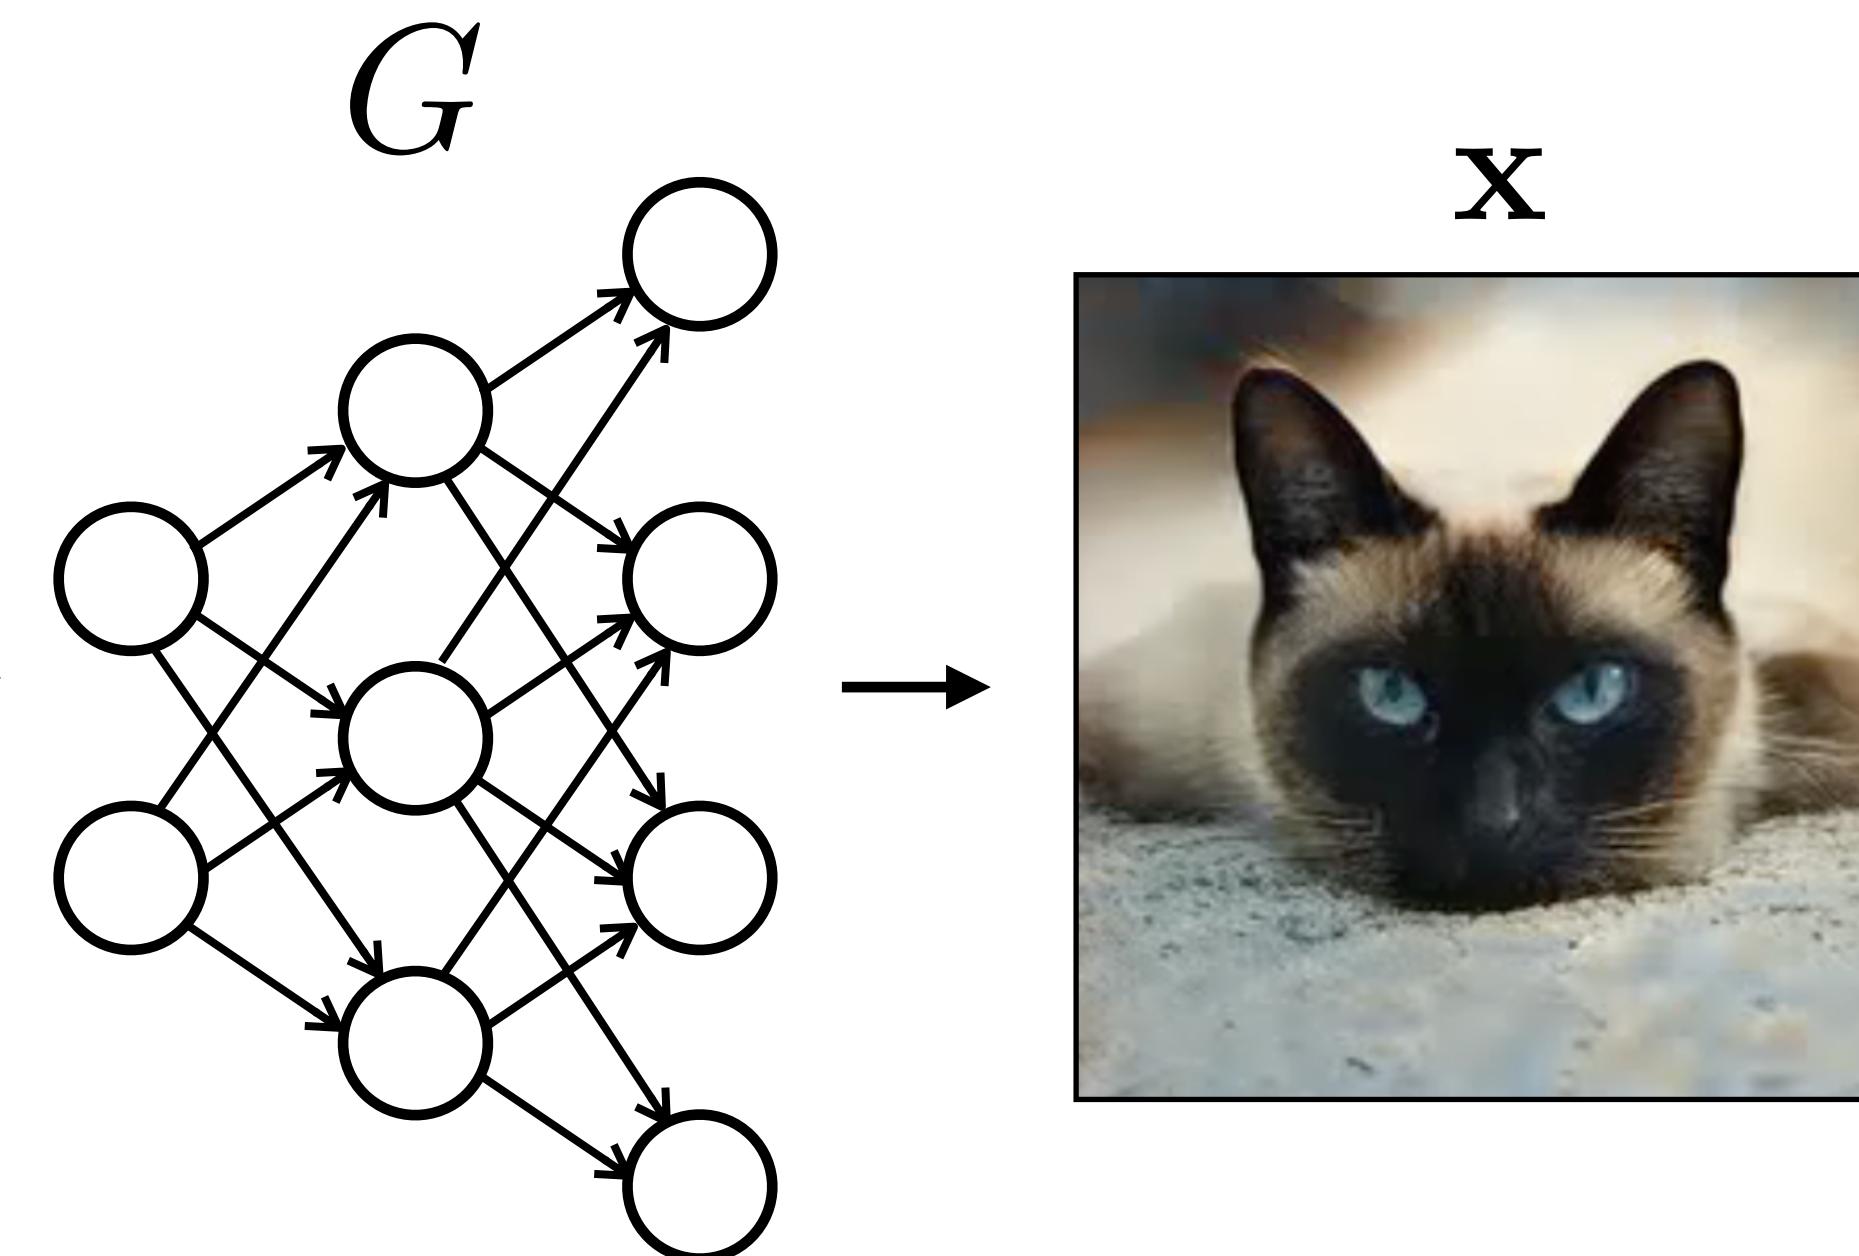


Generative Models

Latent variables
(controls)

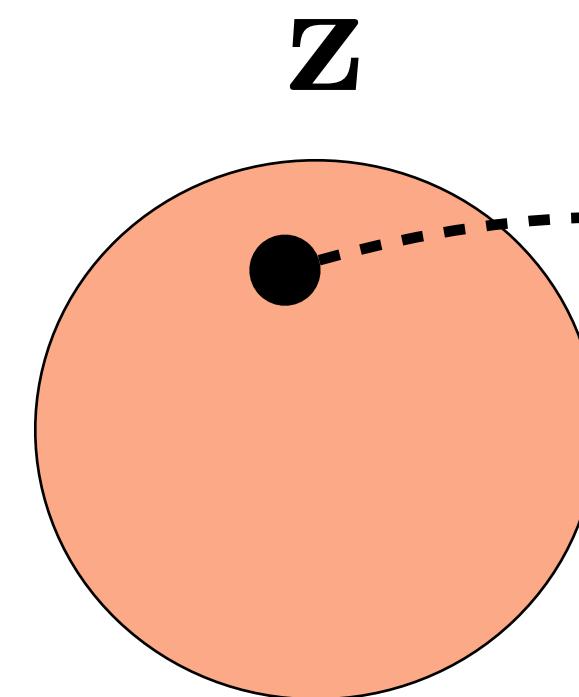


$$\mathbf{z} \sim \mathcal{N}(0, 1)$$

Synthesized Image

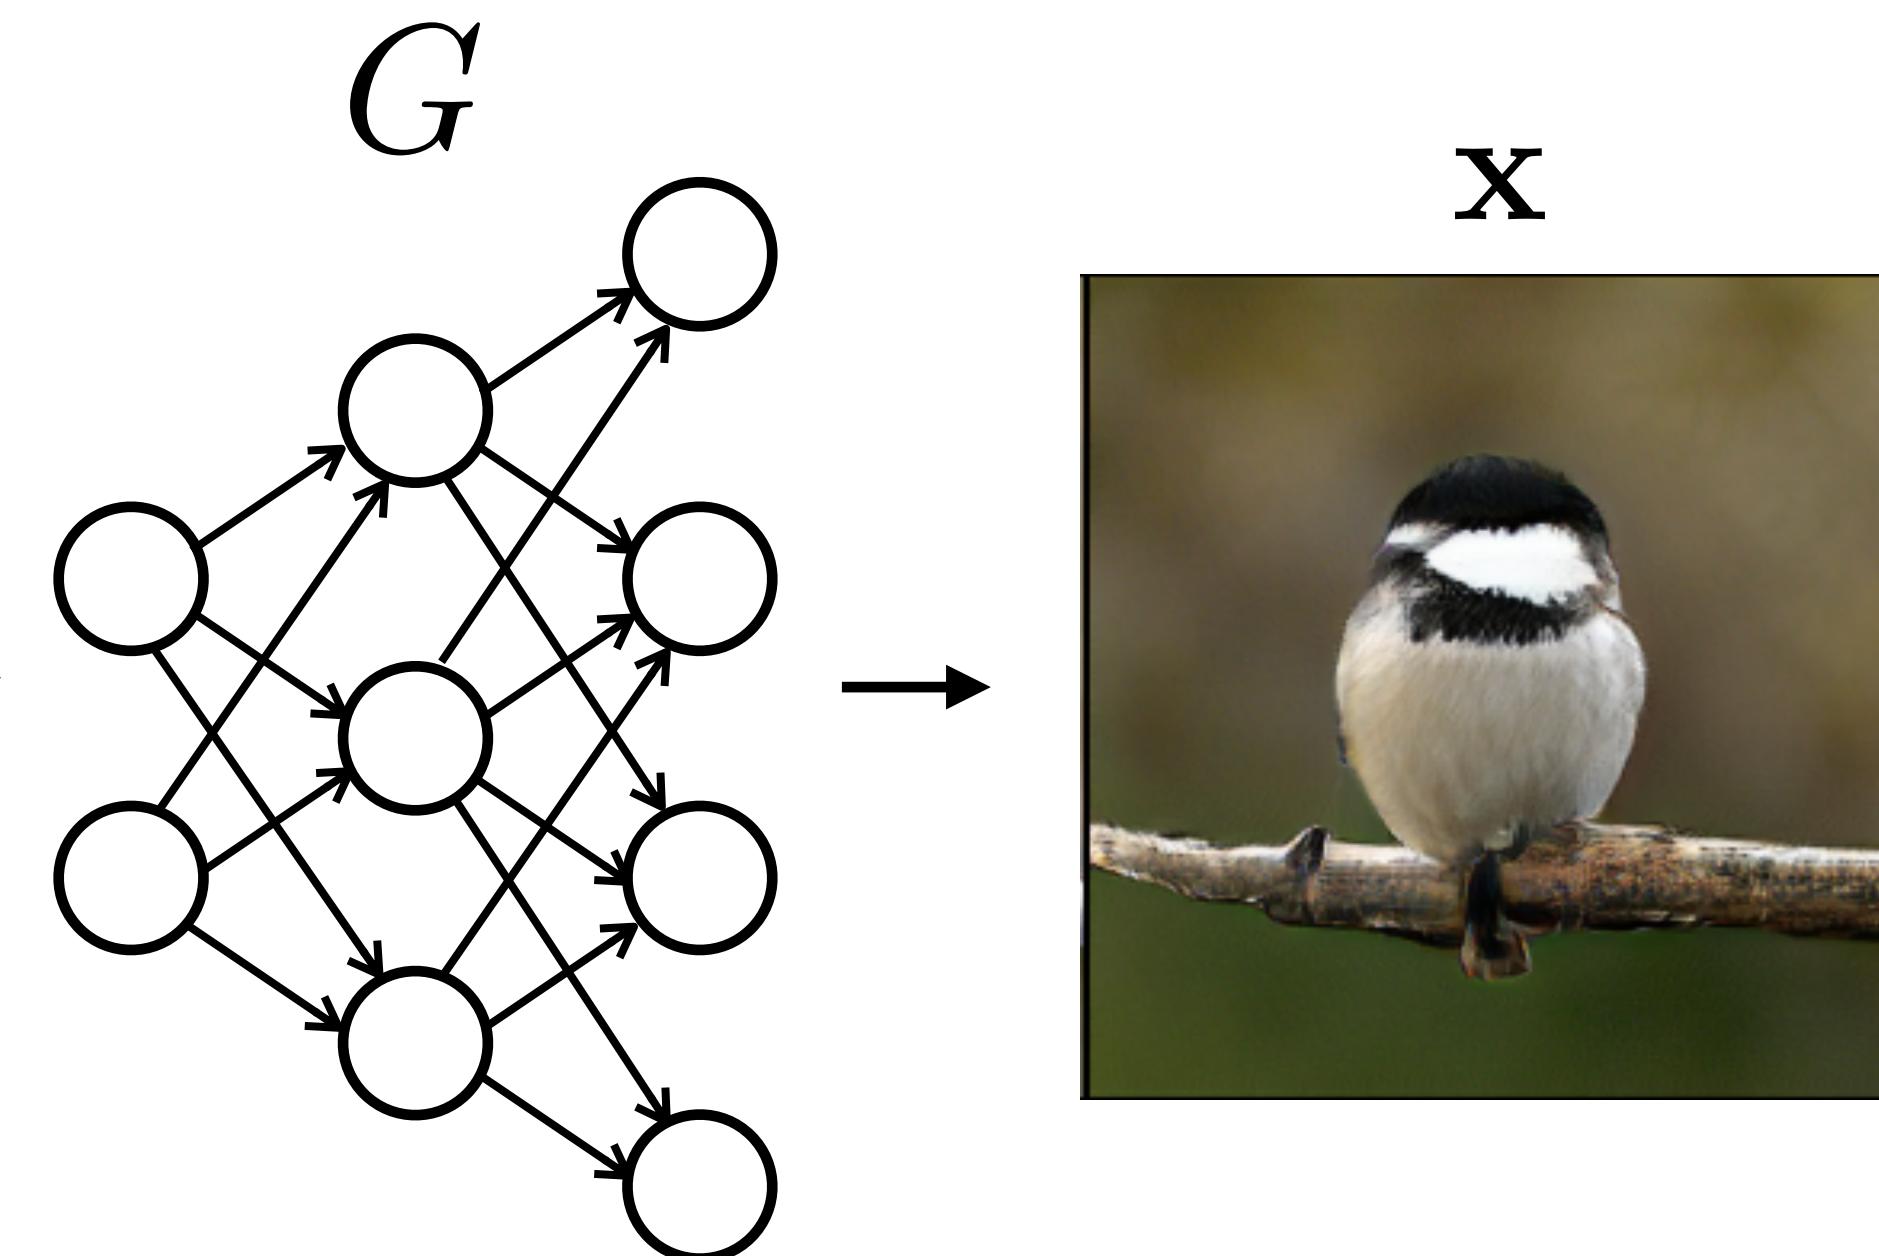

Synthesized Images

Latent variables
(controls)

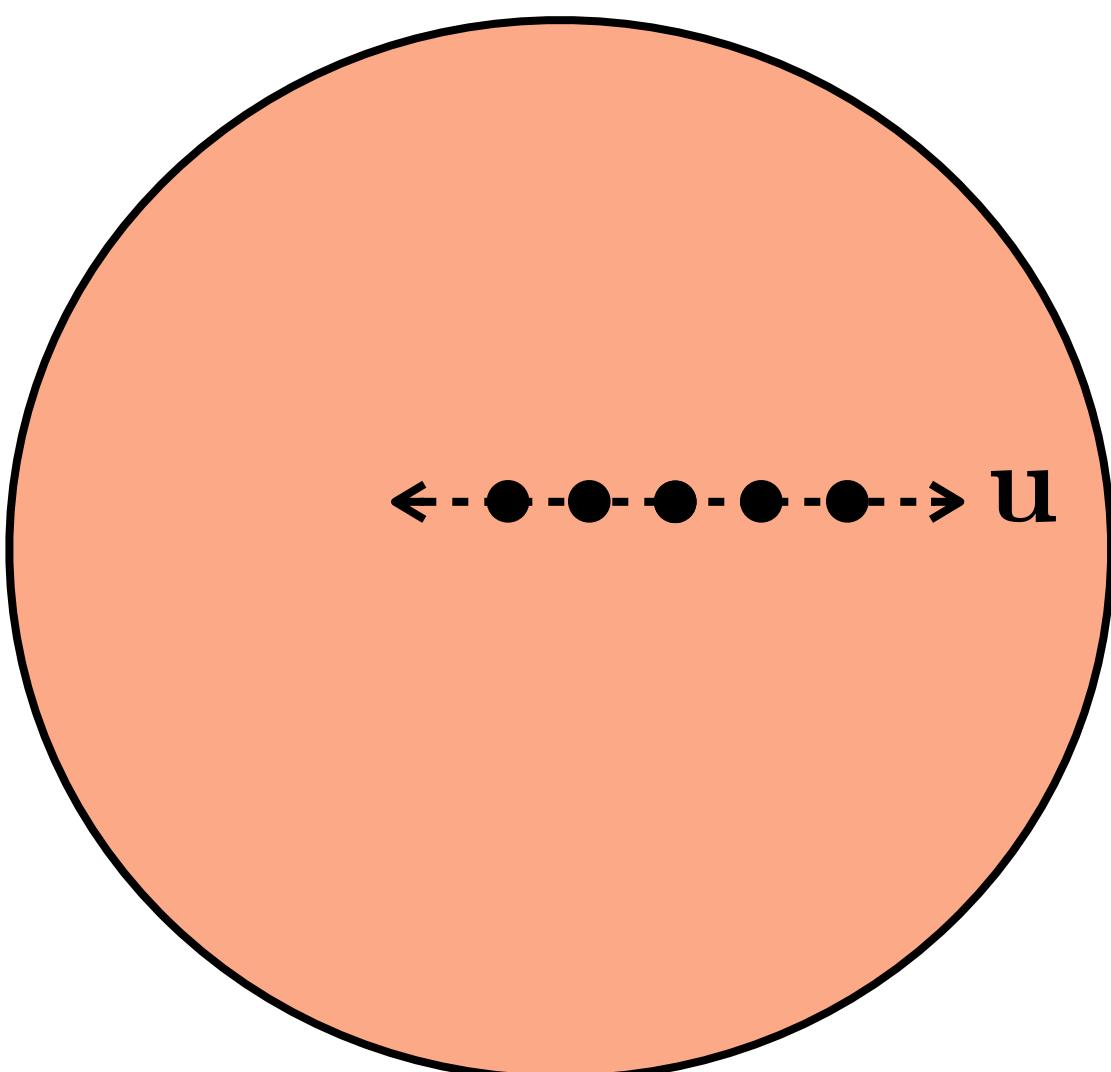


v





u

“Bird orientation”

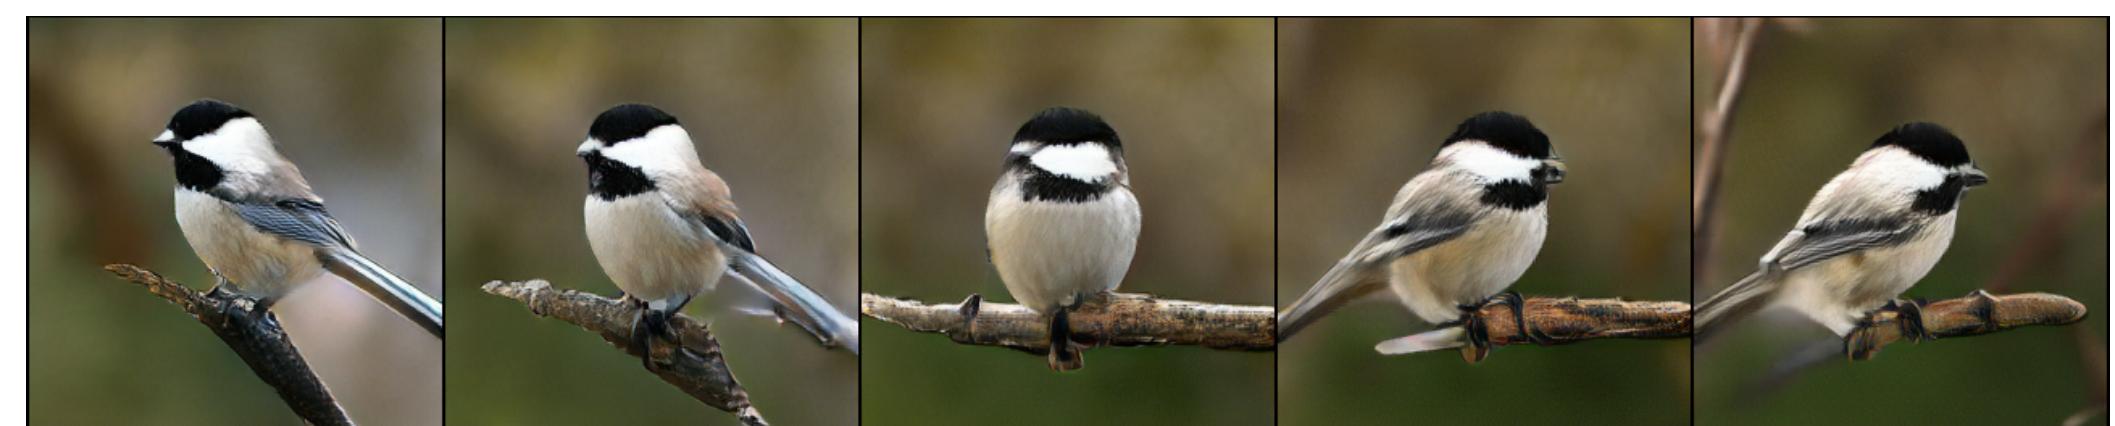

Synthesized Images

Latent variables
(controls)

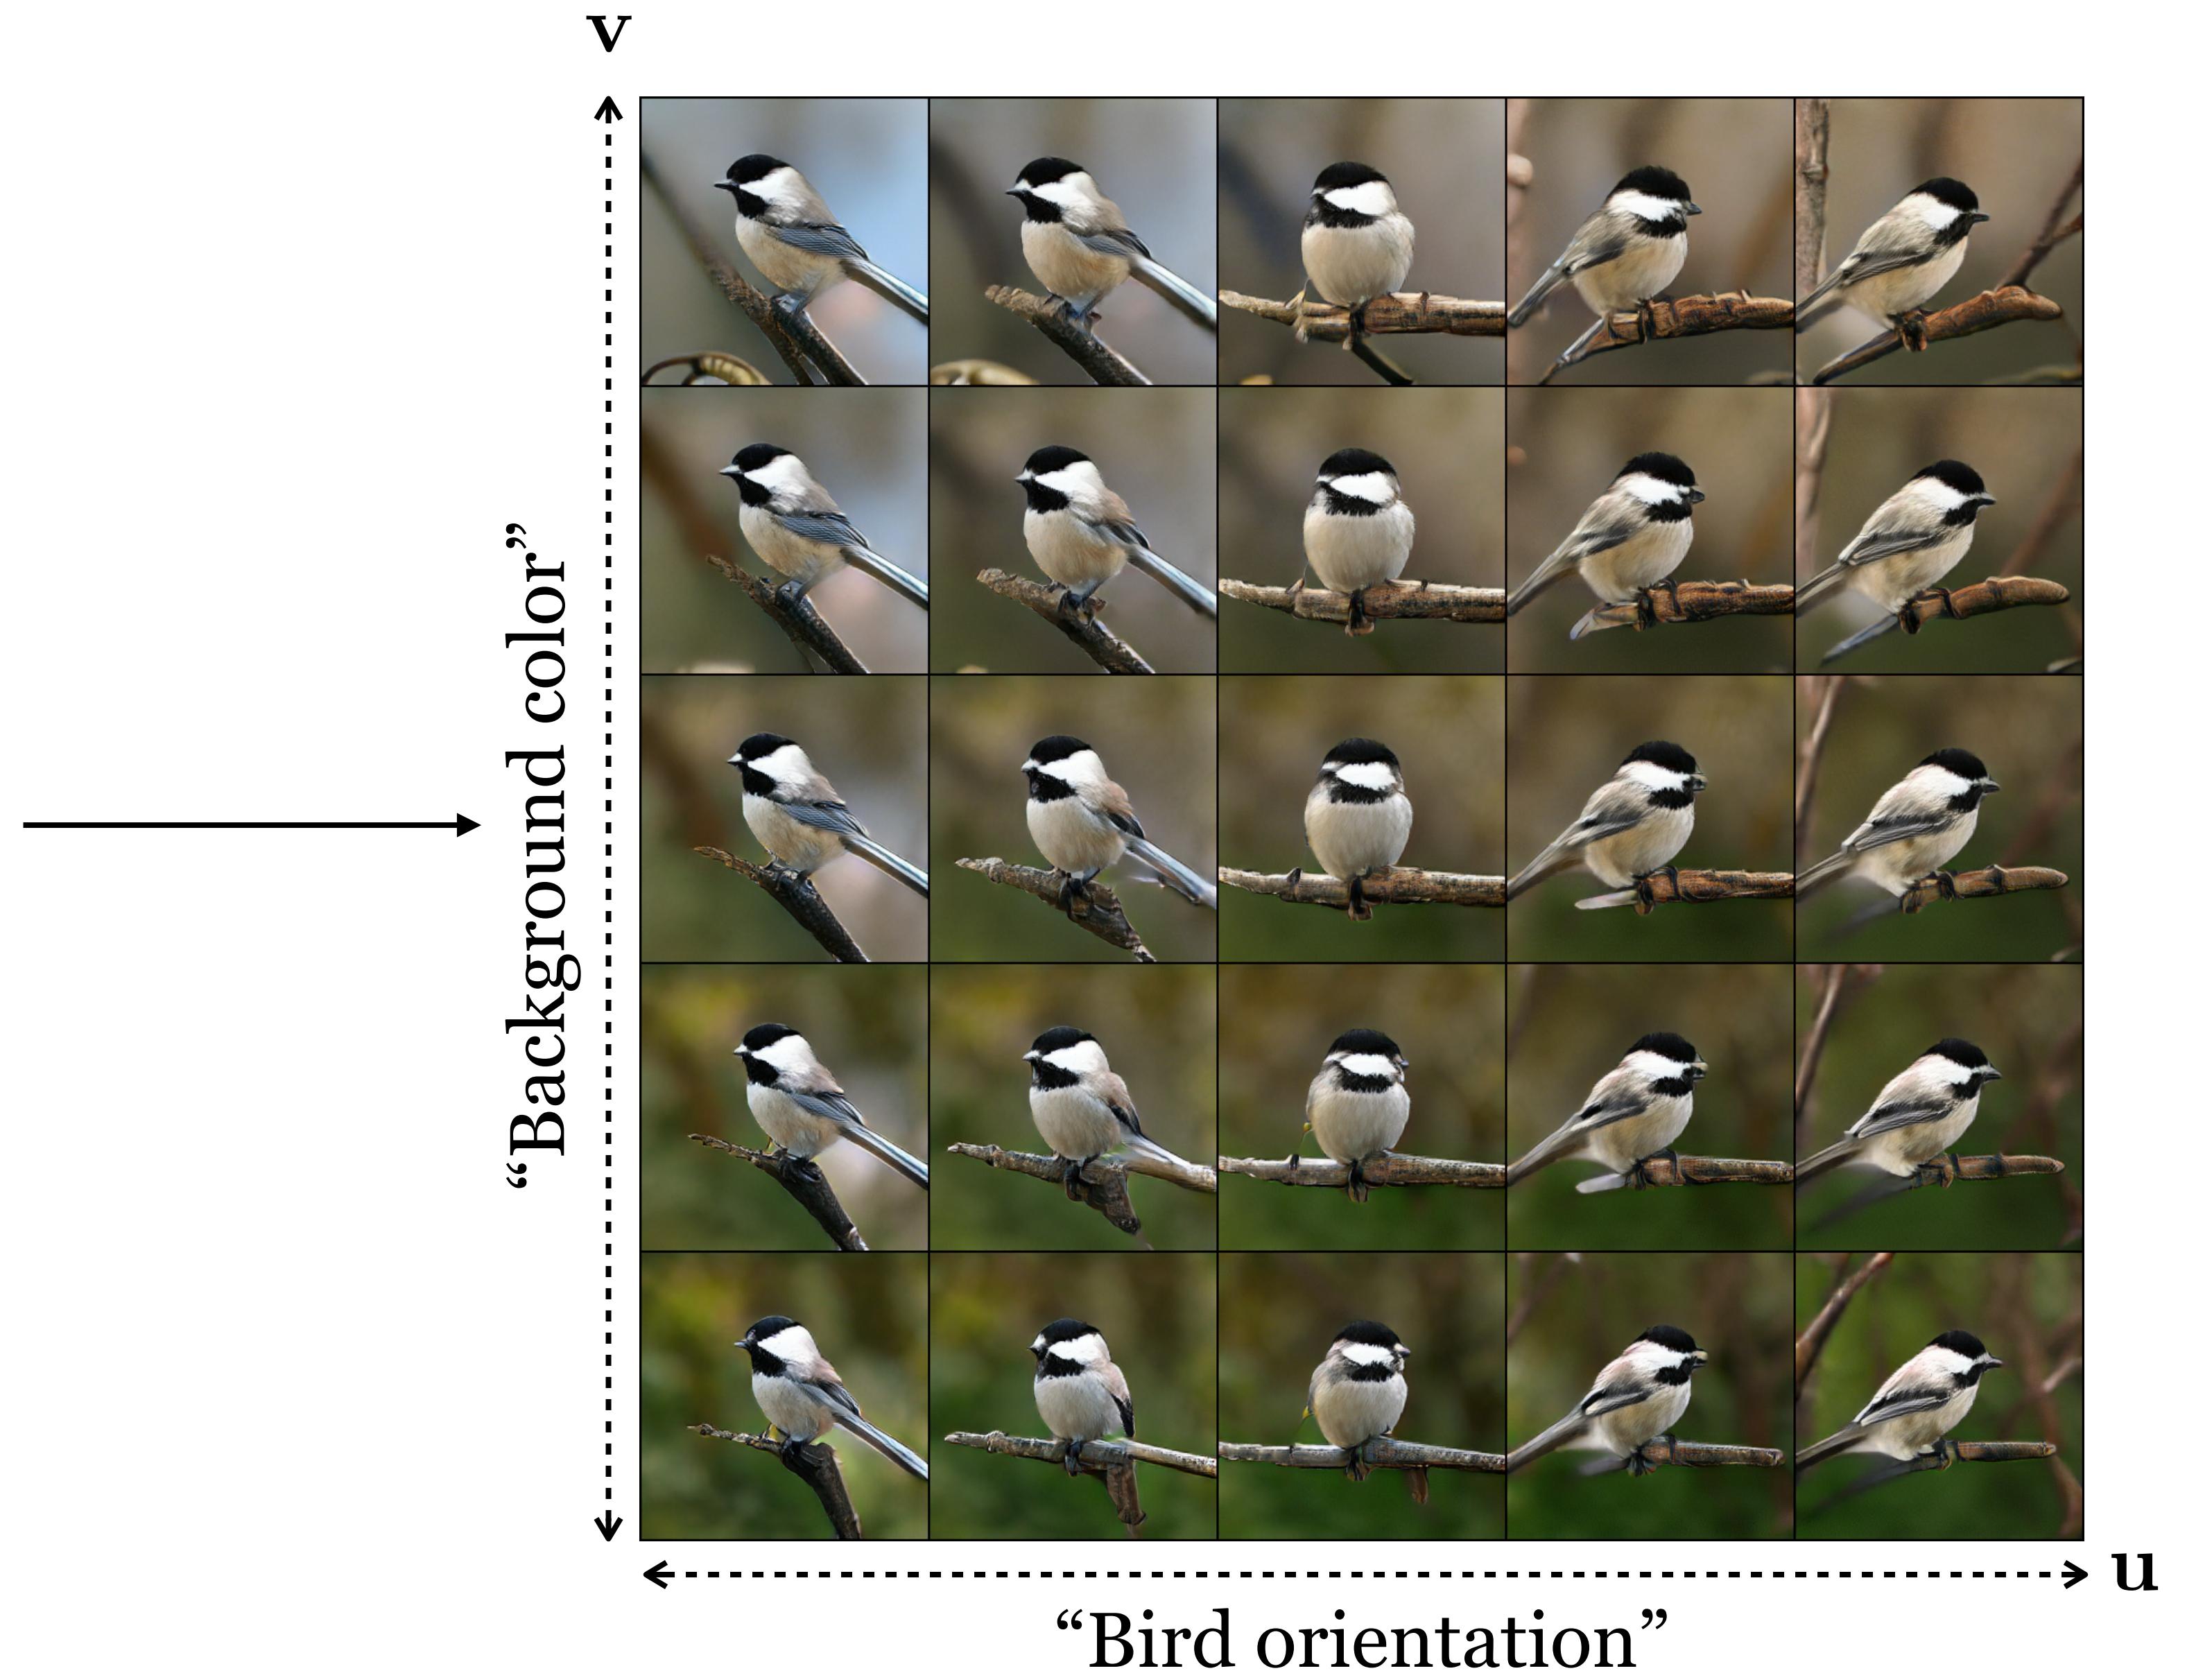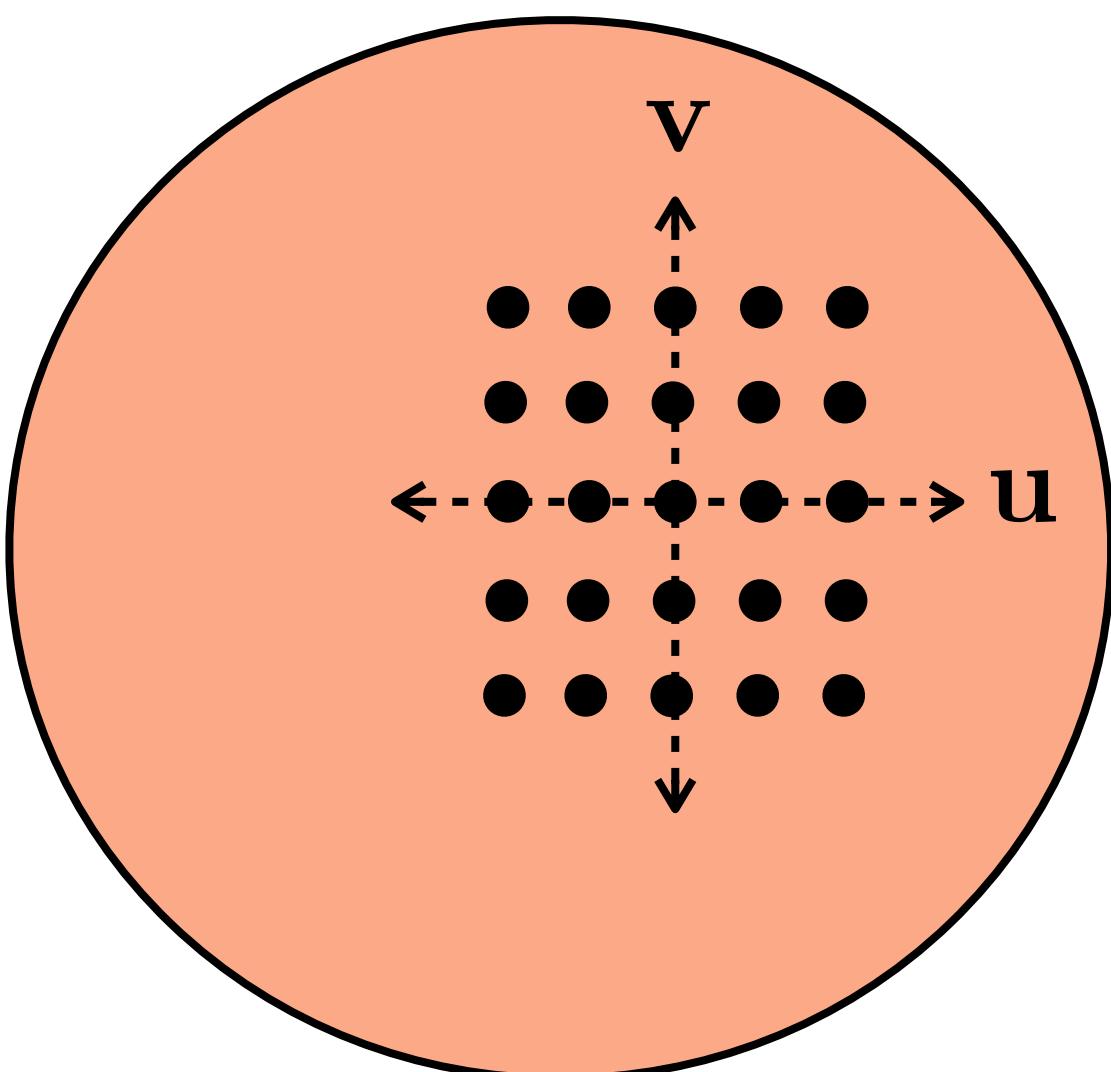


Data++ supports counterfactual reasoning


“What would it look like if...”

Data2Data++

x

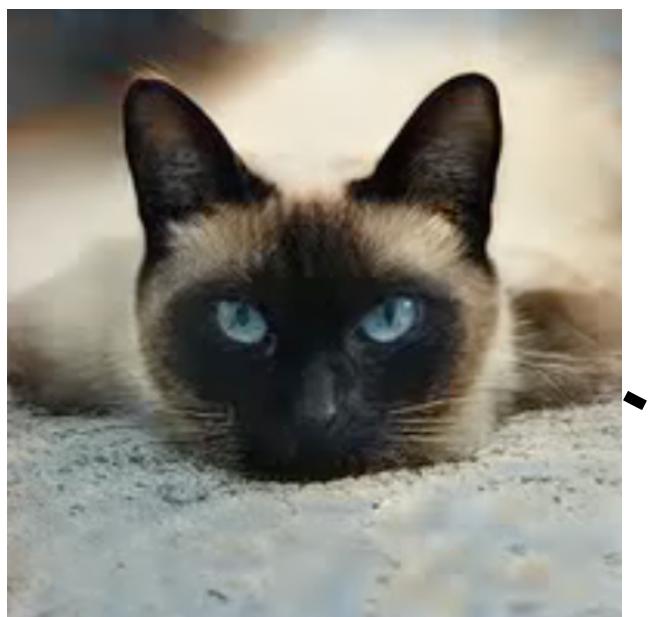


z

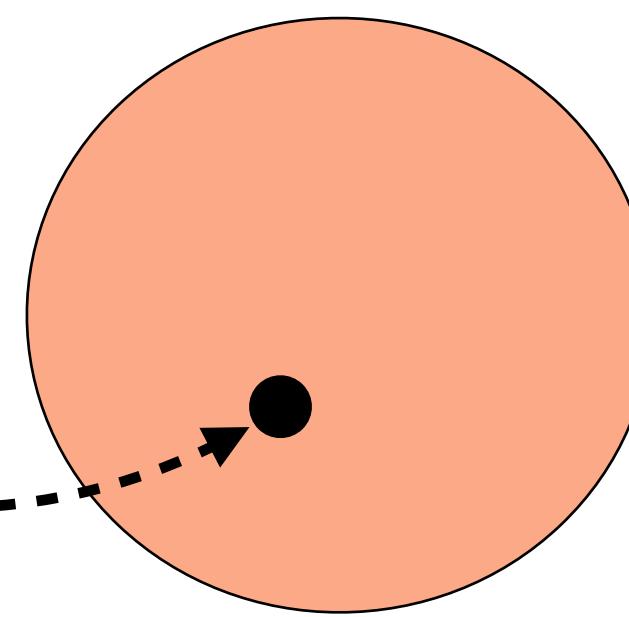

Data++ supports counterfactual reasoning



“What would it look like if...”

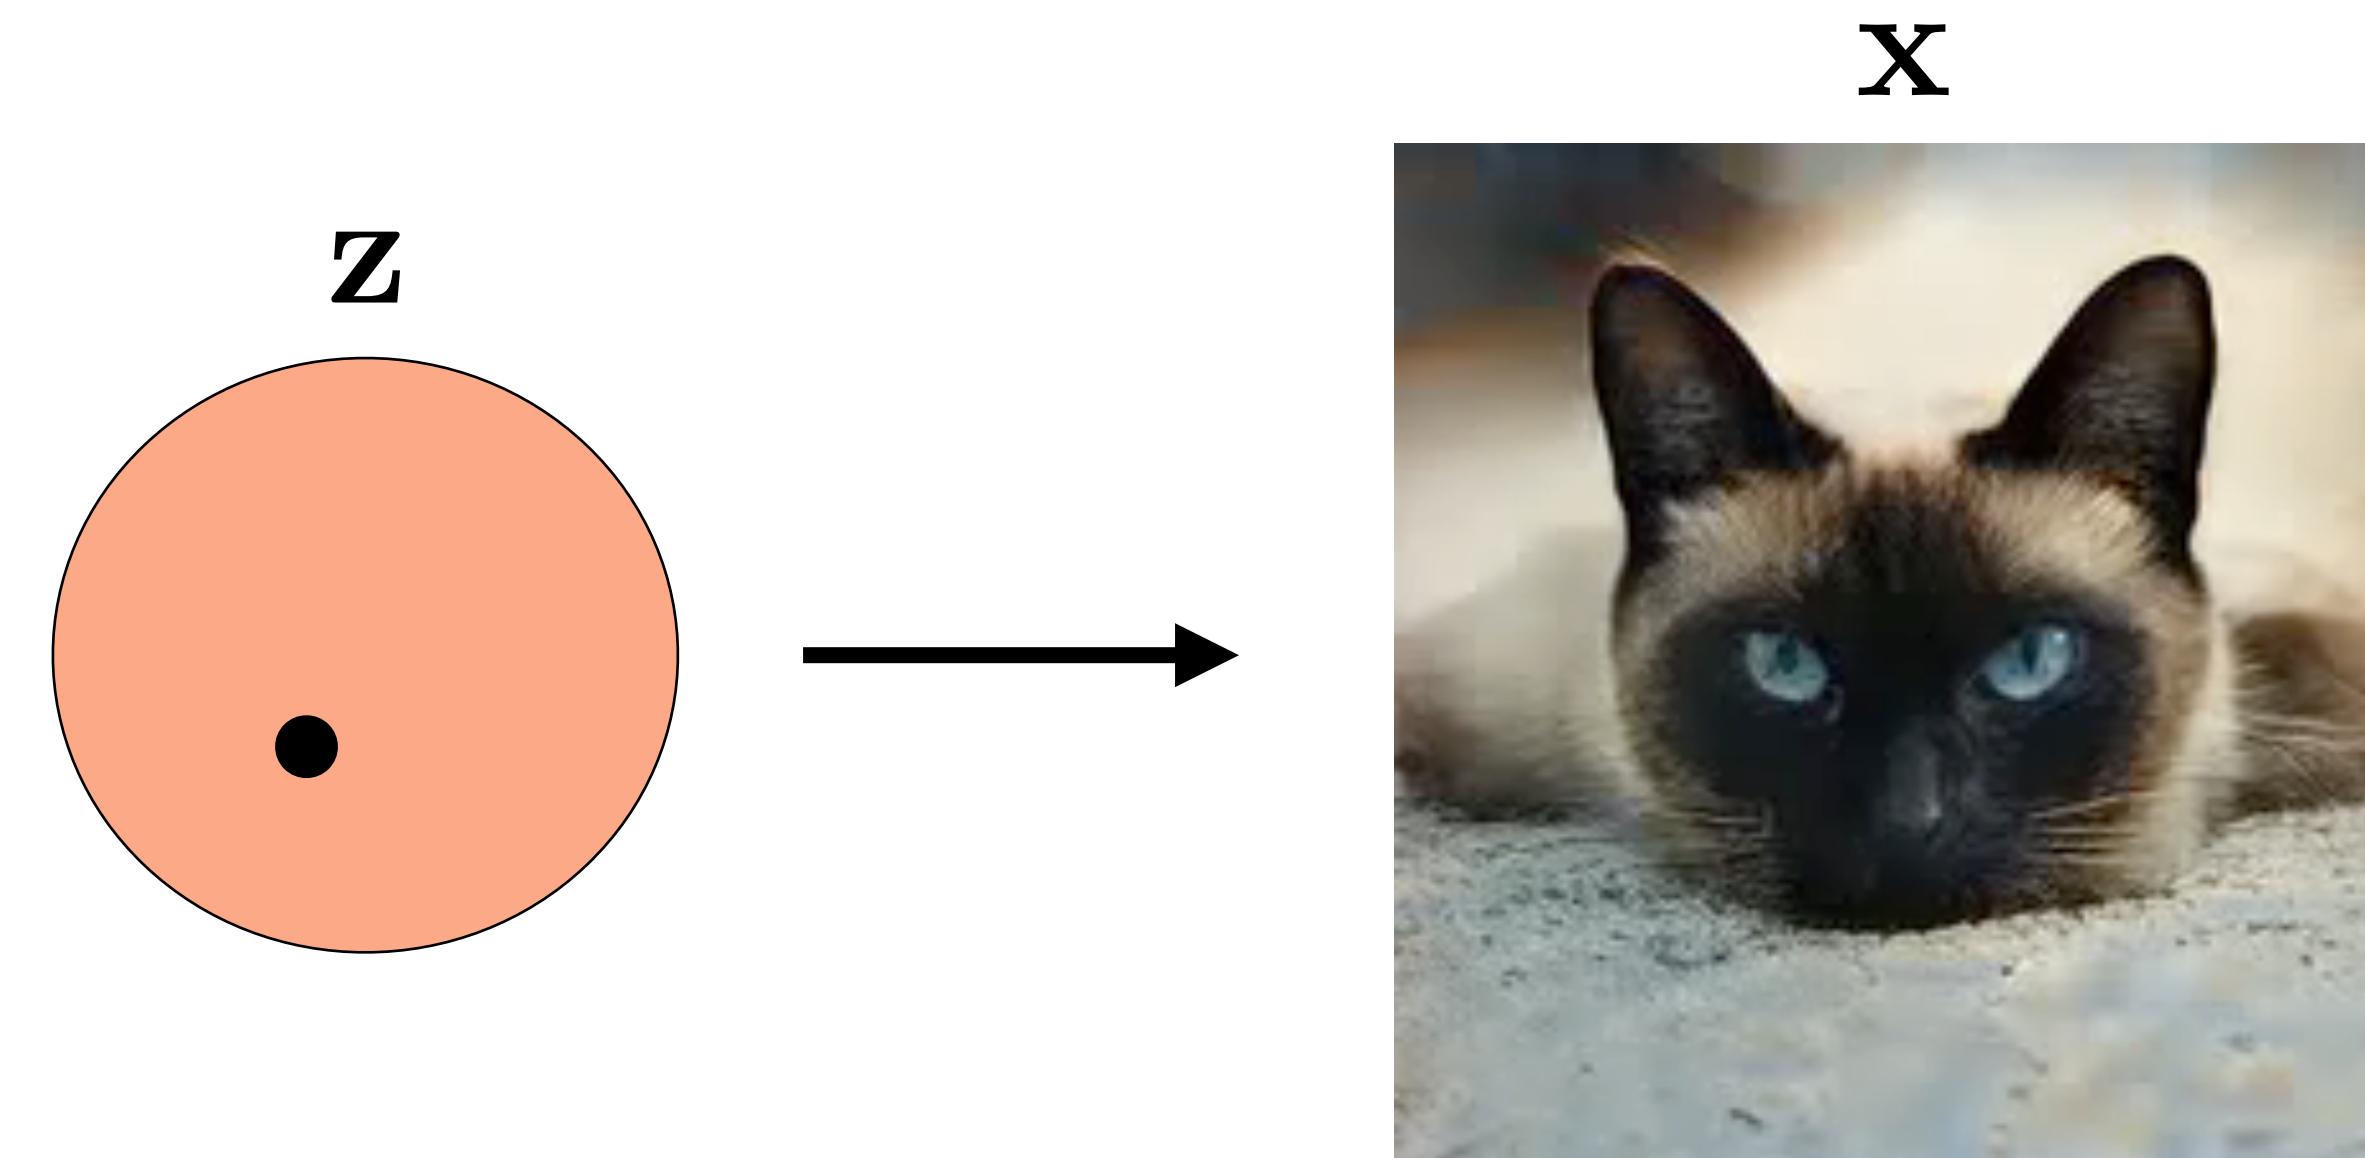


Ensembling with Deep Generative Views

Chai, Zhu, Shechtman, Isola, Zhang

CVPR 2021

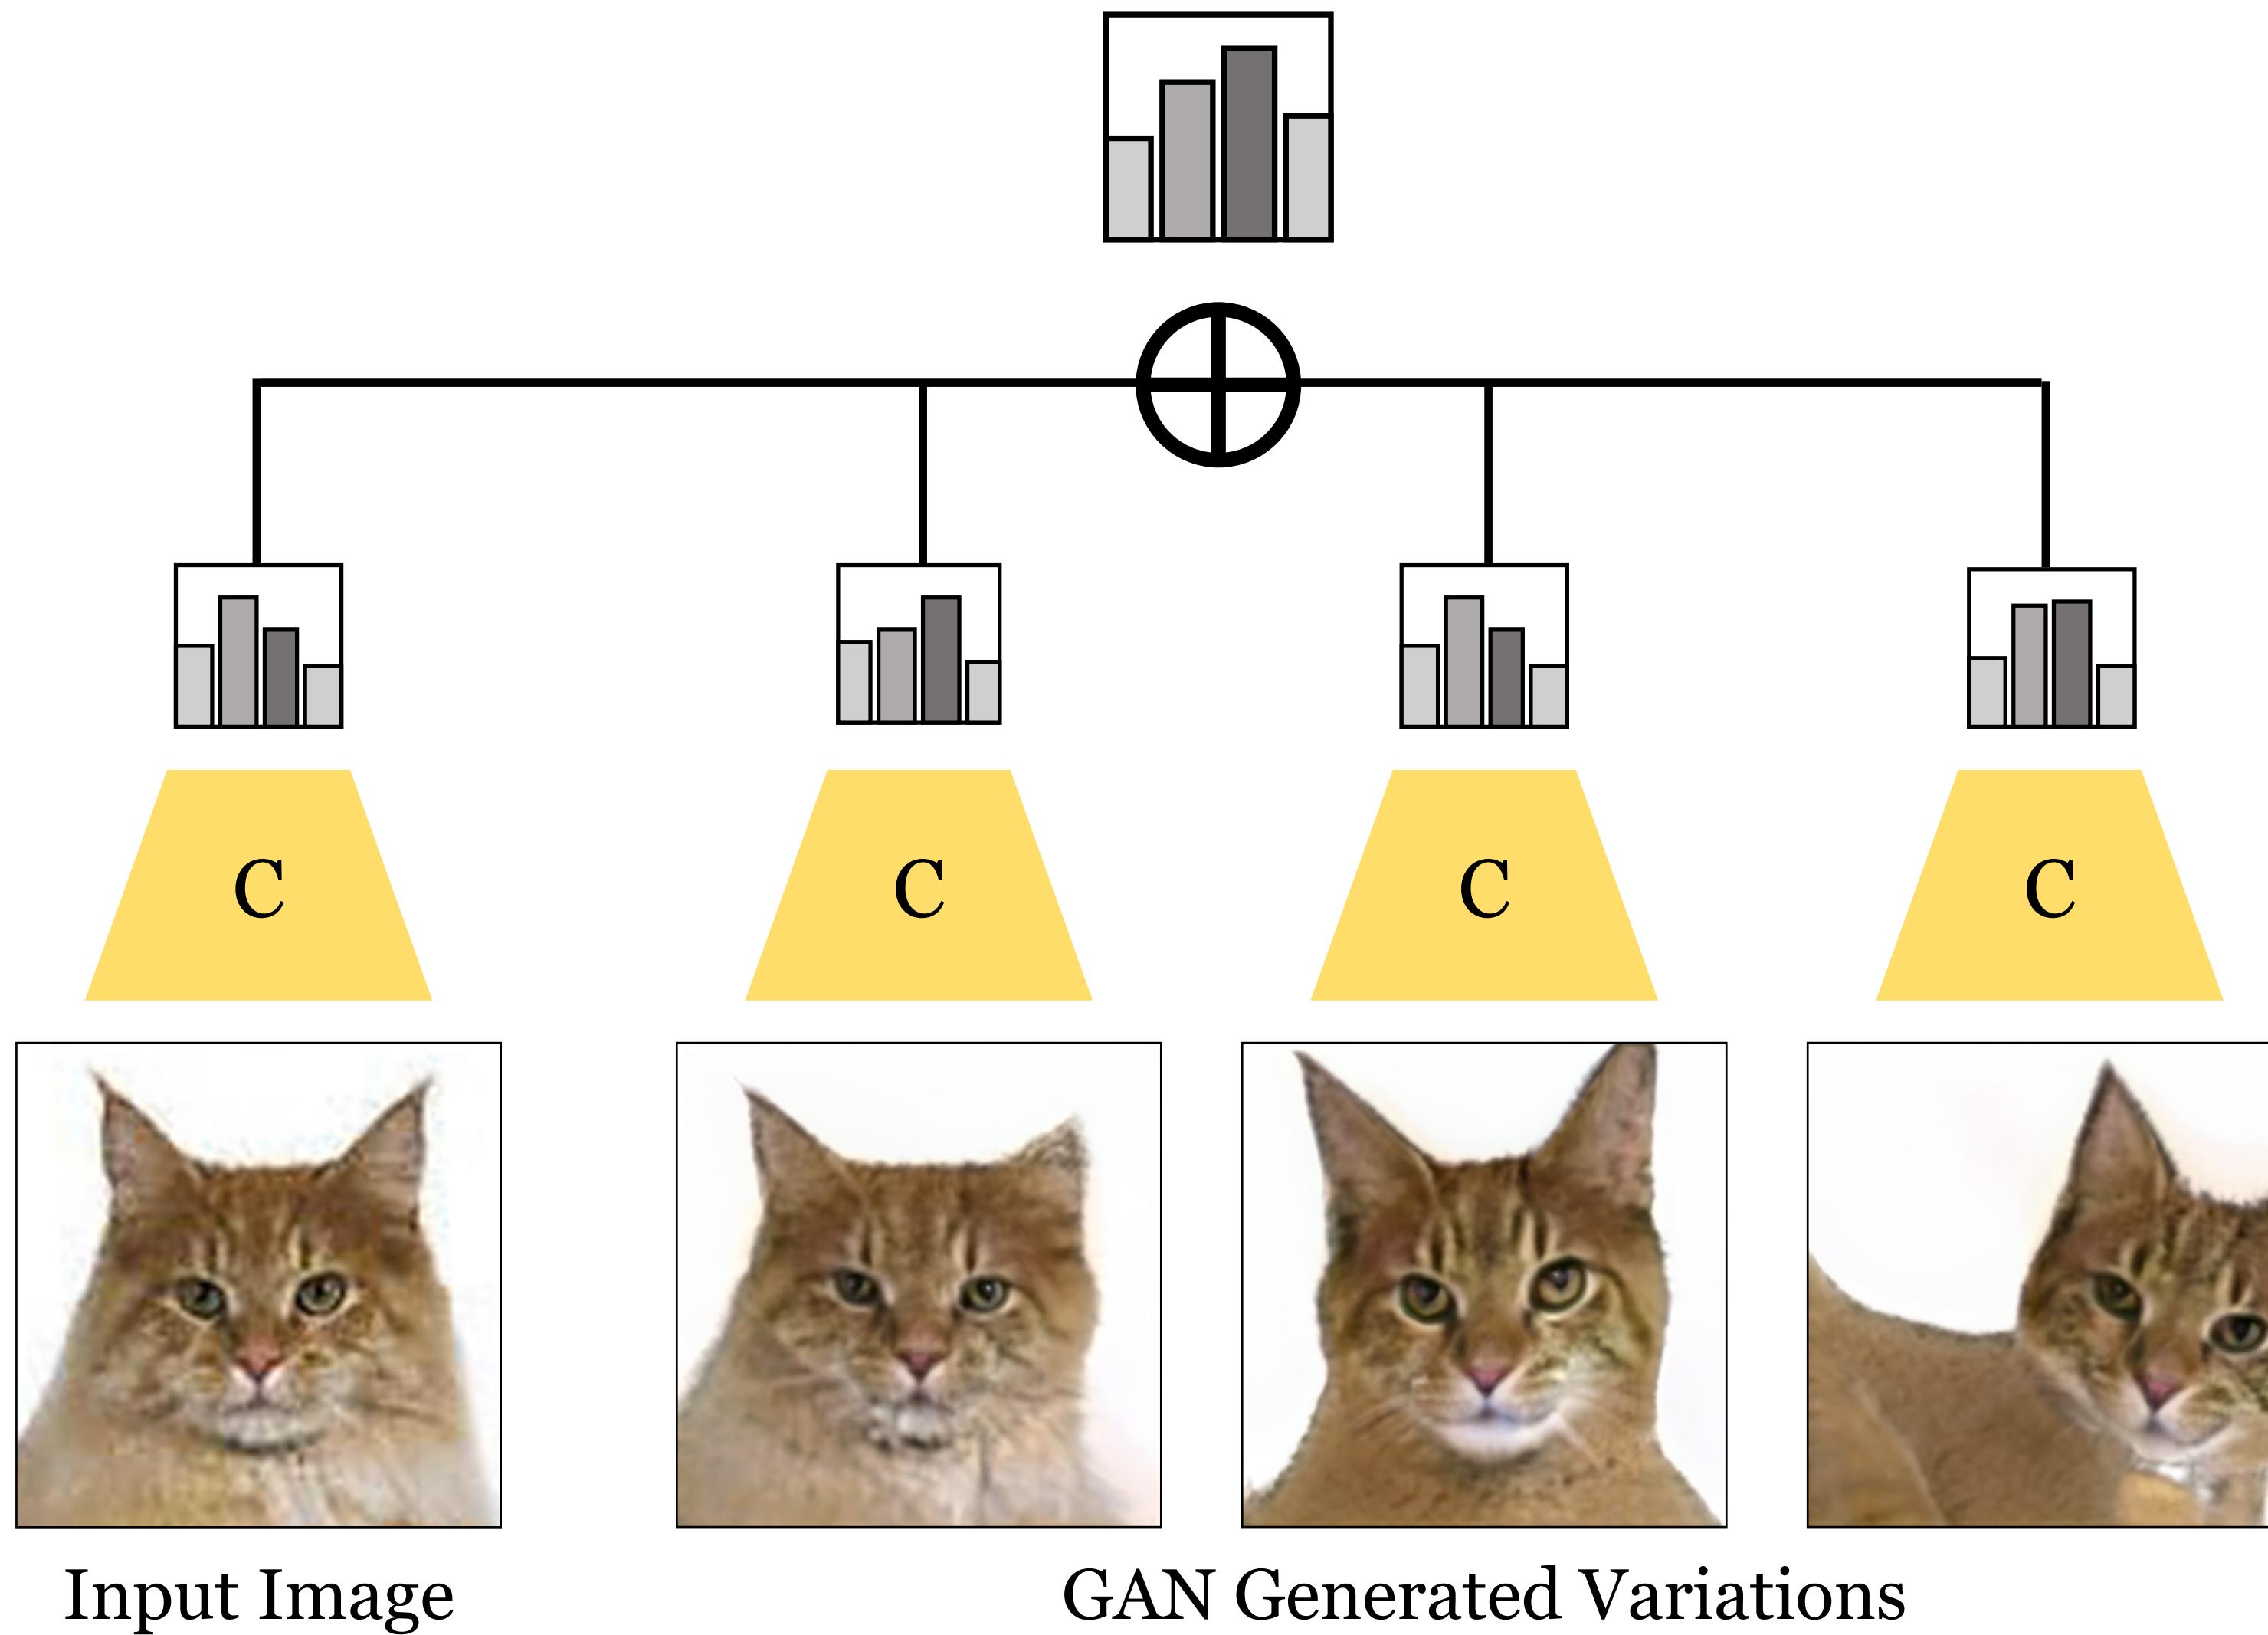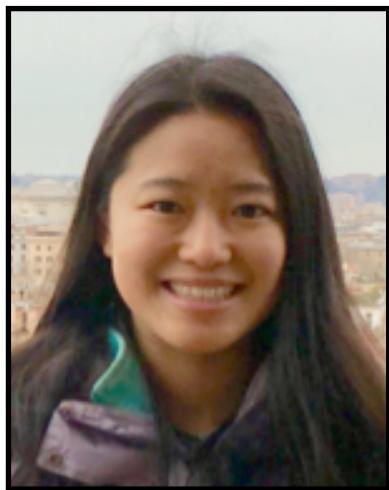


Improved
accuracy and
robustness

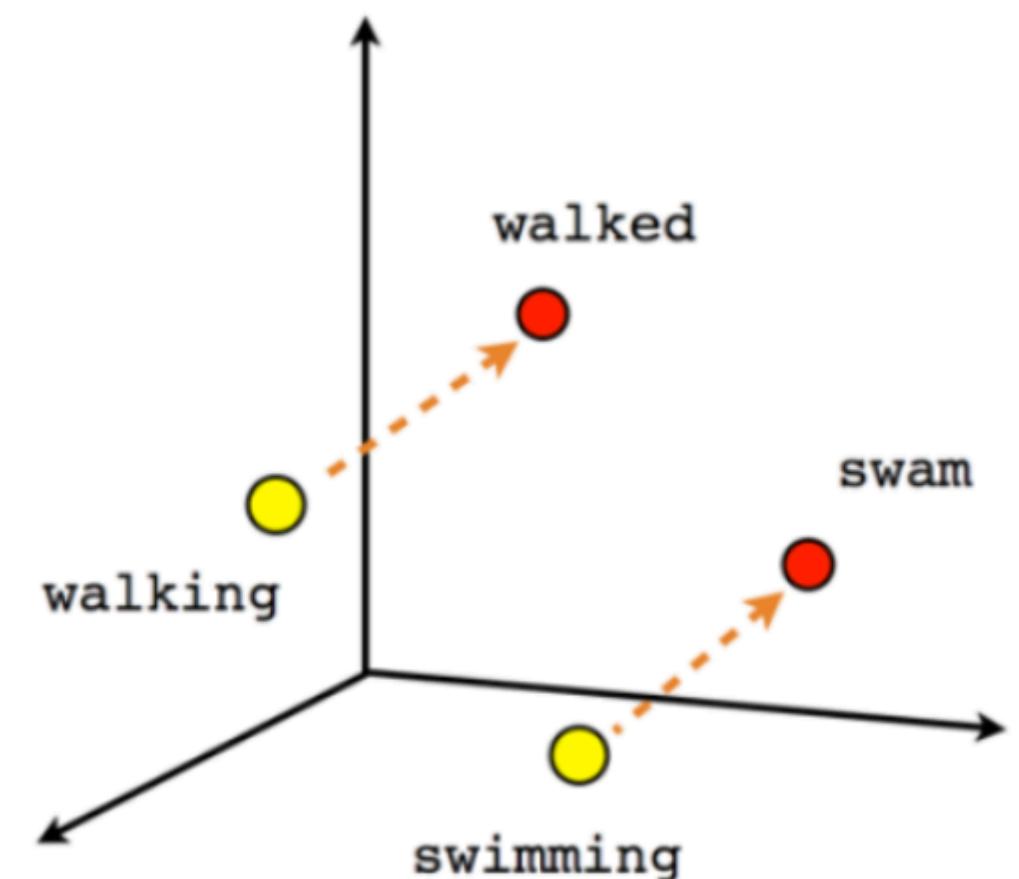


[word2vec, Mikolov et al., 2013]


[DCGAN, Radford, Metz, Chintala, 2015]

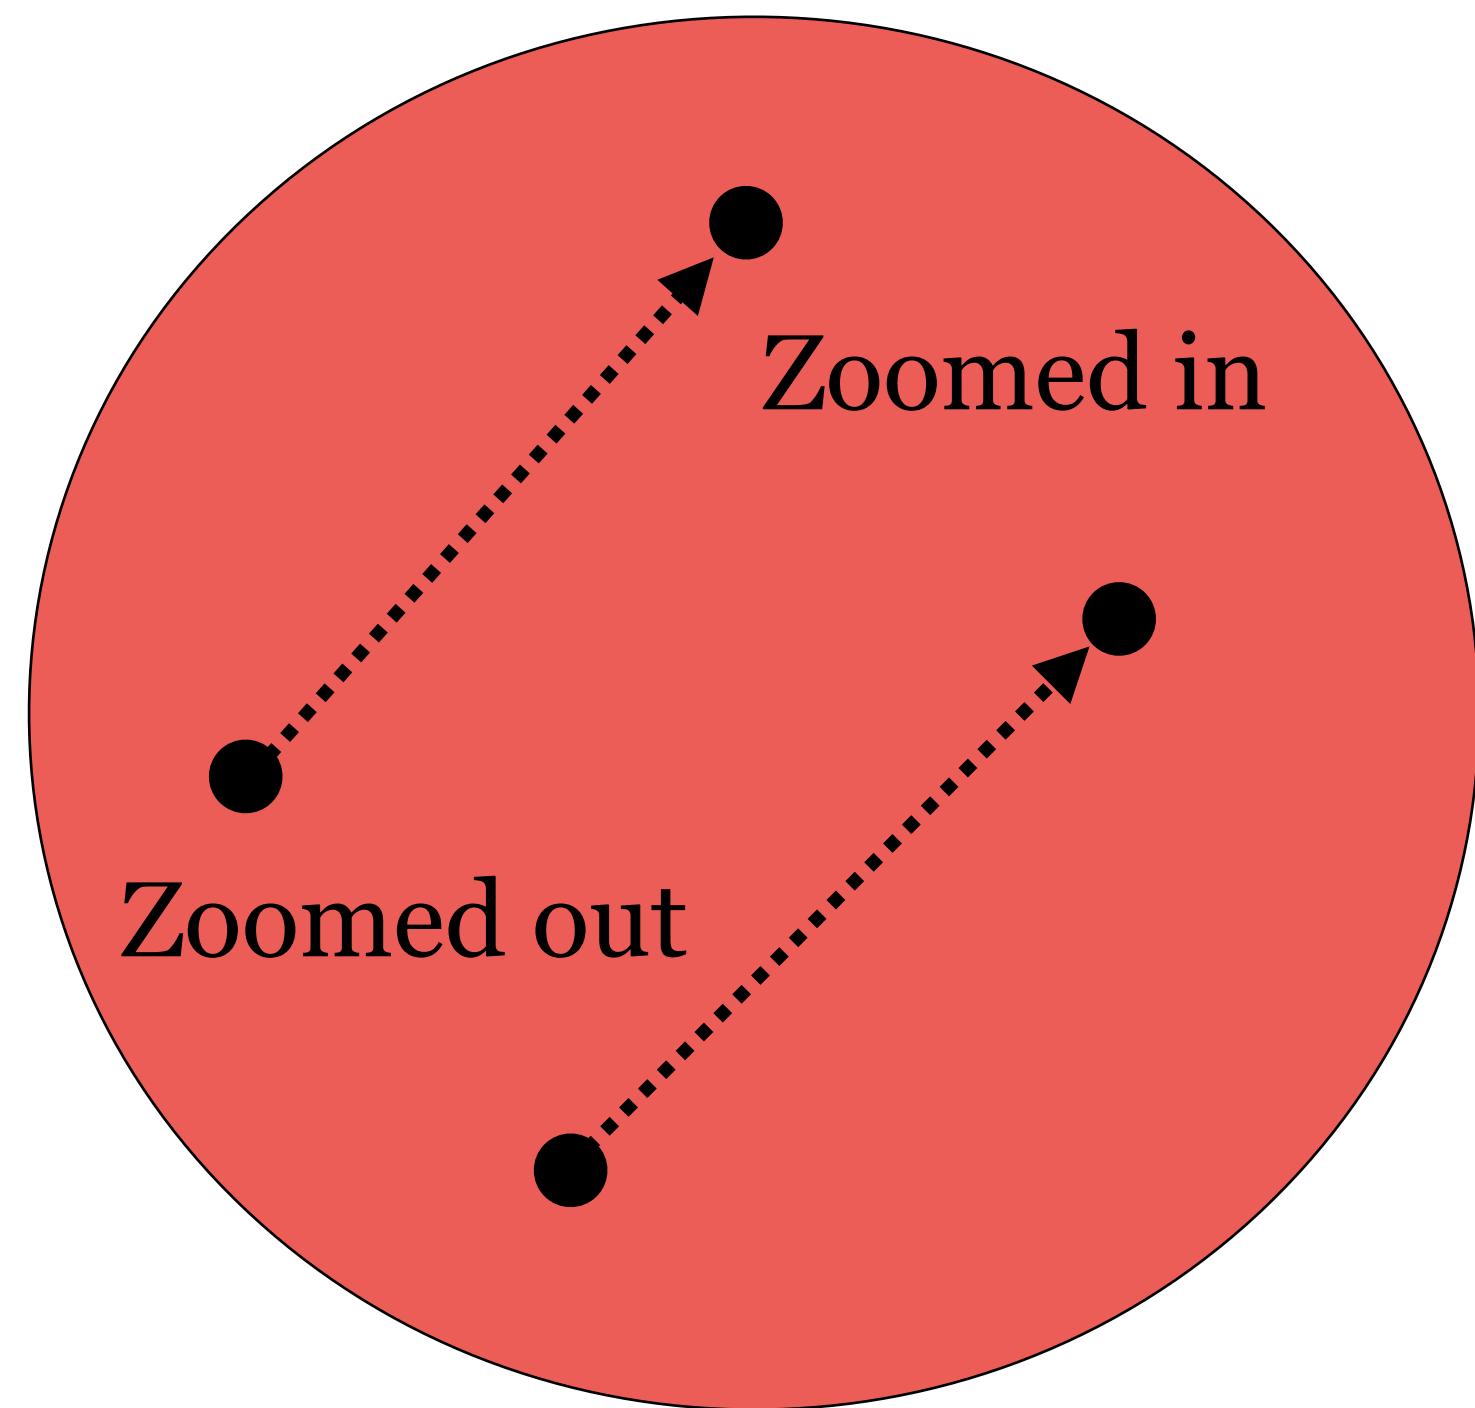

Zoom

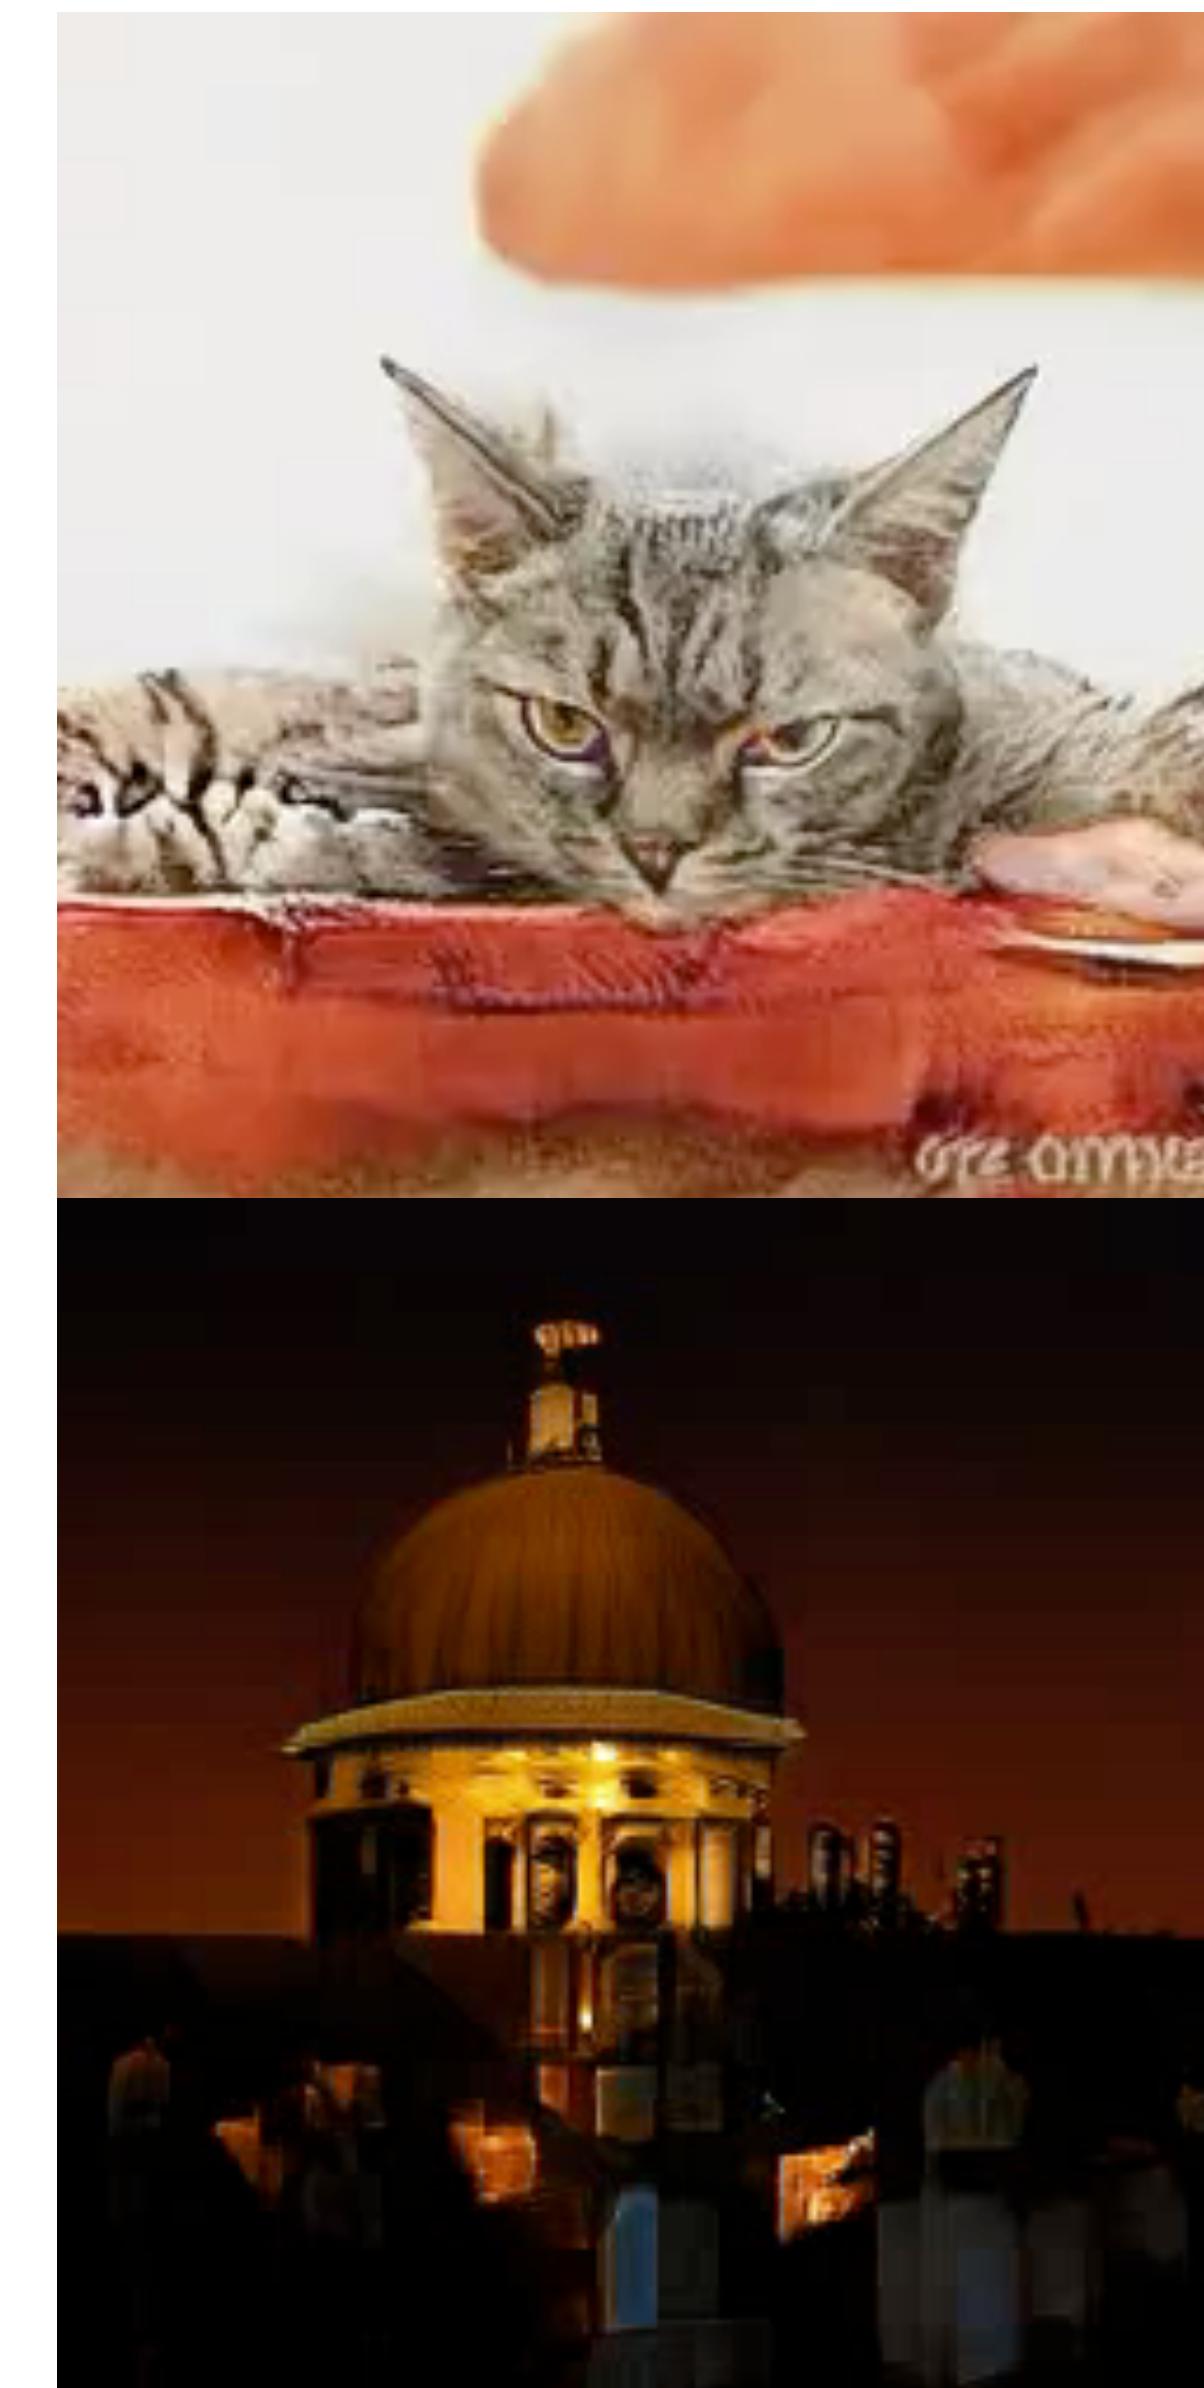

Shift

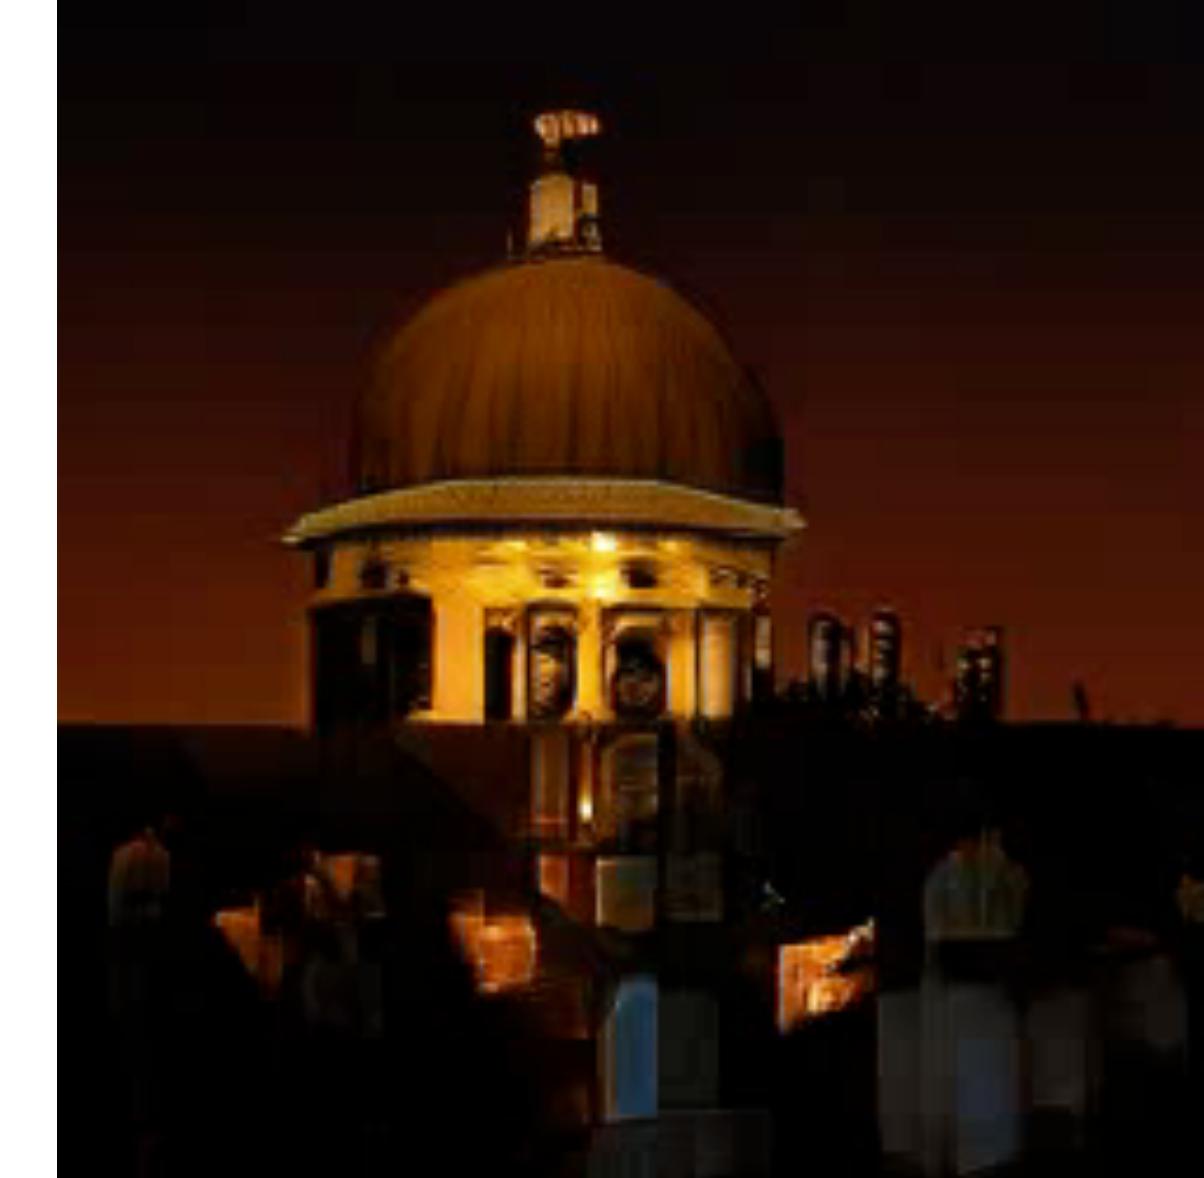

Brighten



Darken

Color transformation vectors


Winter to spring



input

output

Turning on the lights

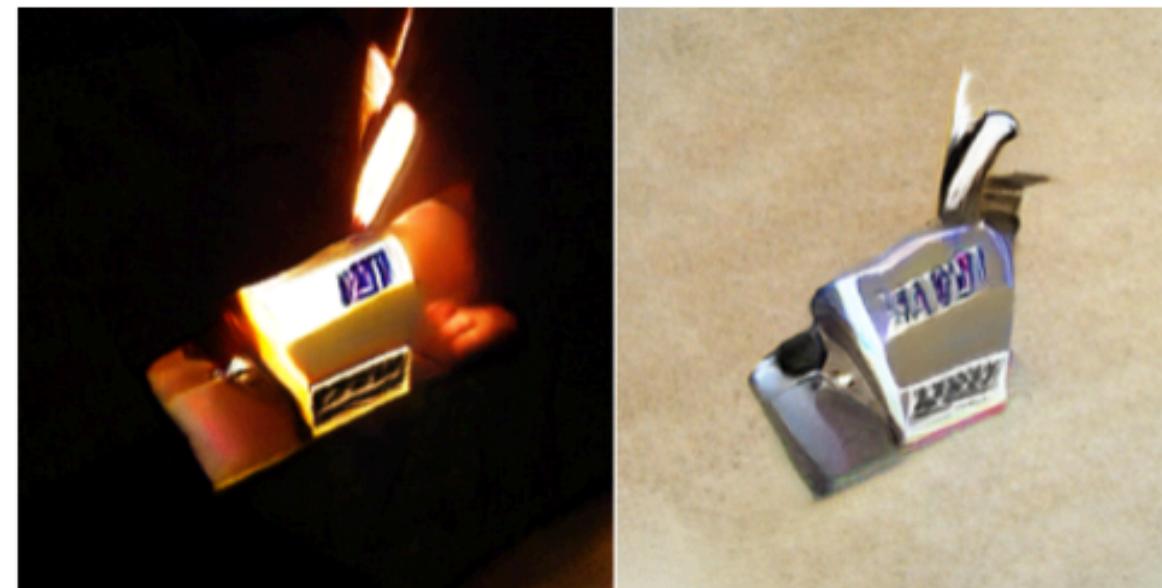

input

output

Day to night



input

output

Volcano!




input


output

There is a latent space “vector” for each of these transformations — the “spring vector”, the “volcano exploding vector”

Traditional GAN

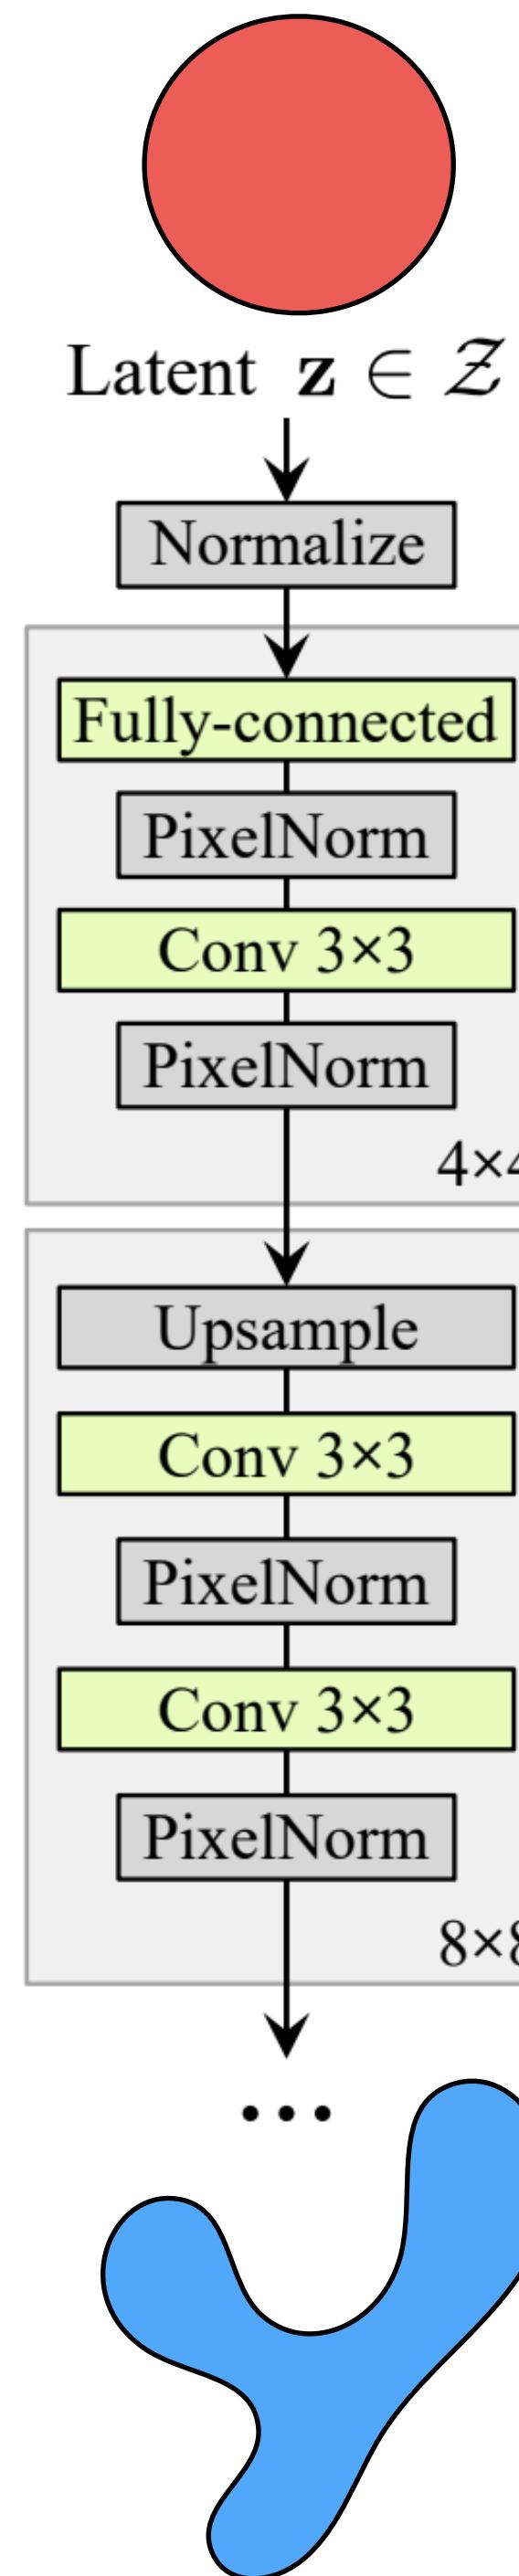

StyleGAN

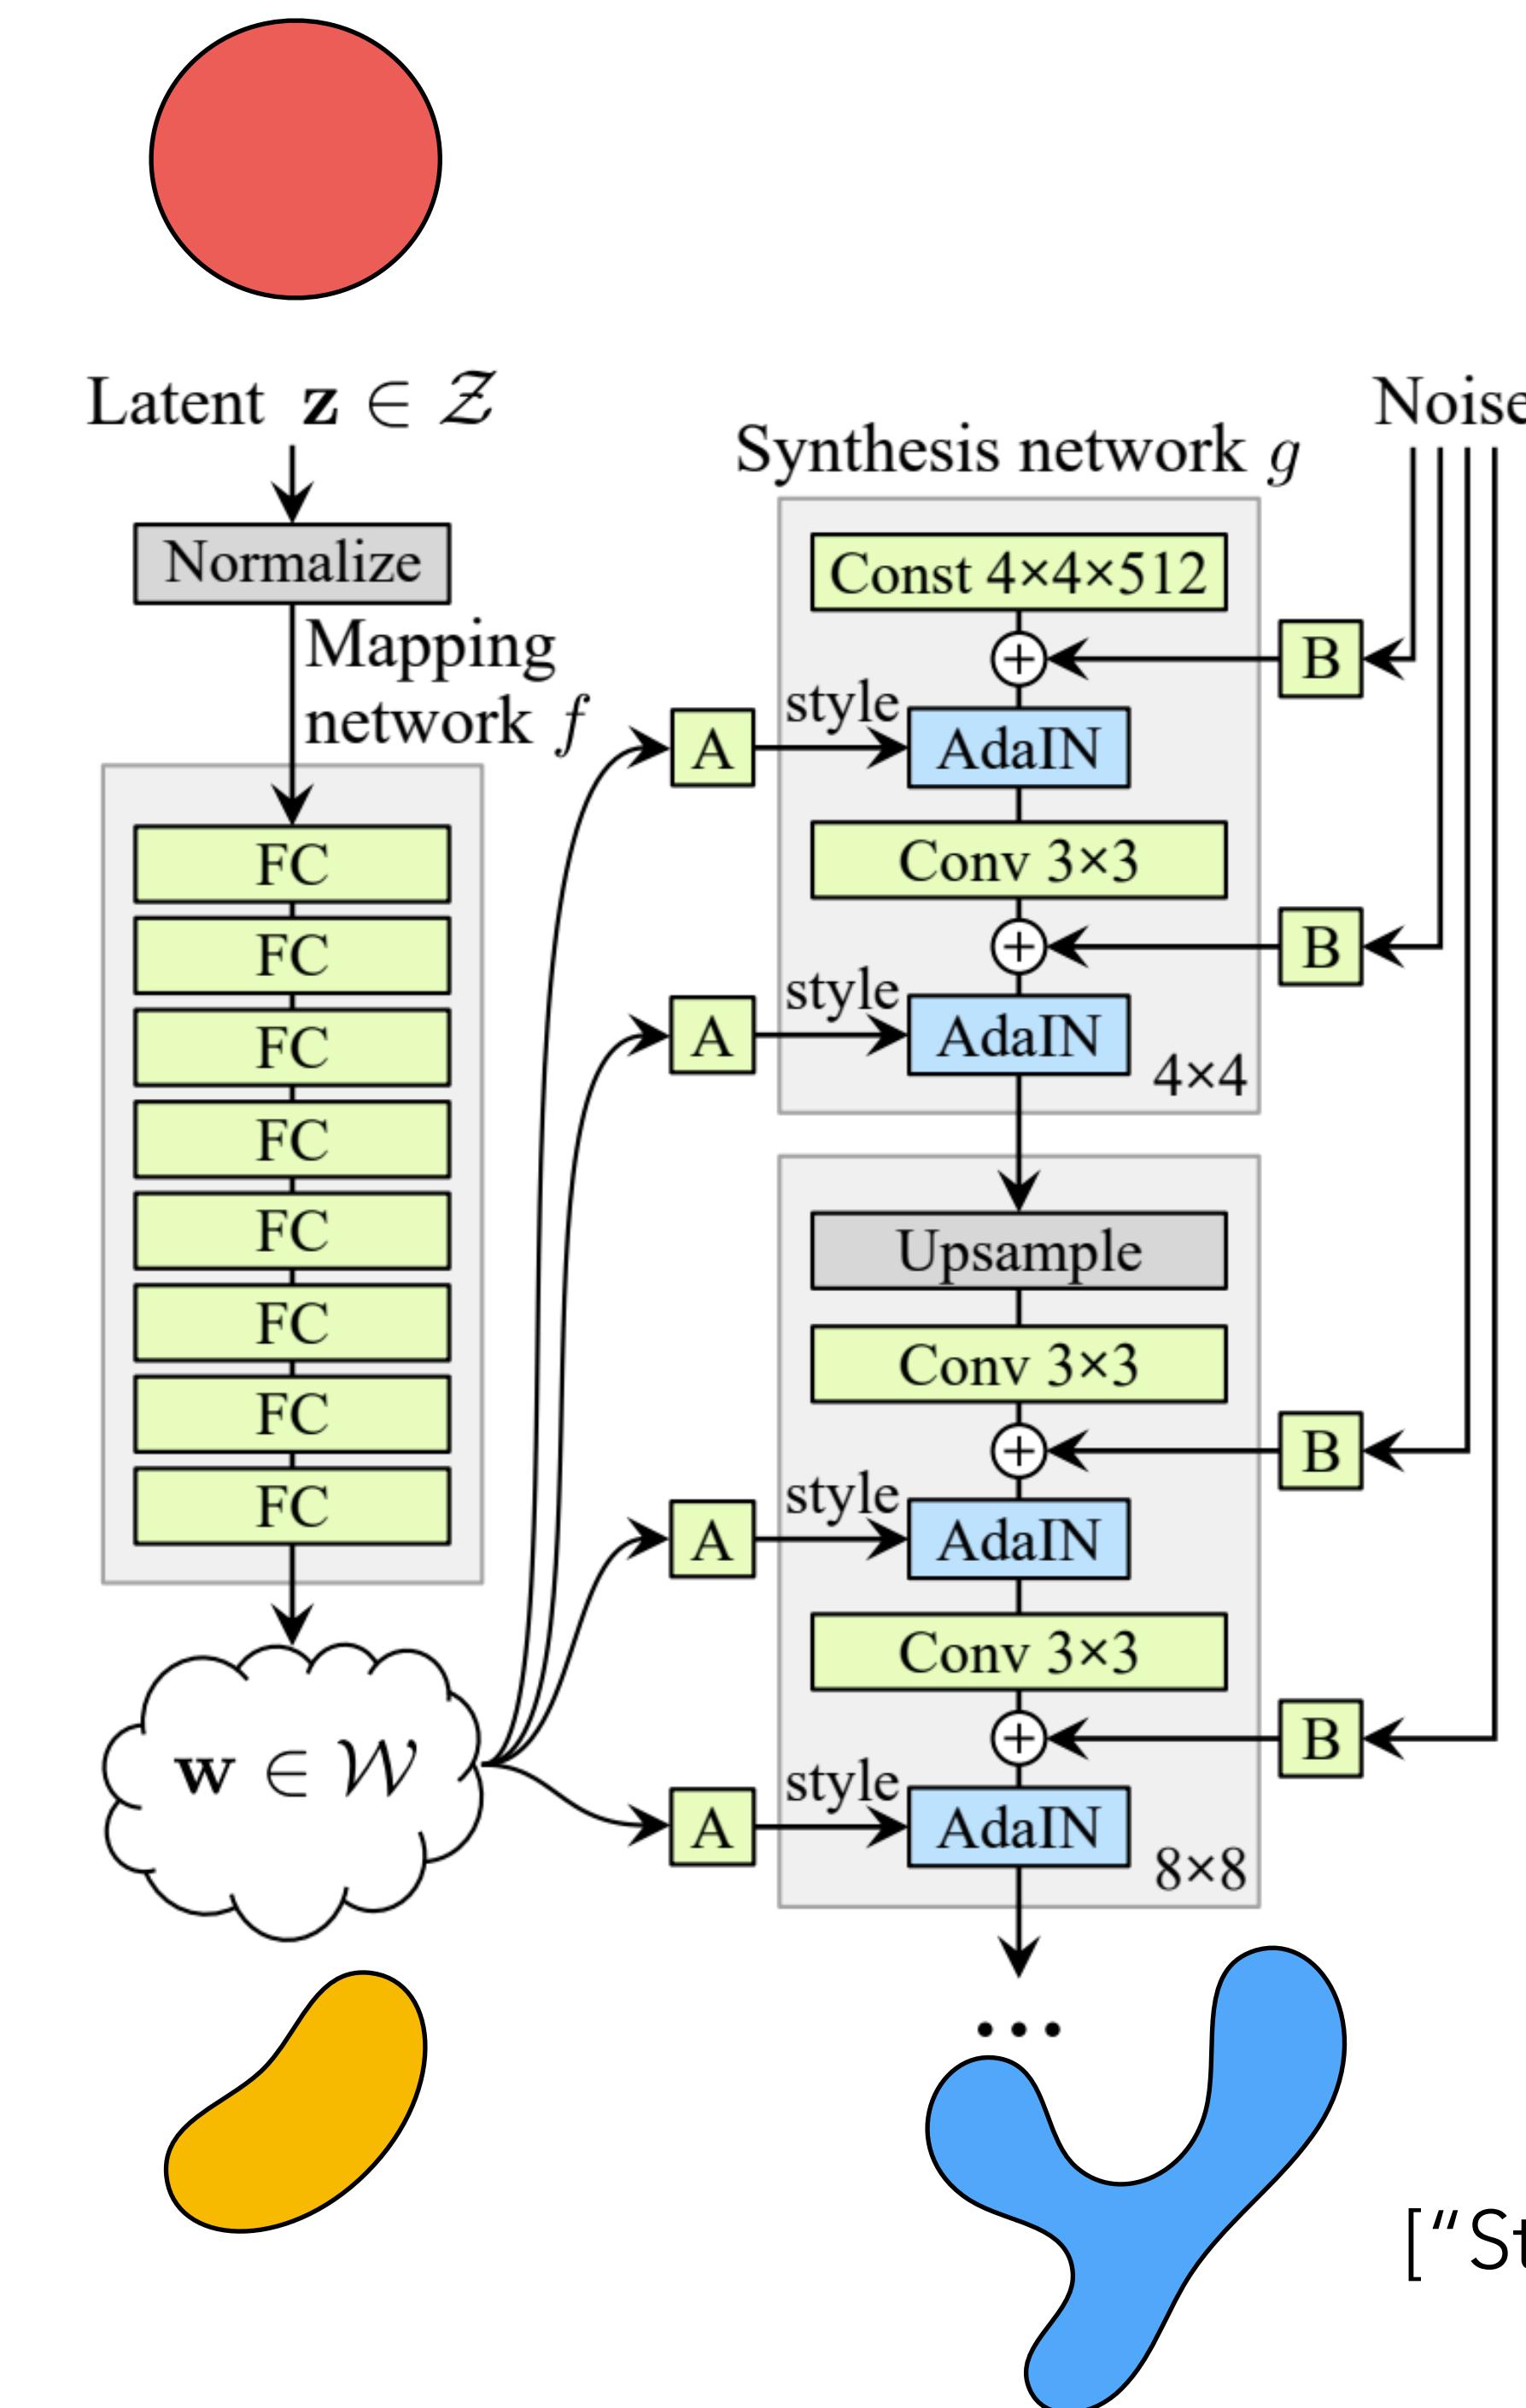

[“StyleGAN”, Karras,
Laine, Aila, 2018]

Interpolation in data space

Data space
(Natural image manifold)


\mathbf{X}









Interpolation in latent space

Latent space
(Gaussian)

Data space
(Natural image manifold)

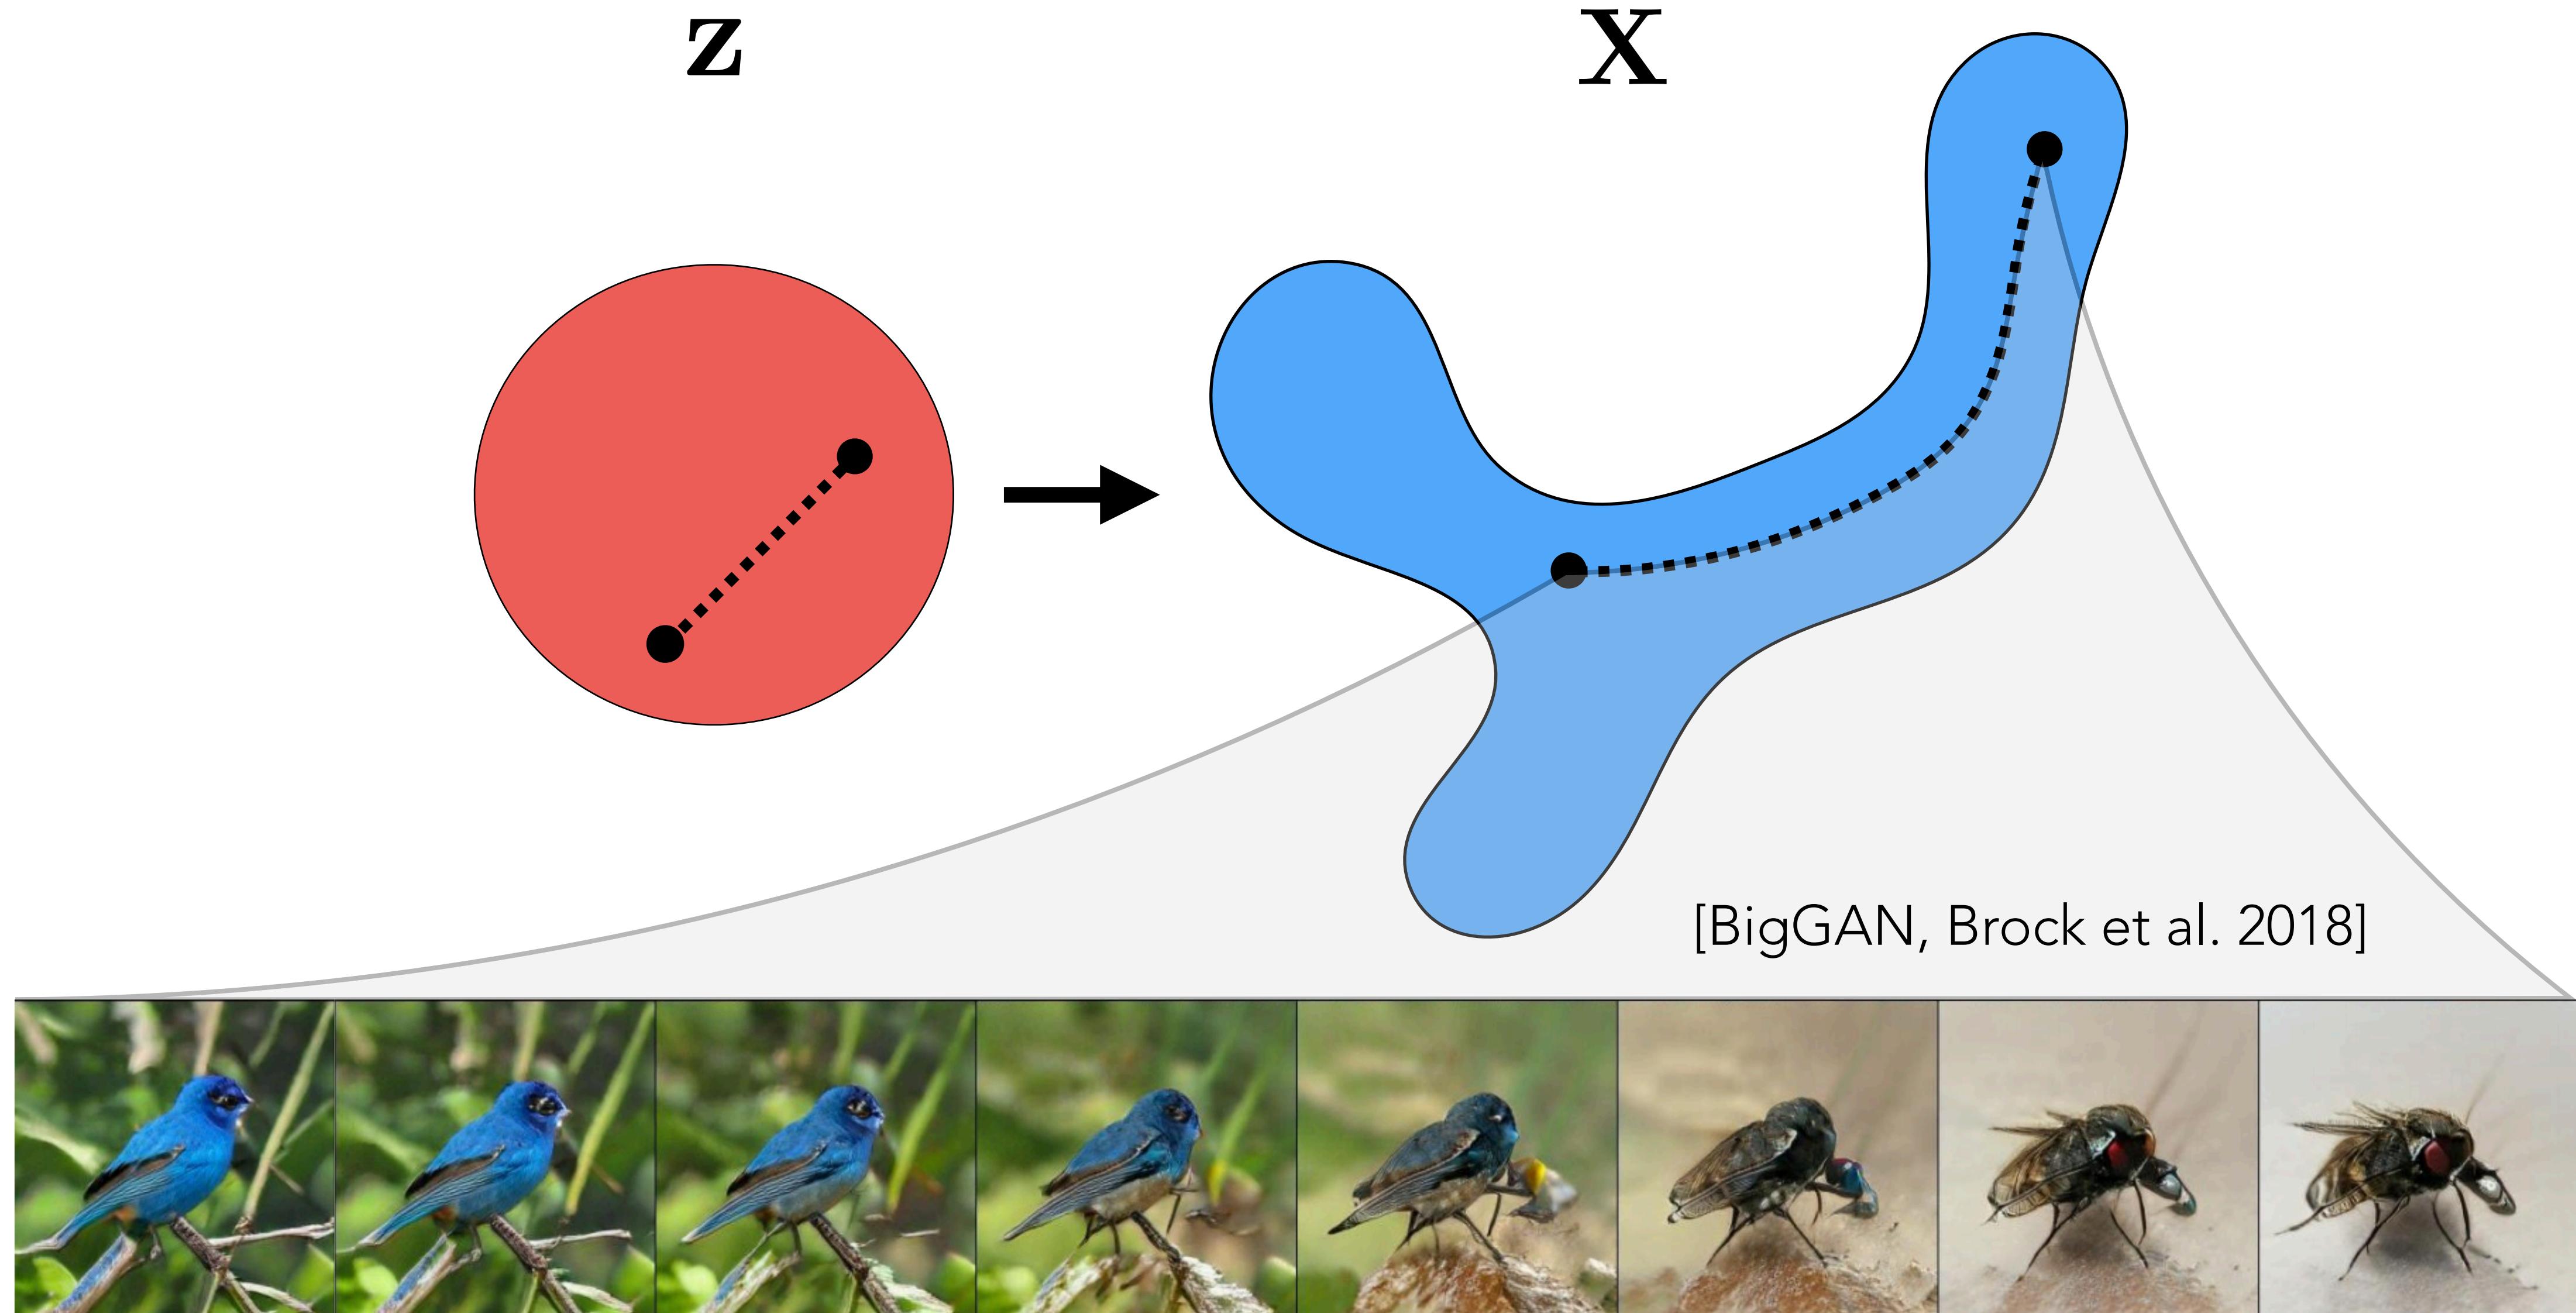

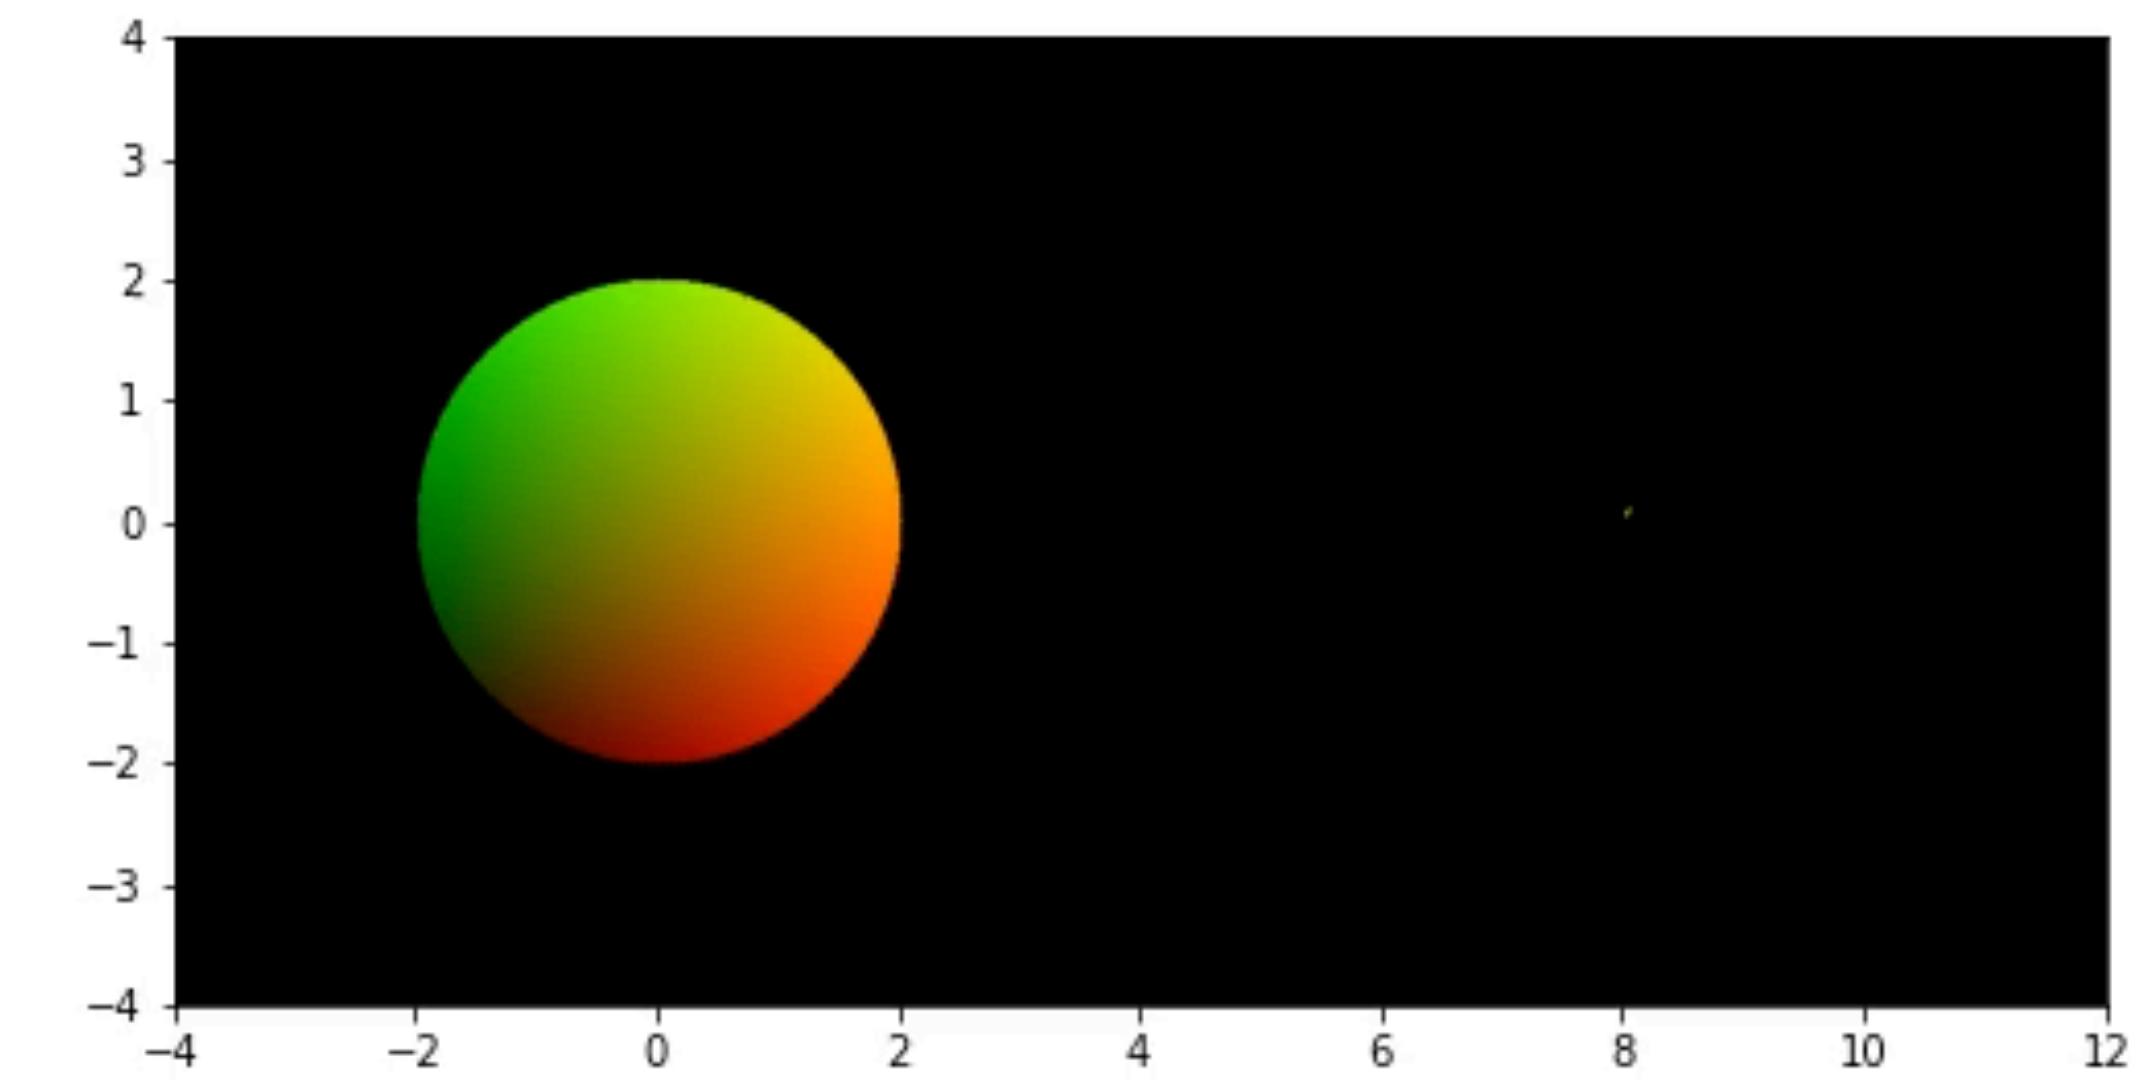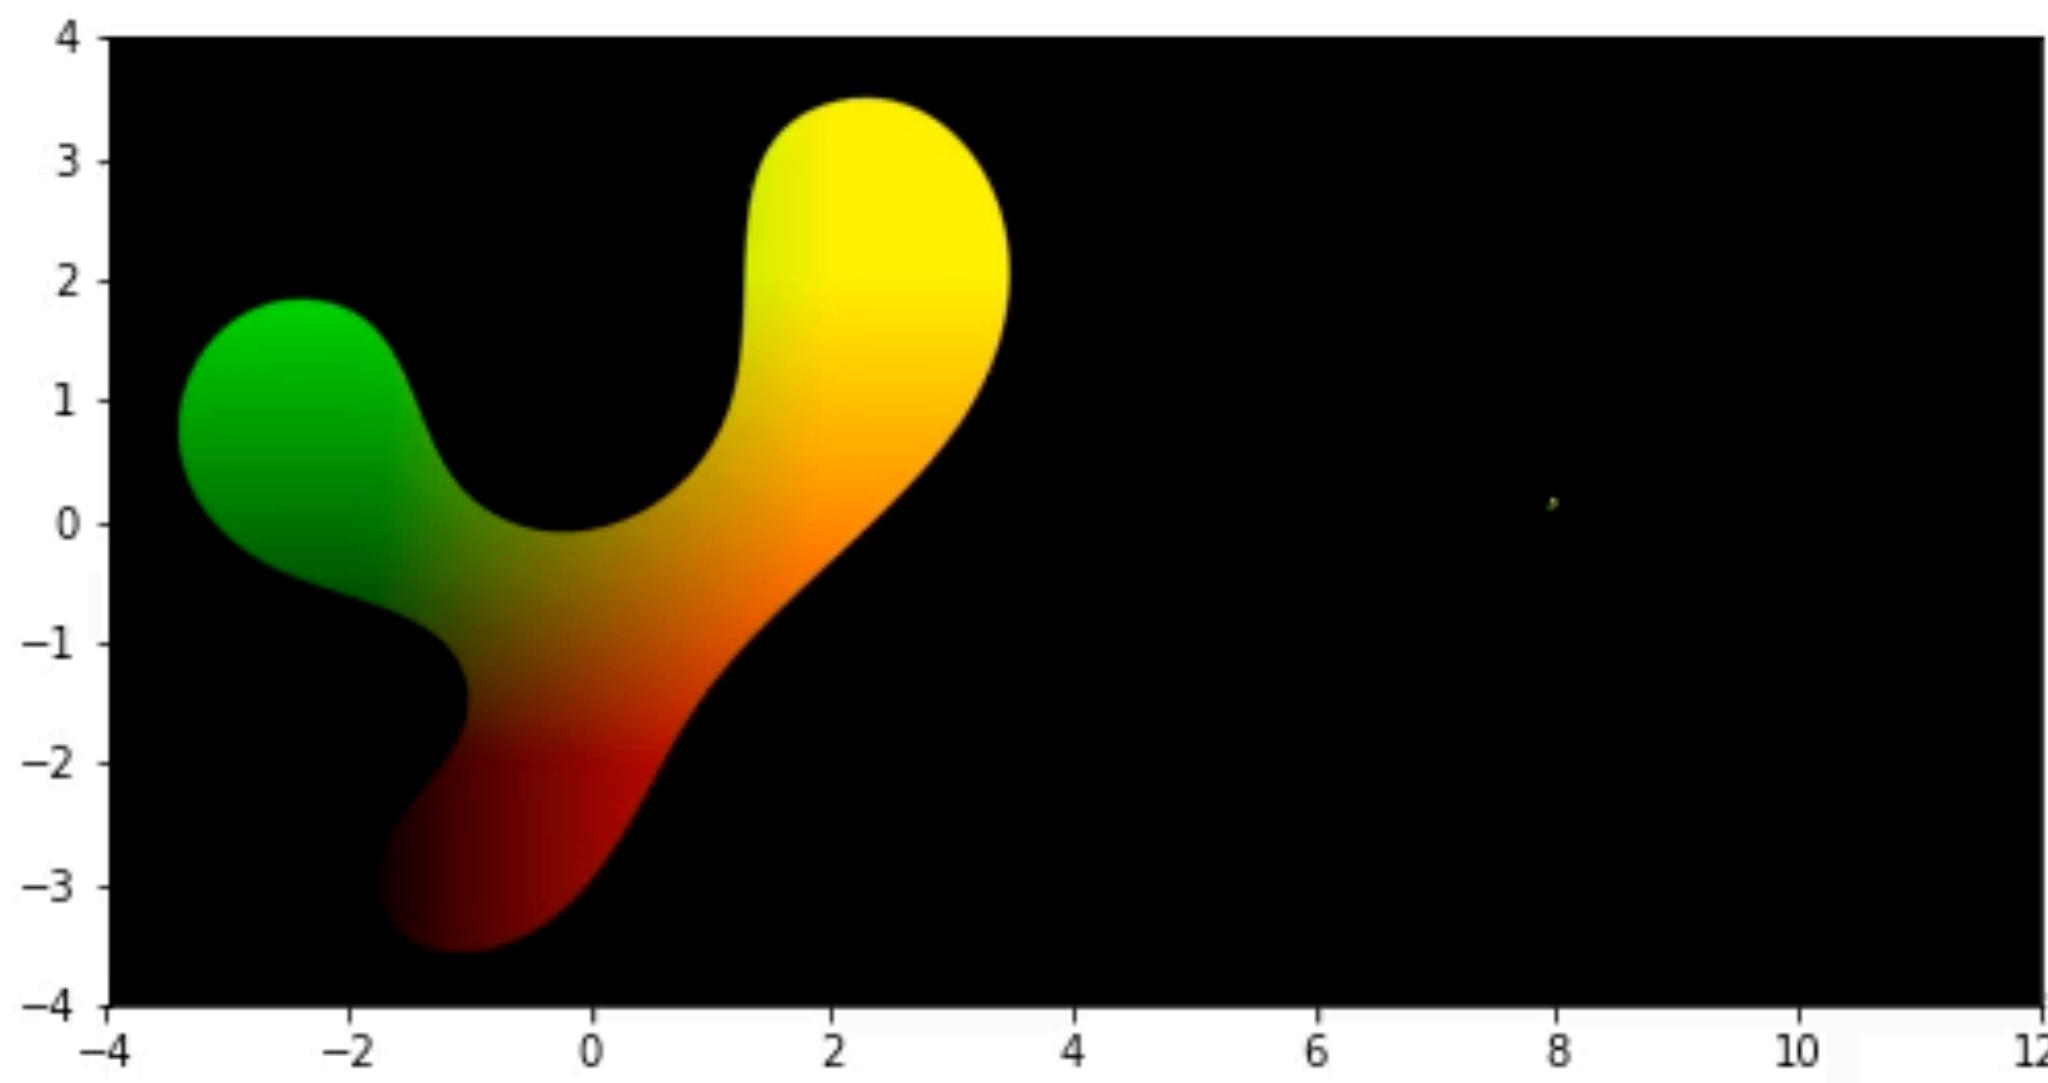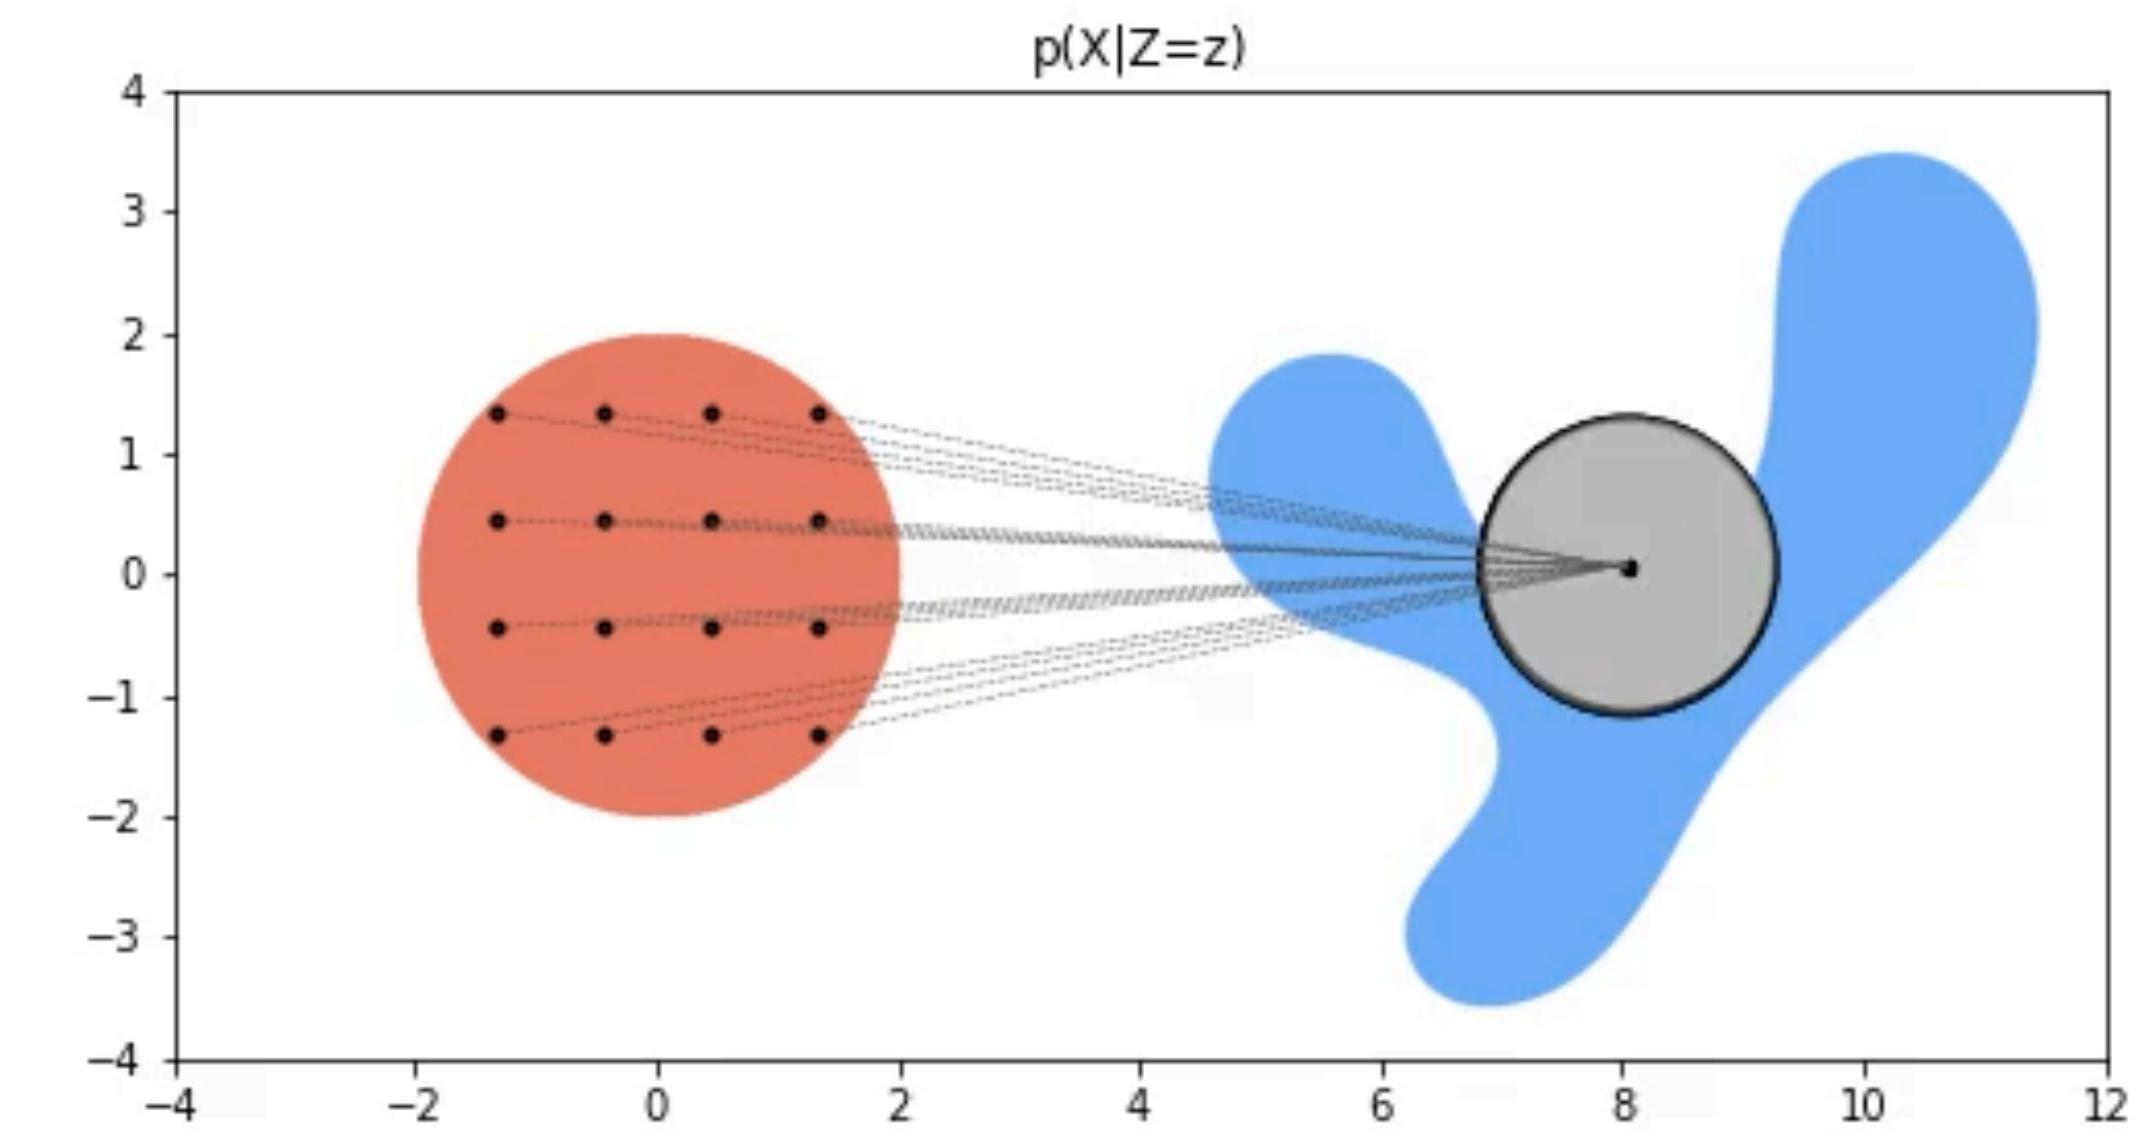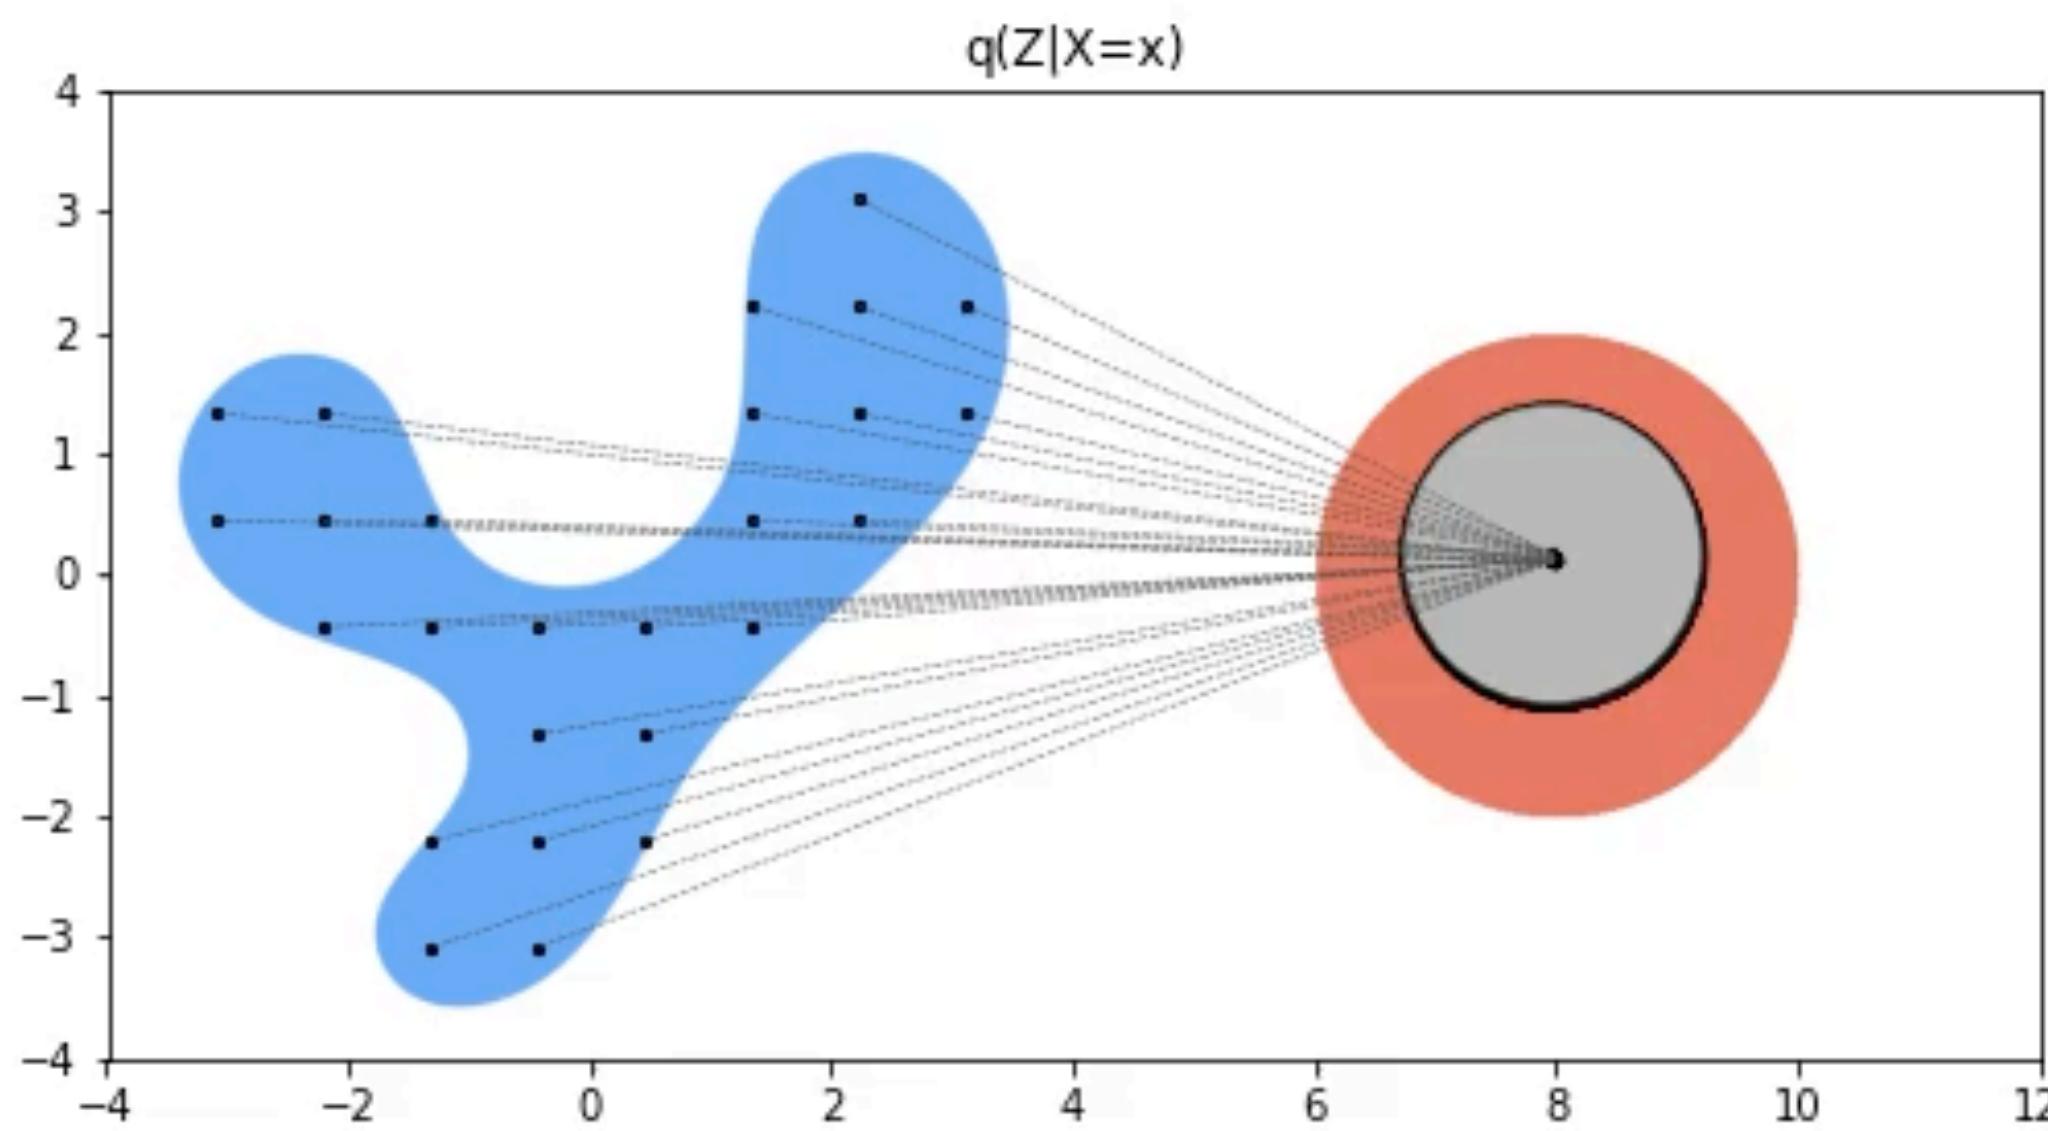

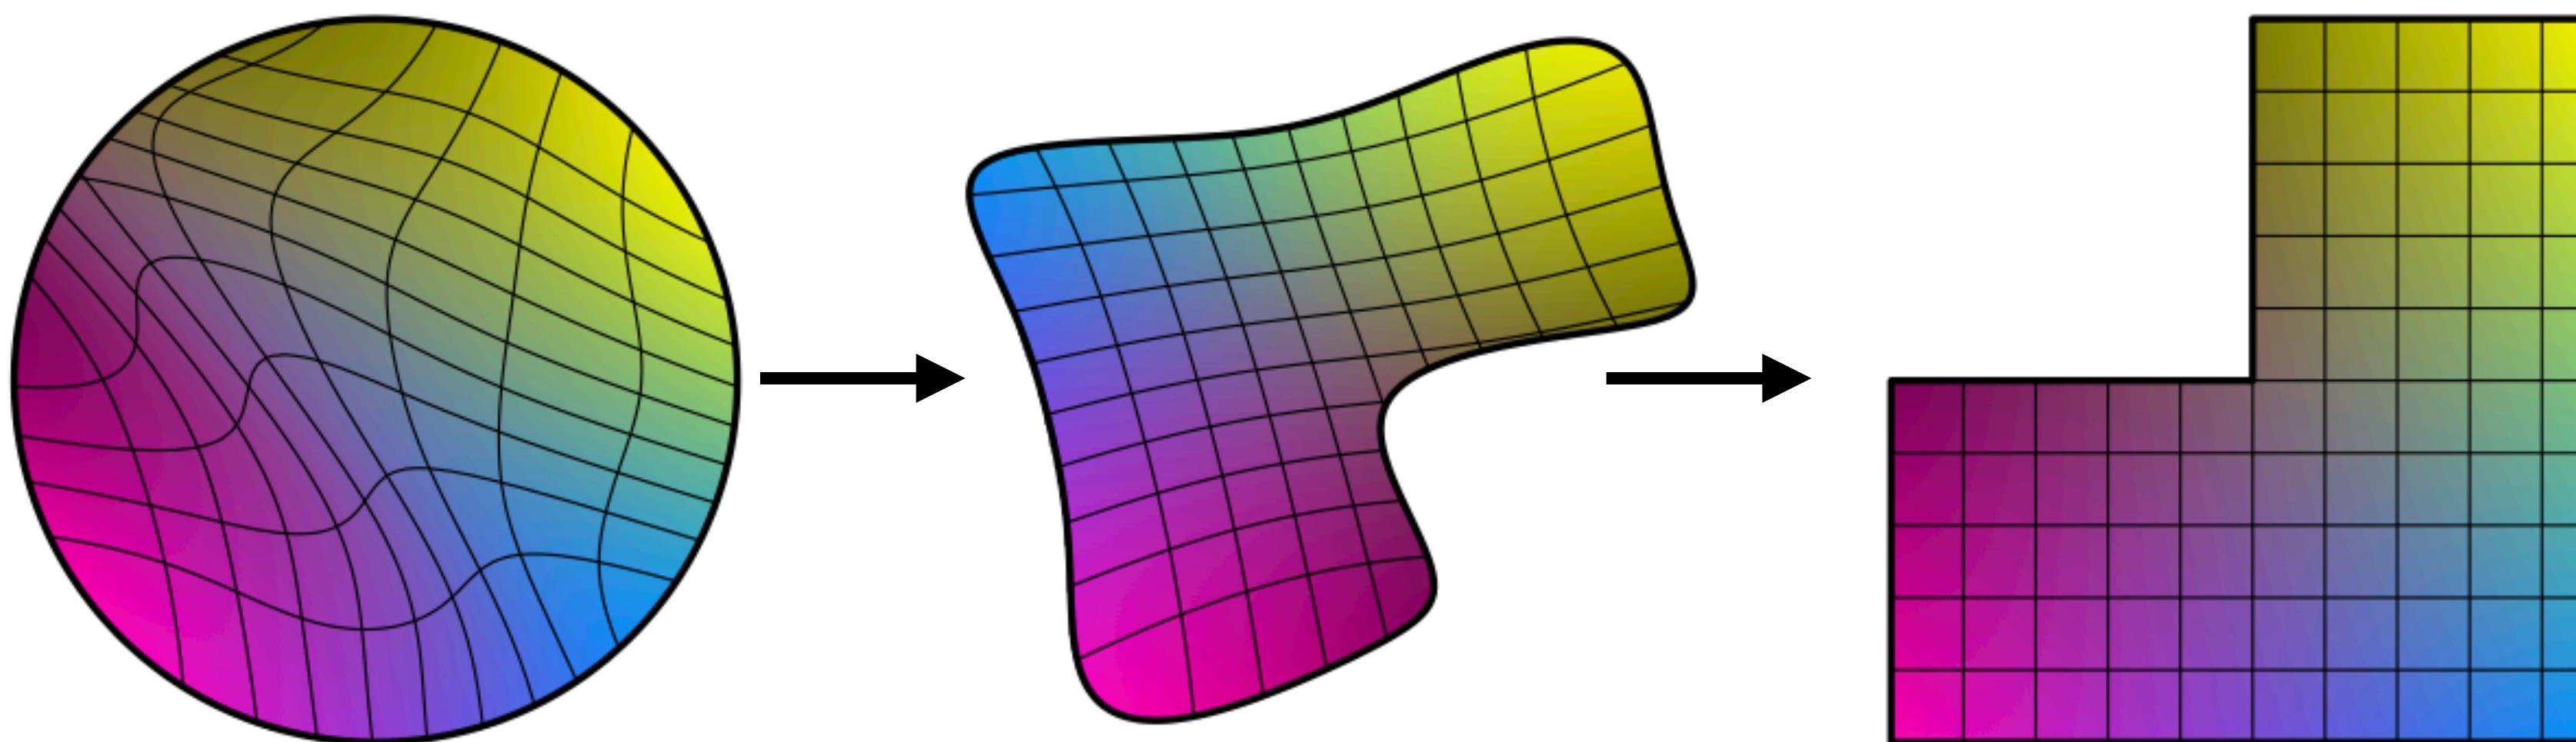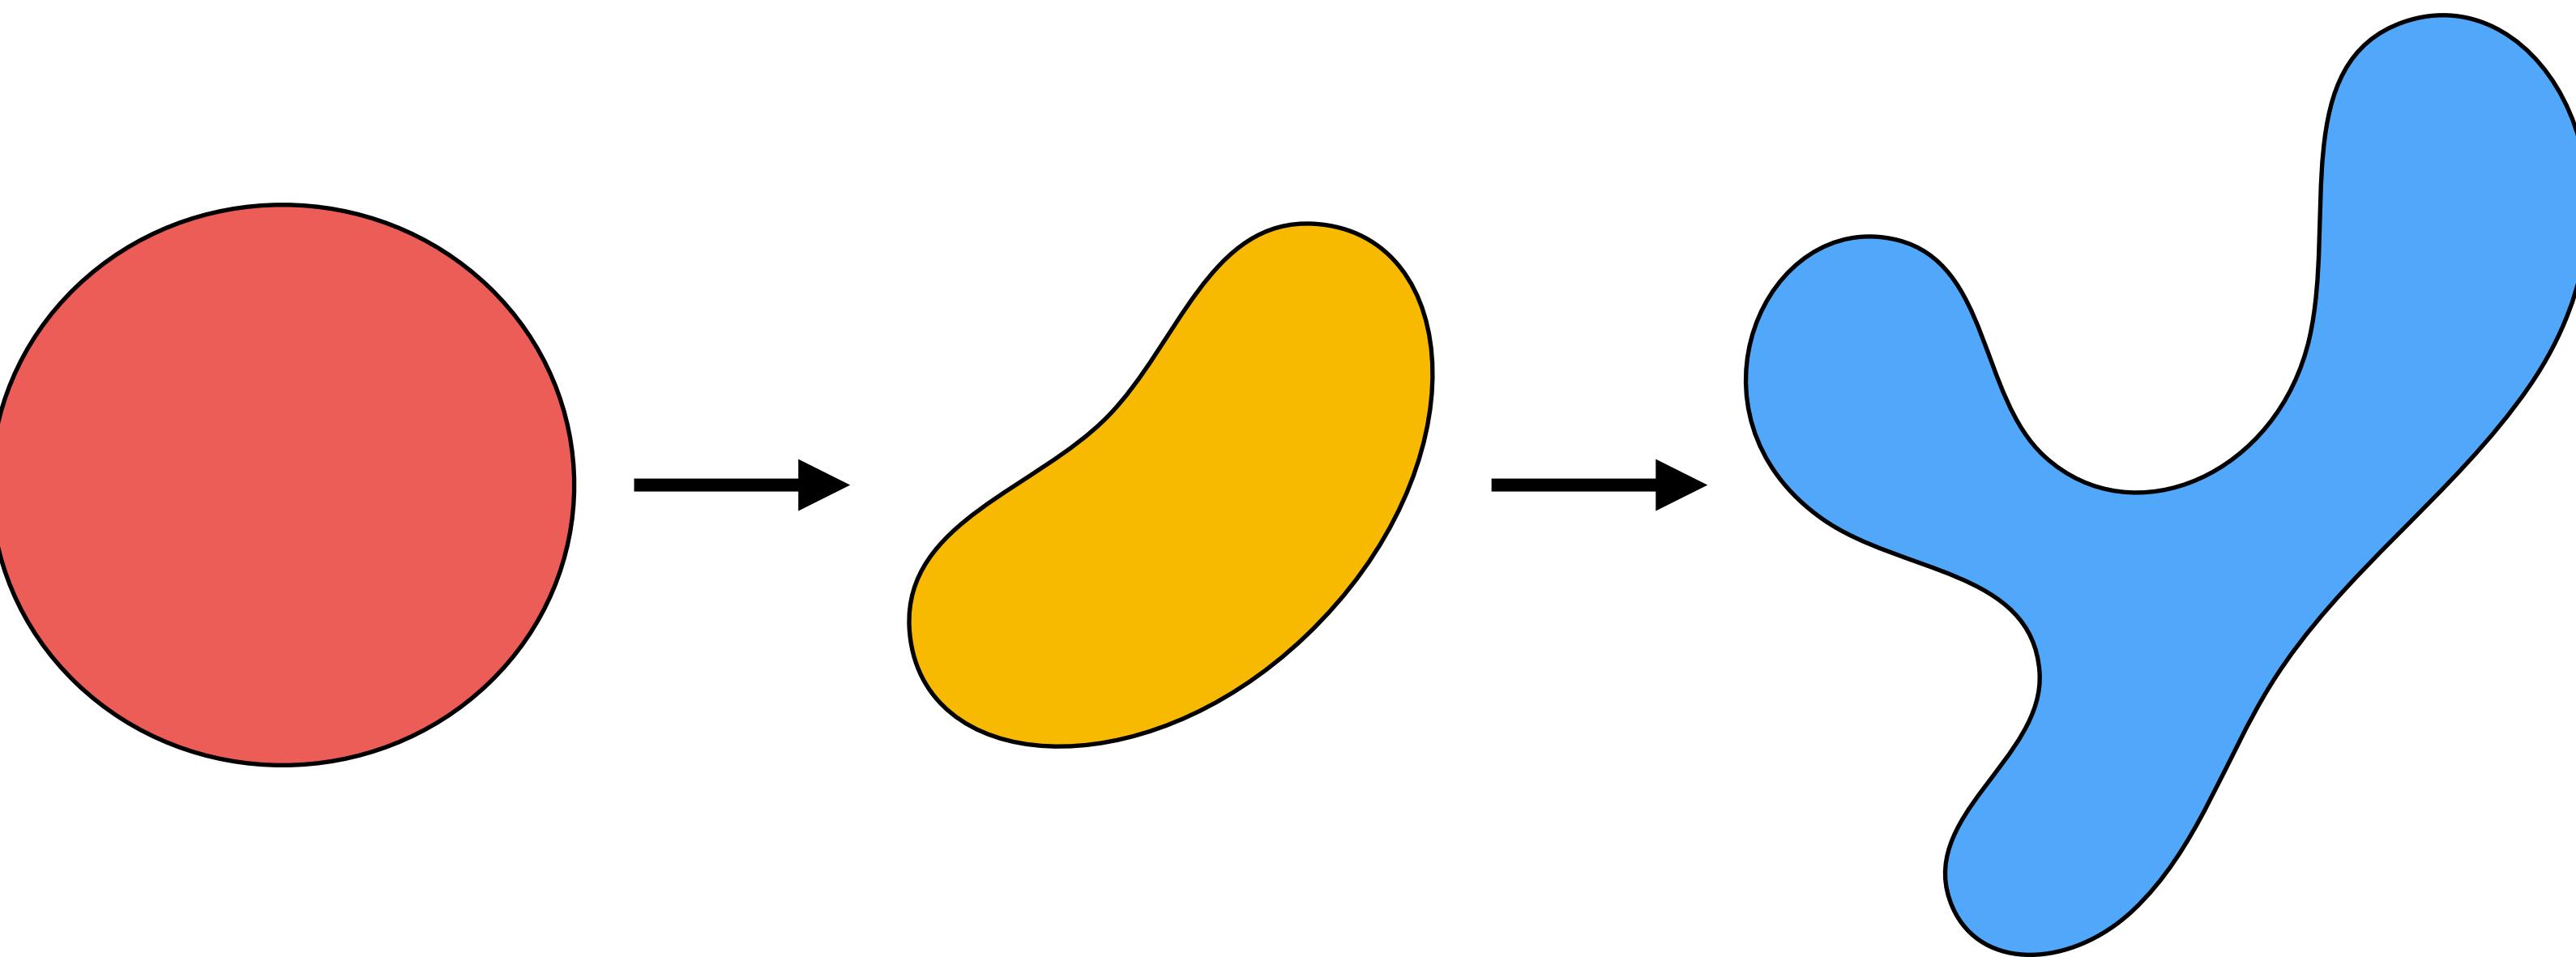



(b) Mapping from
 \mathcal{Z} to features

(c) Mapping from
 \mathcal{W} to features

(a) Distribution of
features in training set


["StyleGAN", Karras, Laine, Aila, 2018]

Different ways to navigate latent space

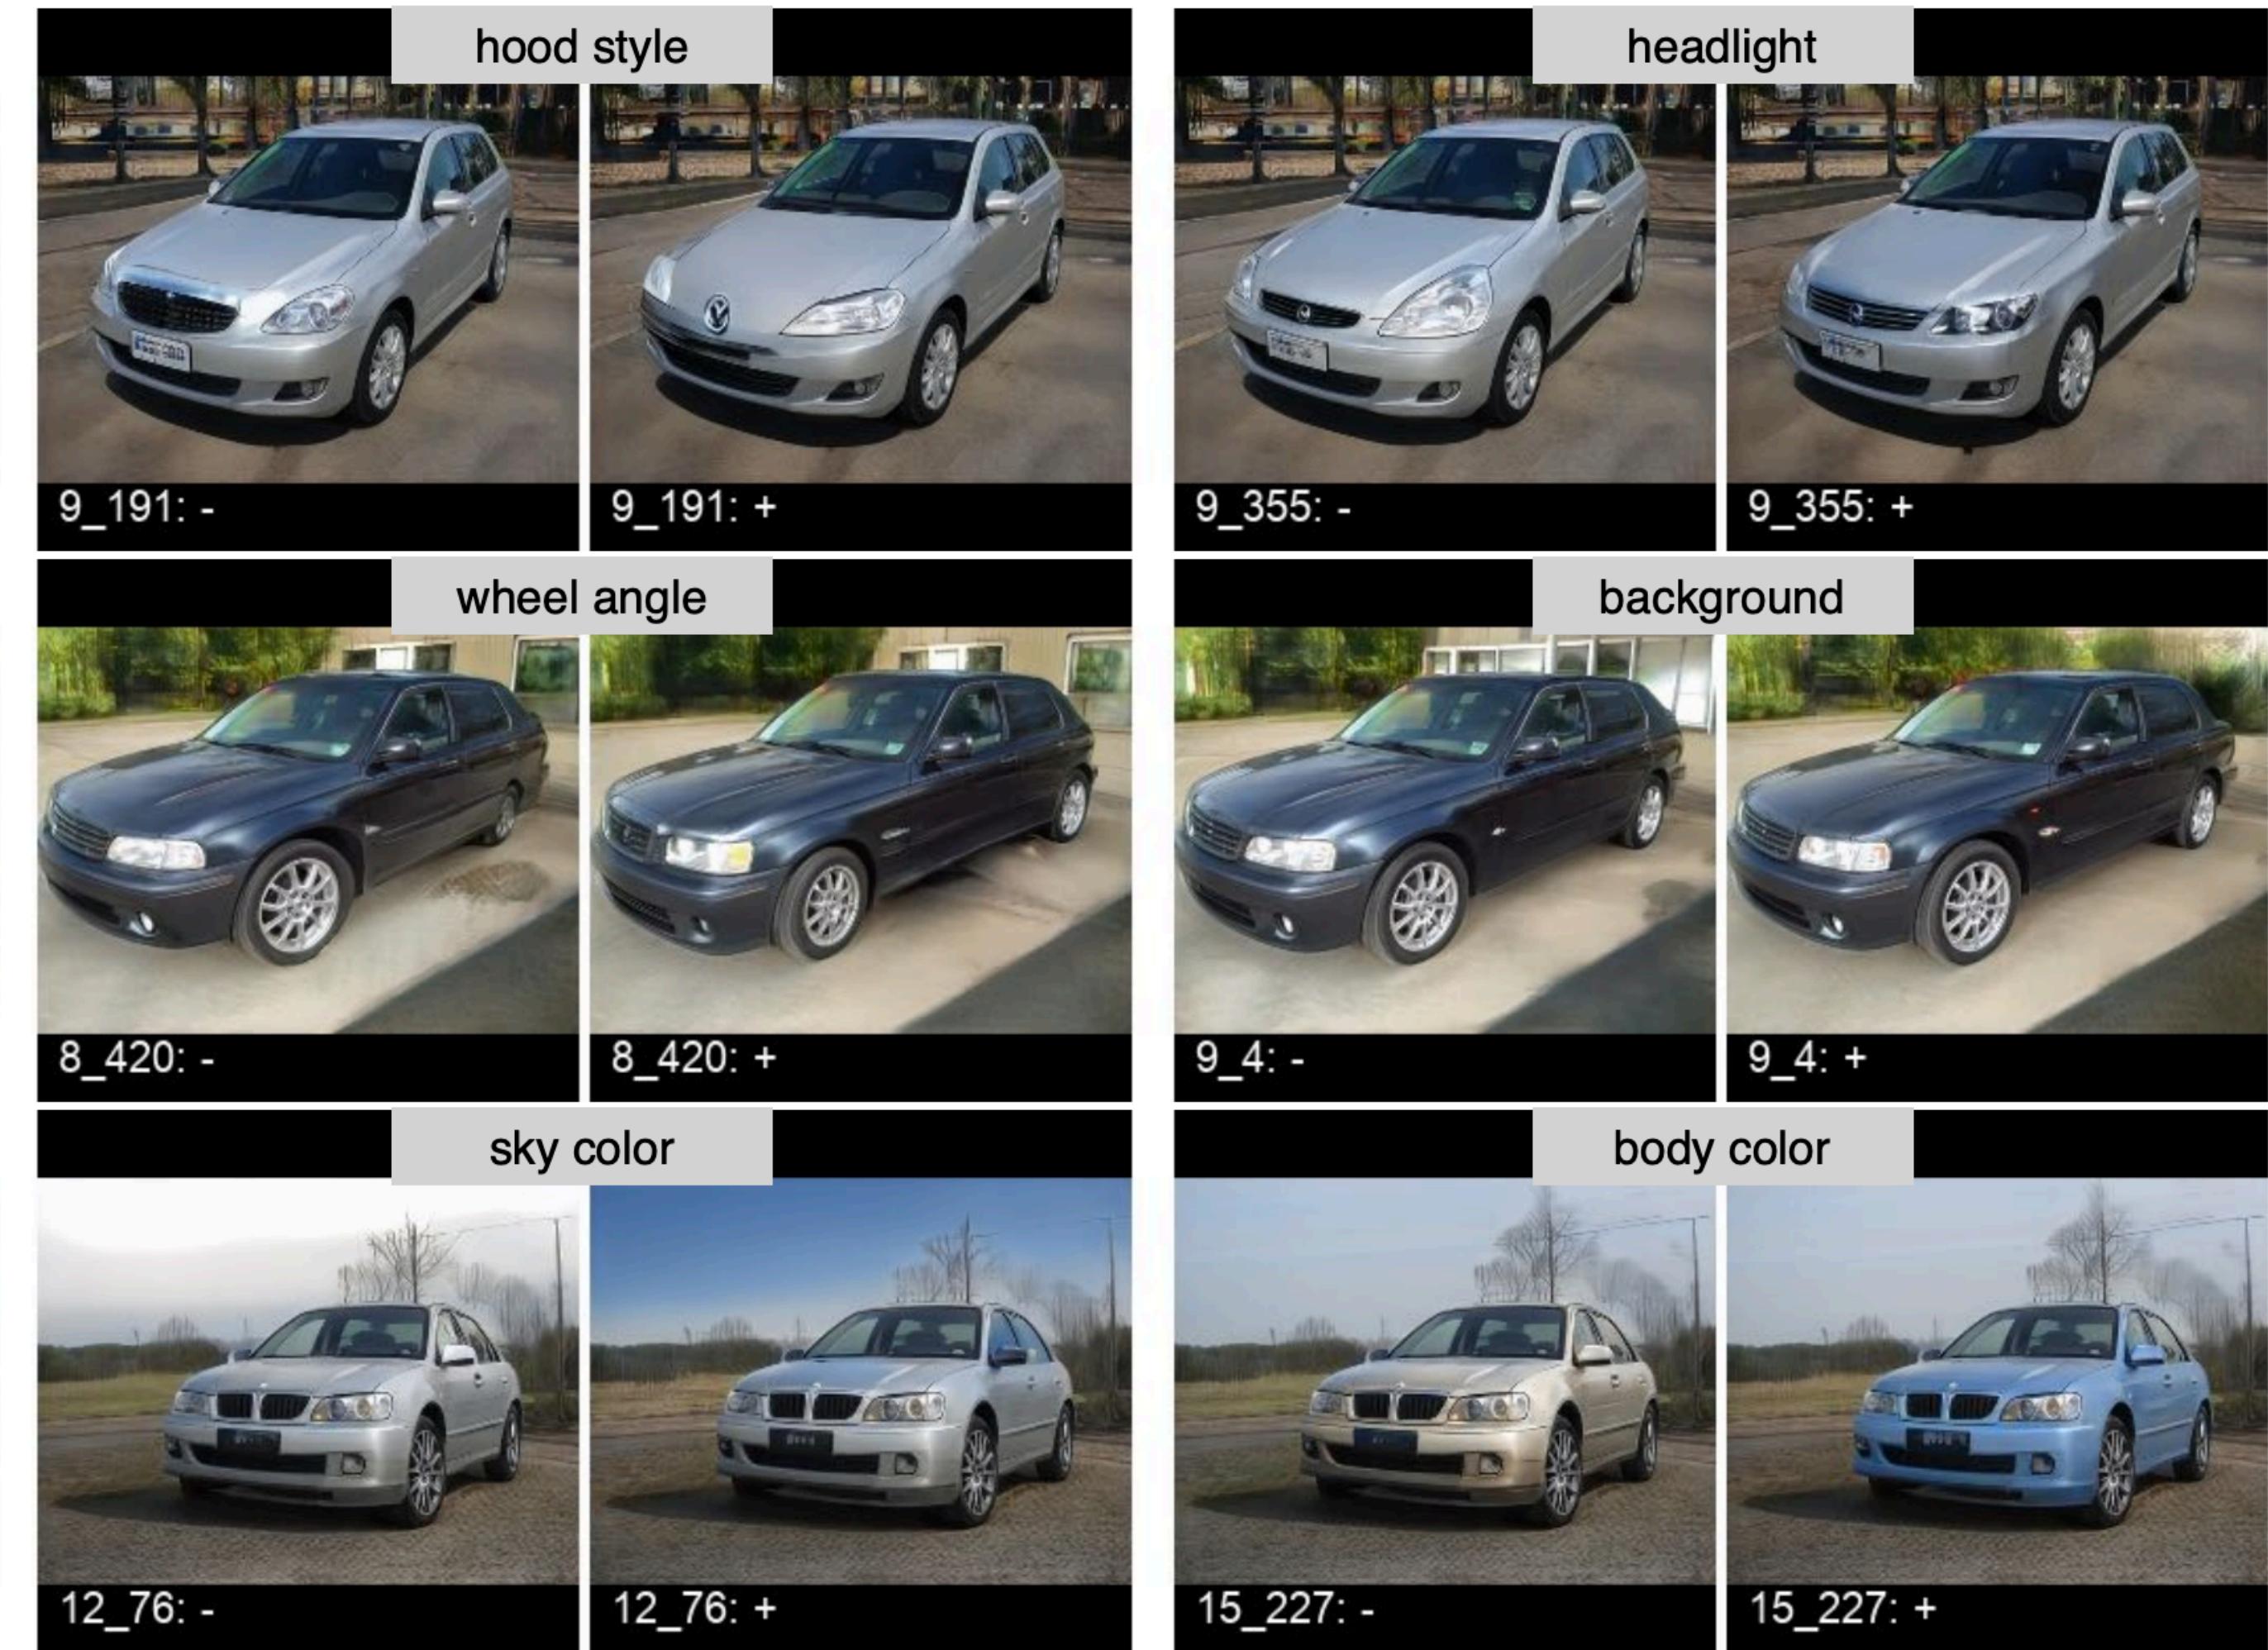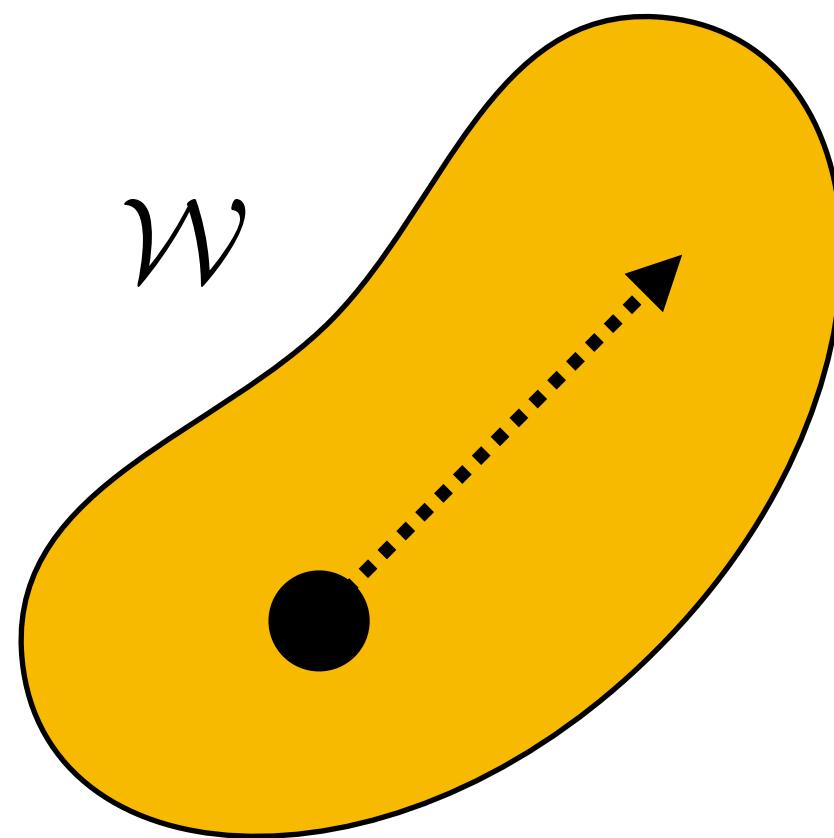


[“StyleSpace”, Wu, Lischinski, Shechtman, 2020]



Labeling Data++

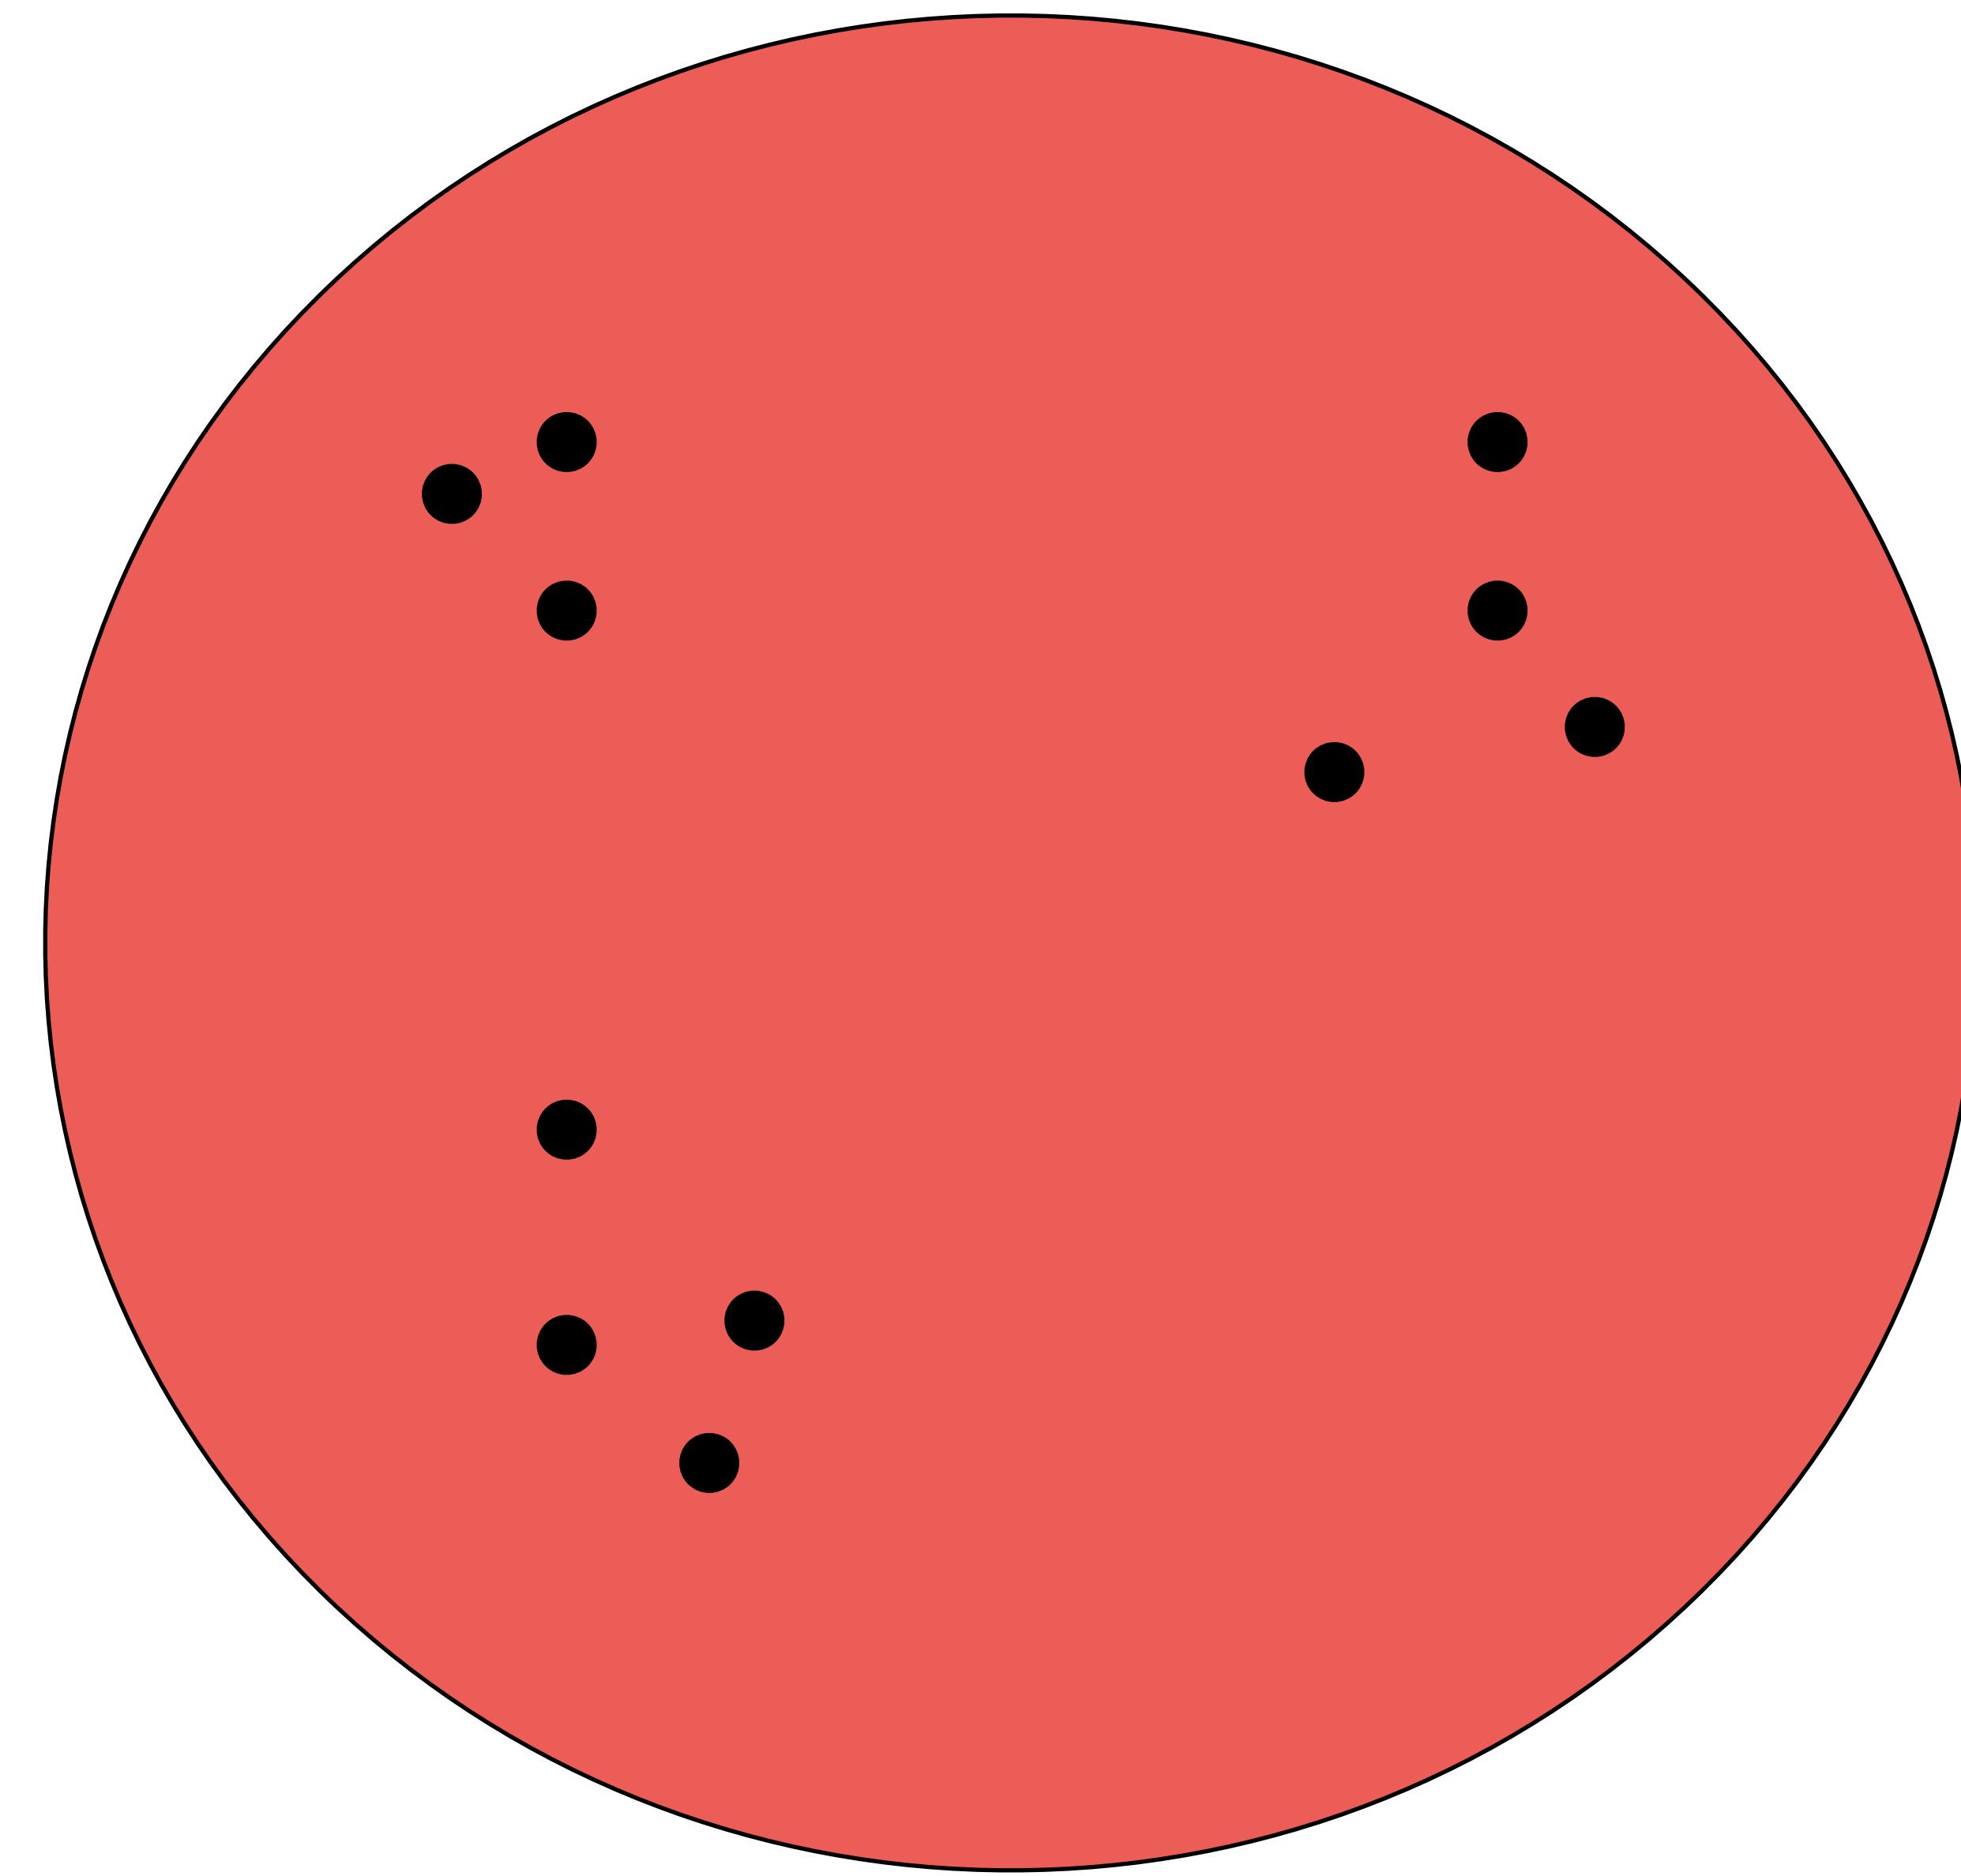

Labeling Data++

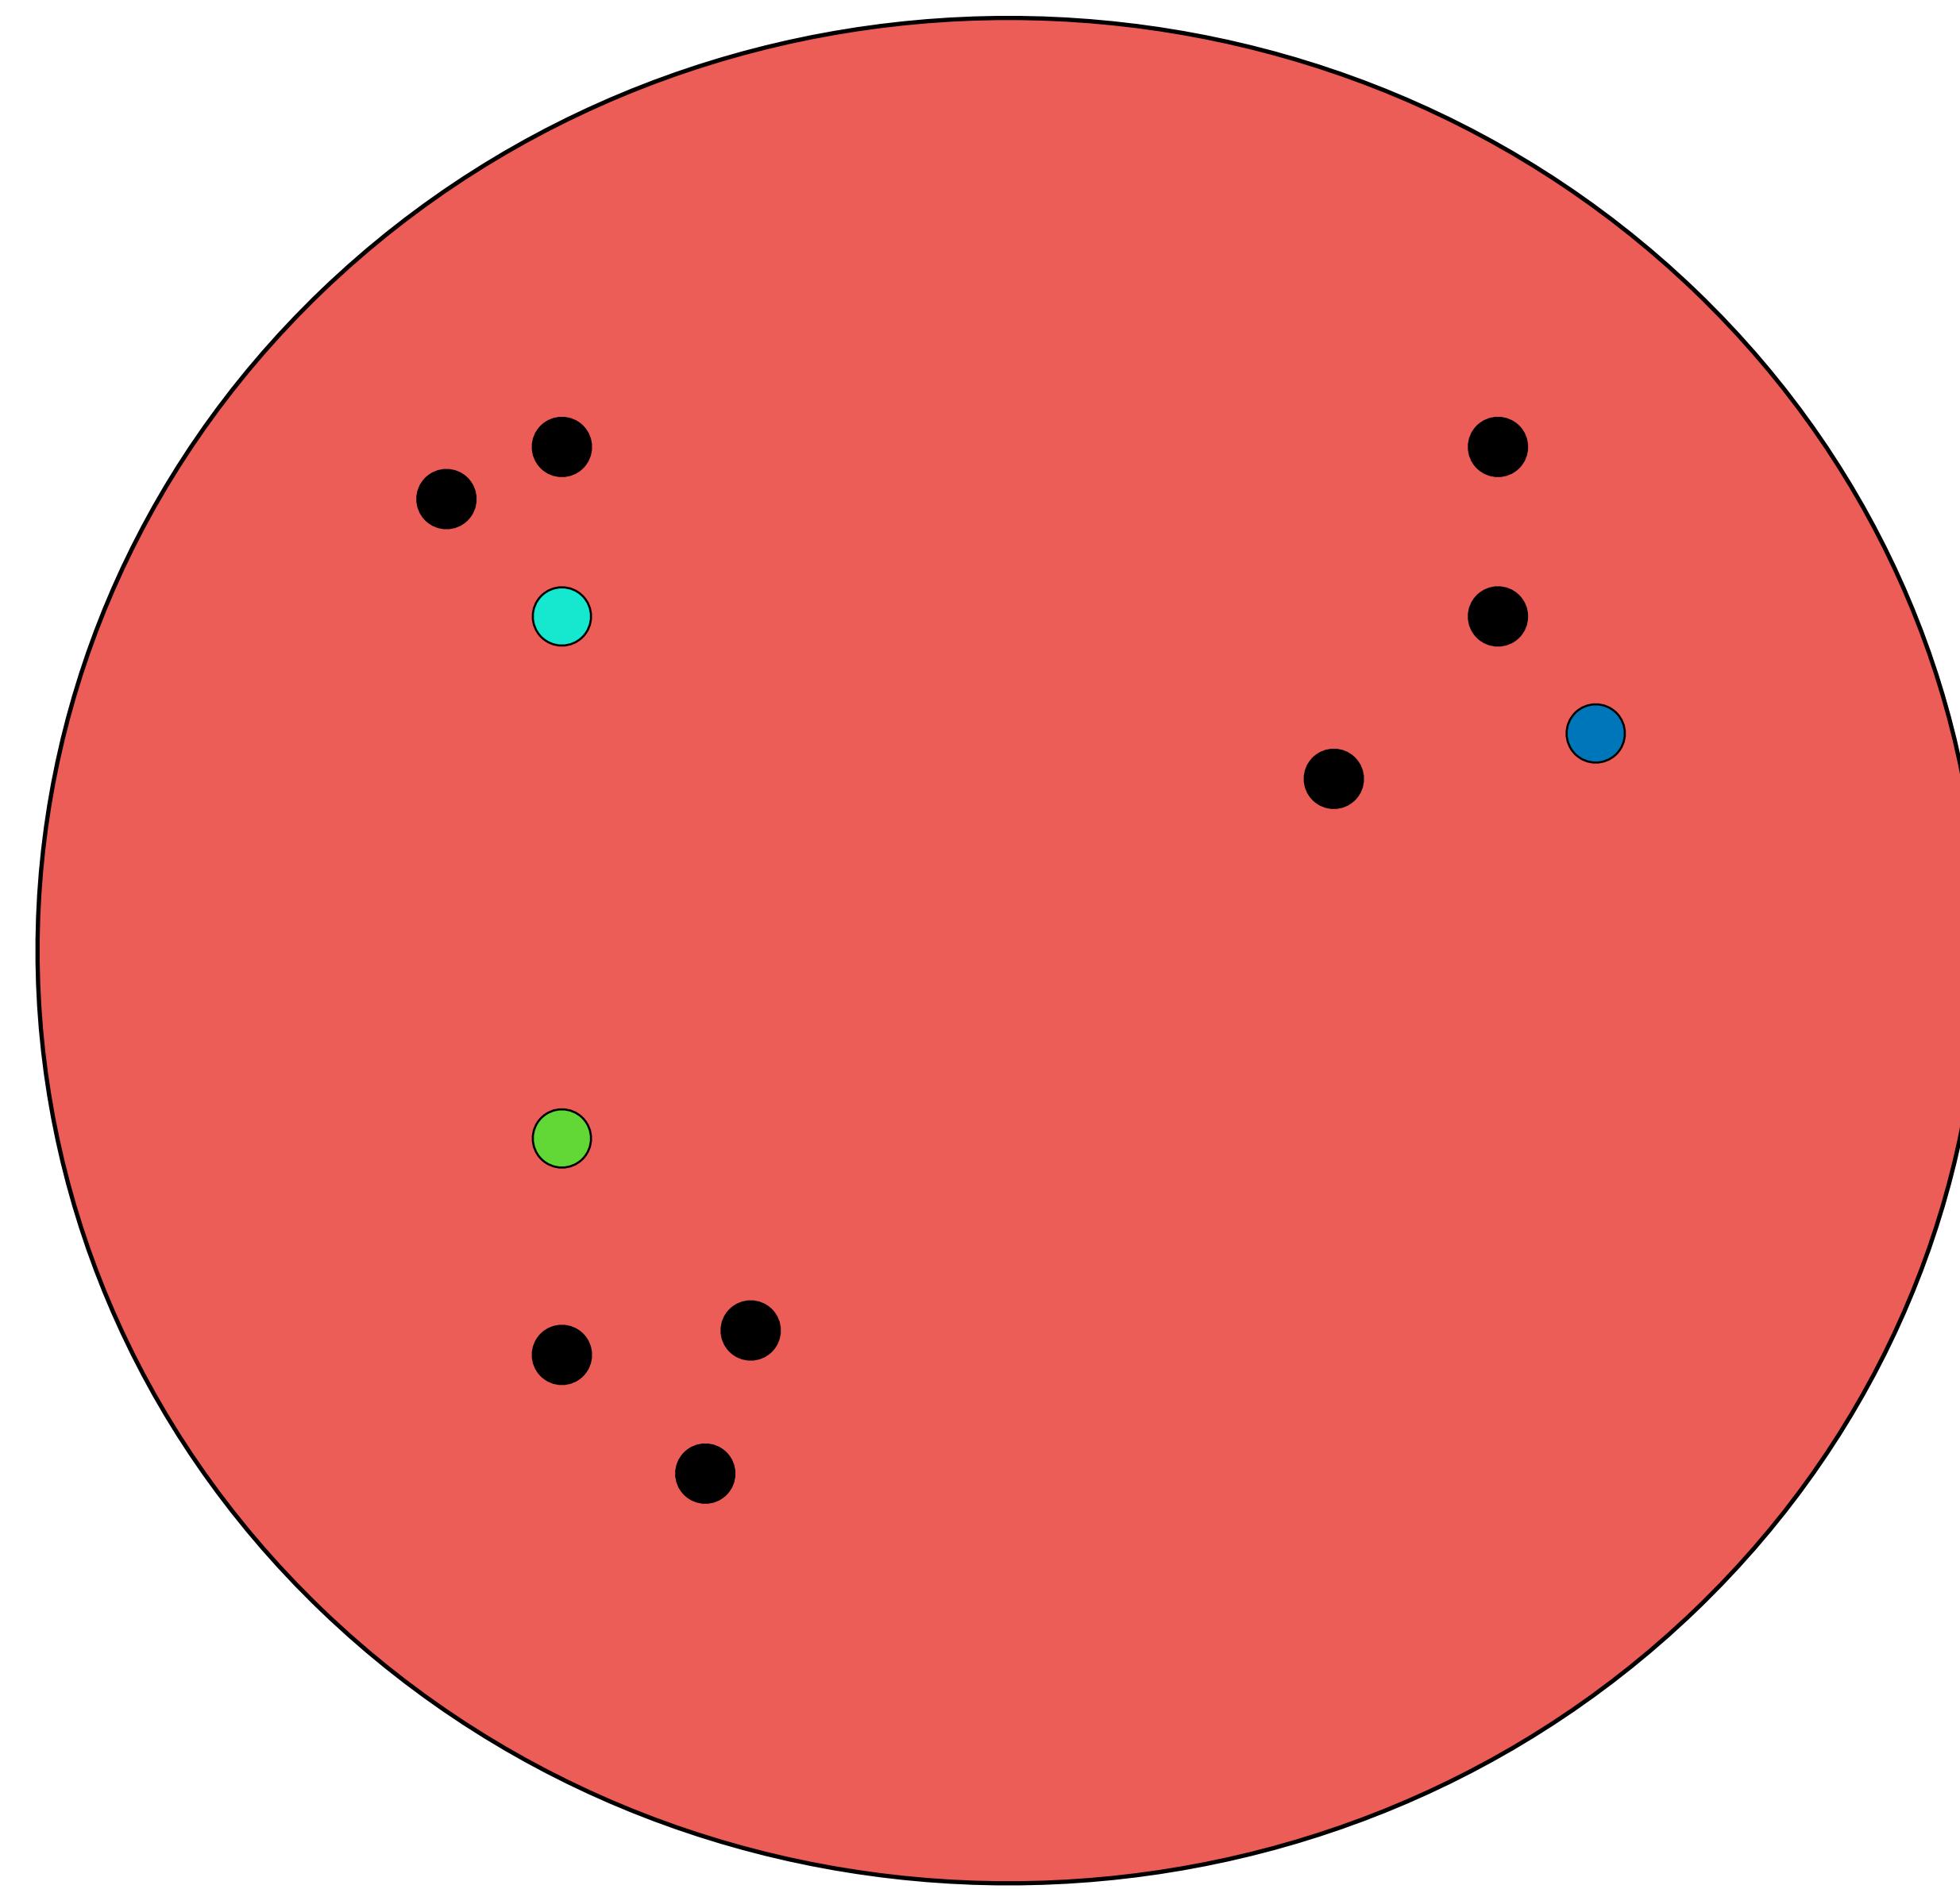


Labeling Data++

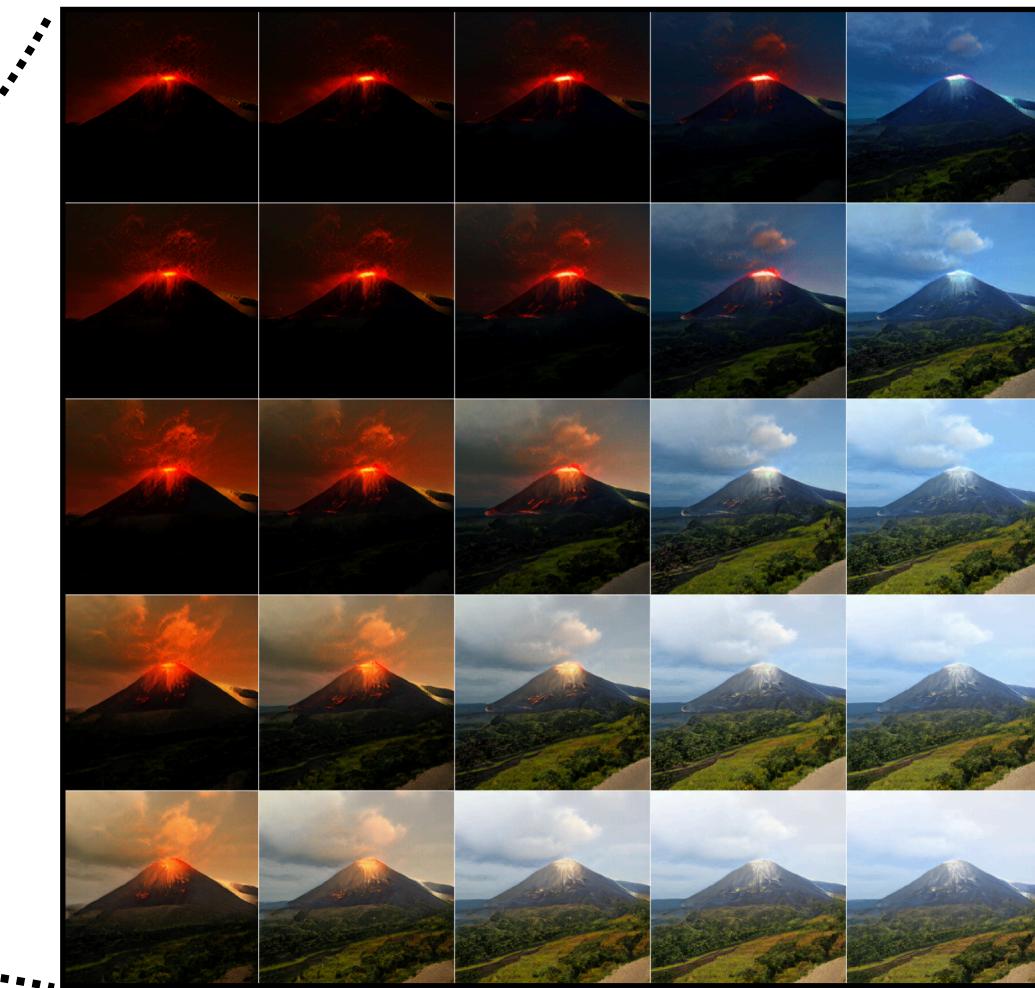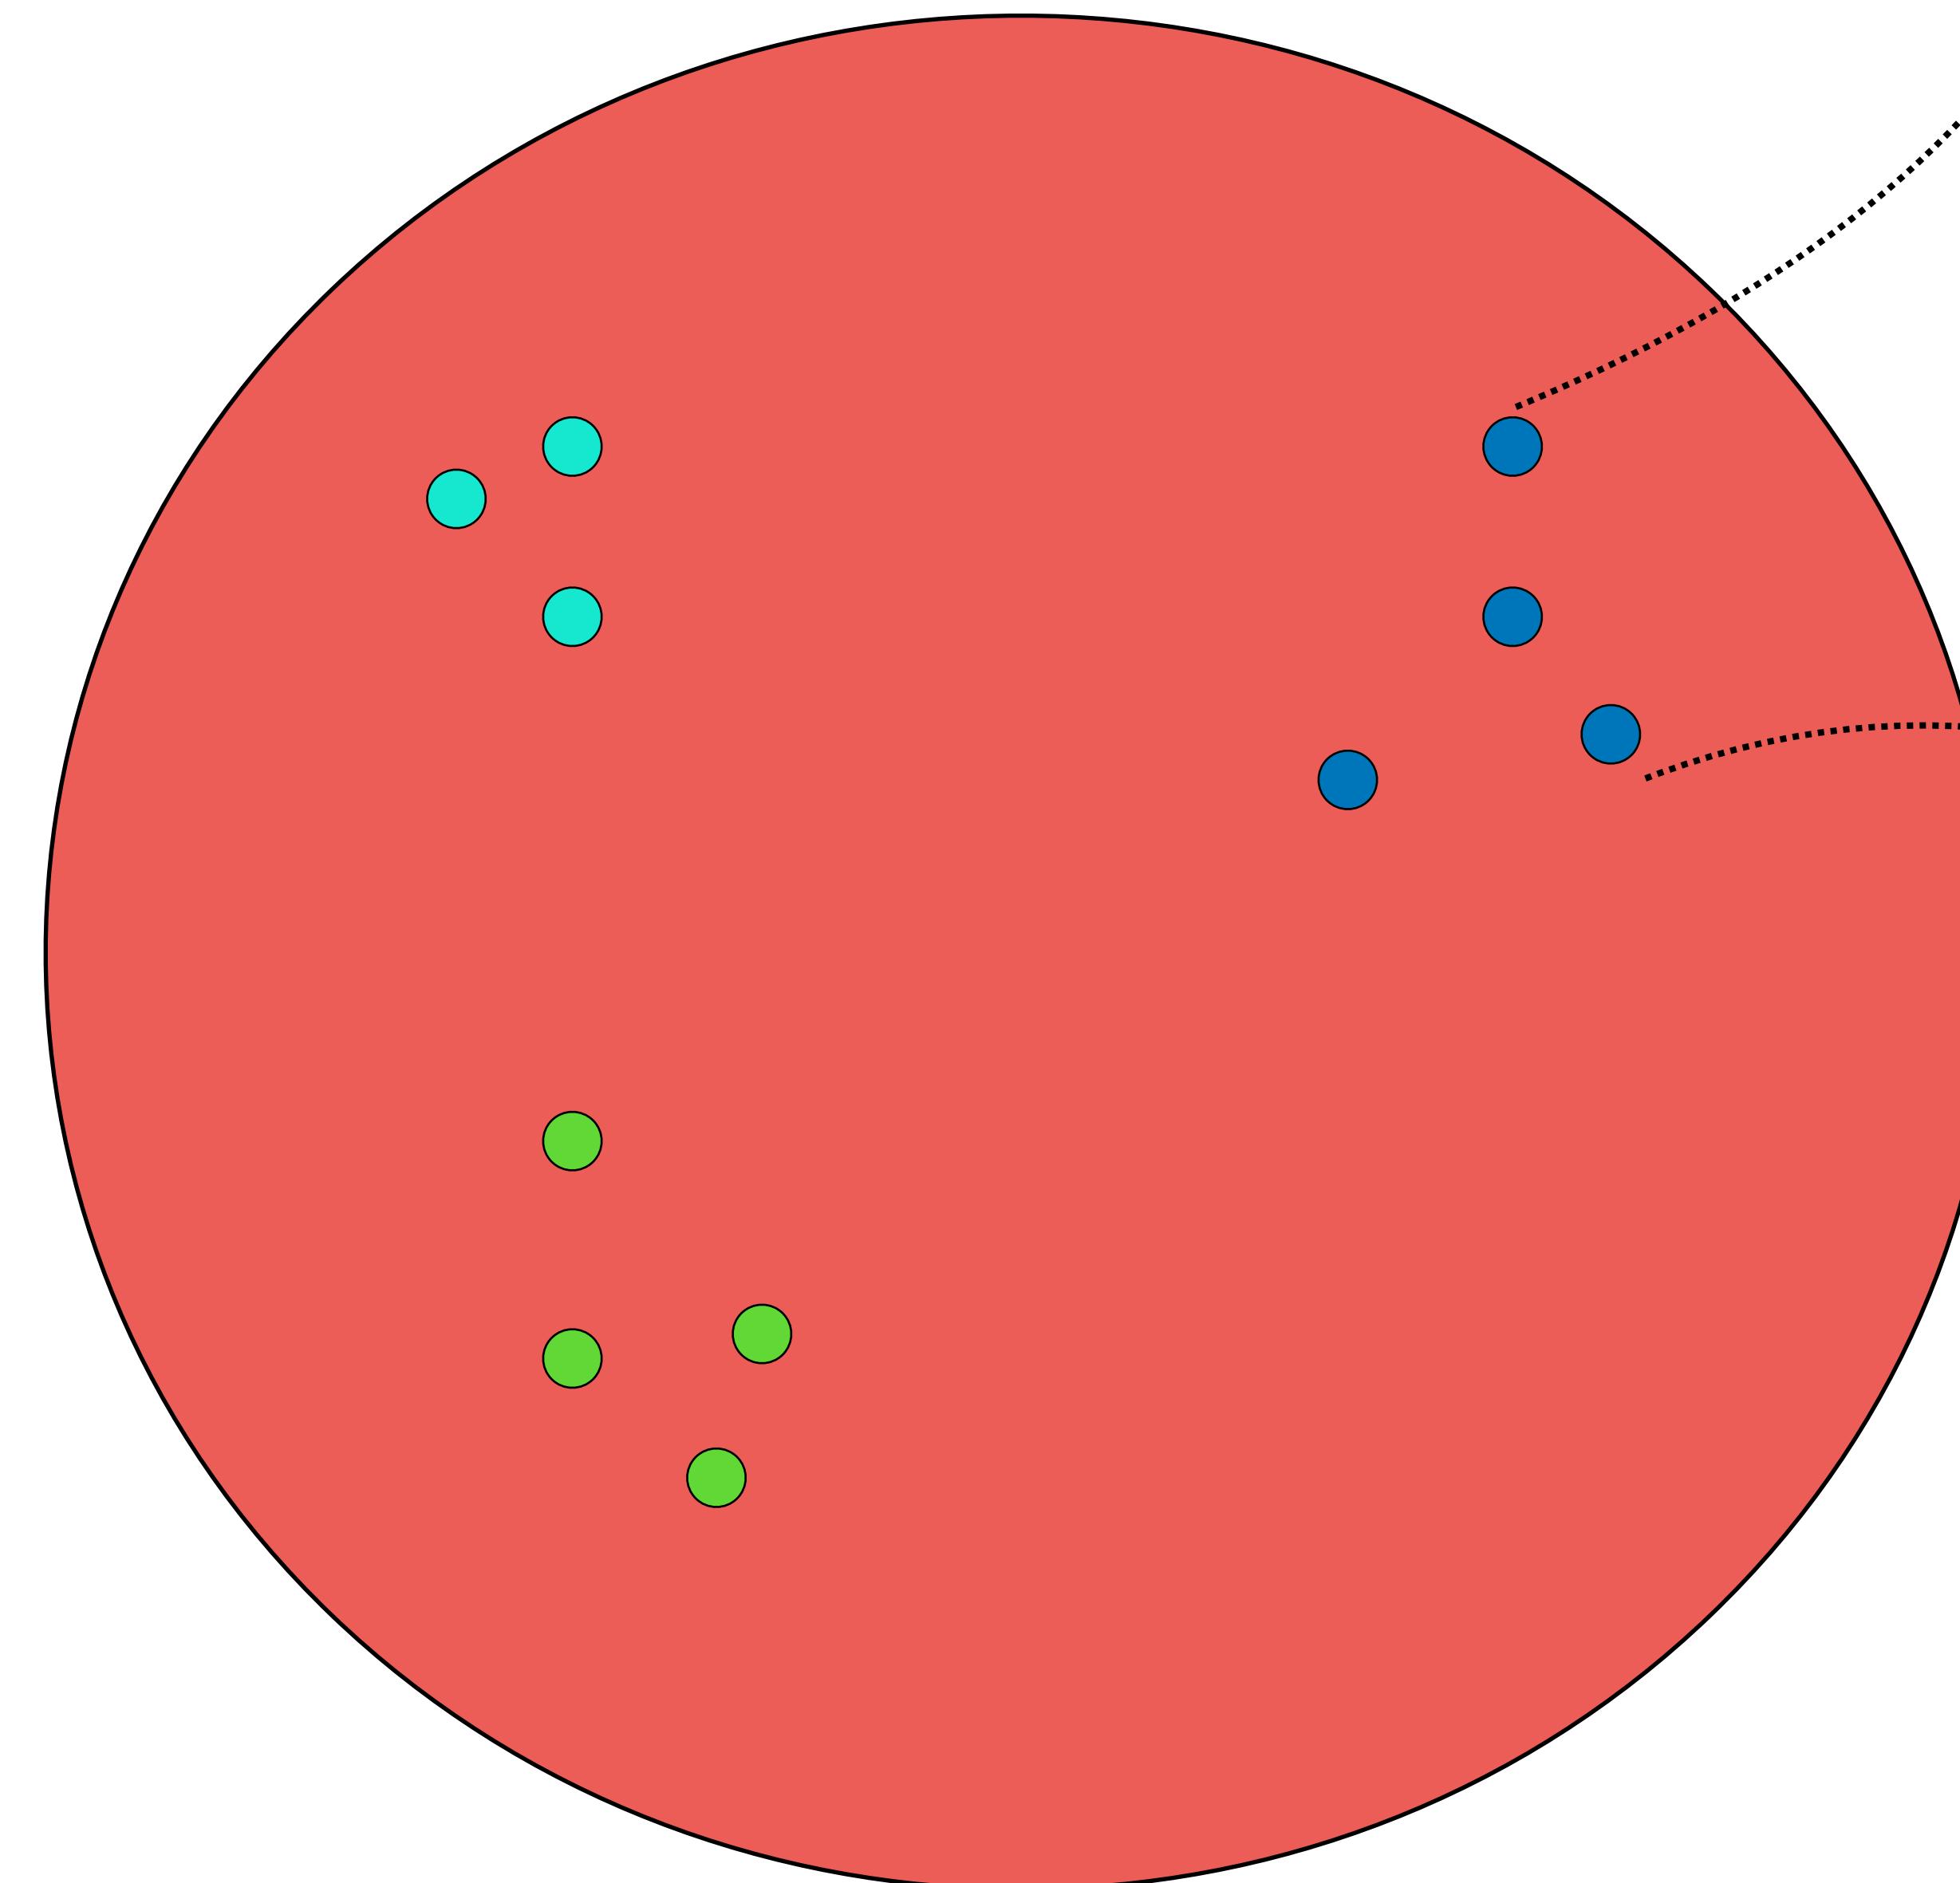



DatasetGAN

[Zhang*, Ling*, Gao, Yin, Lafleche, Barriuso, Torralba, Fidler 2021]

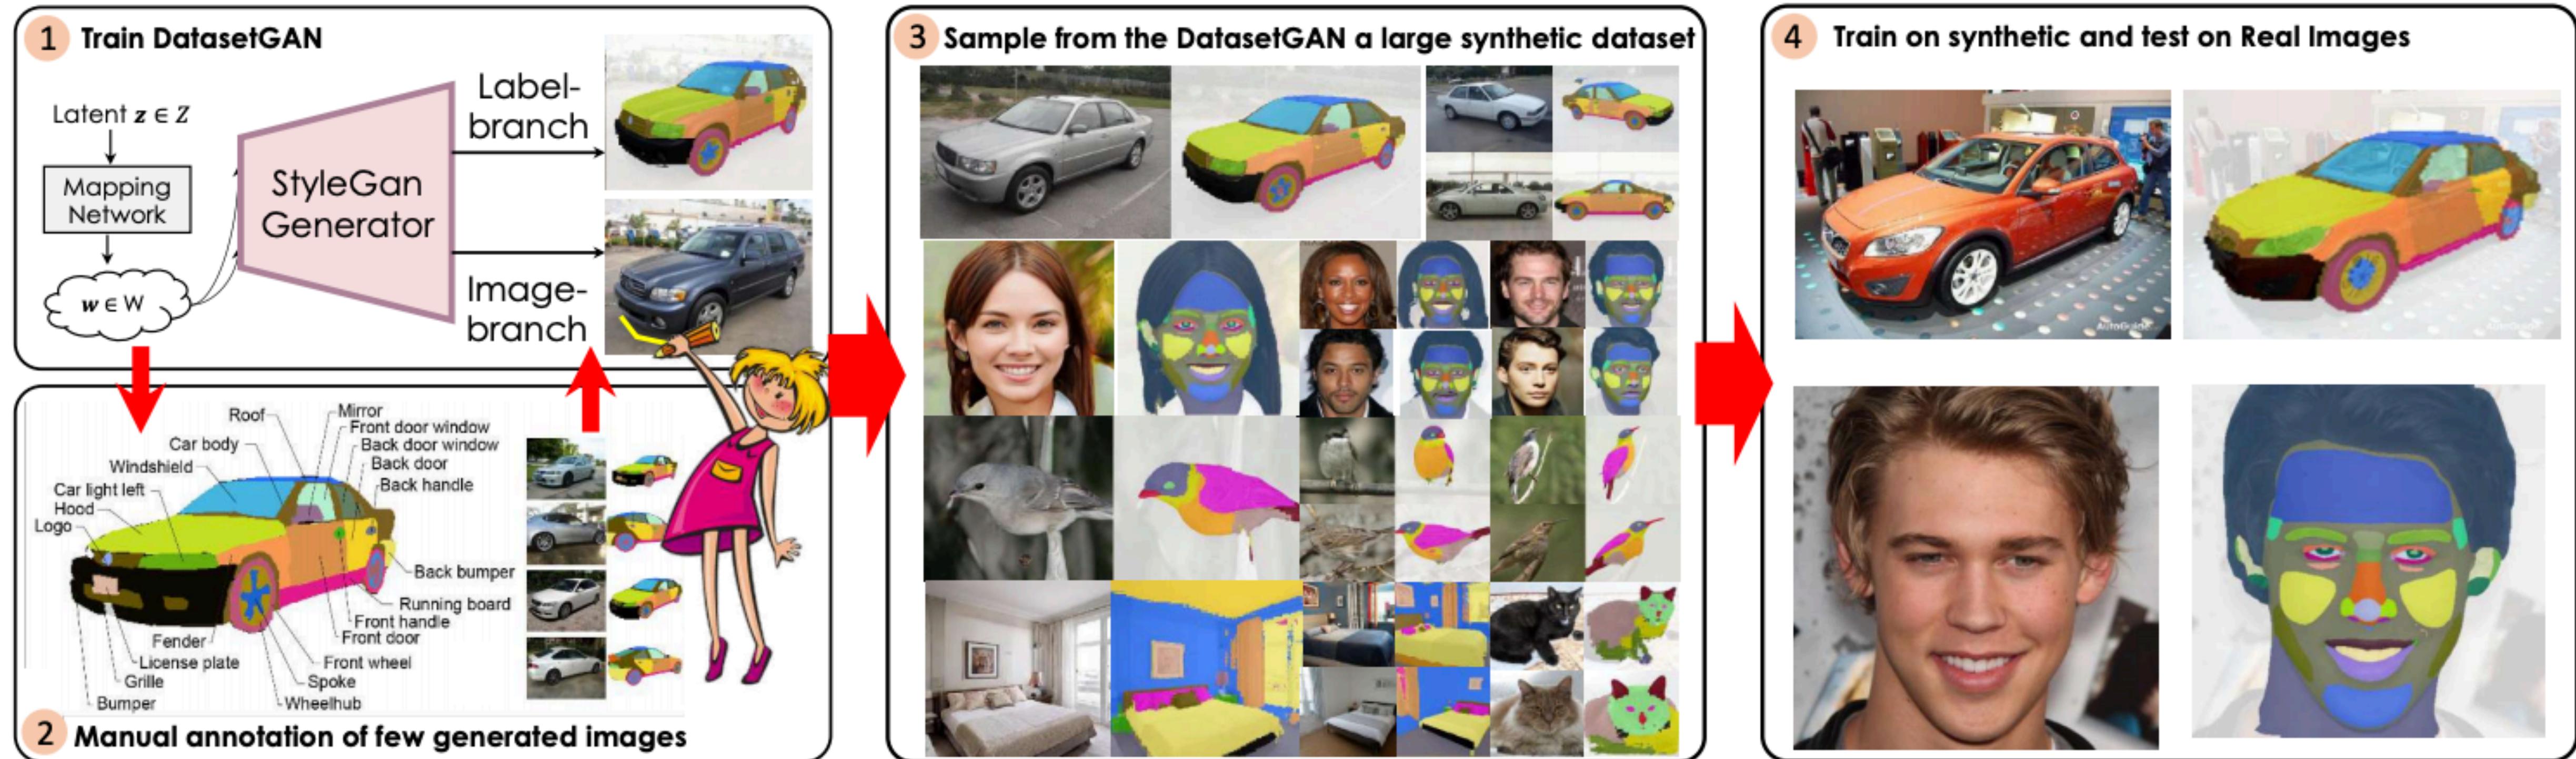


see also [Tritrong*, Rewatbowornwong*, Suwajanakorn, CVPR 2021]
[Li, Yang, Kries, Torralba, Fidler, CVPR 2021]

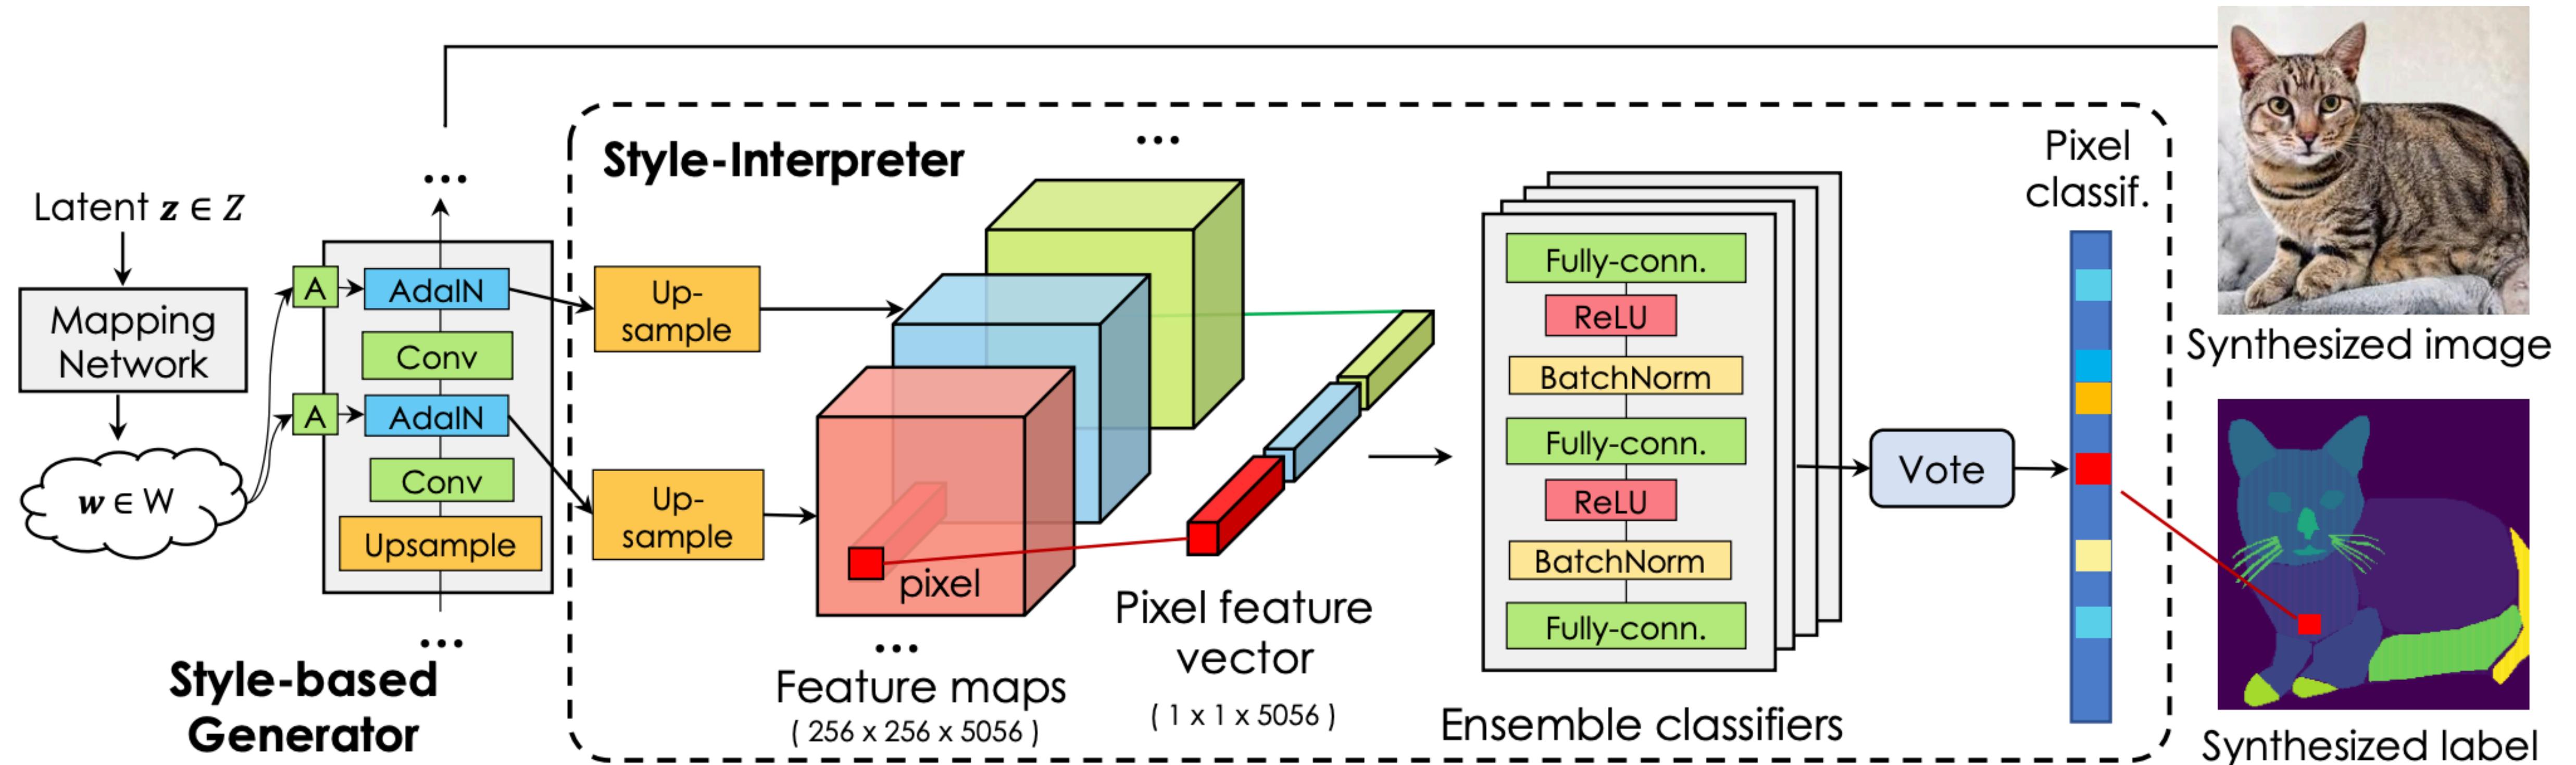


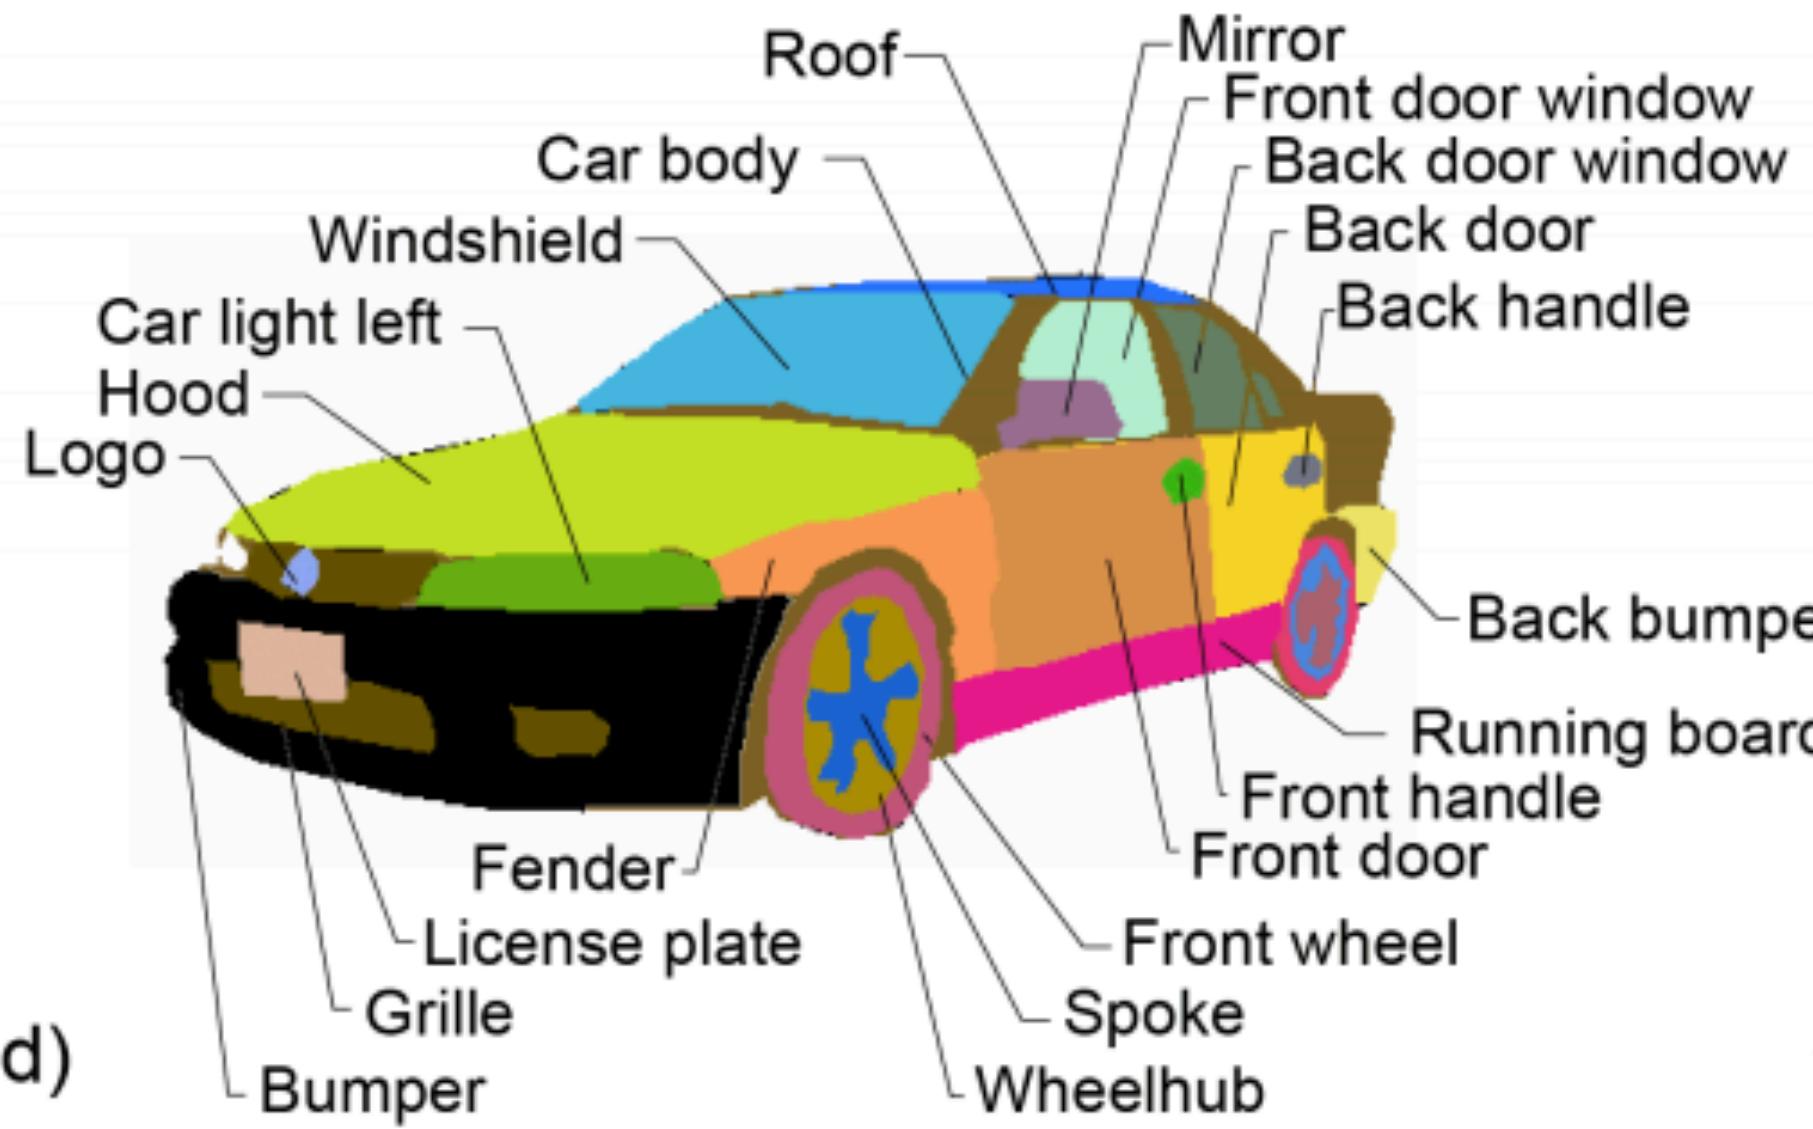


	#miou
spoke	40
windshield	26
car	27
body	21
mirror	20
door	20
window	18
back door	17
handle	17
front door	16
bumper	15
running board	14
front wheel	13
spoke	12
hub	11
front light	10
headlight	10
side mirror	10
hood	9
license plate	9
front bumper	8
front left wheel	8
front right wheel	8
front left door	8
front right door	8
front ground front left wheel	7
front ground back left wheel	7
side light	7
front left headlight	7
front right headlight	7
front left door	6
front right door	6
front left headlight	6
front right headlight	6
front bumper	5
front right wheel	5
front left wheel	5
back bumper	5
back right wheel	5
back left wheel	5
back left door	5
back right door	5
back ground front left wheel	5
back ground back right wheel	5
front left fog light	5
back left fog light	4
back left turn light	4
front right fog light	3
exhaust pipe	3
left headlight	3
right headlight	3
front light	3
back	3
front	3
license plate	3
front light	2
back light	2
back light	1

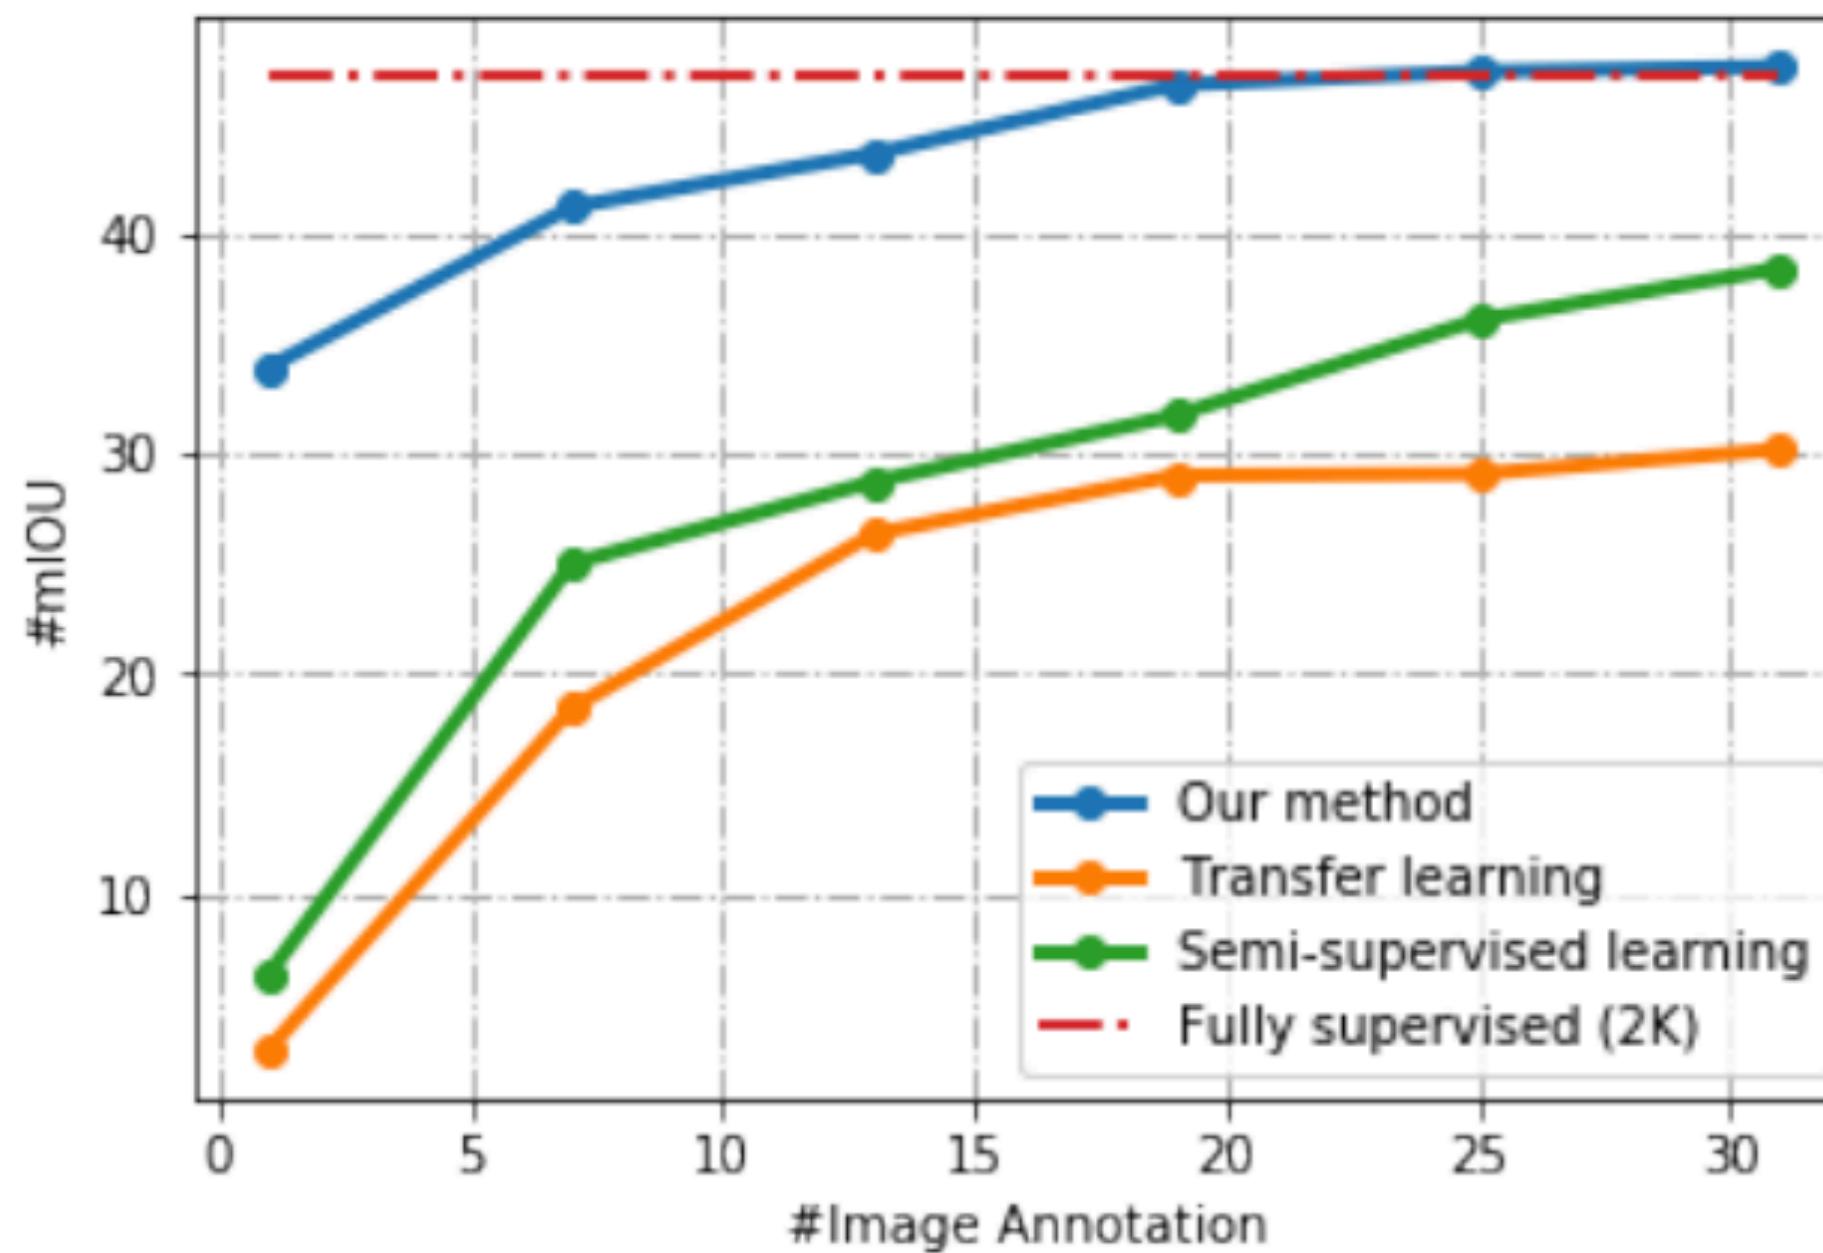

1 labeled GAN image is worth
~100 labeled regular images!

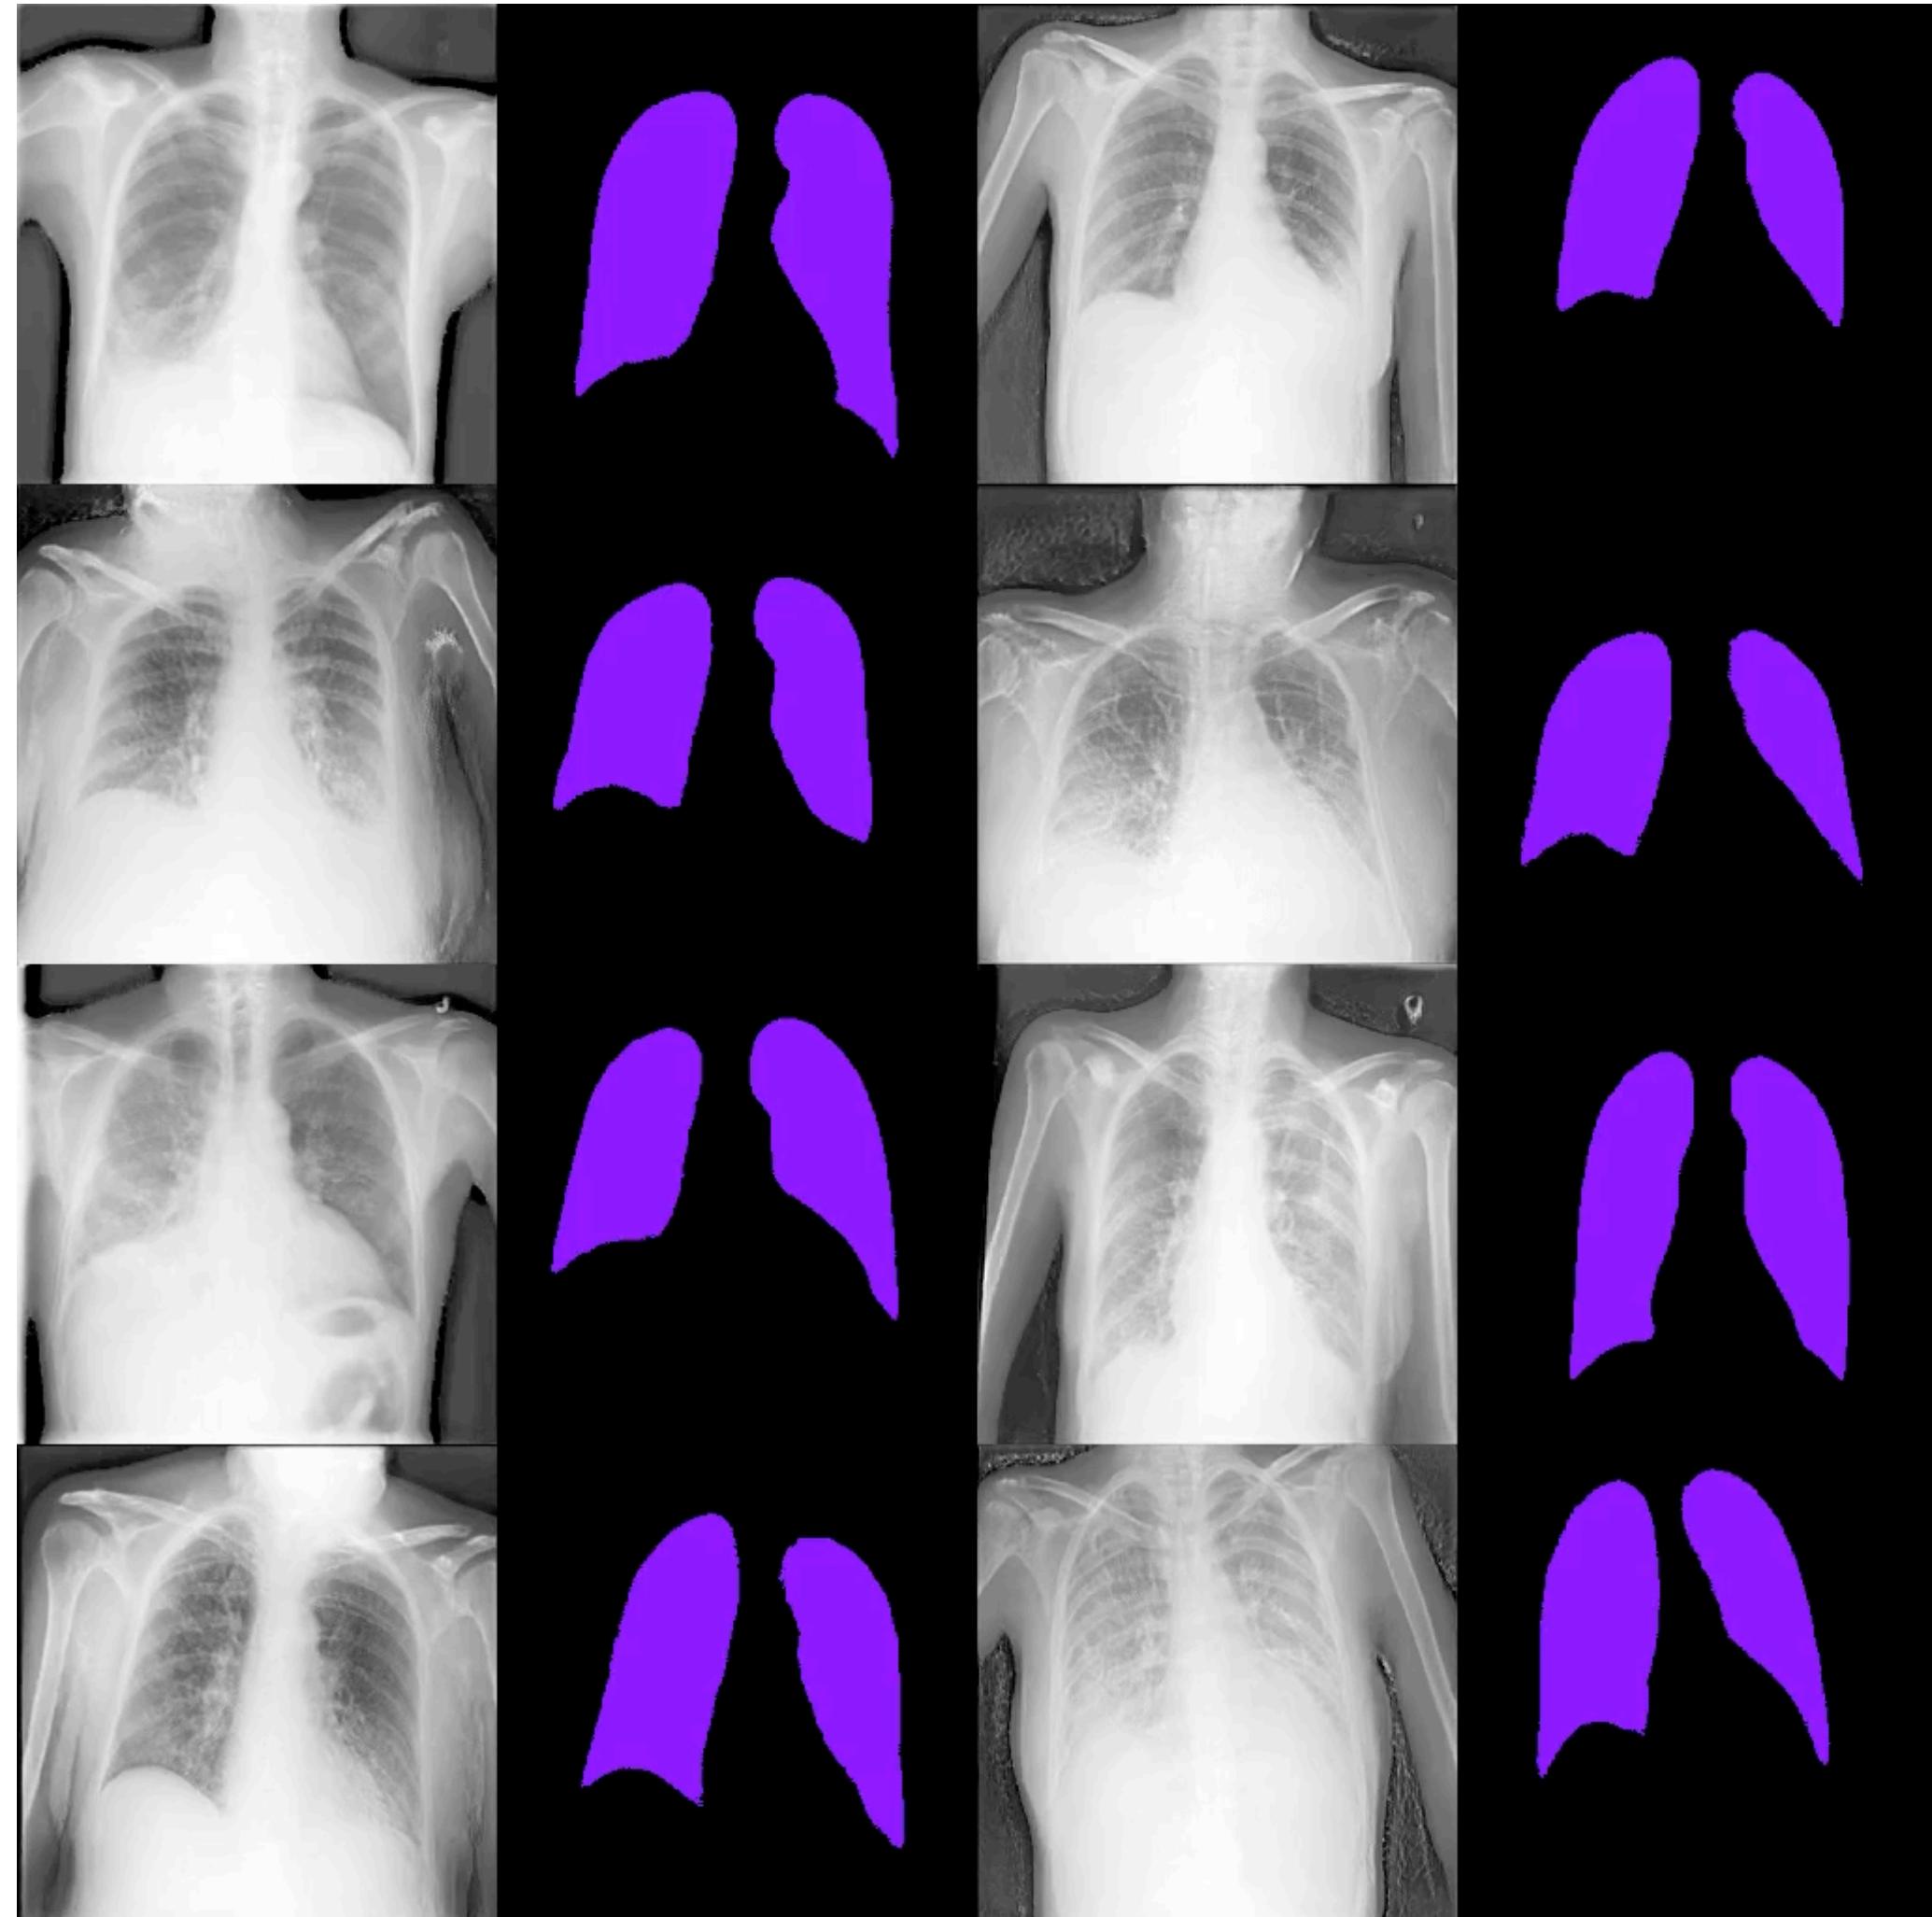

[Li, Yang, Kries, Torralba, Fidler, CVPR 2021]

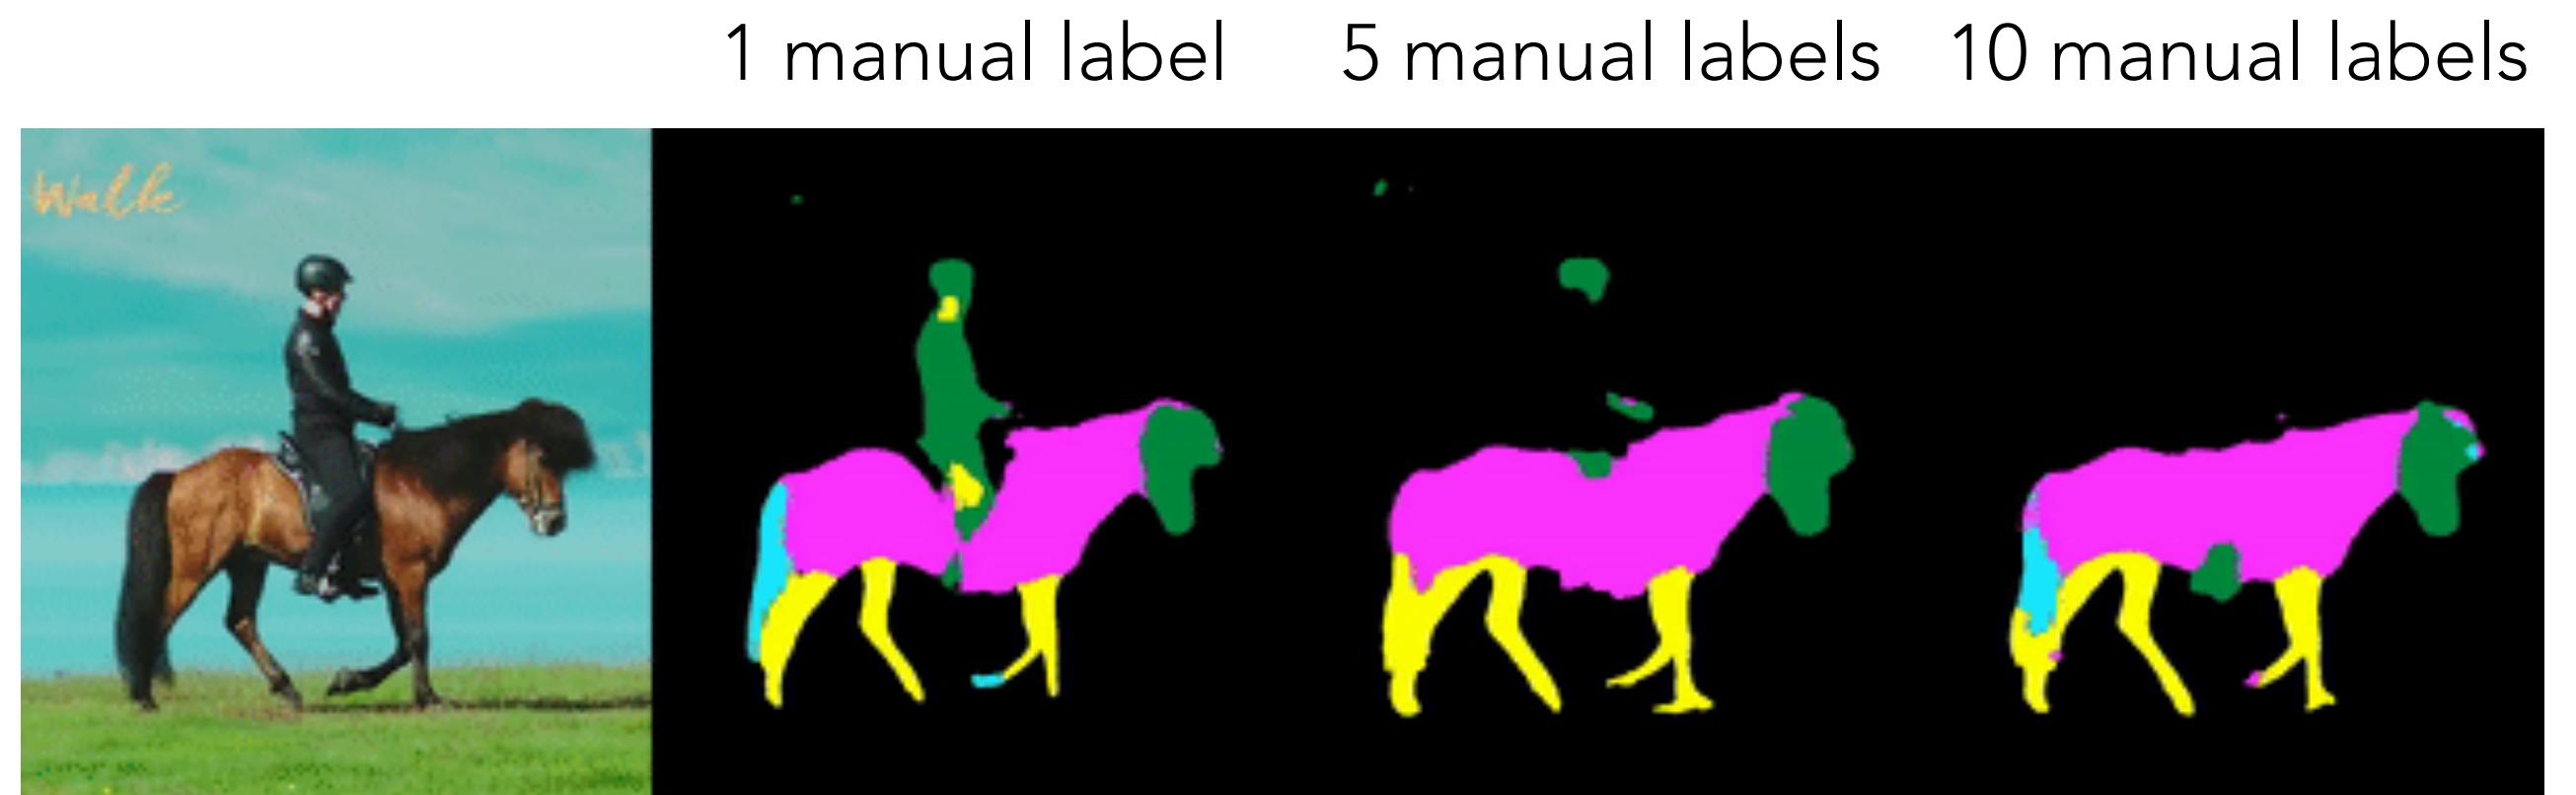


[Tritrong*, Rewatbowornwong*, Suwajanakorn, CVPR 2021]

Explaining in Style: Training a GAN to Explain a Classifier

Oran Lang*, Yossi Gandelsman*, Michal Yarom*, Yoav Wald*, Gal Elidan, Avinatan Hassidim,
William T. Freeman, Phillip Isola, Amir Globerson, Michal Irani, Inbar Mosseri

ICCV 2021

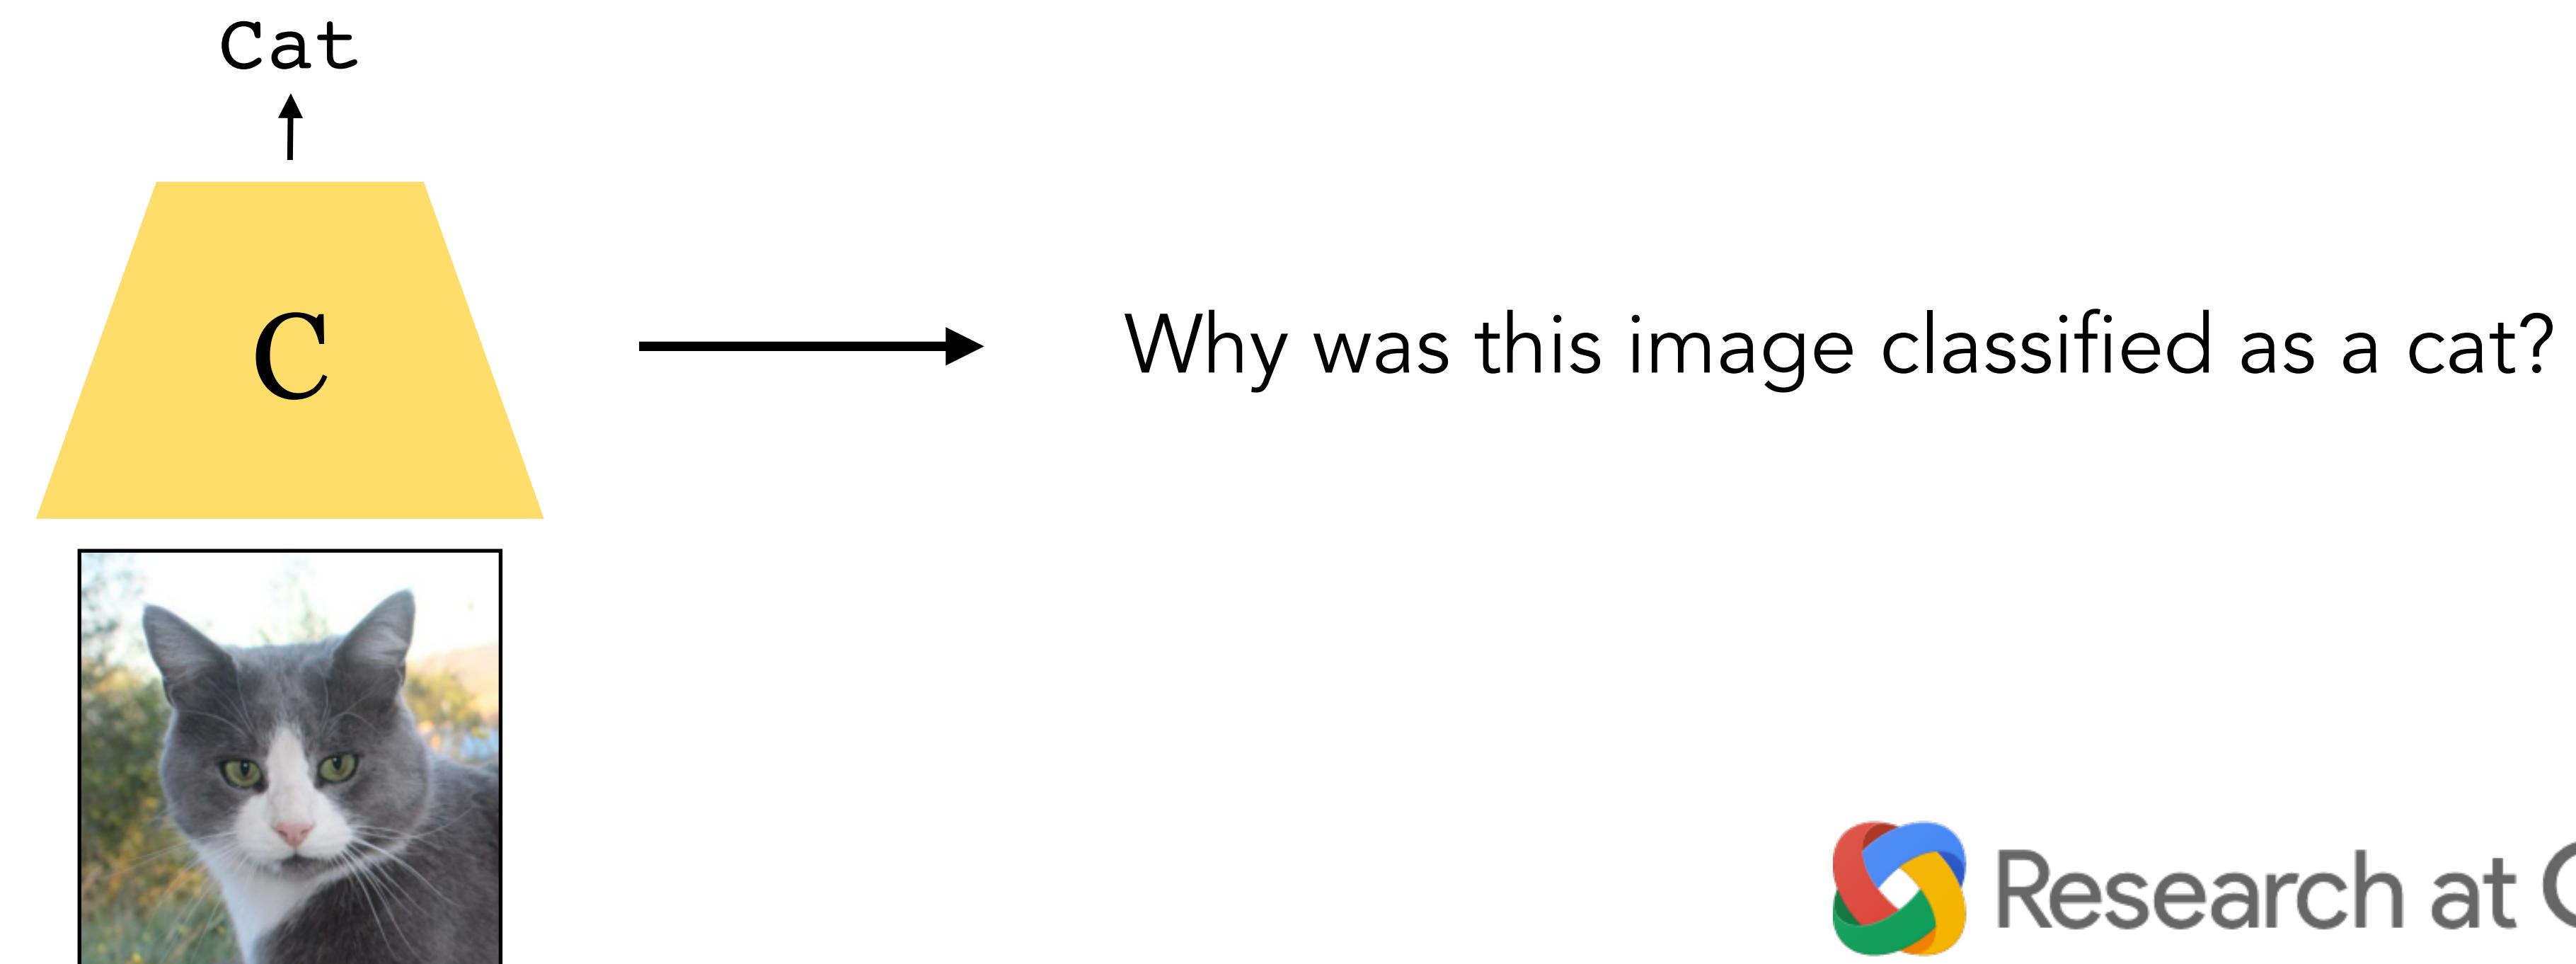

Cat




C






Data++

Predicted class

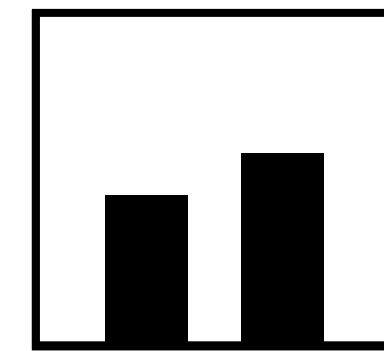

Cat
Dog

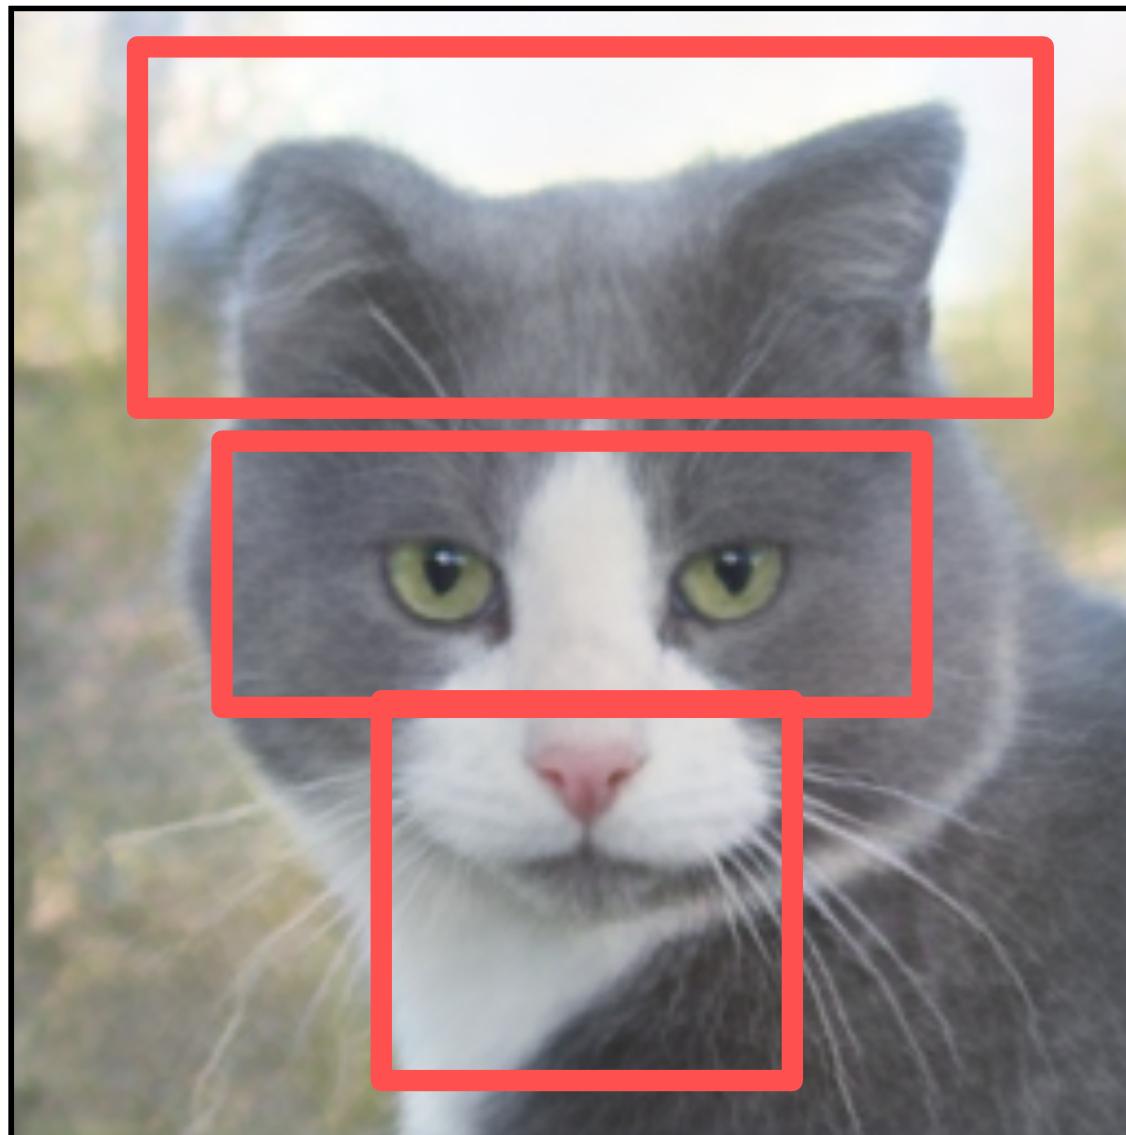

StylEx


Find top-K StyleSpace directions that most affect predicted class

G


Manipulate latent variables
["StyleSpace": Wu, Lischinski, Shechtman 2020]

Class-specific explanation


Perceived Age Classifier:

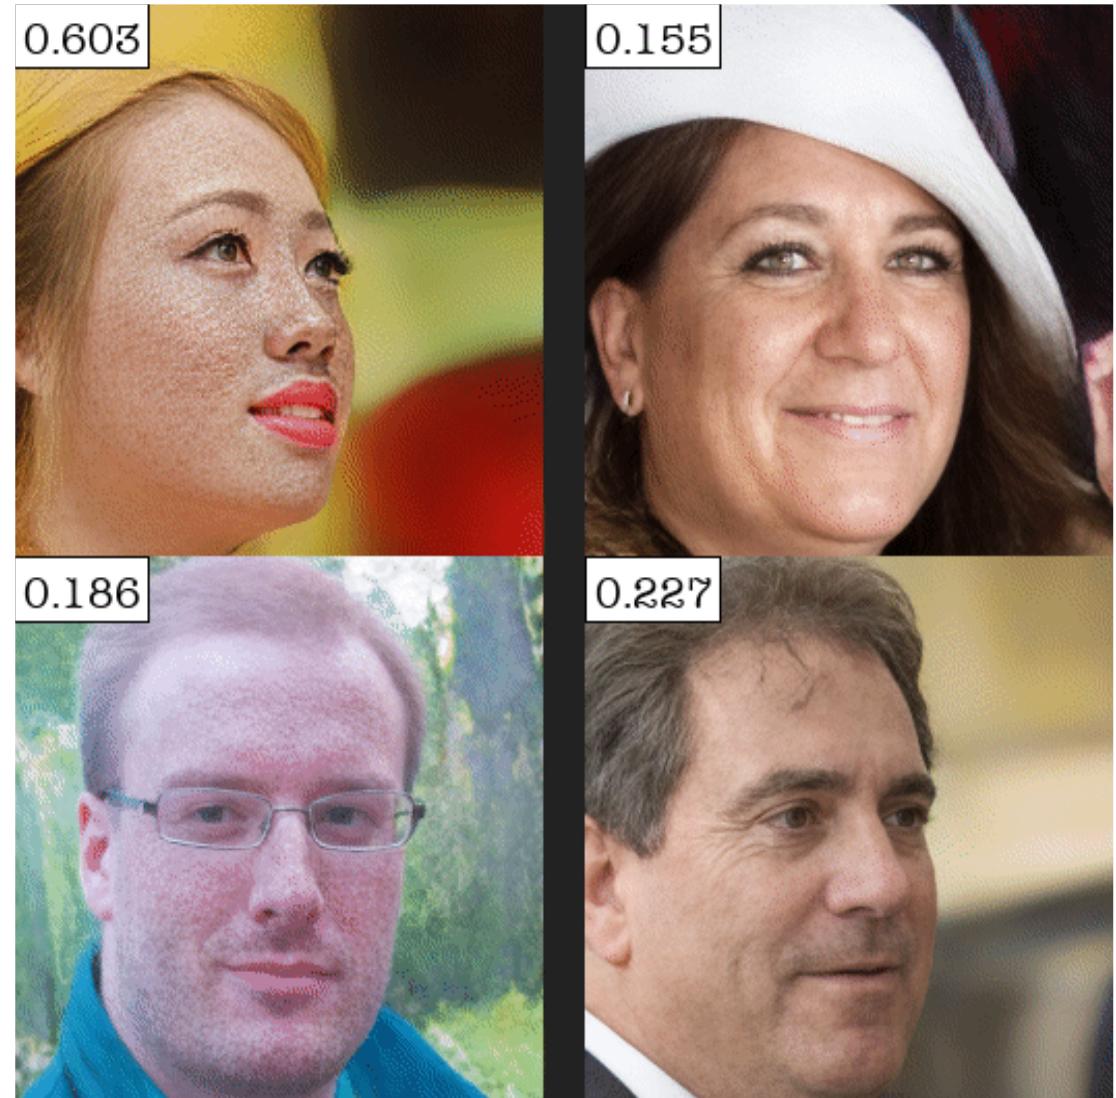


Attribute #1
“Skin Pigmentation”

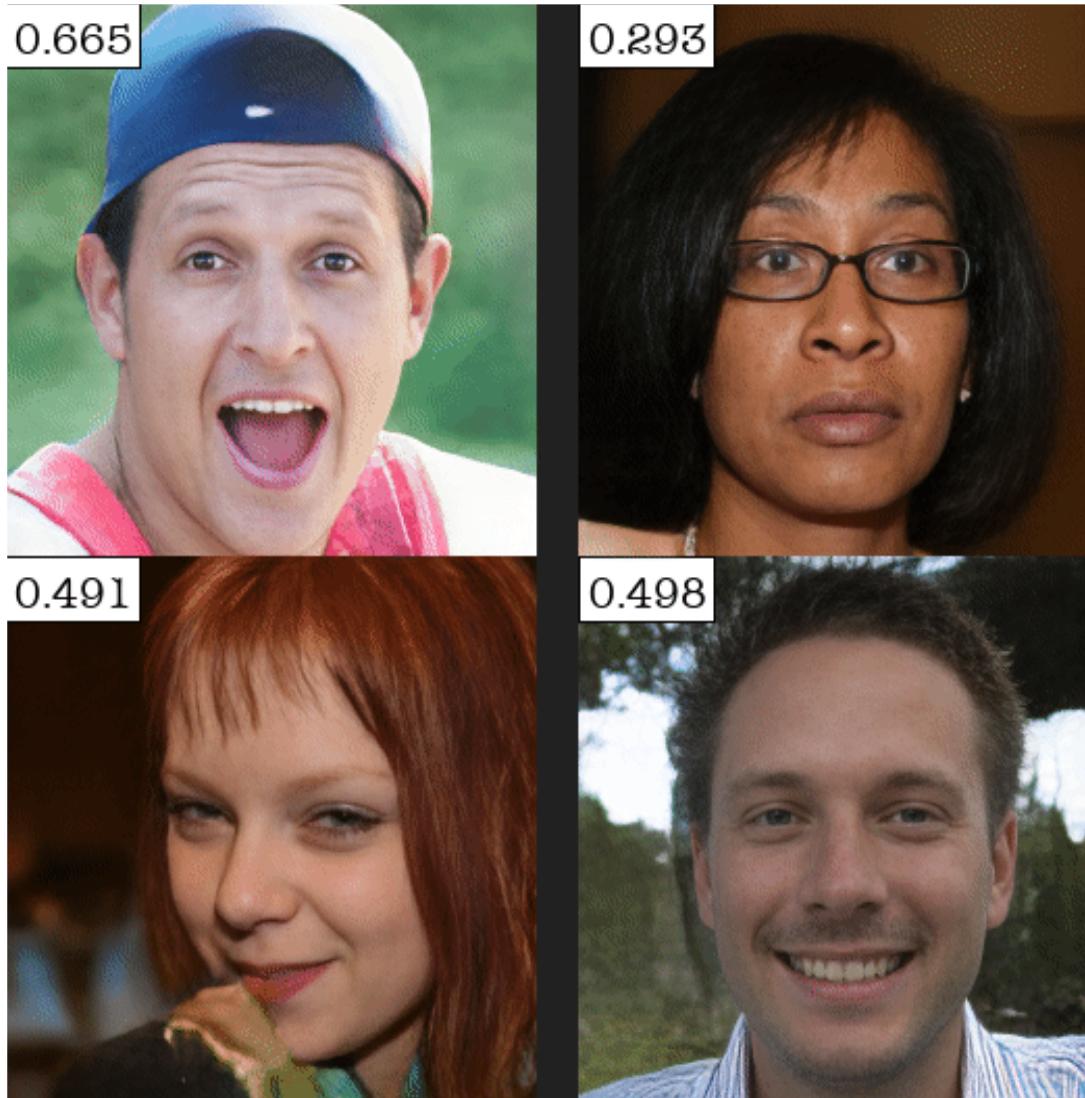

Attribute #2
“Eyebrow Thickness”

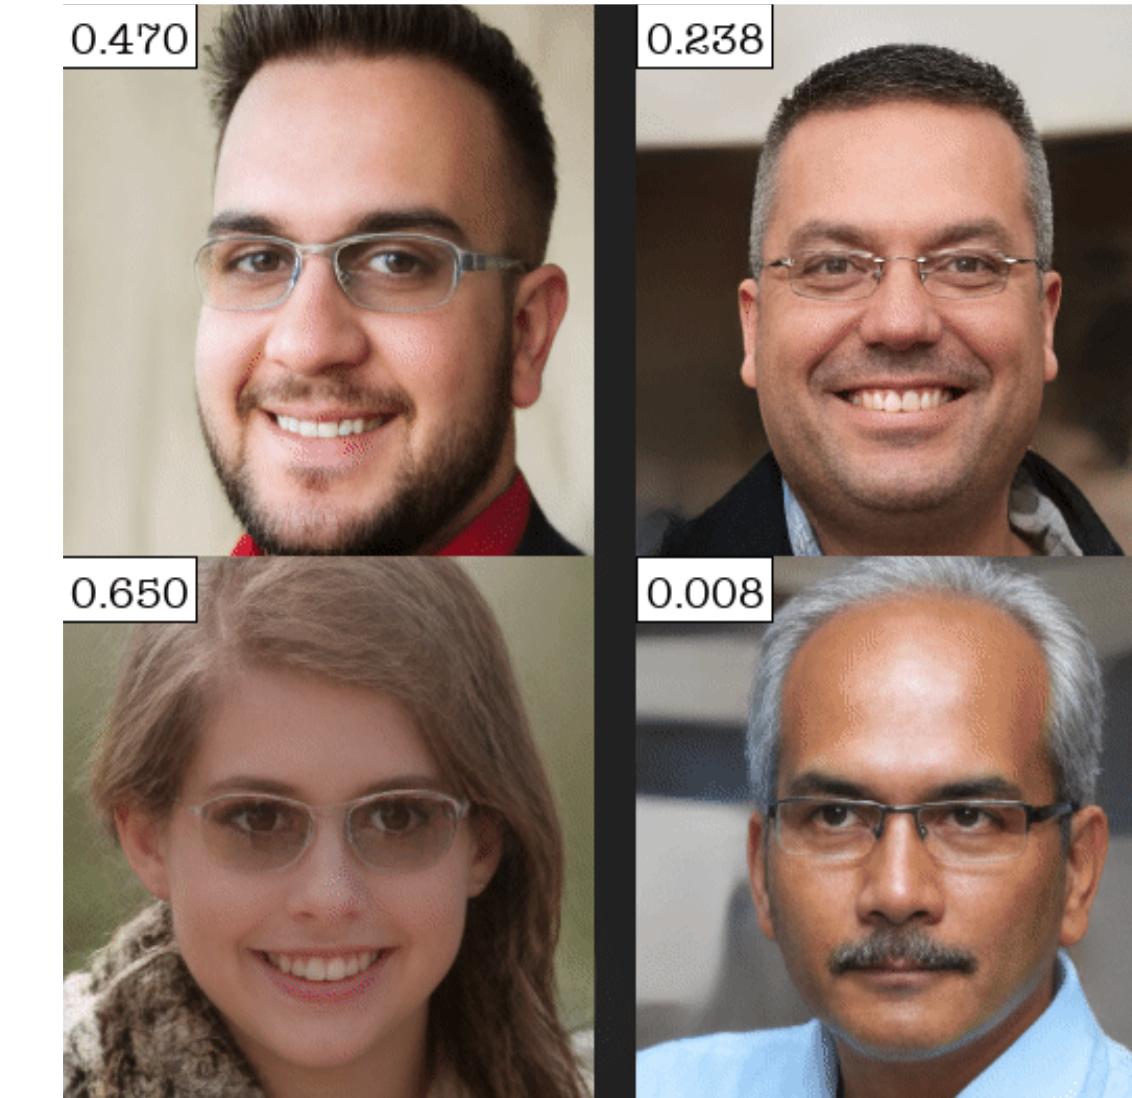





Attribute #3
“Glasses”

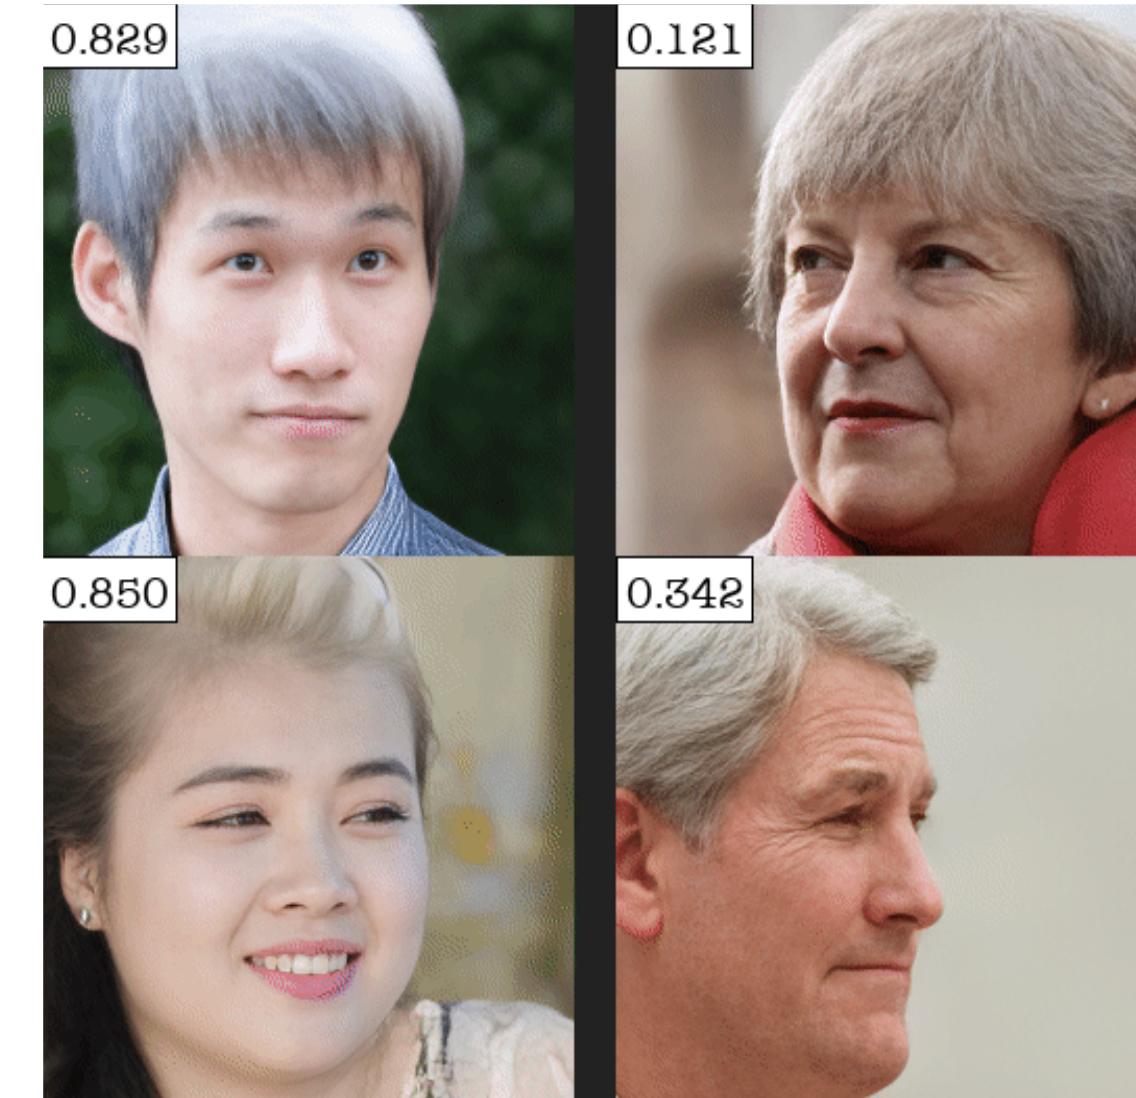

Attribute #4
“Dark / White Hair”

Class-specific explanation

Retinal Fundus Classifier:

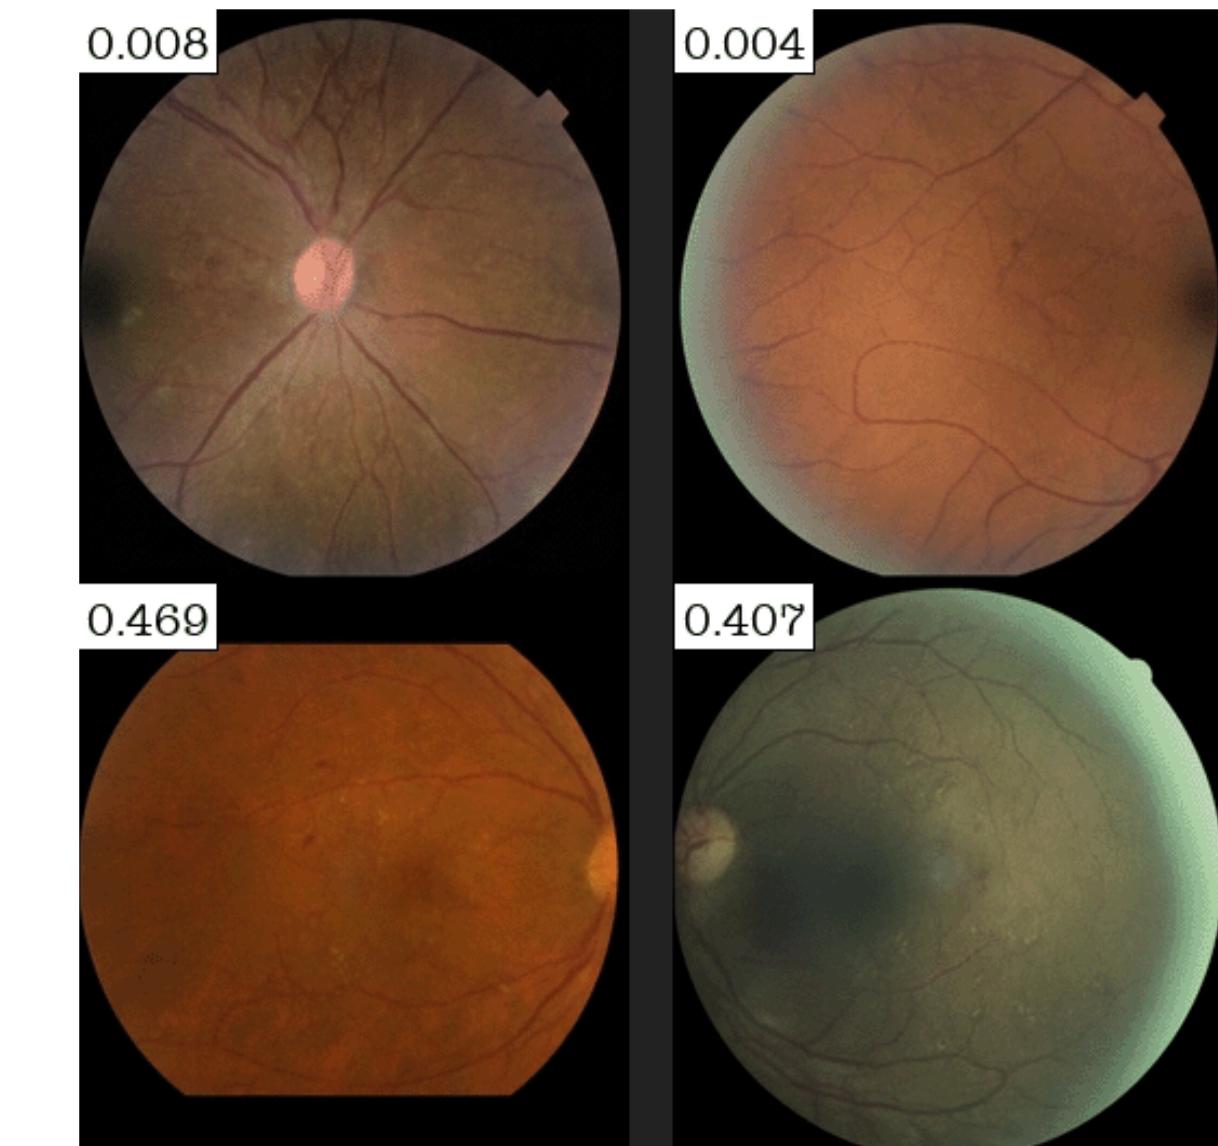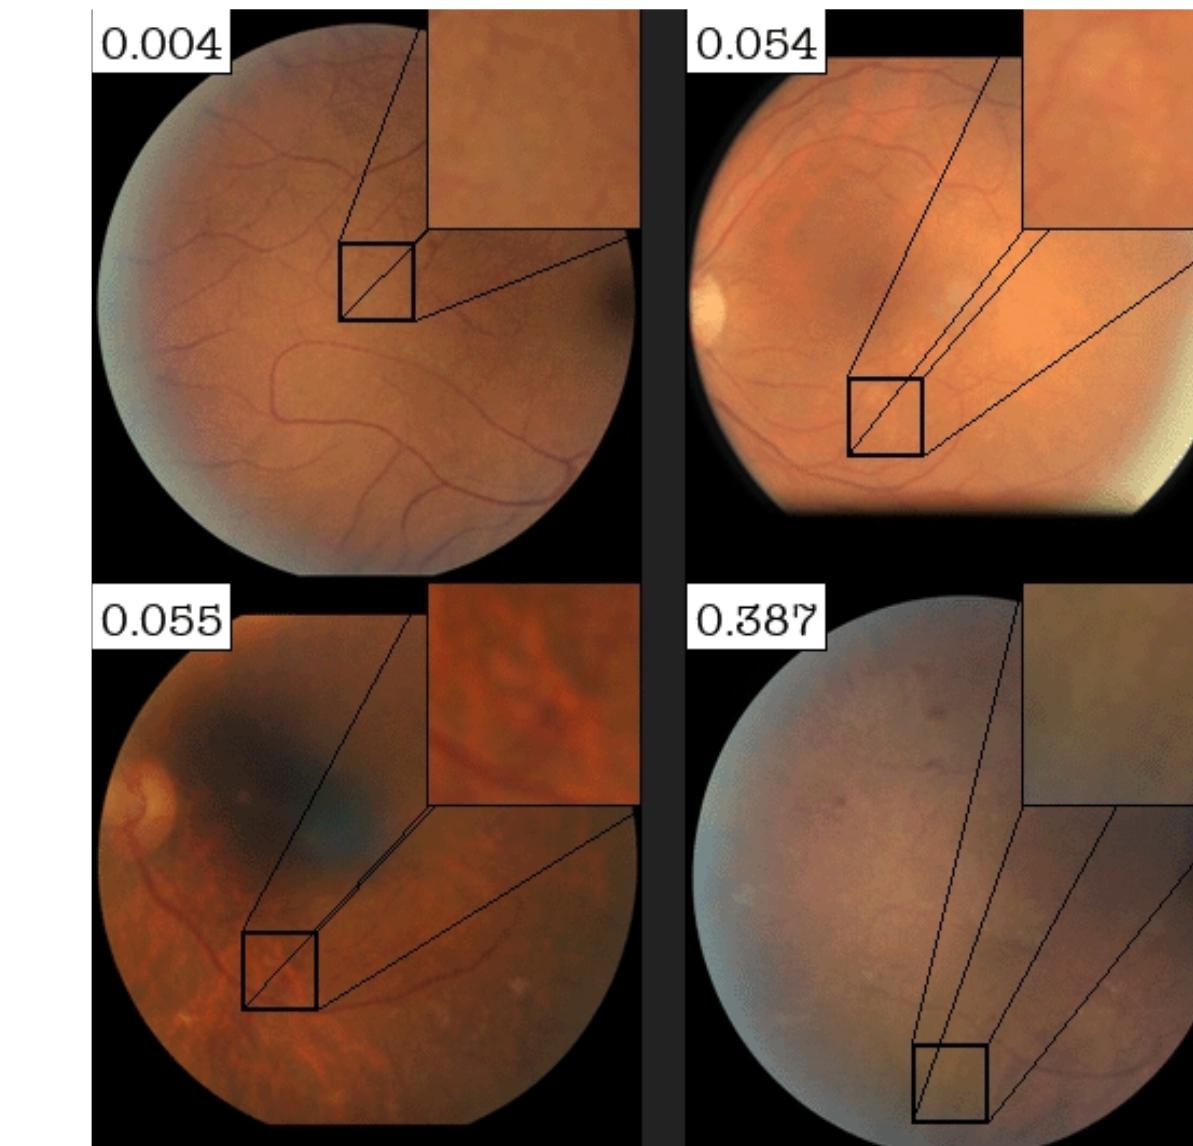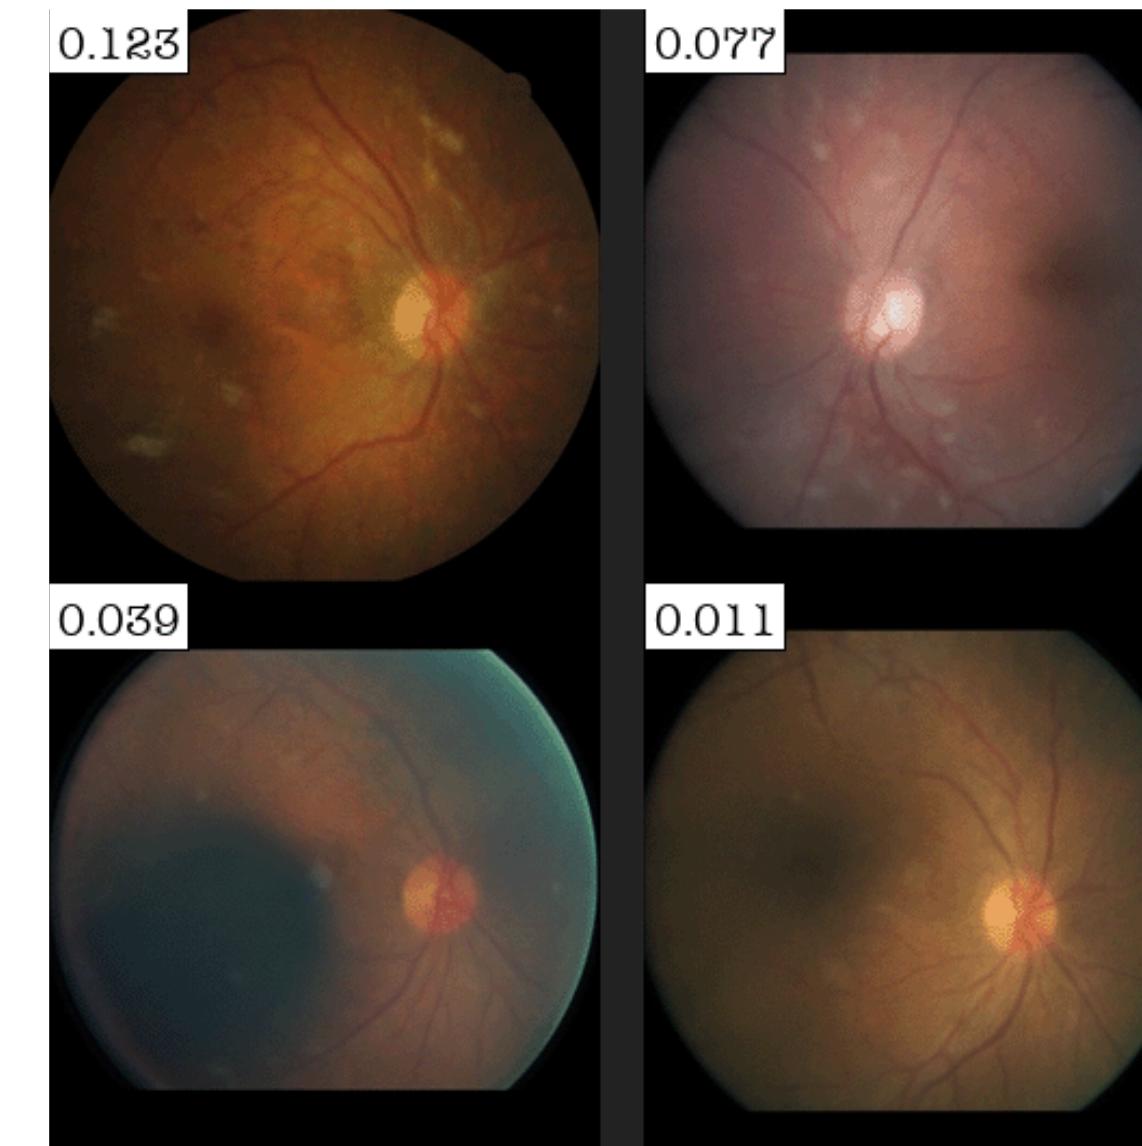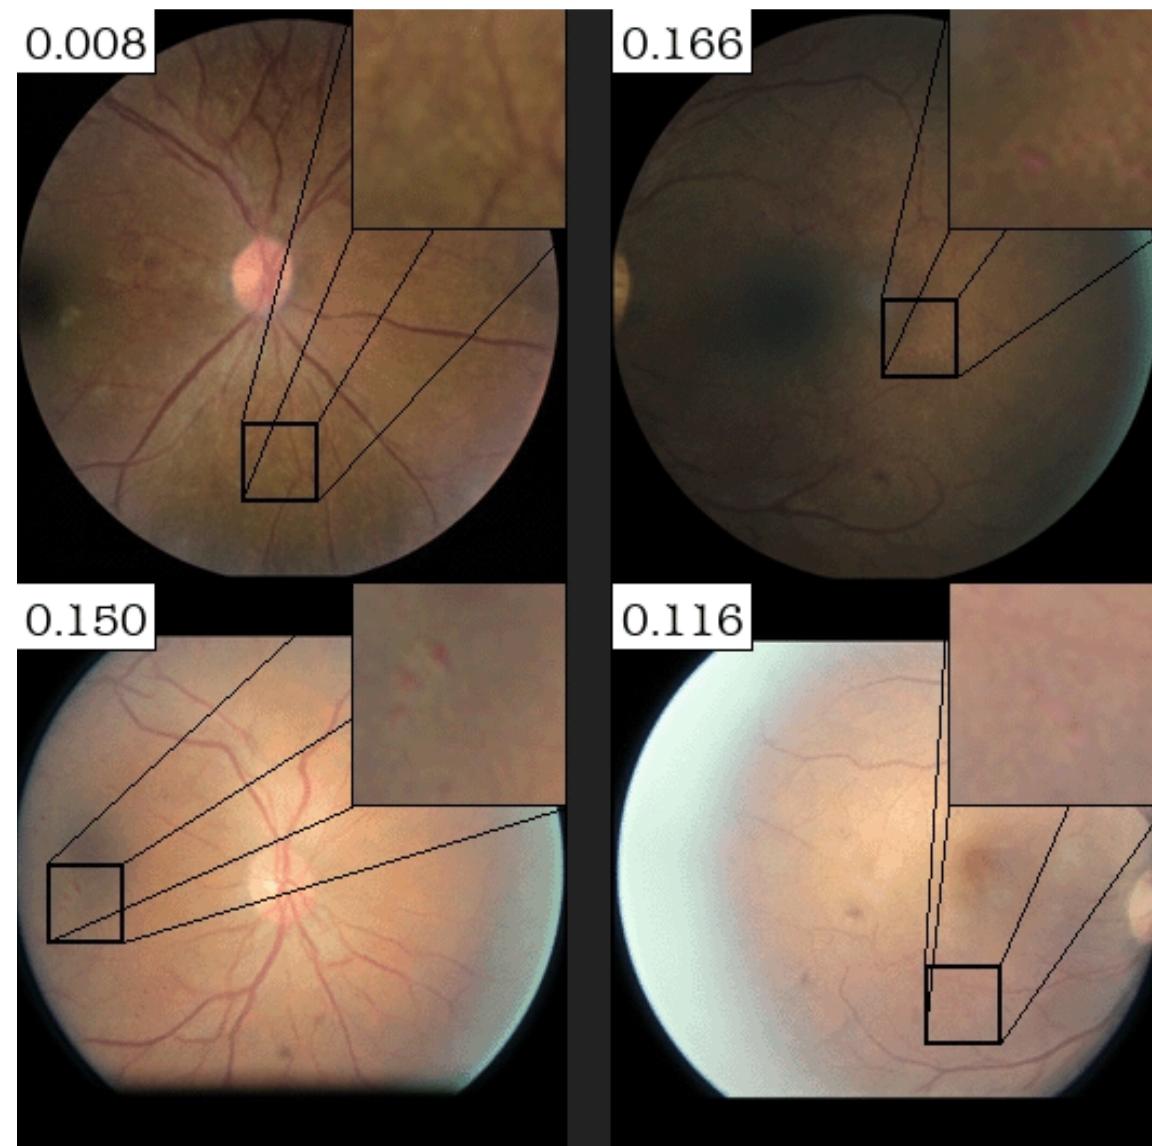

Original Plates




ImageNet

Acquiring images of plates with utensils



Bing

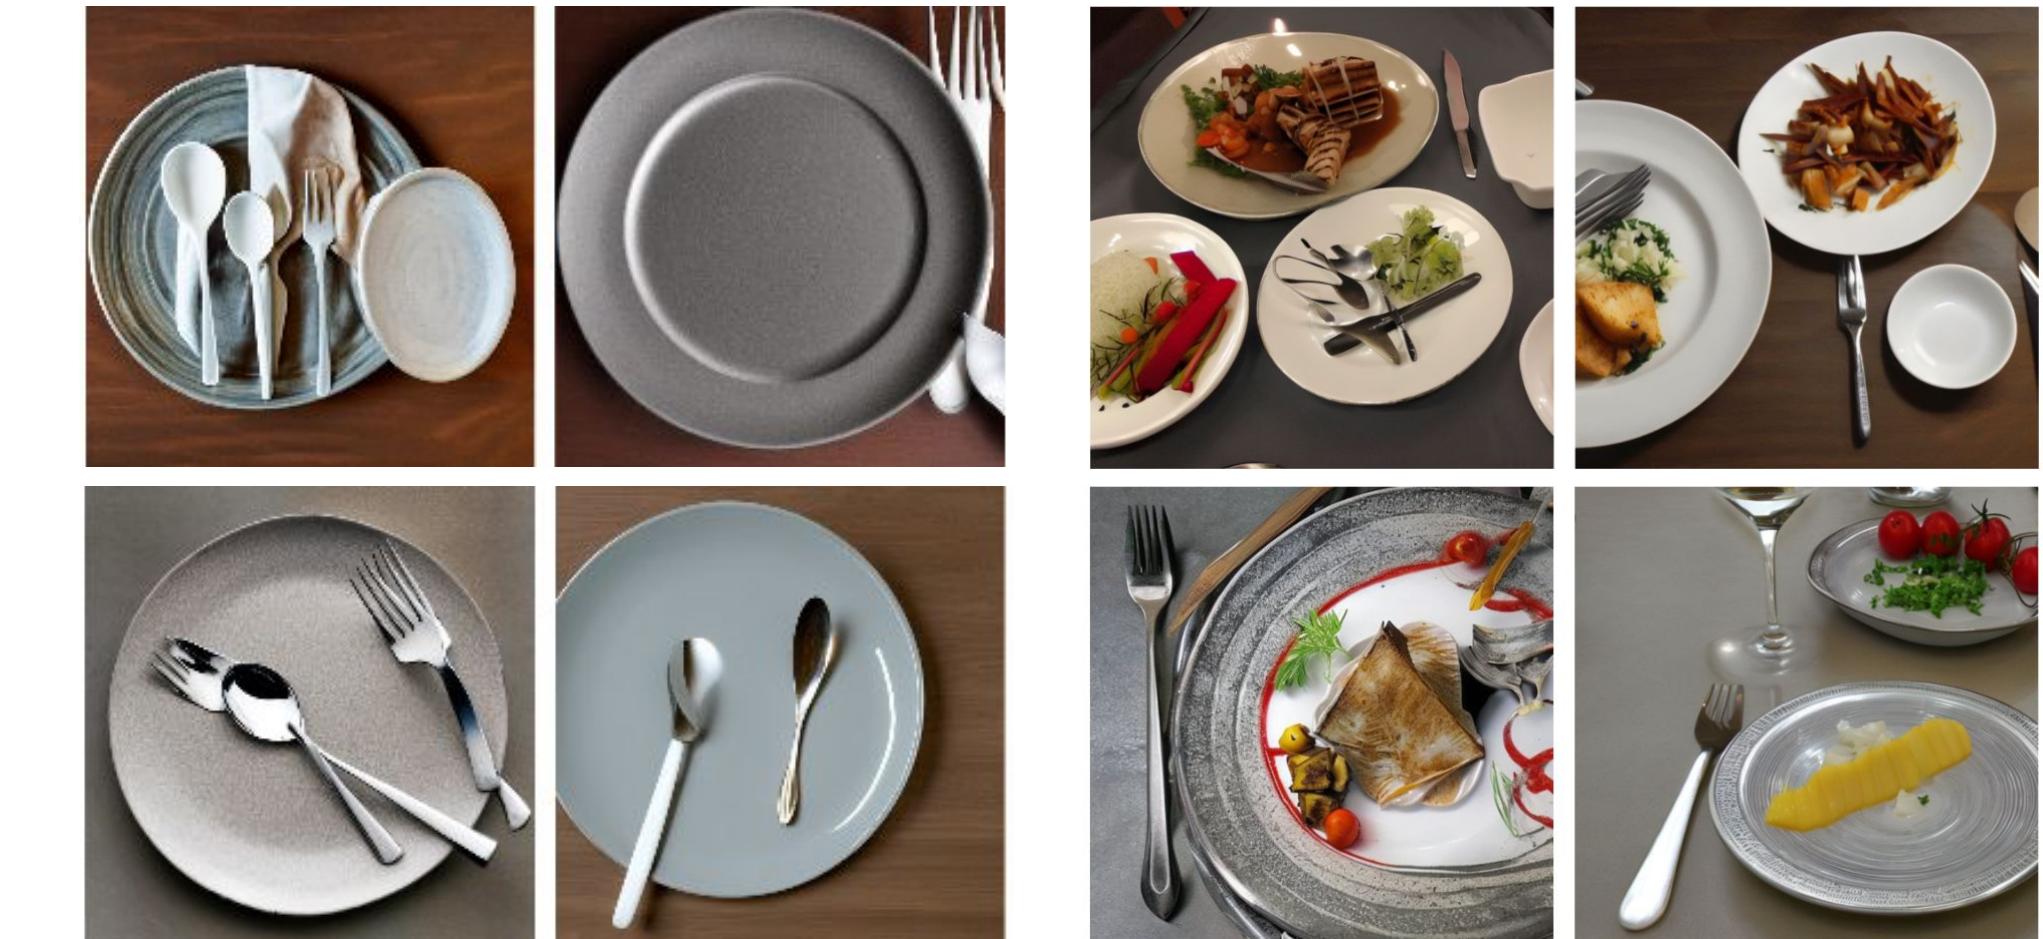


Stable Diffusion



ImageNet*



tray

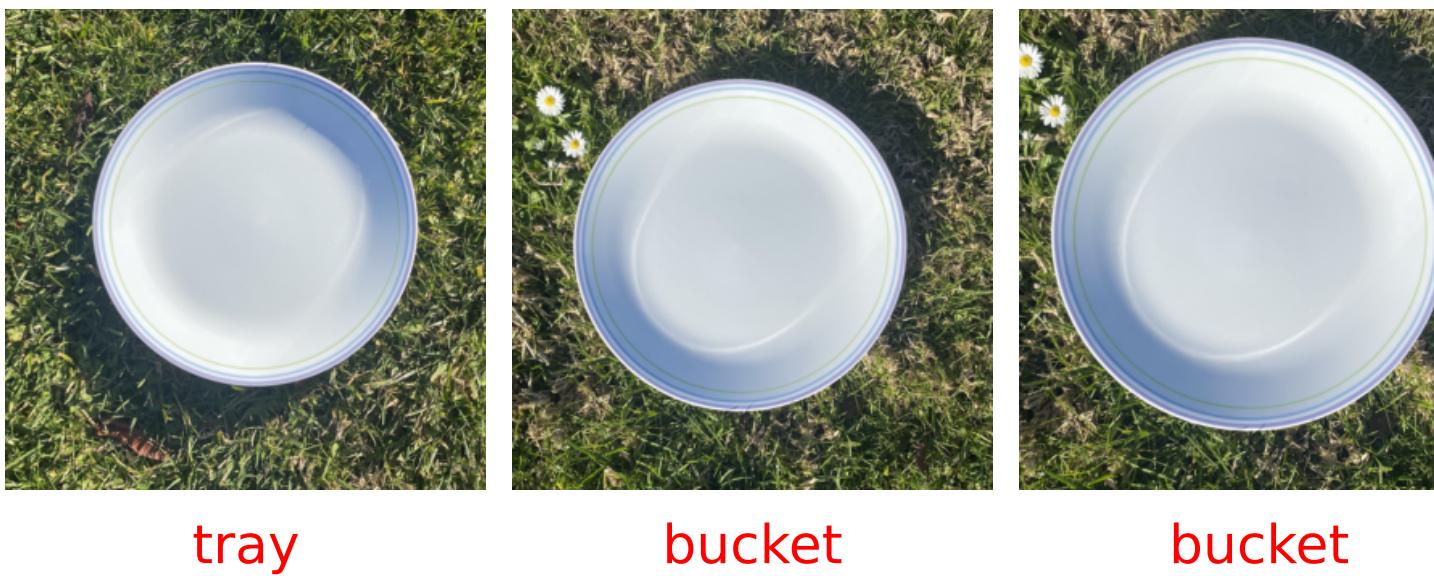

tray

bucket



plate

plate

plate




plate

plate

plate

Generative Models as a Data Source for Multiview Representation Learning

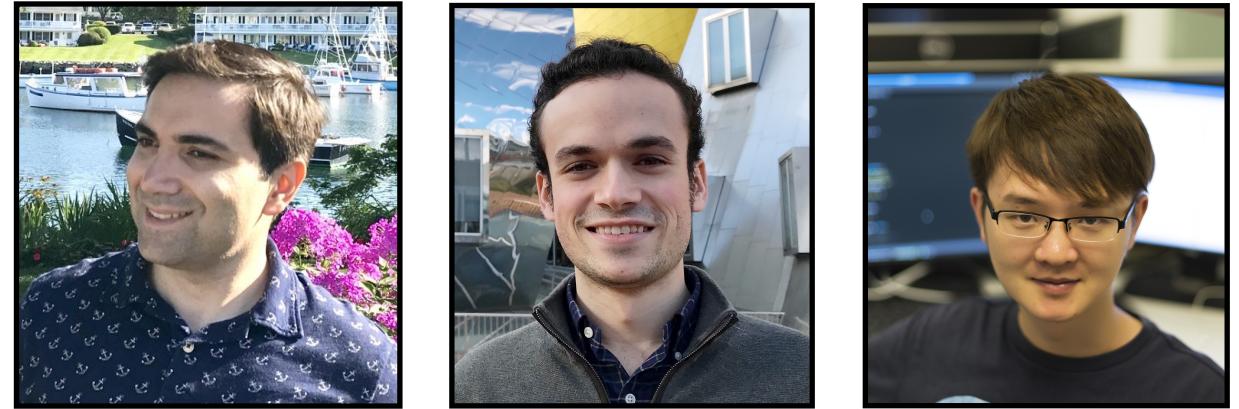

Jahanian, Puig, Tian, Isola
ICLR 2022

Dataset




$$\mathbf{x} \sim \{\mathbf{x}_i\}_{i=1}^N$$


Generative Model



Contrastive Learning

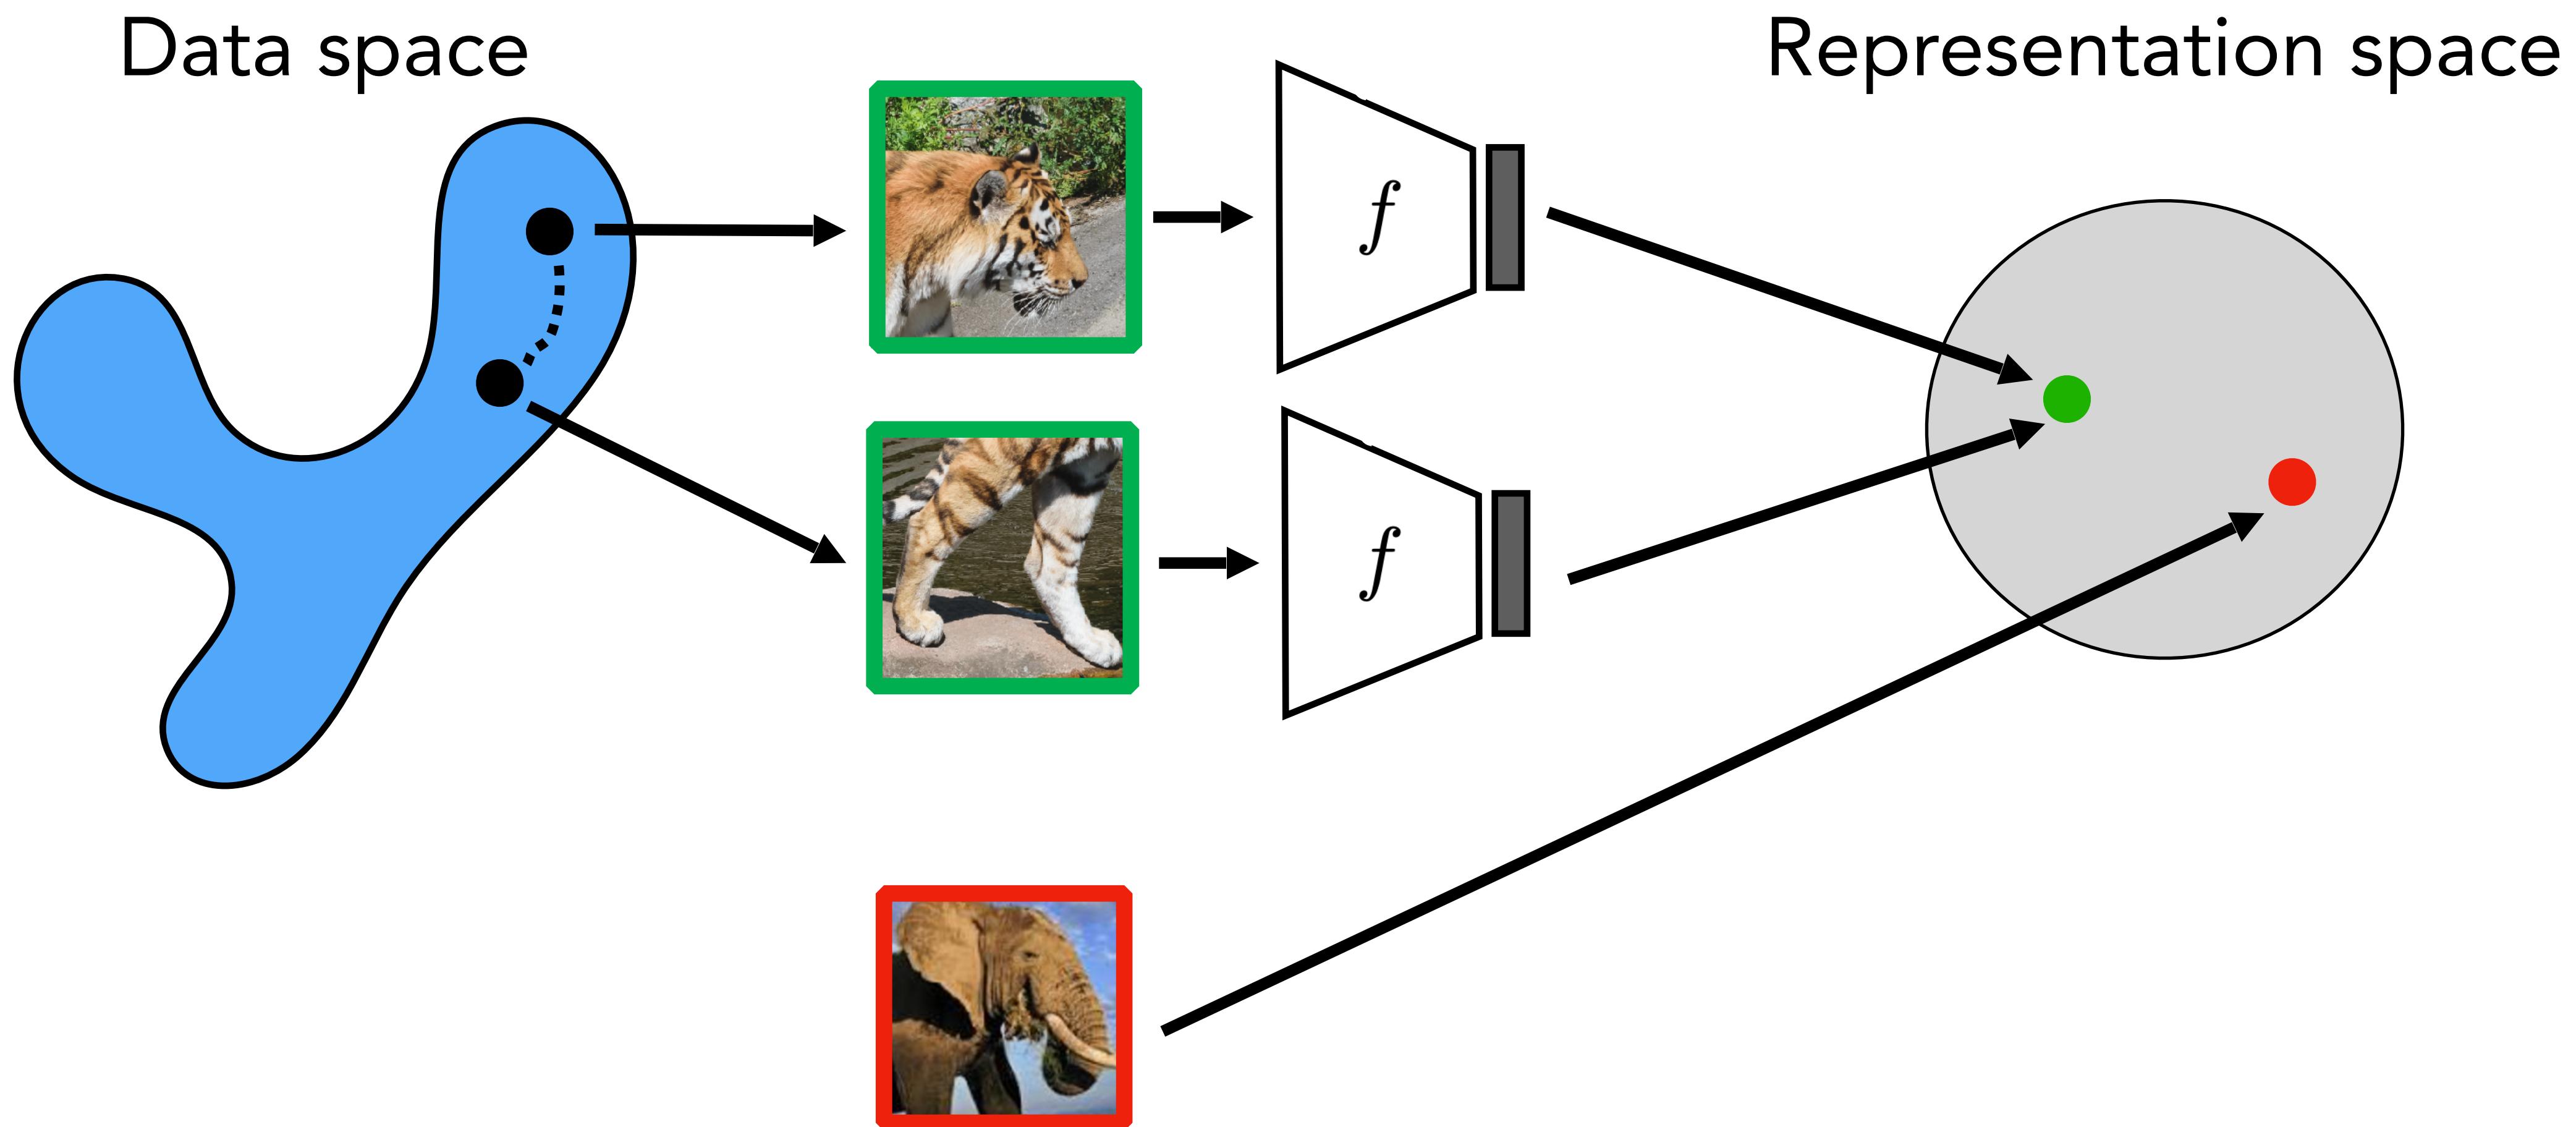


Contrastive learning + Generative modeling

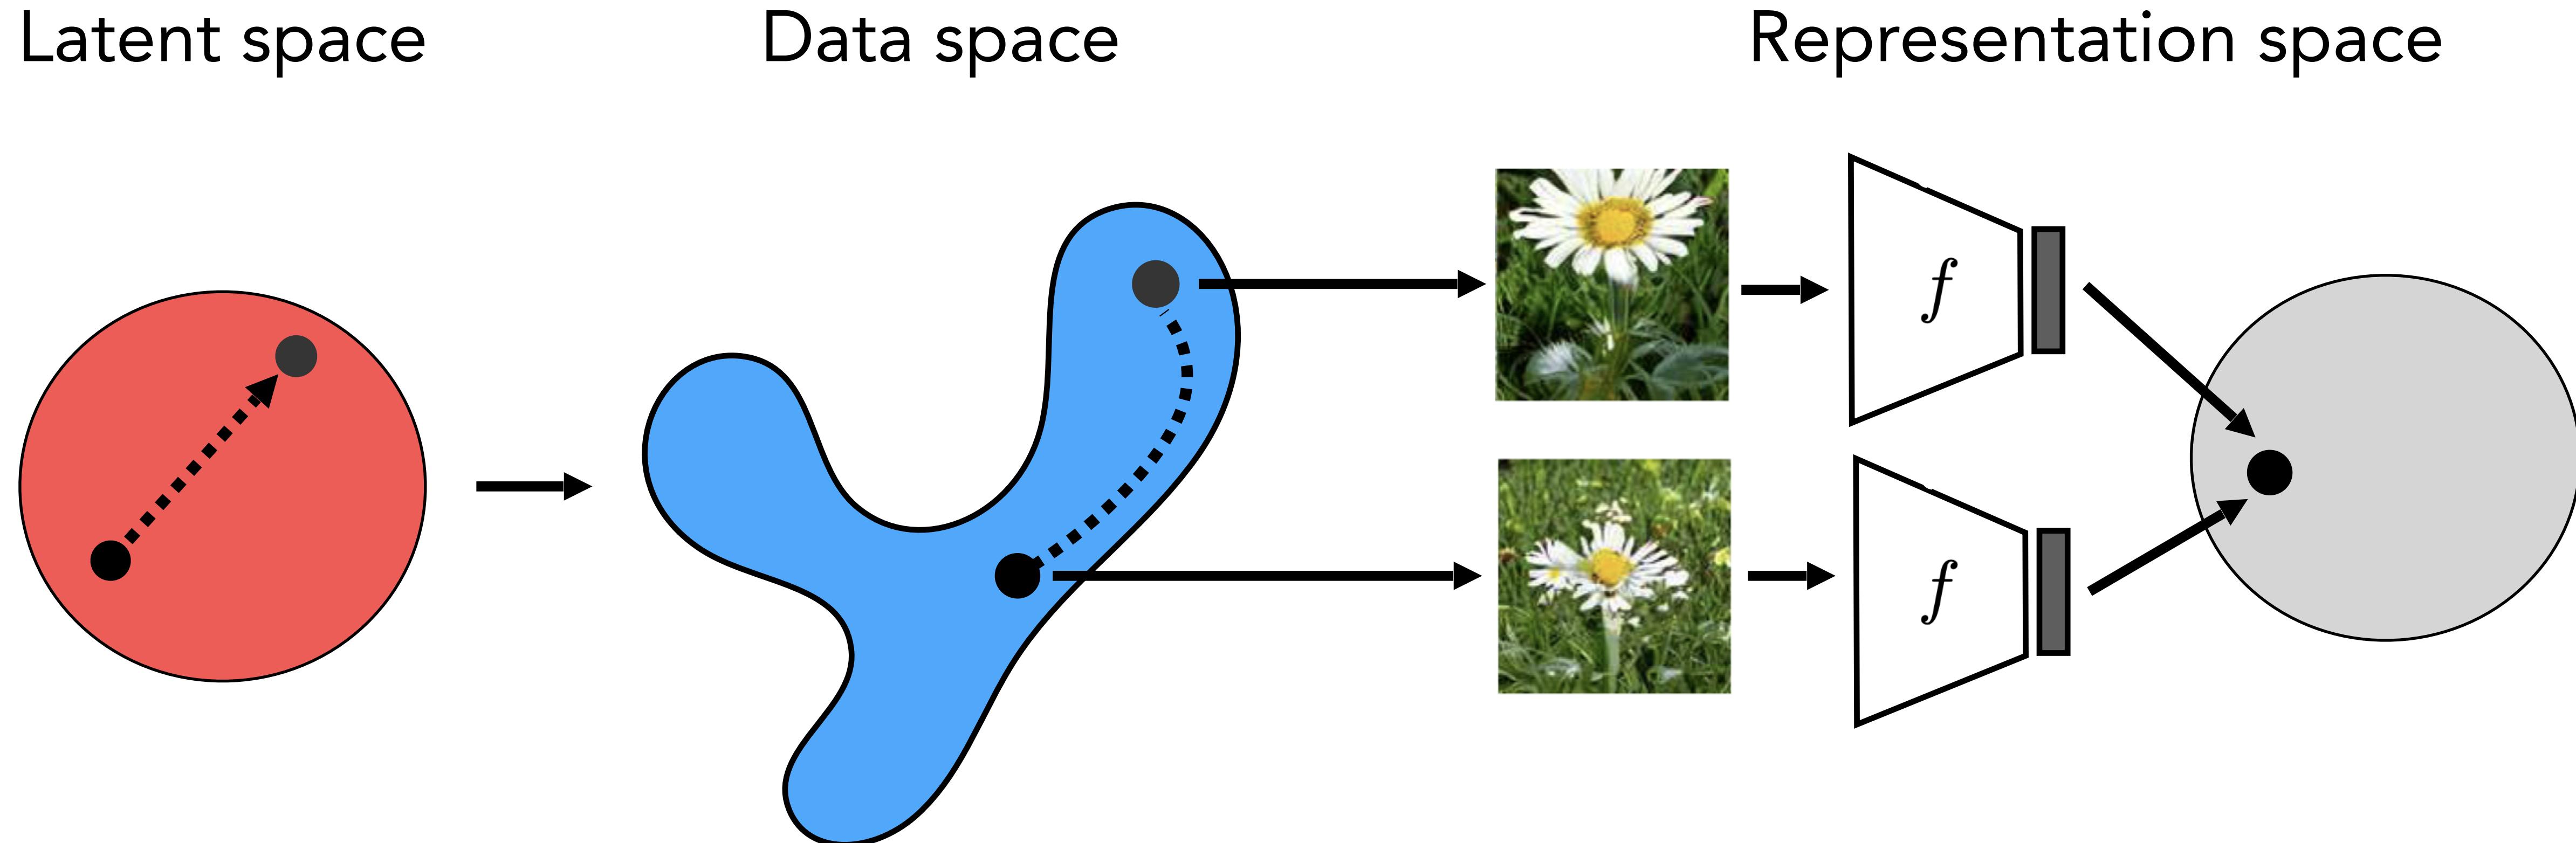


Create positive pairs by transformations in latent space, rather than in data space

Contrastive learning + Generative modeling

SimCLR views

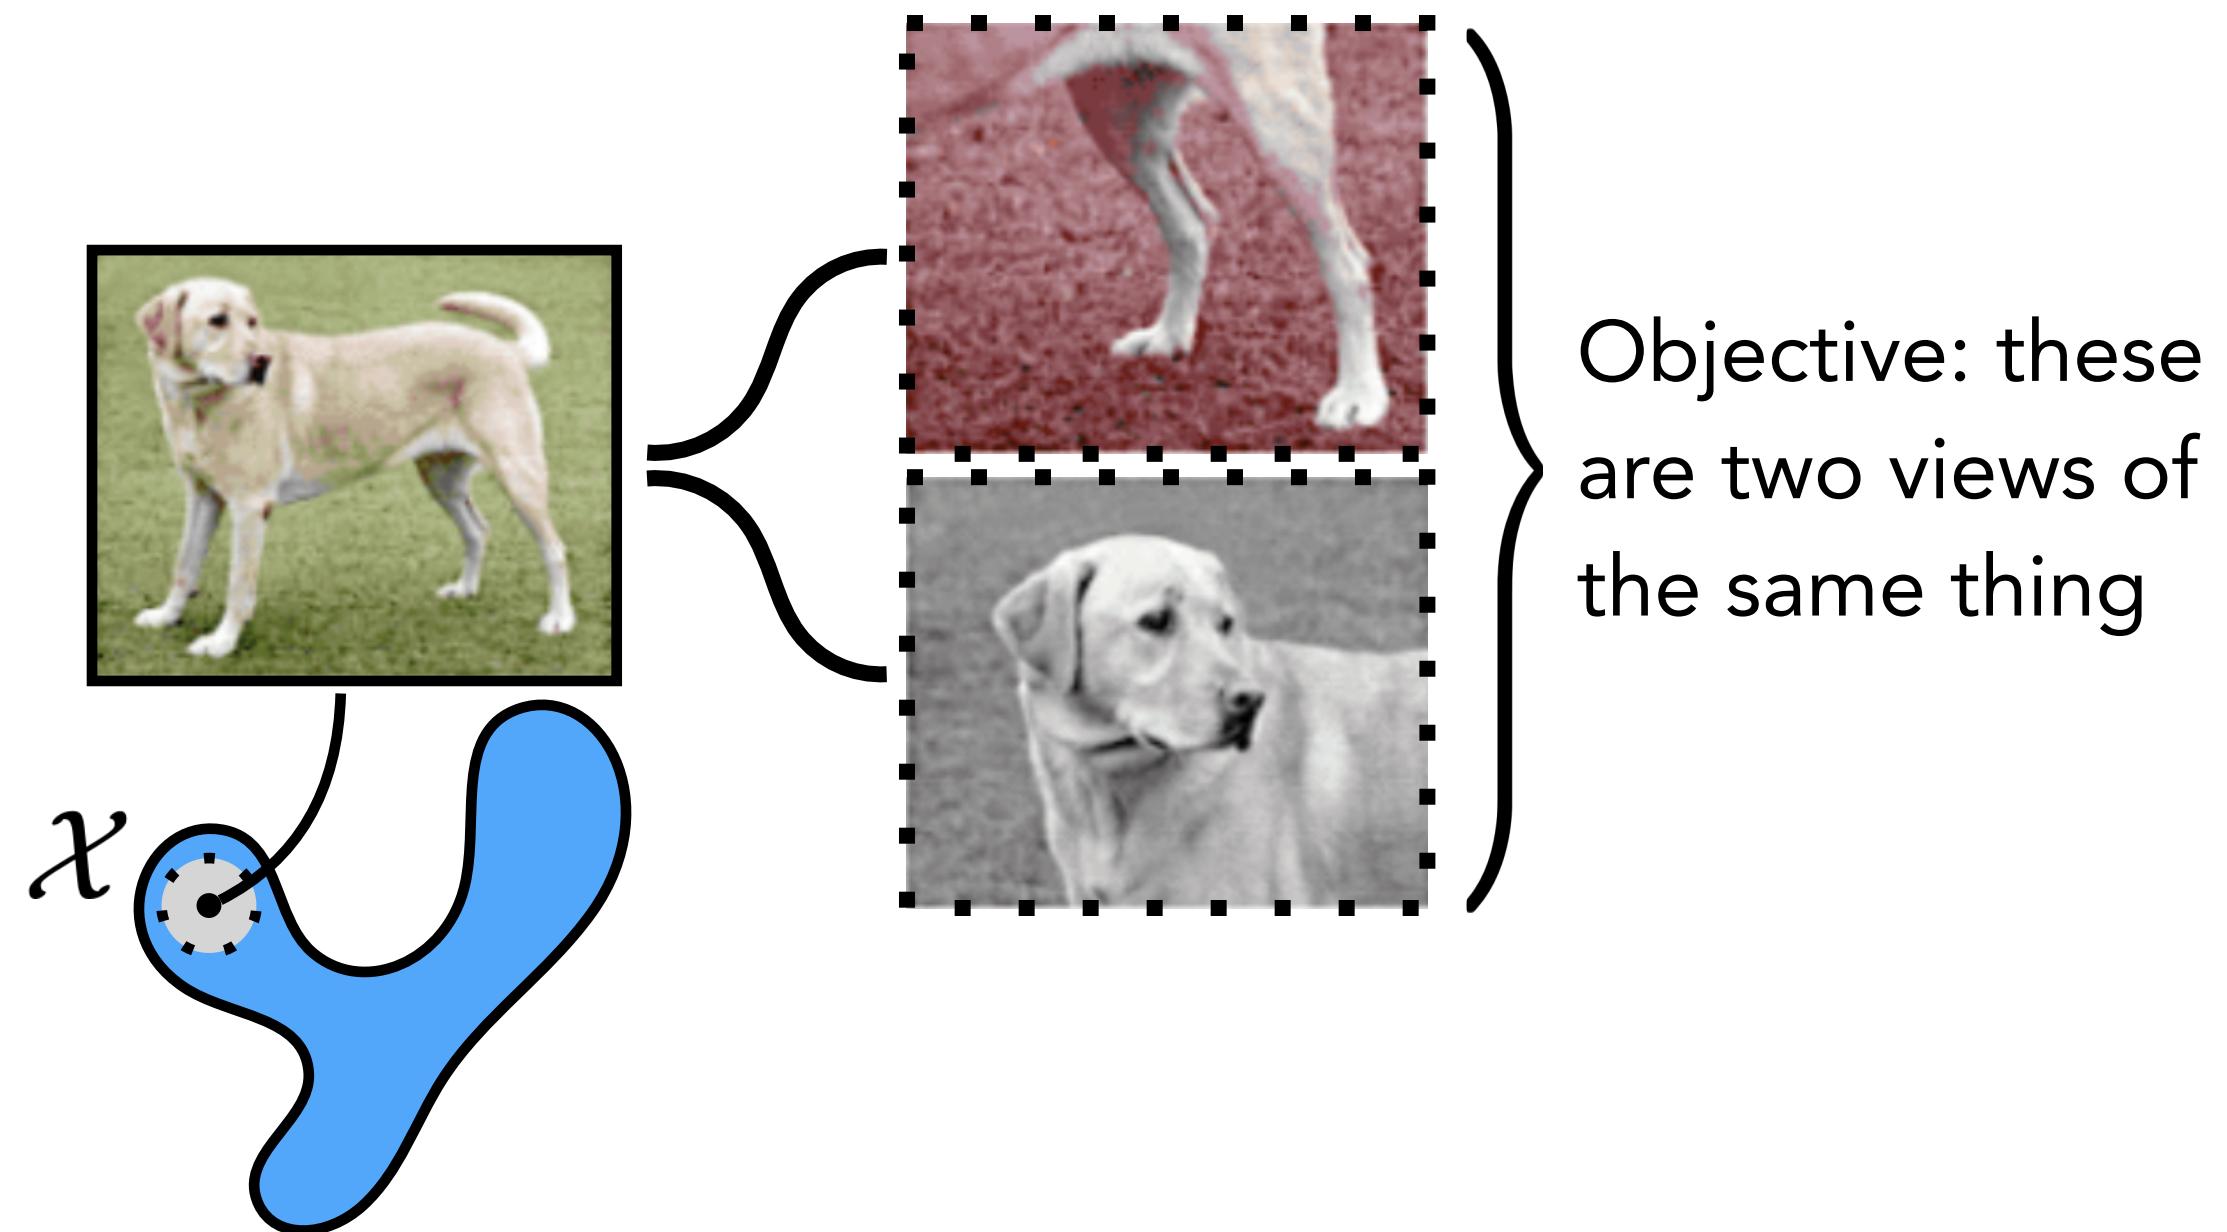


Latent views

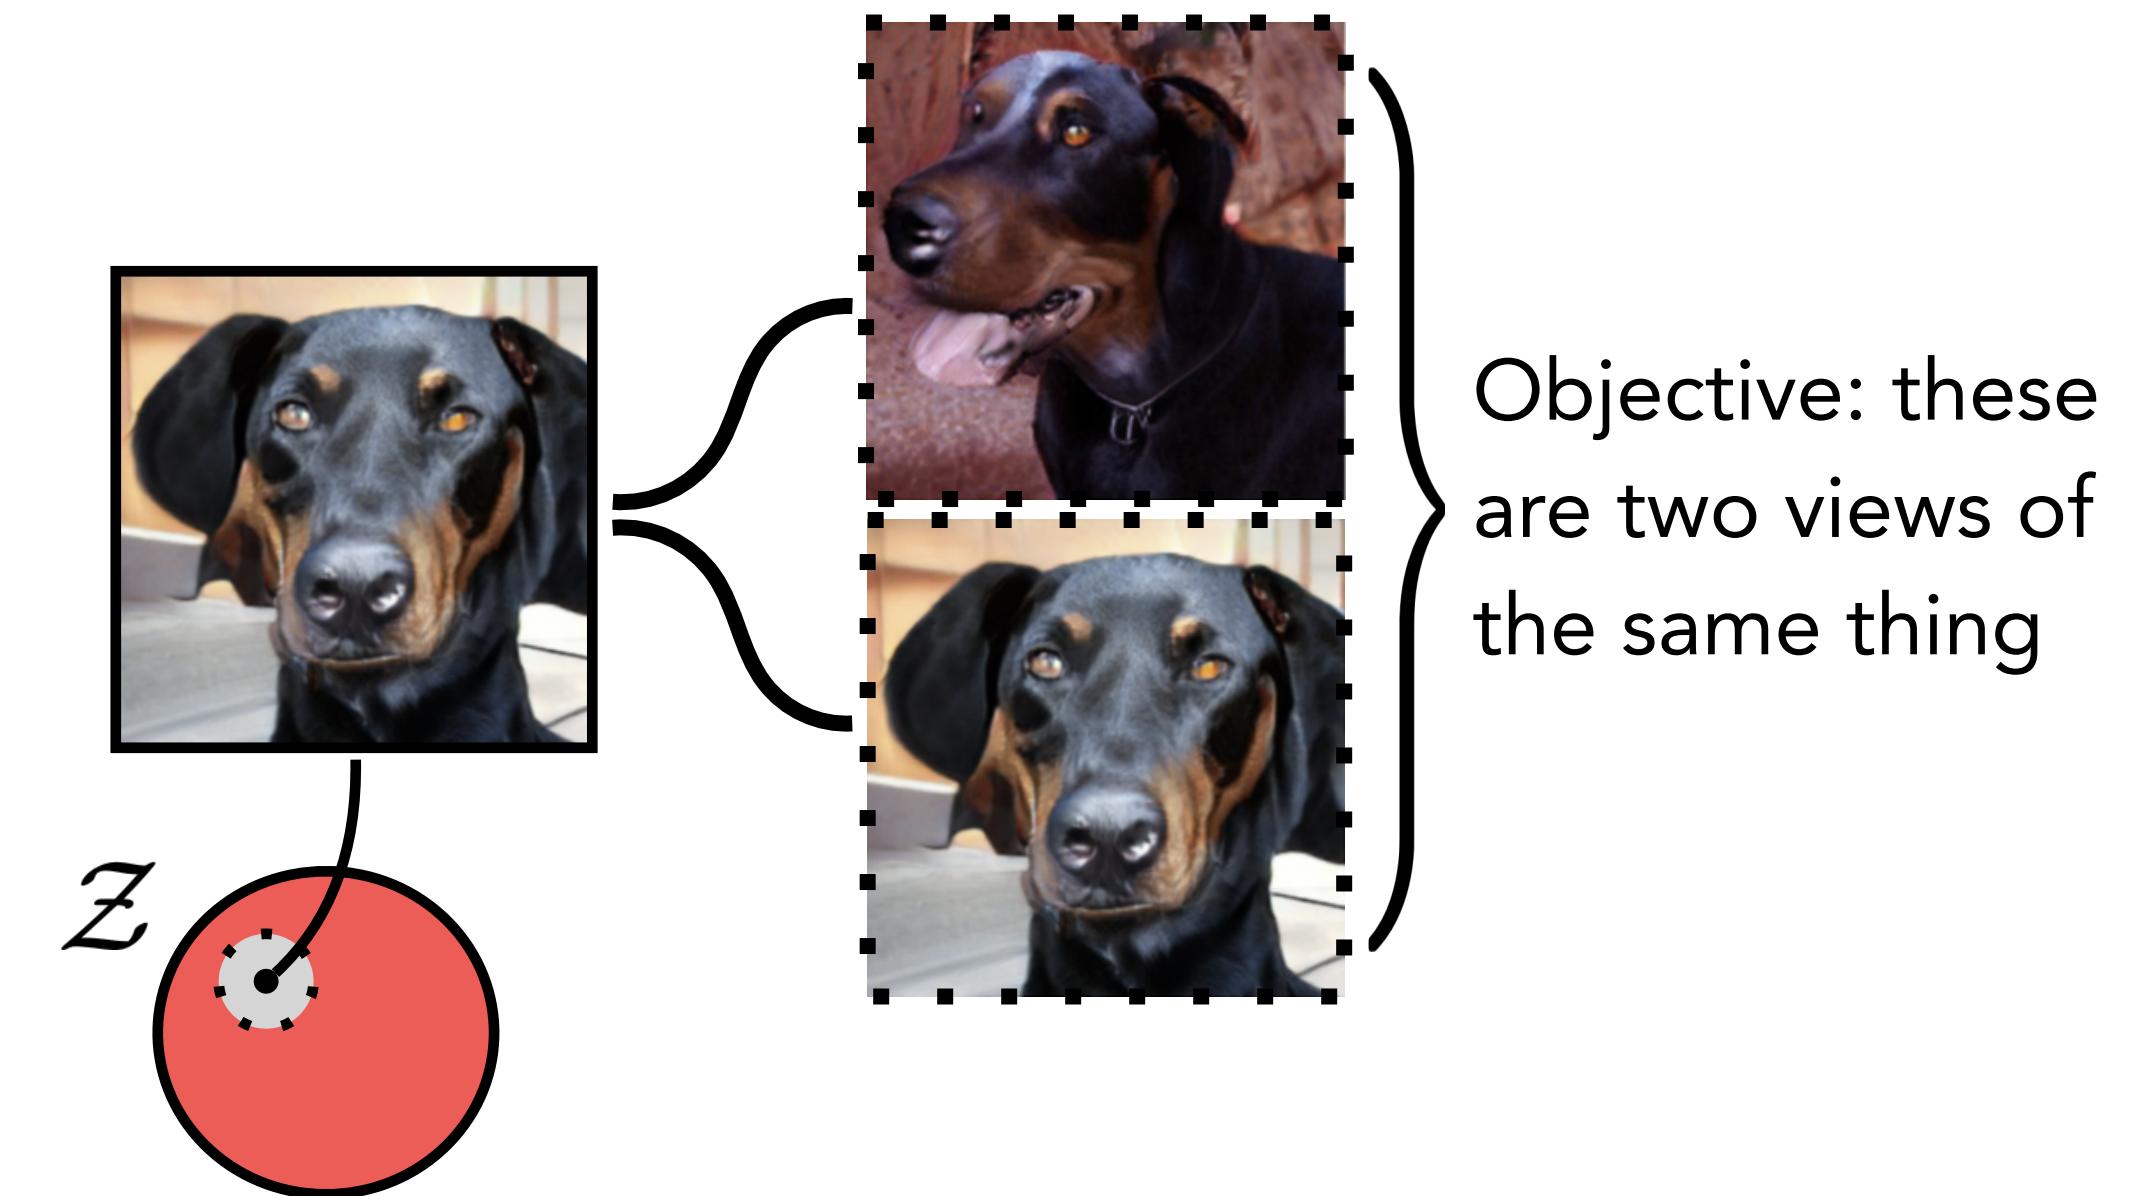


Contrastive learning + Generative modeling

SimCLR views

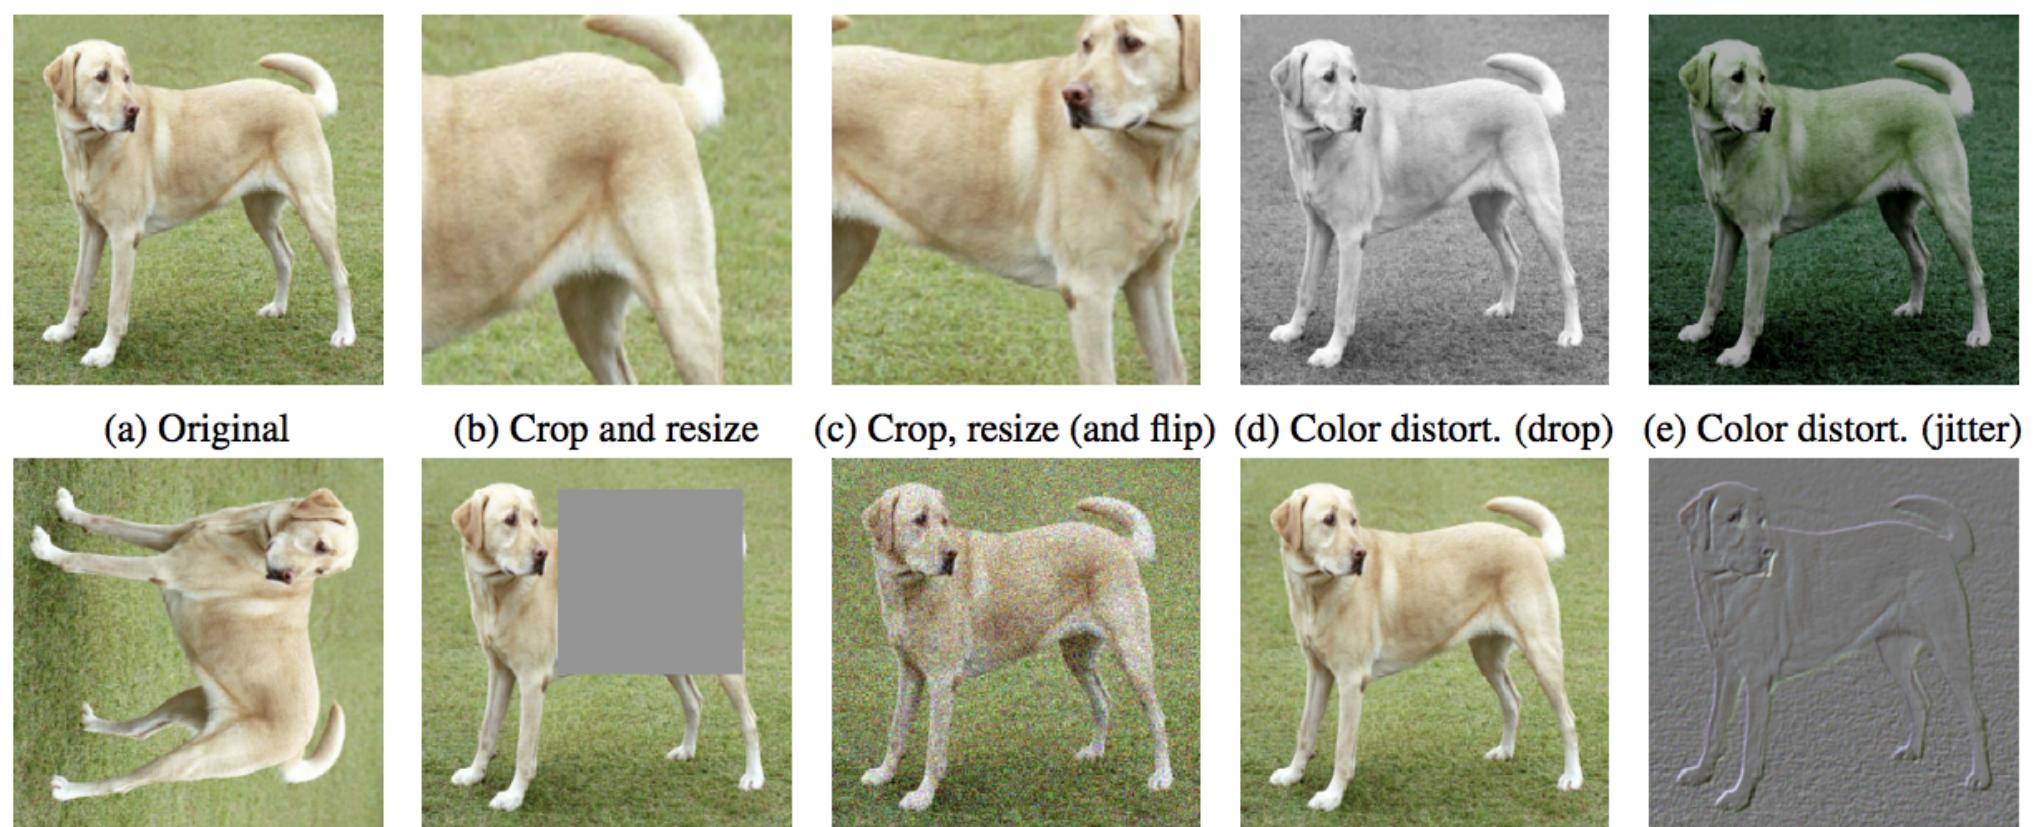

These are all different views of the same thing


Latent views

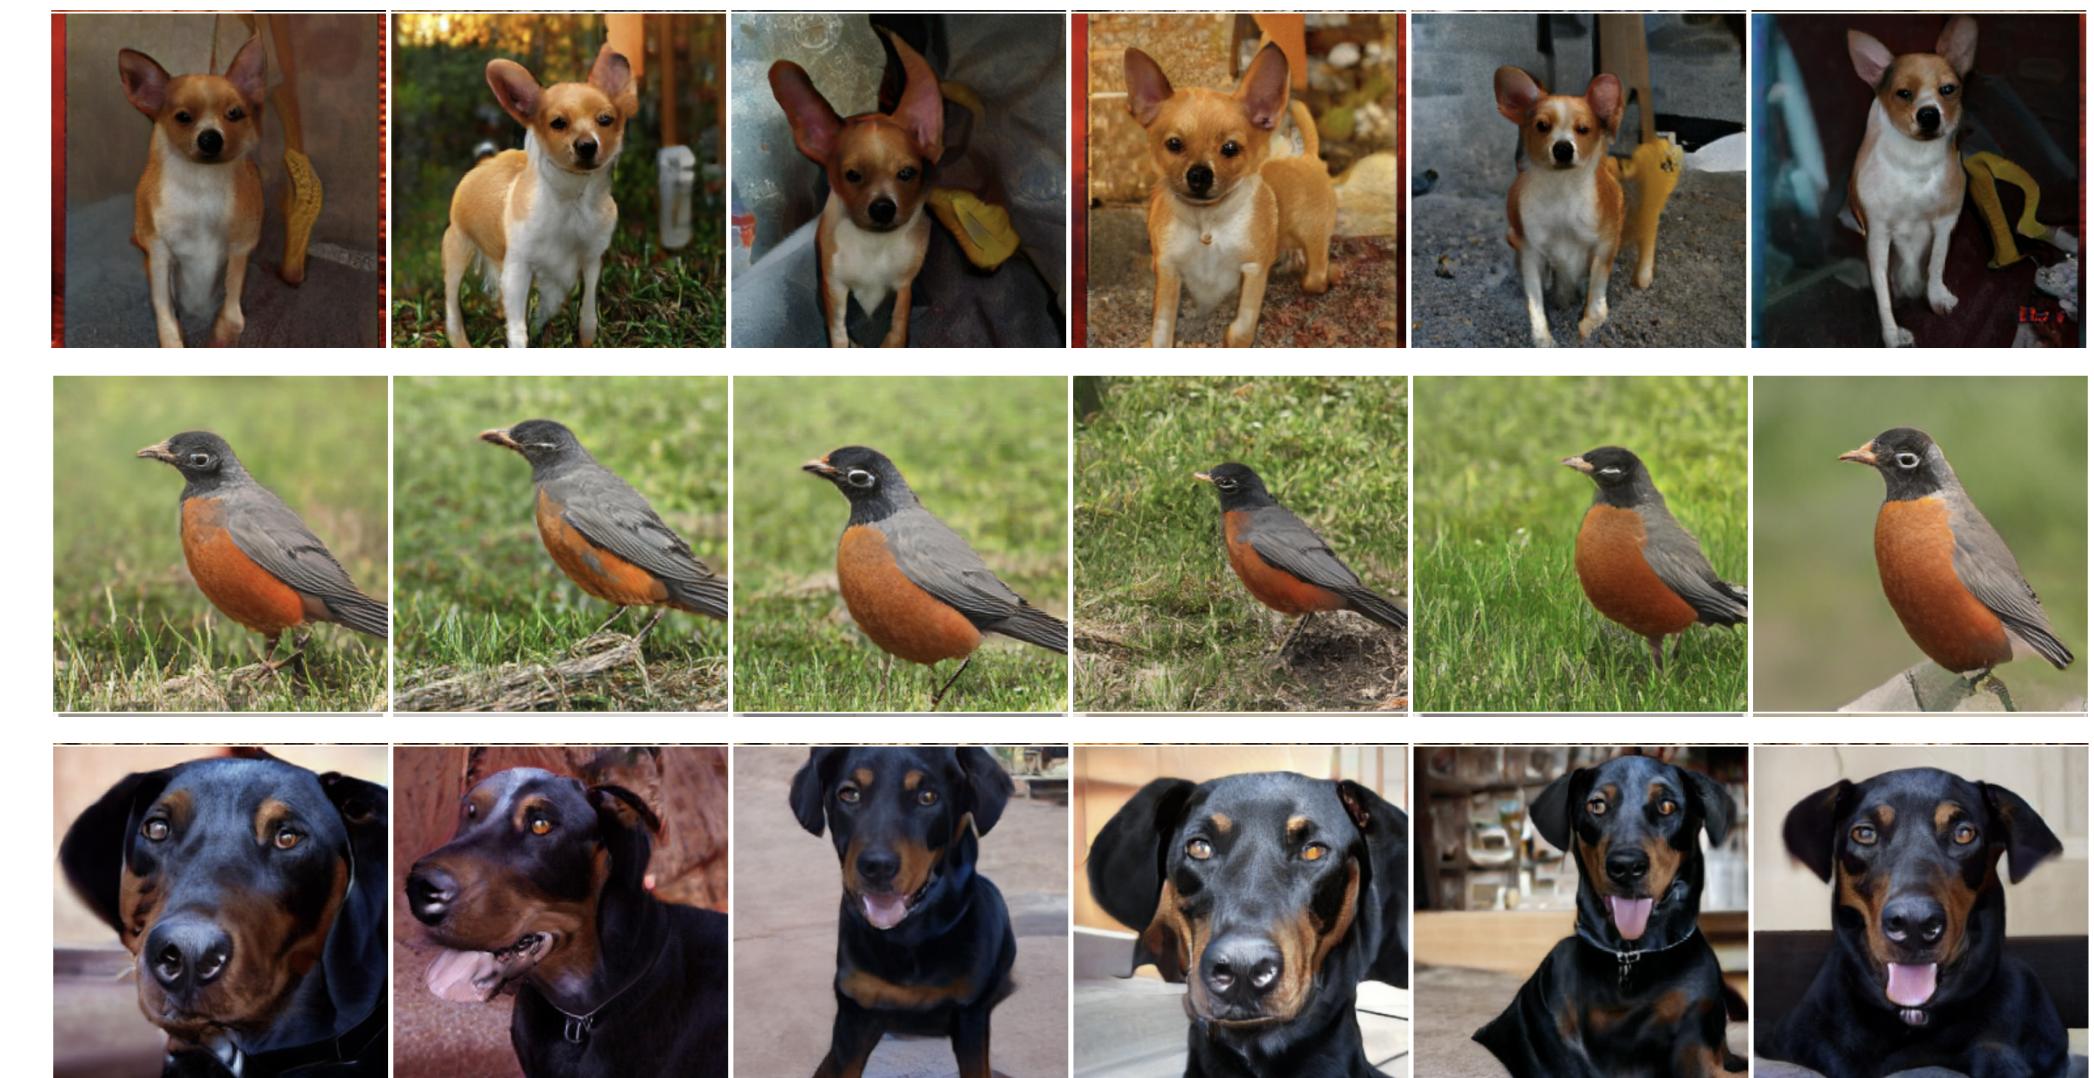

These are all different views of the same thing

Contrastive learning + Generative modeling


Contrastive learning from real data (SimCLR, etc)

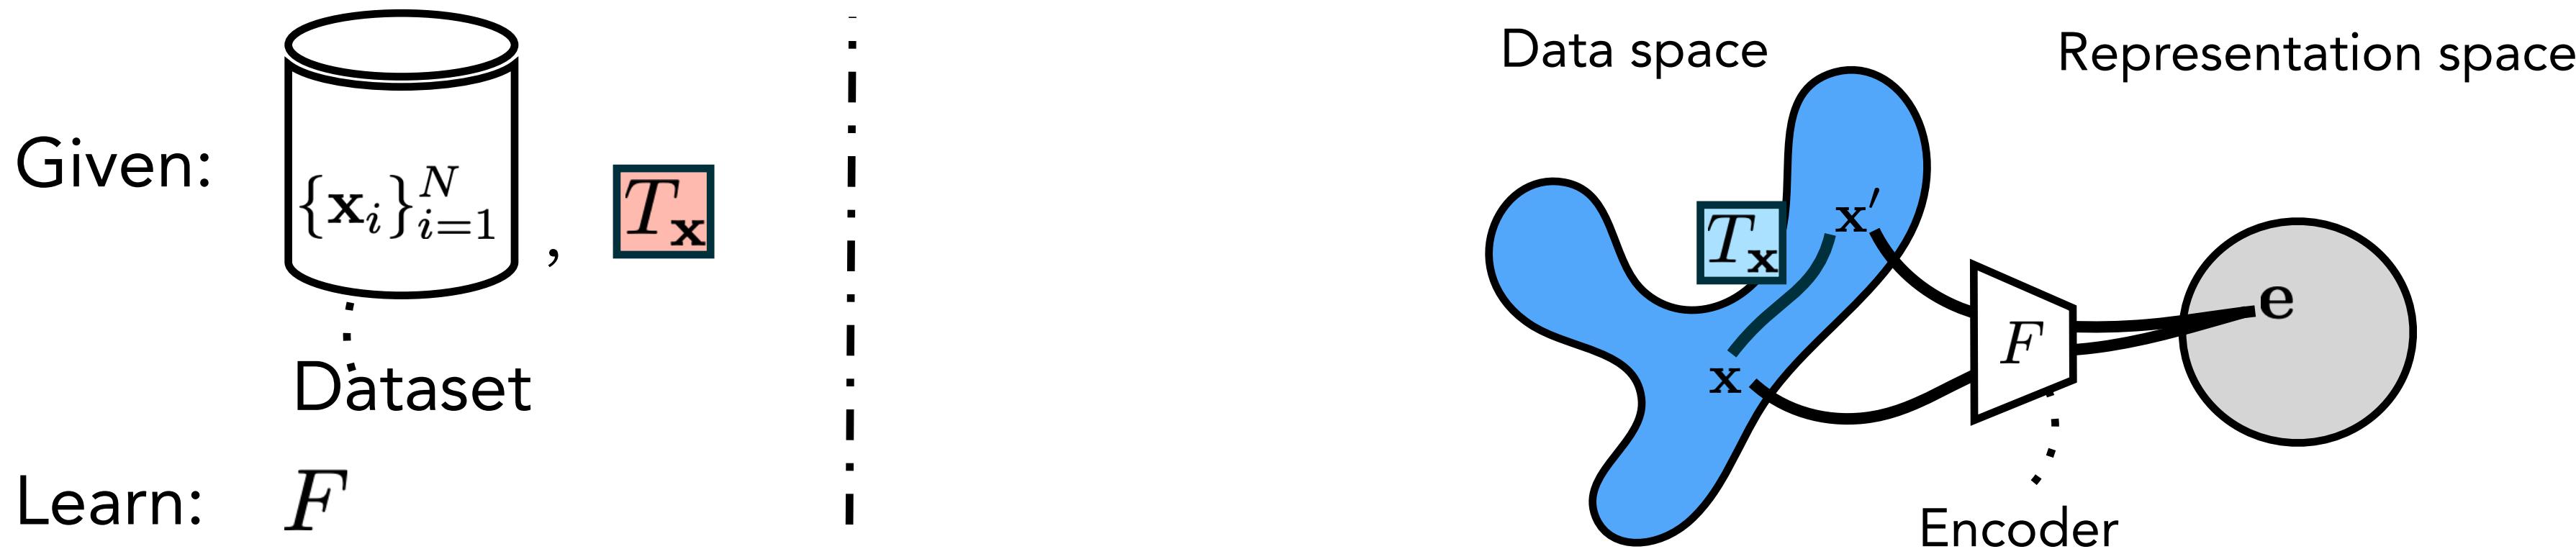

Top-1 Accuracy on
ImageNet1000 linear
transfer

43.9%

Contrastive learning from generated data

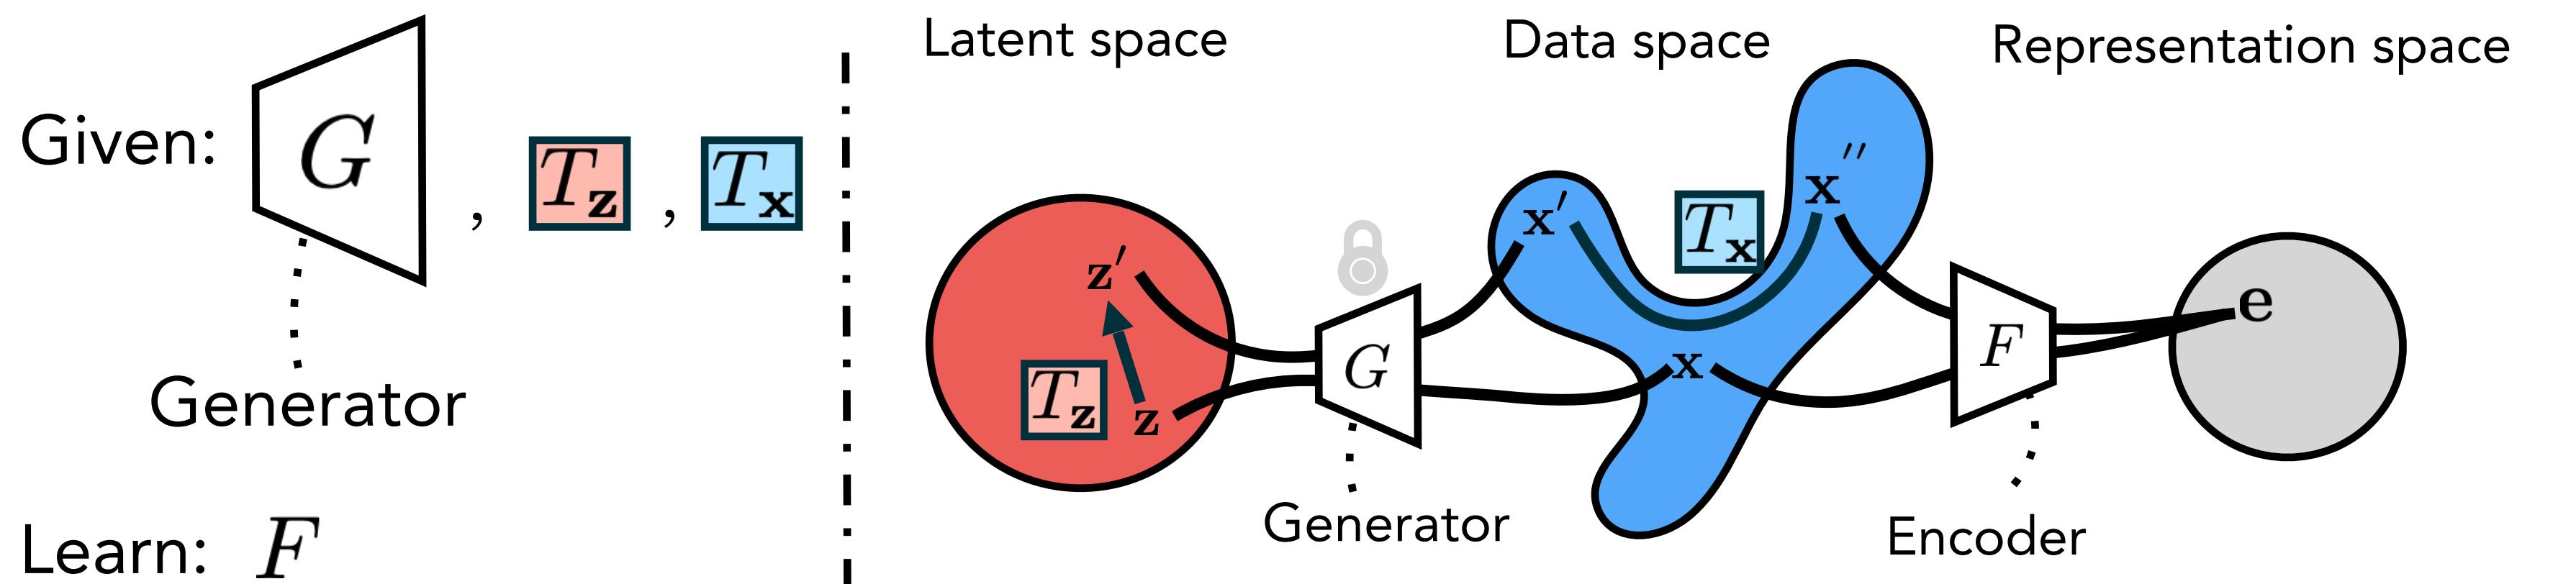

Only $T_x \rightarrow 35.7\%$


$T_z + T_x \rightarrow 42.6\%$

Contrastive learning + Generative modeling

Deep generative views improve contrastive learning beyond only using standard data augmentation.

When the generative model is high quality, can even outperform learning from real data.

Data++

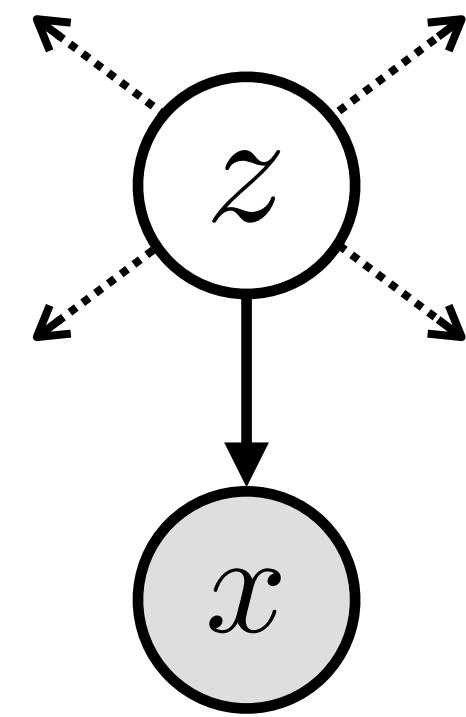

Datapoint++



Samples from implicit generative models act like decorated data, *data++*, with extra functionality.

With special operators, you can *interpolate*, *extrapolate*, *manipulate*, *compose*, *optimize*, and *label* these datapoints.

Everything you can do with regular data, you can also try with *data++*. It might work better!

Meta-learning: learning to learn fast

Meta-learning



Learning



Inference



MAML: Model-Agnostic Meta-Learning

[Finn, Abbeel, Levine 2017]

- So far we saw transfer learning as: given some prior model/representation, how can we quickly adapt it?
- Could we *learn* to do transfer learning?
- Consider finetuning: given an init, update it with SGD
- MAML: *learn* an init such just a few steps of SGD will update it very effectively

MAML: Model-Agnostic Meta-Learning


[Finn, Abbeel, Levine 2017]

Algorithm 1 Model-Agnostic Meta-Learning

Require: $p(\mathcal{T})$: distribution over tasks

Require: α, β : step size hyperparameters

```
1: randomly initialize  $\theta$ 
2: while not done do
3:   Sample batch of tasks  $\mathcal{T}_i \sim p(\mathcal{T})$ 
4:   for all  $\mathcal{T}_i$  do
5:     1. Starting with init, run a few steps of SGD on task i
6:     2. Compute loss after these steps
7:   end for
8:   init  $\leftarrow$  backprop through
9: end while
```

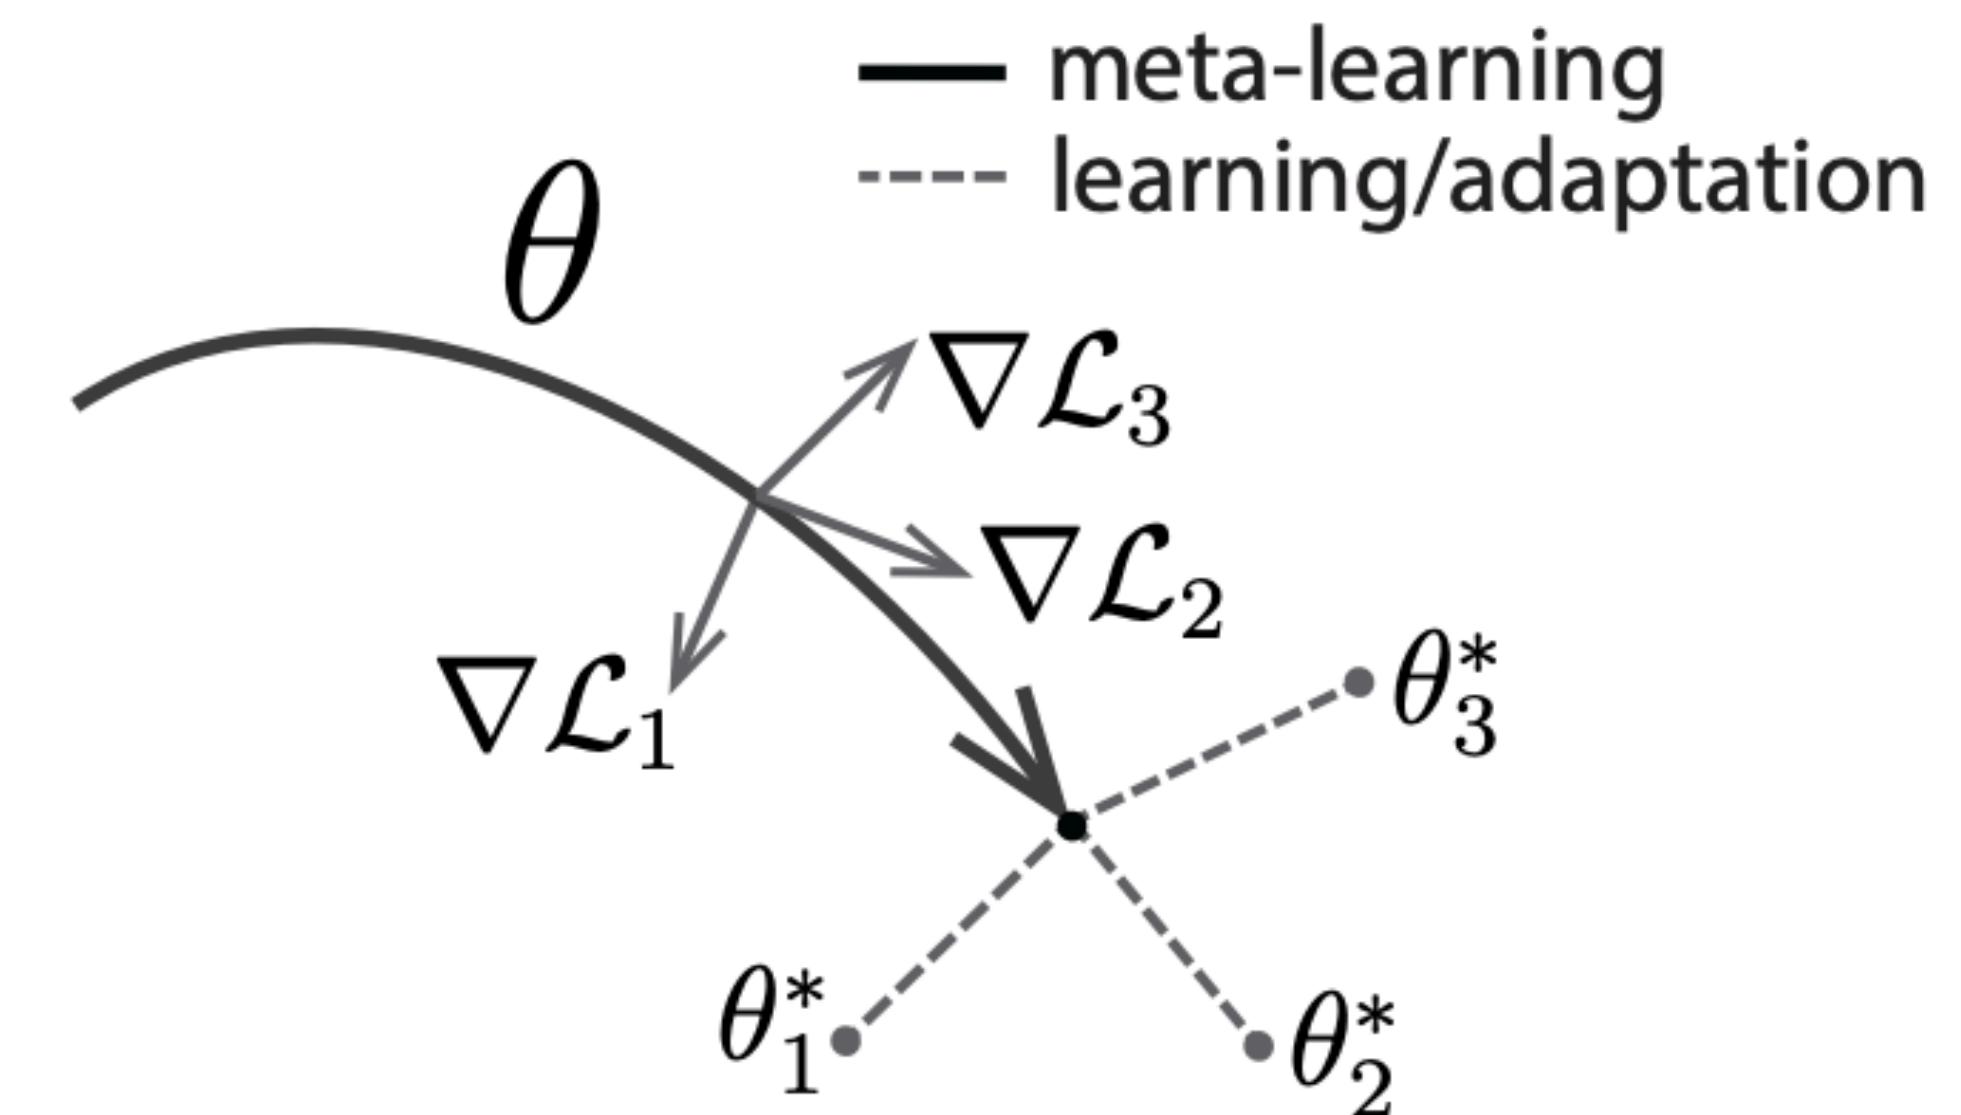

MAML: Model-Agnostic Meta-Learning

[Finn, Abbeel, Levine 2017]

init \leftarrow backprop through 

How to backprop through  ?

1 step SGD:

$$\theta = \text{forward}(x, \text{backward}(\text{forward}(x, \theta)) + \theta)$$


2 steps SGD:

$$\theta = \text{forward}(x, \text{backward}(\text{forward}(x, \text{backward}(\text{forward}(x, \theta)) + \theta), \theta) + \theta)$$

You can backprop through backward!

```
forward(x, backward(forward(x, backward(forward(x, θ)) + θ), θ) + θ)
```

Example forward and backward through a simple net:

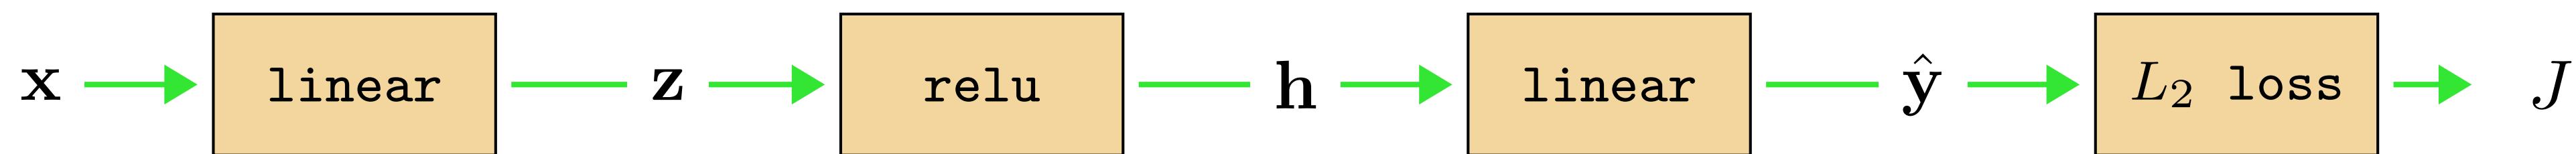


$$z = \mathbf{W}_1 x$$

z is a green vector of size 4. \mathbf{W}_1 is a blue 4x4 matrix. x is a green vector of size 4.

$$\hat{y} = \mathbf{W}_2 h$$

\hat{y} is a green vector of size 4. \mathbf{W}_2 is a blue 4x4 matrix. h is a green vector of size 4.

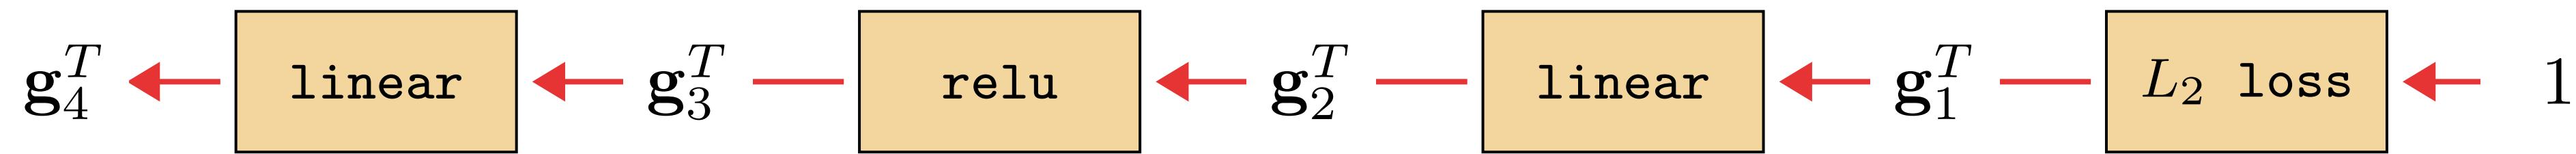

$$g_4^T = \mathbf{W}_1^T g_3^T$$

g_4^T is a red vector of size 4. \mathbf{W}_1^T is a blue 4x4 matrix. g_3^T is a red vector of size 4.

$$g_3^T = \mathbf{H}'^T g_2^T$$

g_3^T is a red vector of size 3. \mathbf{H}'^T is a blue 3x4 matrix. g_2^T is a red vector of size 4.


$$g_2^T = \mathbf{W}_2^T g_1^T$$

g_2^T is a red vector of size 4. \mathbf{W}_2^T is a blue 4x4 matrix. g_1^T is a red vector of size 4.

You can backprop through backward!



```
forward(x, backward(forward(x, backward(forward(x, θ)) + θ), θ) + θ)
```

Example forward and backward through a simple net:

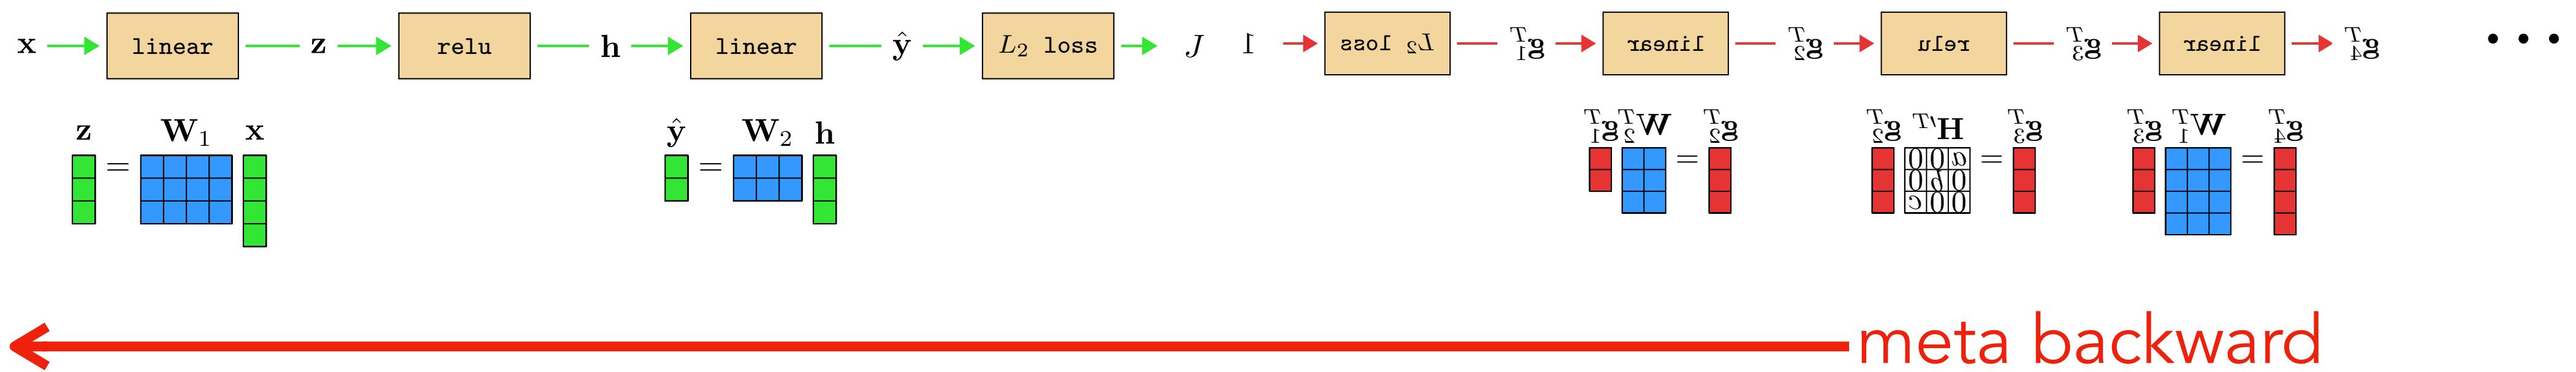


Task-Informed MAML for Agriculture

- In practice, the gains of this method are not often worth the additional computational cost at training time (worse than just pretraining?)
- Tseng et al. introduce a geospatial embedding that encodes task-specific context into meta-learning, and helps performance

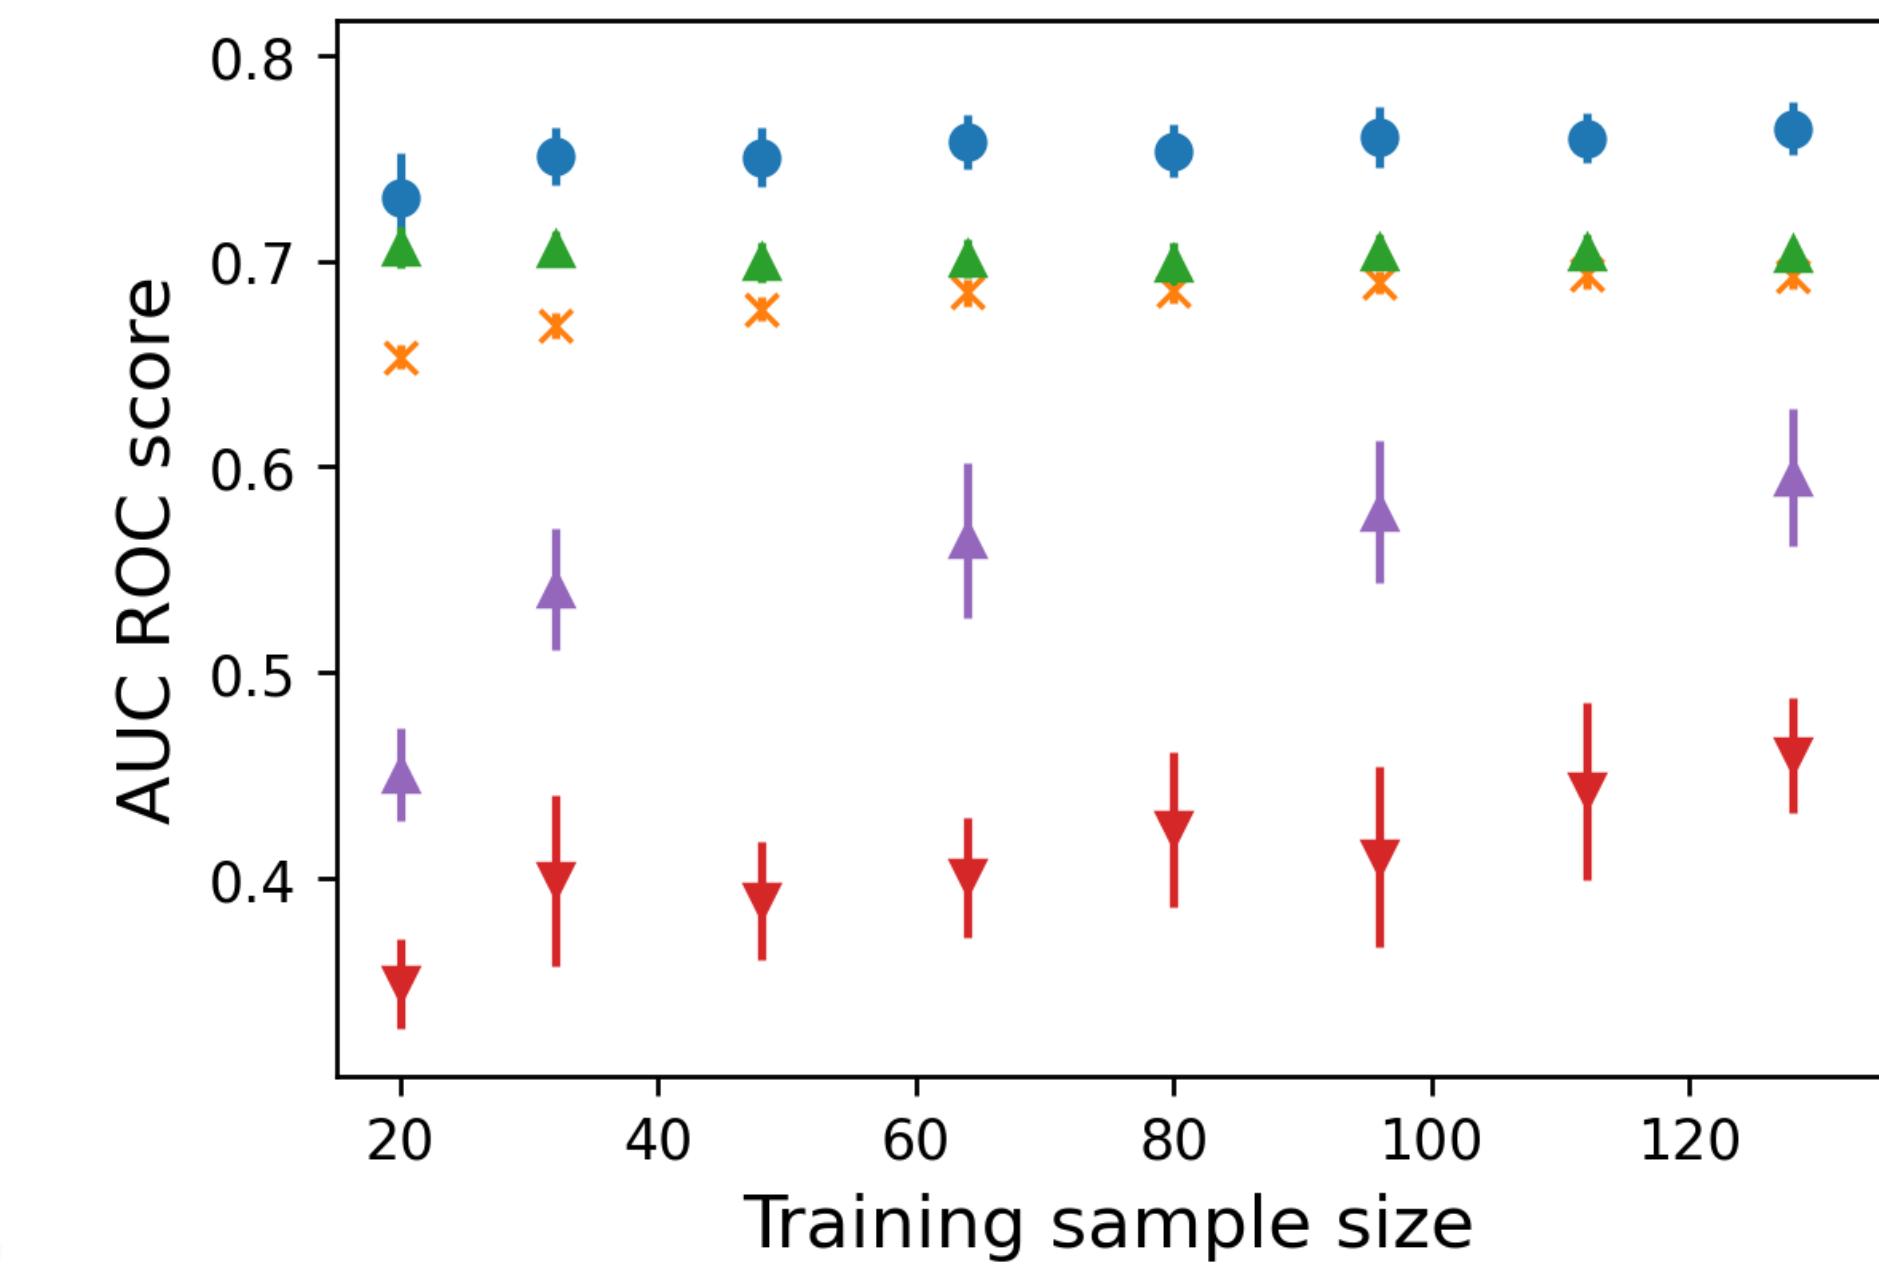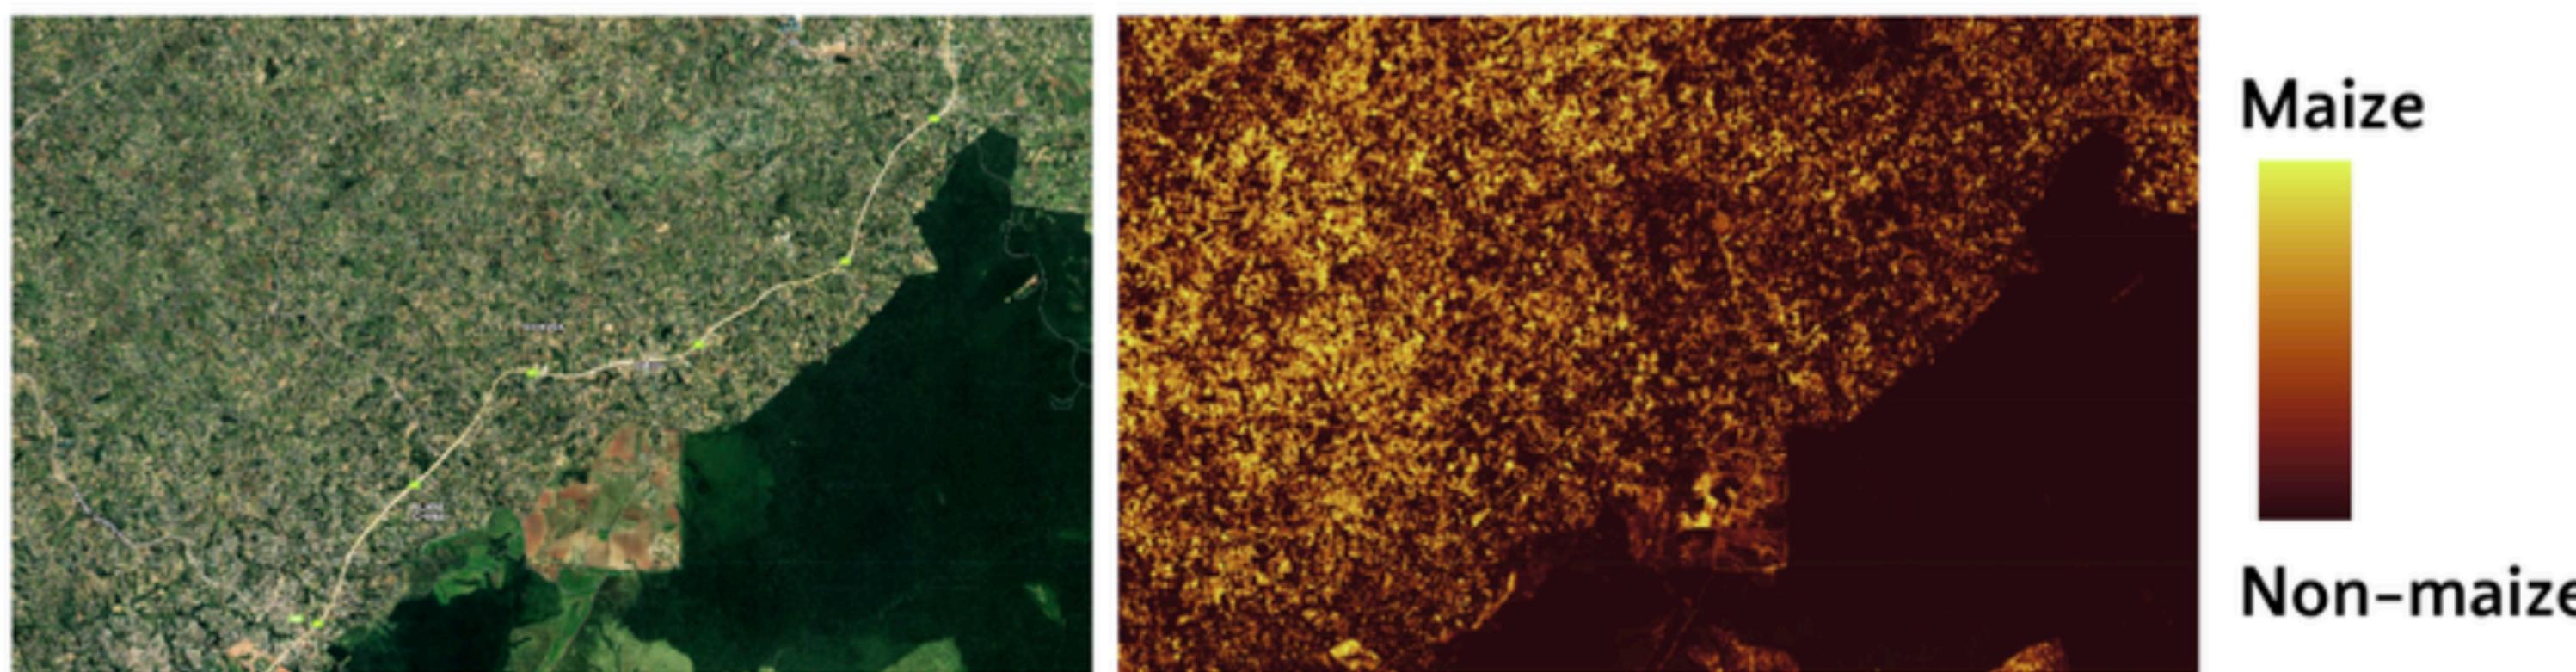

(a) Kenya: Maize vs. Rest

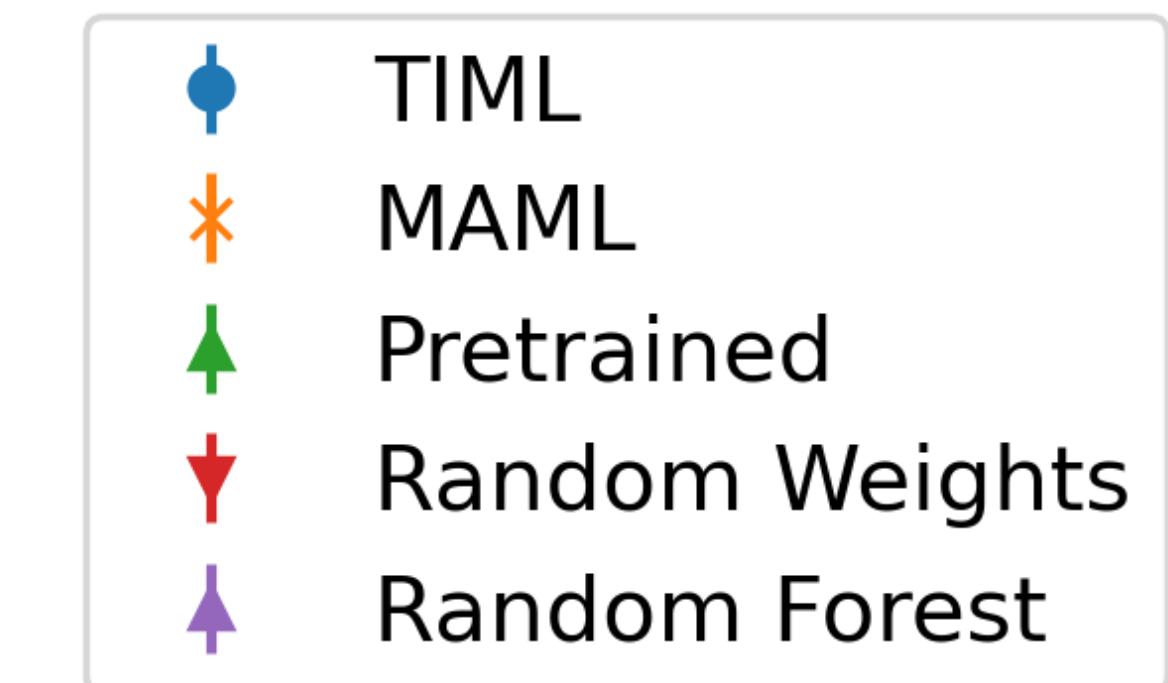

Meta-learning by sequence modeling

- Definition of learning:
 - input: a sequence $x_0, y_0, x_1, y_1, x_2, y_2, \dots$
 - output: a function $f: x \rightarrow y$
- $x_0, y_0, x_1, y_1, x_2, y_2, x_3, ?$
- RNN state + params is f , apply that f to x_3

Transfer Learning II

- Transferring knowledge about the inputs
 - Generative models as data++
- Meta-learning