


Lecture 5: Graph Neural Networks


Speaker: Phillip Isola

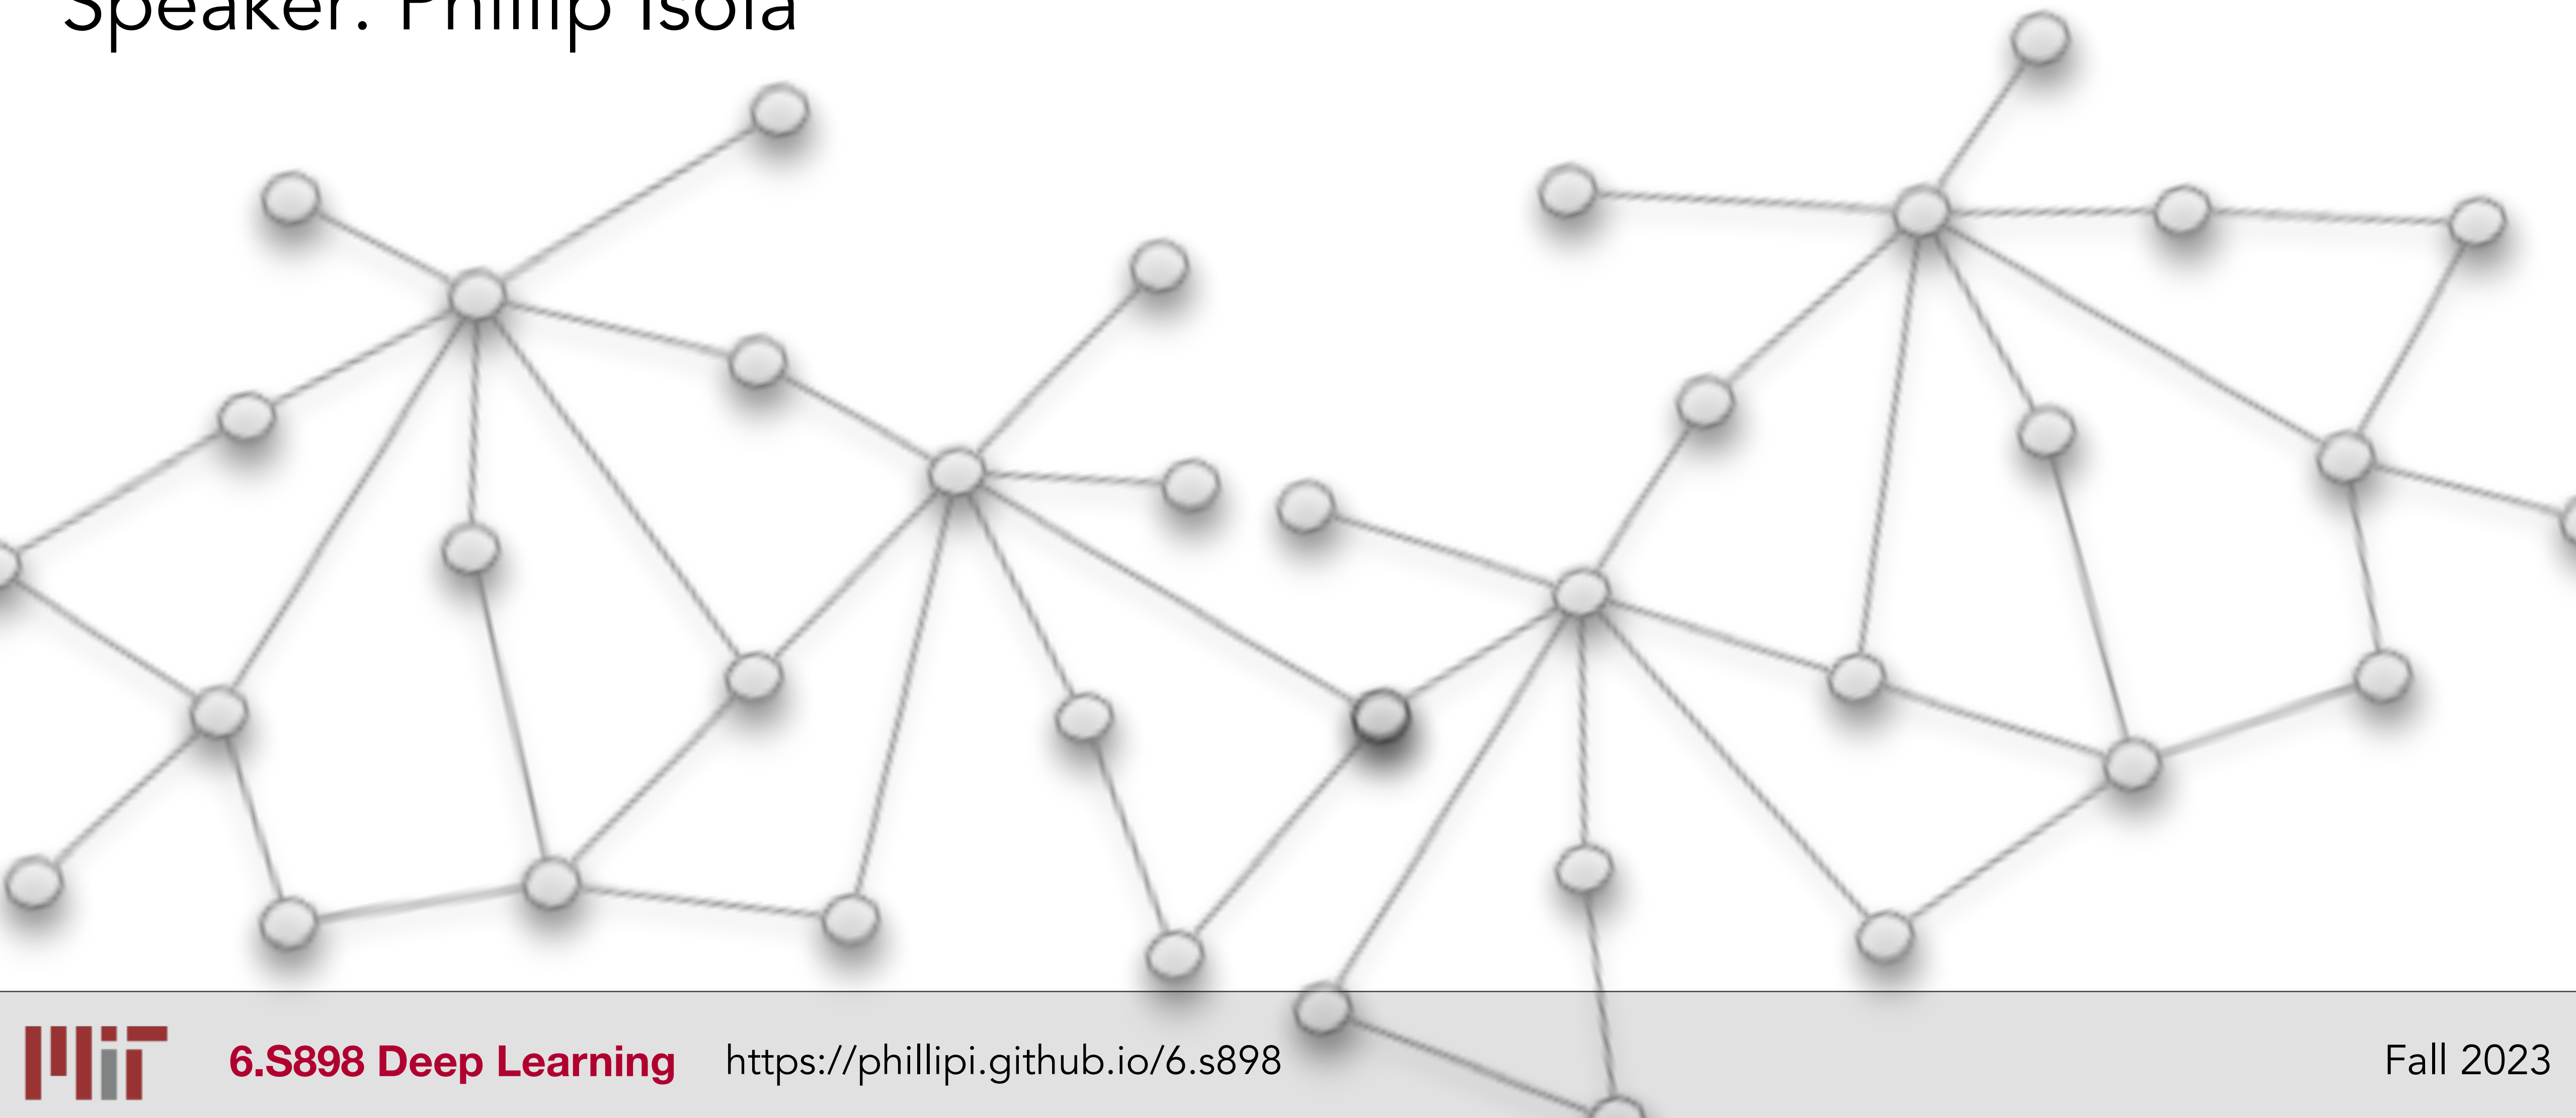

Roadmap


- Learning tasks with graphs
- Message passing GNNs
- Connections
- Approximation Power

Prediction with graphs: examples

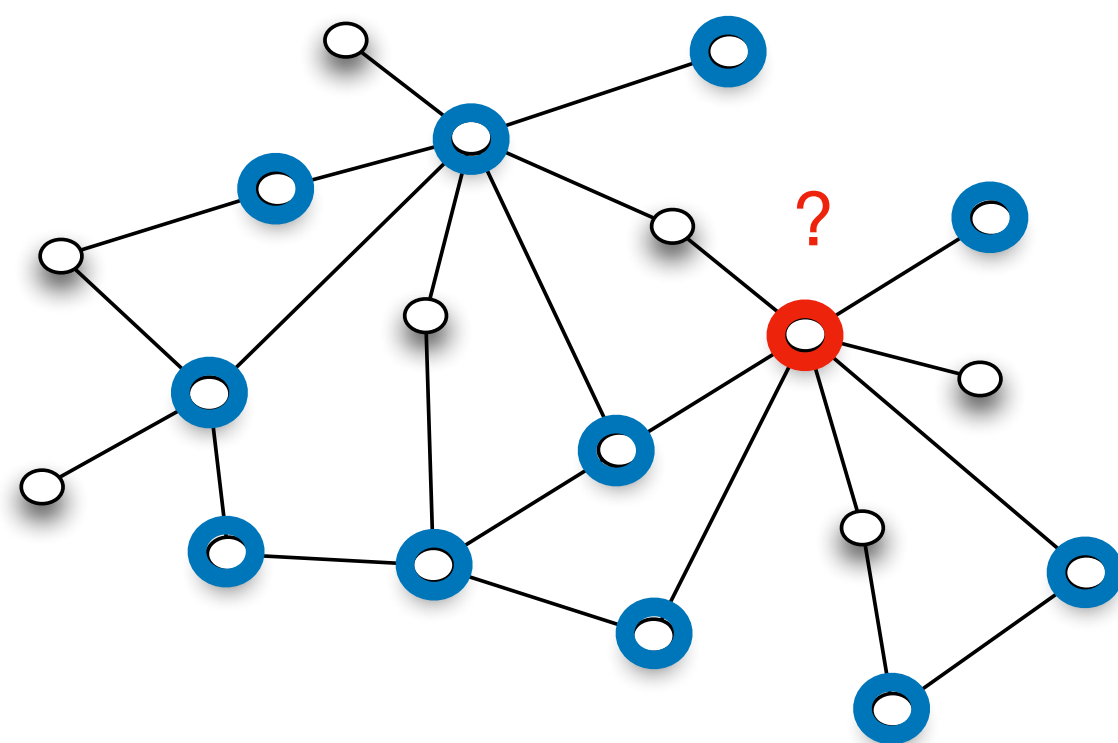


**Node
classification**

Prediction with graphs: examples

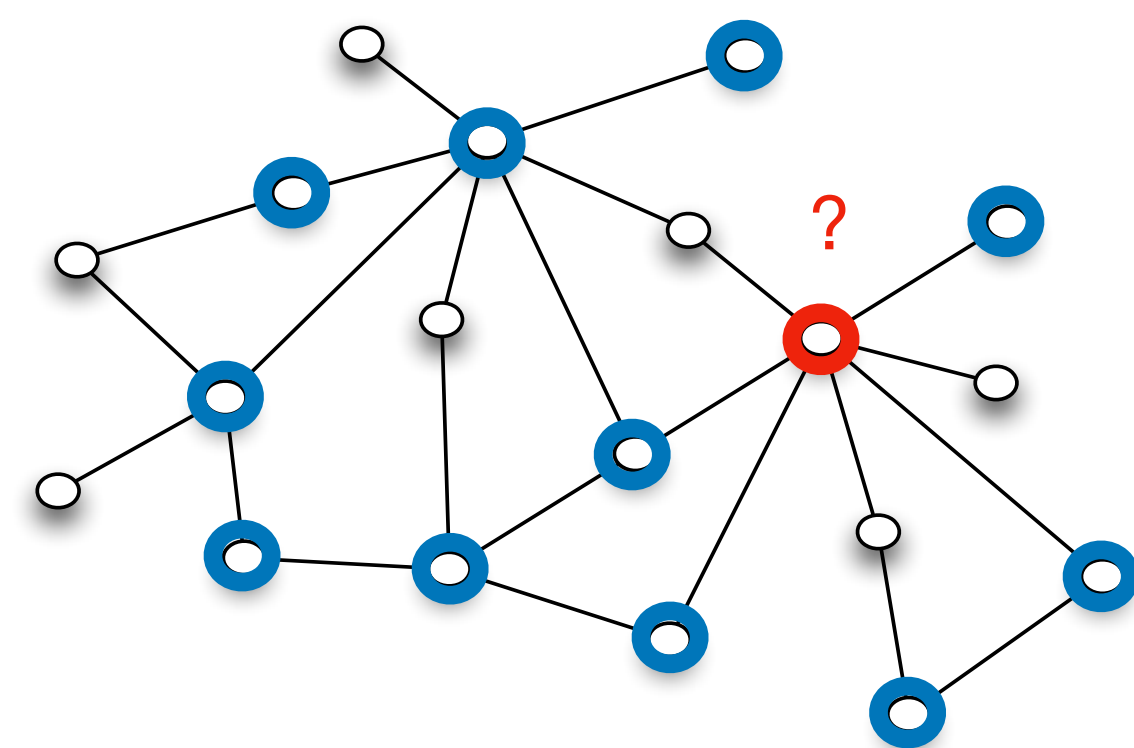


Node
classification

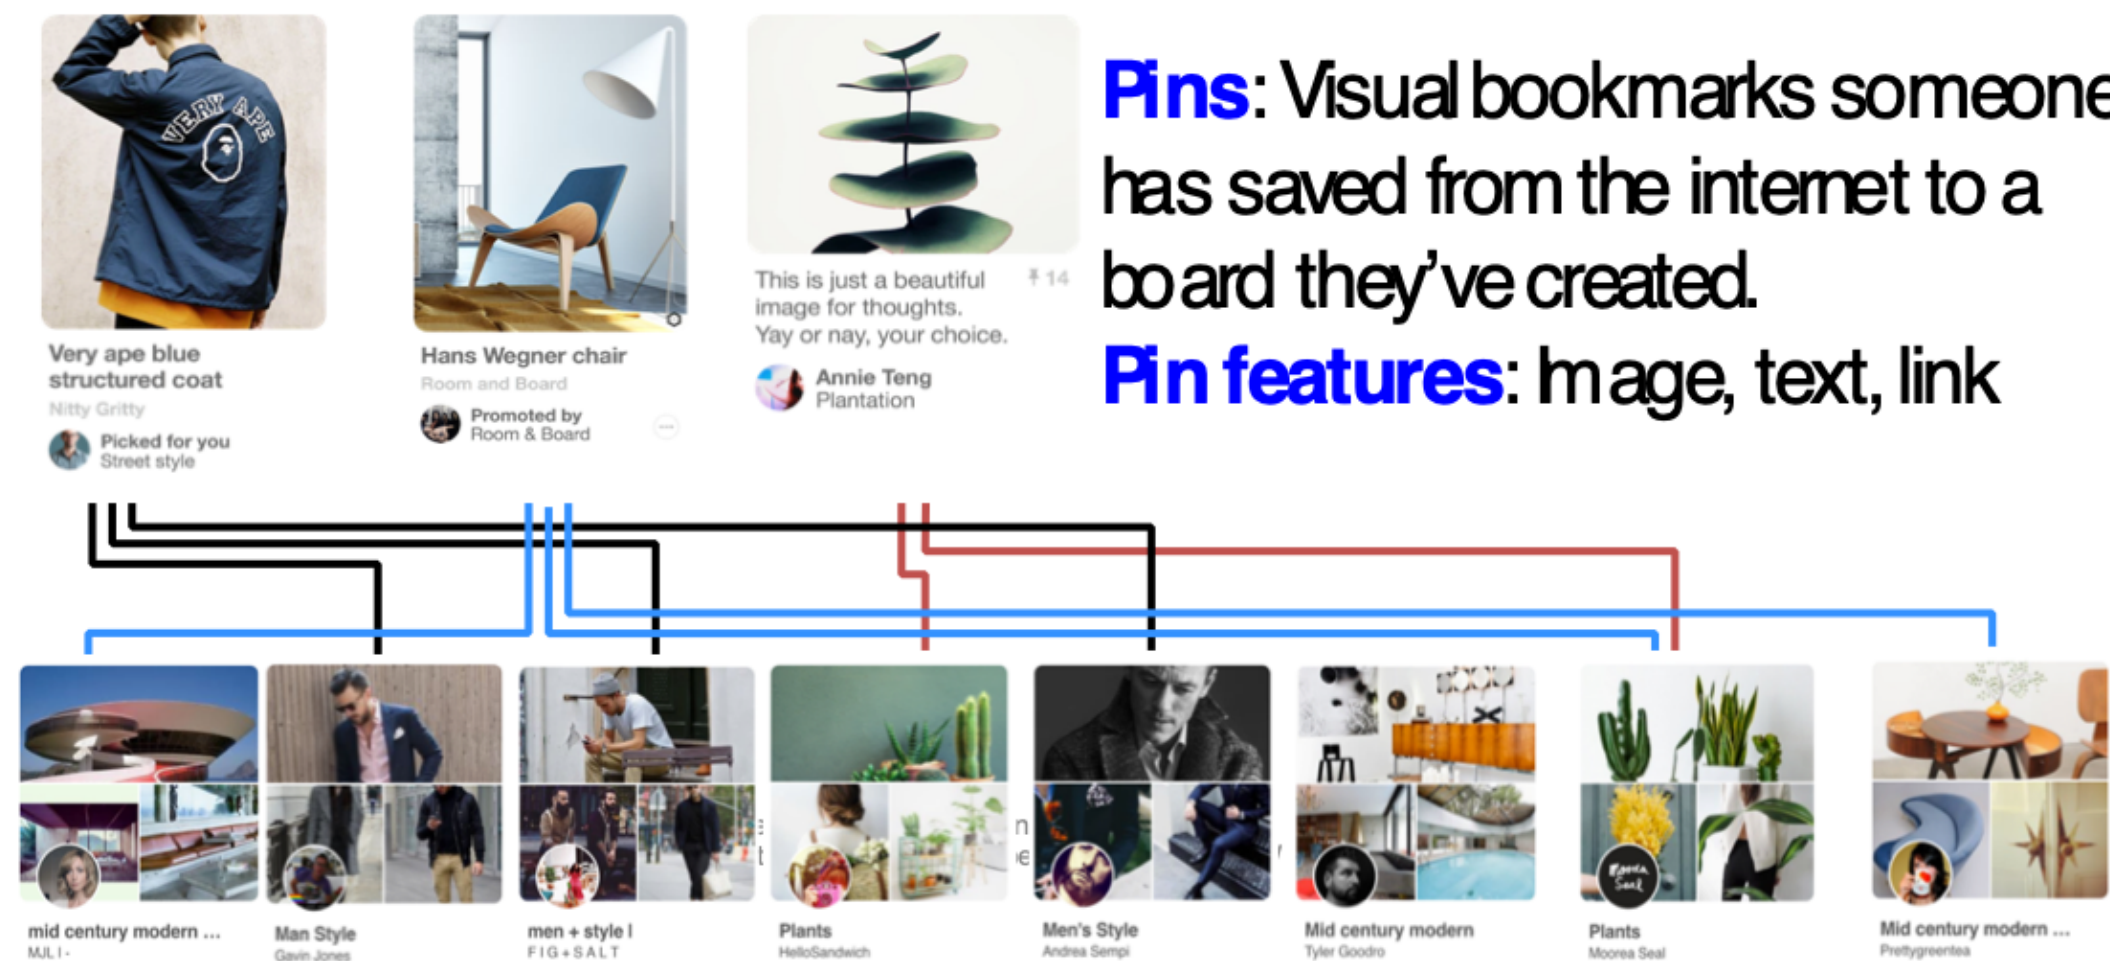


Boards
Link Prediction

(e.g. Ying et al, 2018; illustration: J. Leskovec)

Prediction with graphs: examples

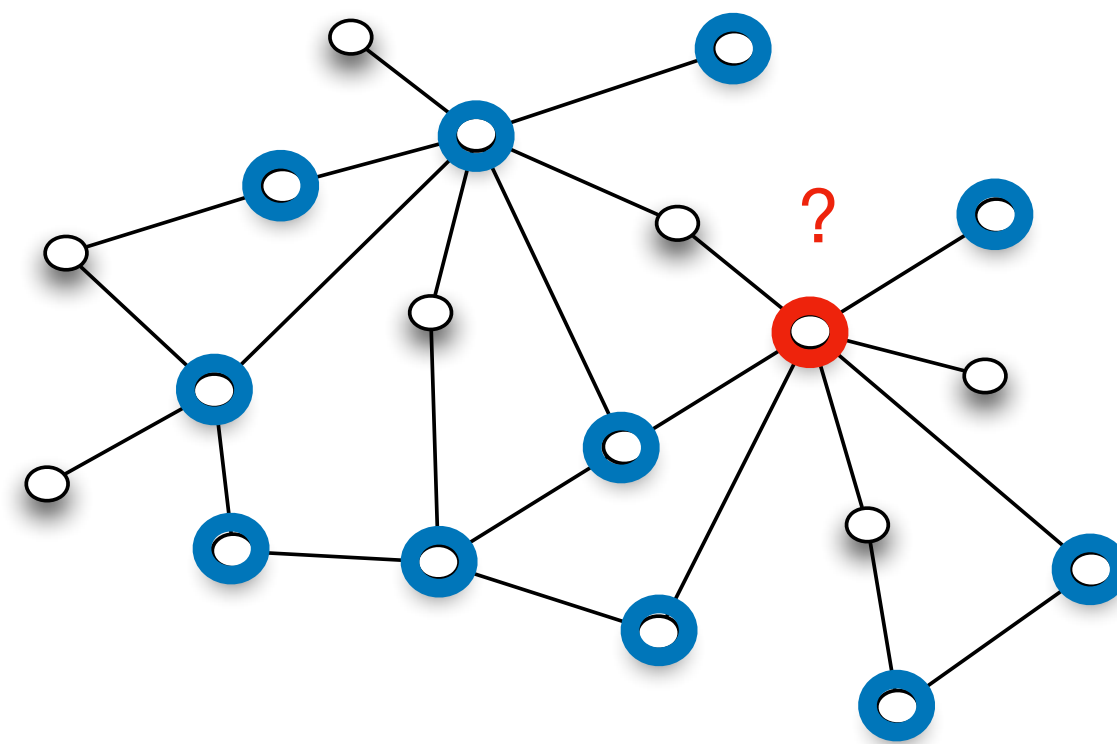

**Node
classification**

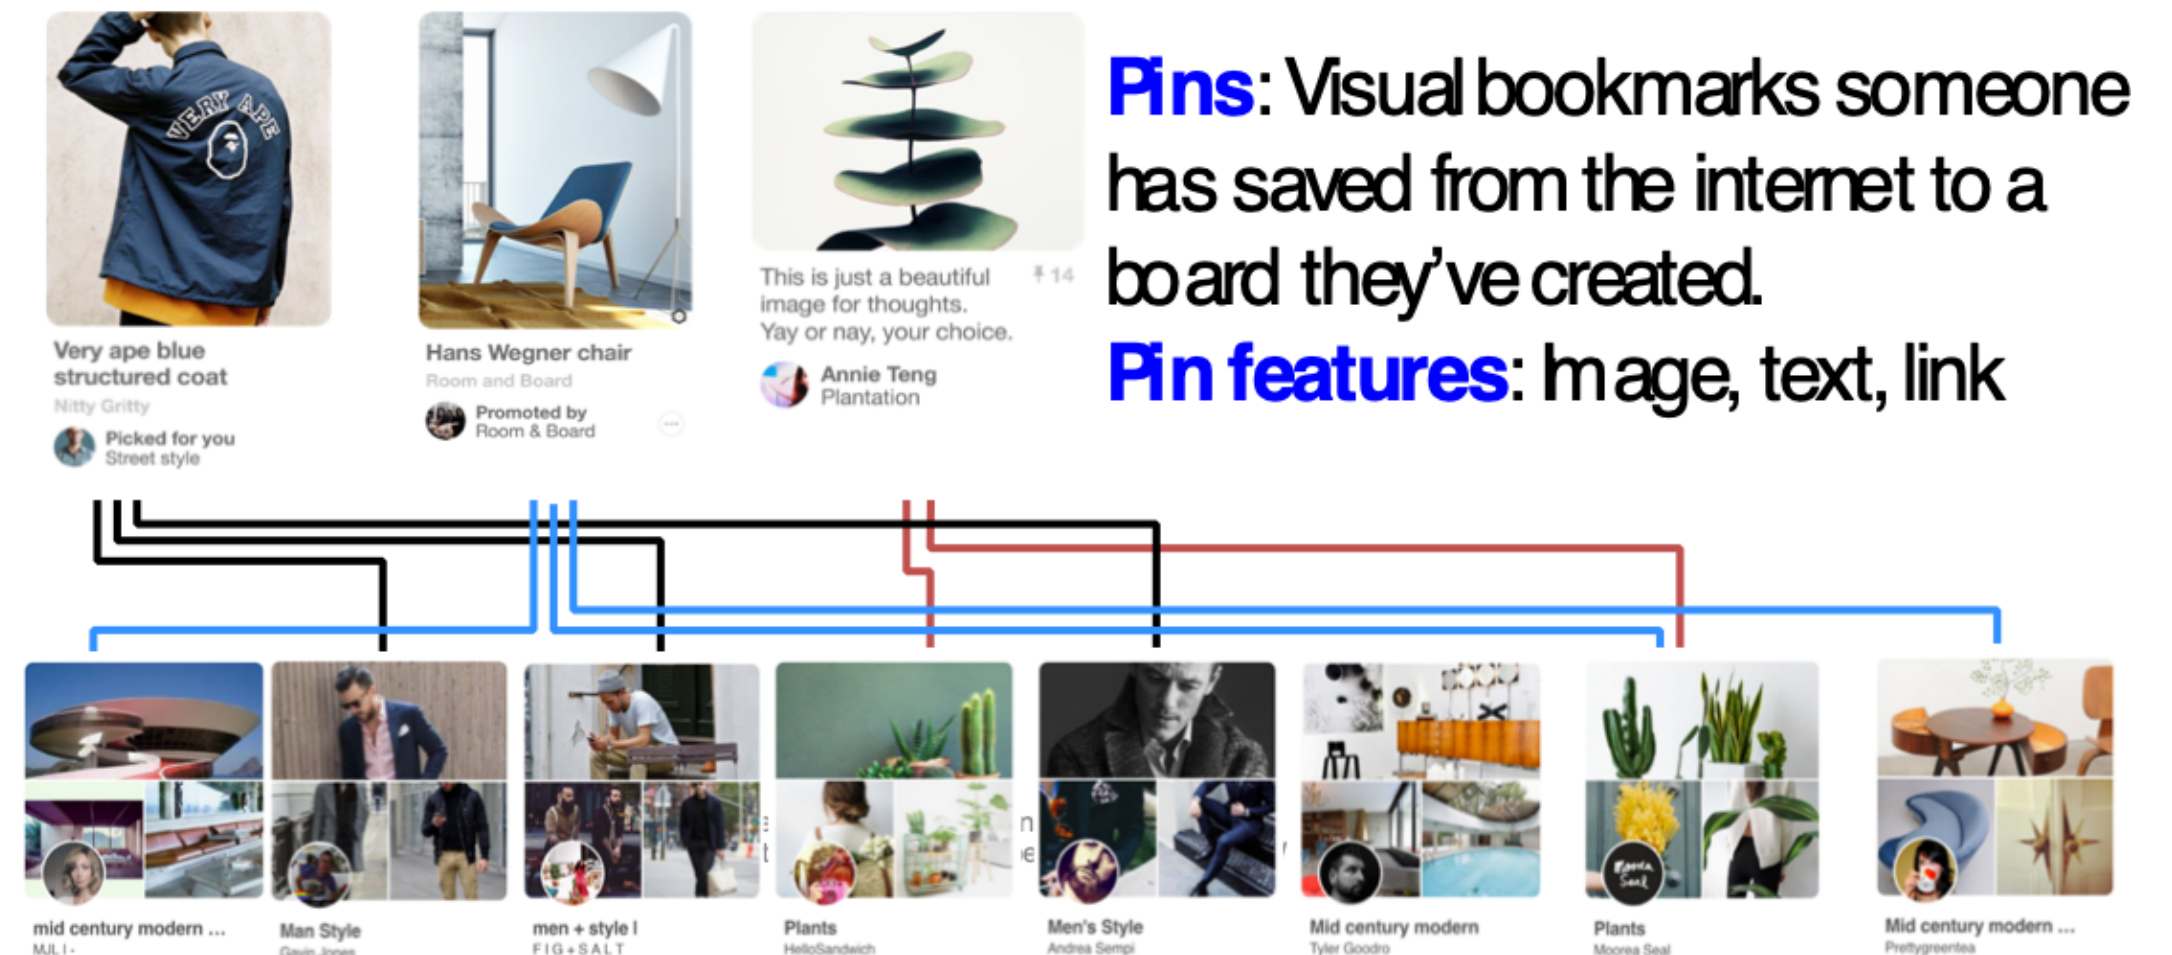



Boards

Link Prediction

(e.g. Ying et al, 2018; illustration: J. Leskovec)



concerned recommender systems, which are very naturally representable as a graph-structured task: with Pinterest being one of the most early adopters [18, 33]. GNNs have also been deployed for product recommendation at Amazon [12], E-commerce applications at Alibaba [32], engagement forecasting and friend ranking in Snapchat [22, 24], and most relevantly, they are powering traffic predictions within Baidu Maps [6].

Example: molecule property prediction

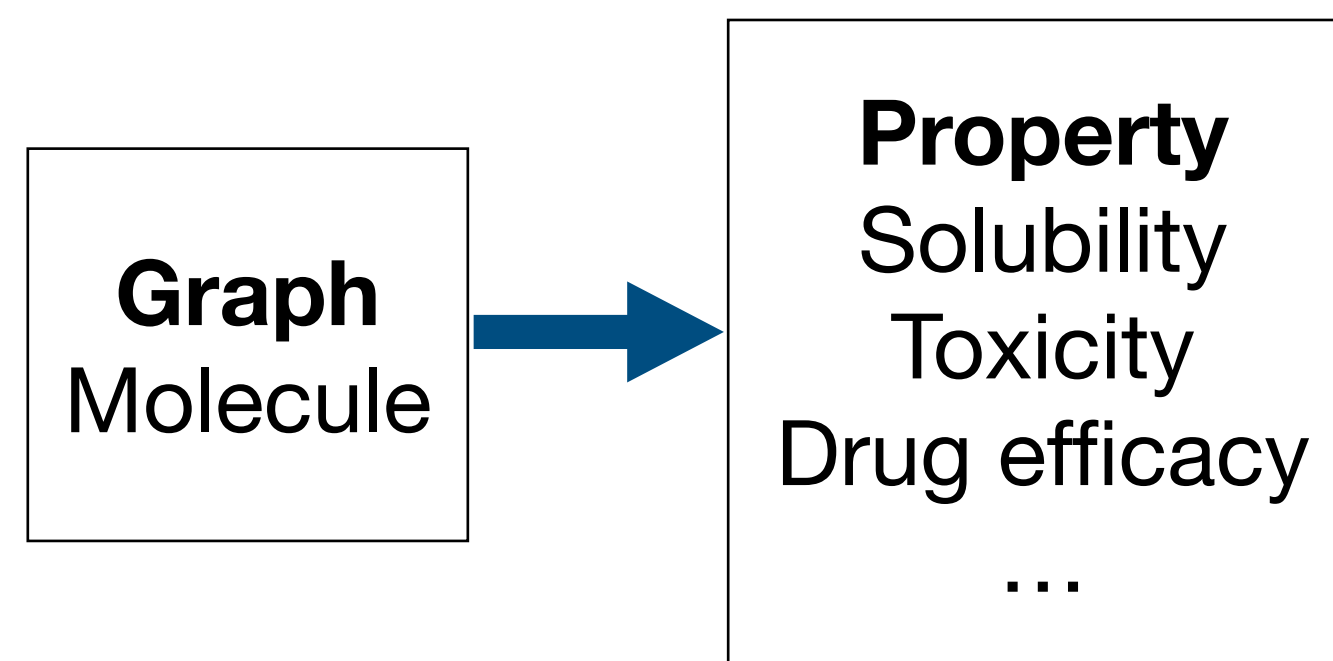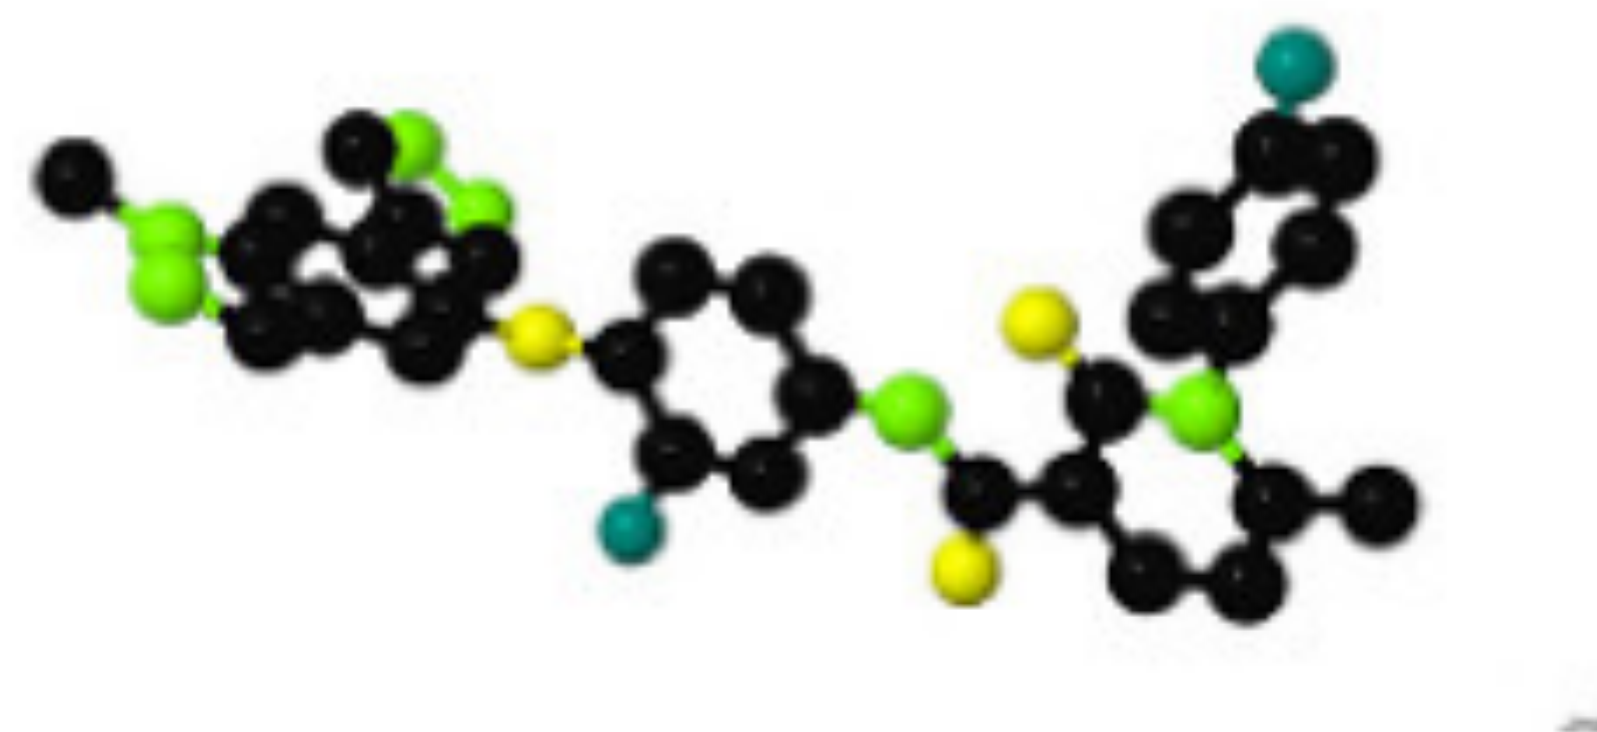


(Duvenaud et al, 2015, Stokes et al 2020,...)

Example: molecule property prediction

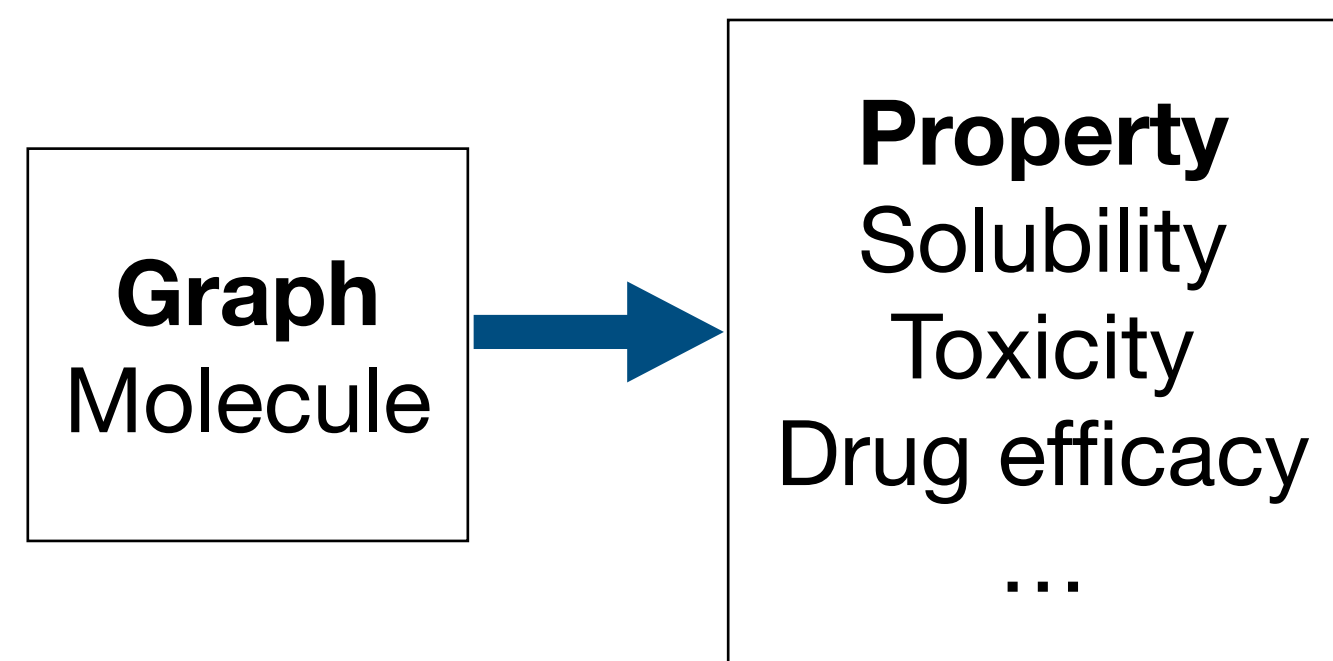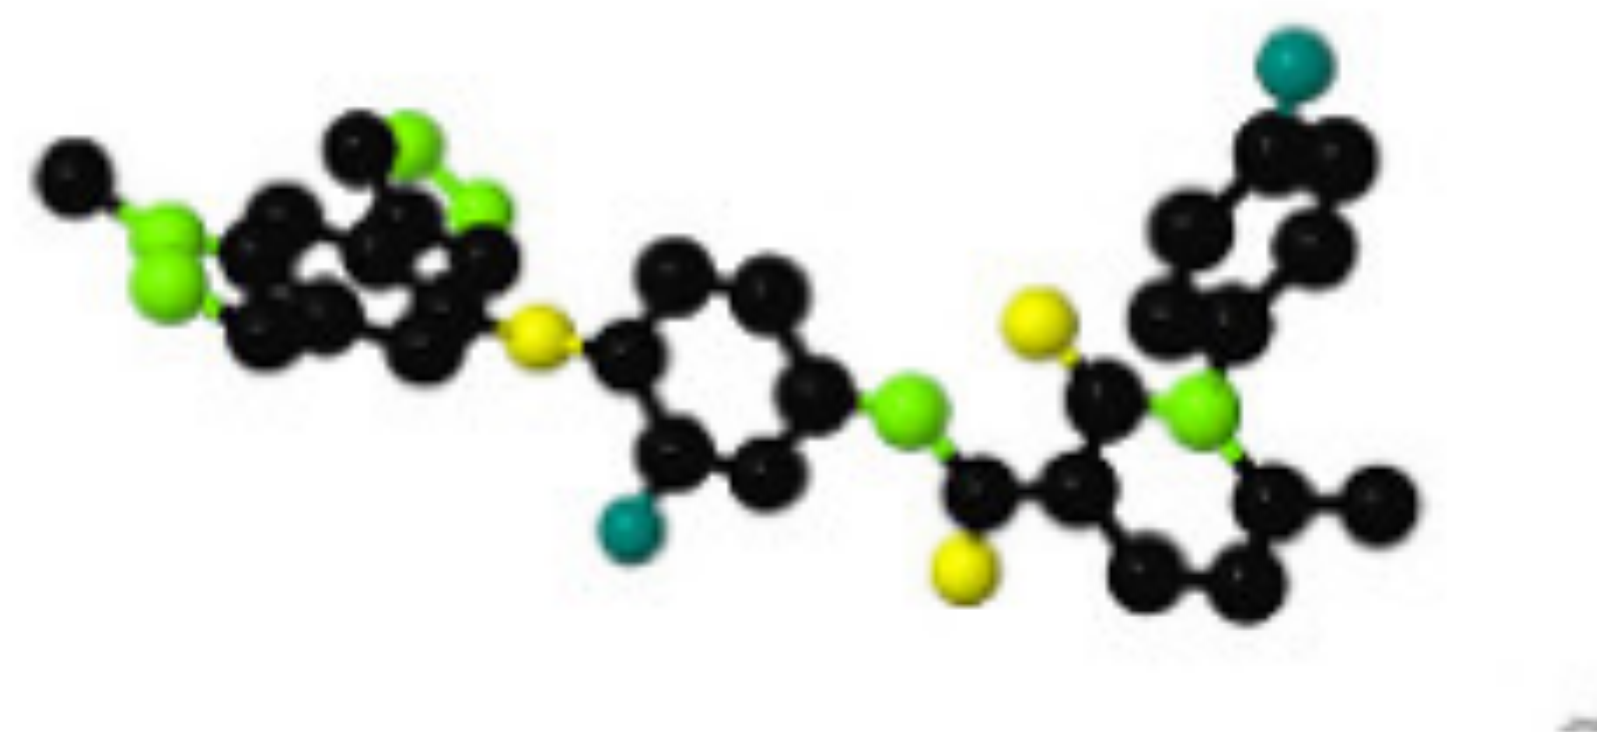


(Duvenaud et al, 2015, Stokes et al 2020,...)


On the cover: Antibiotic resistance is a pervasive public health problem, requiring the adoption of creative approaches to drug discovery. In this issue, ... [Show more](#)

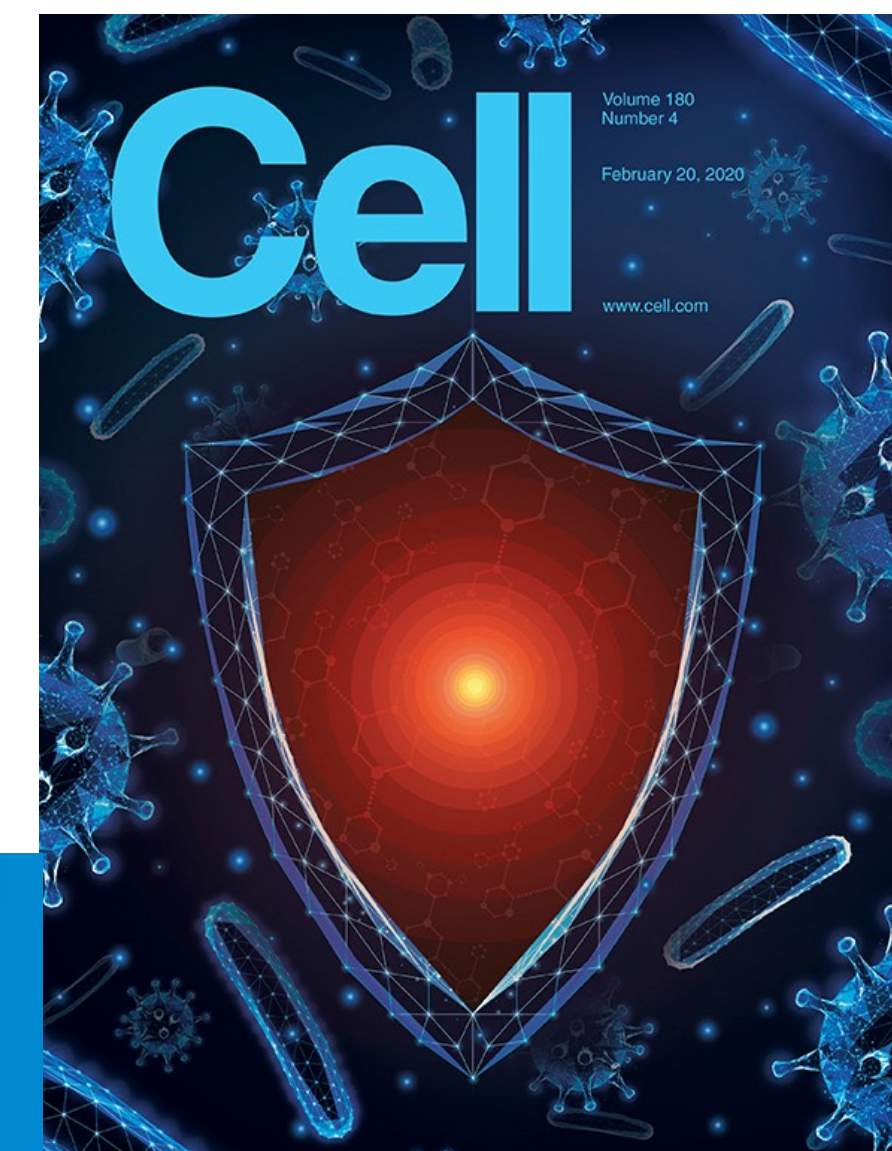

Example: Polypharmacy side effects

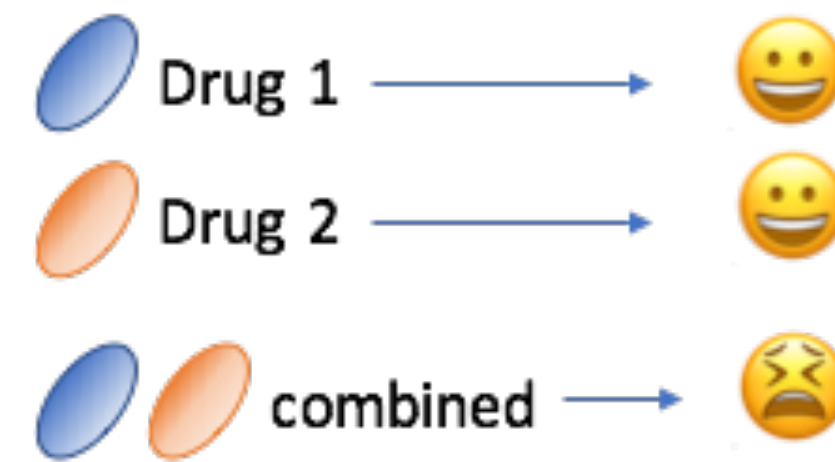

Example: Polypharmacy side effects

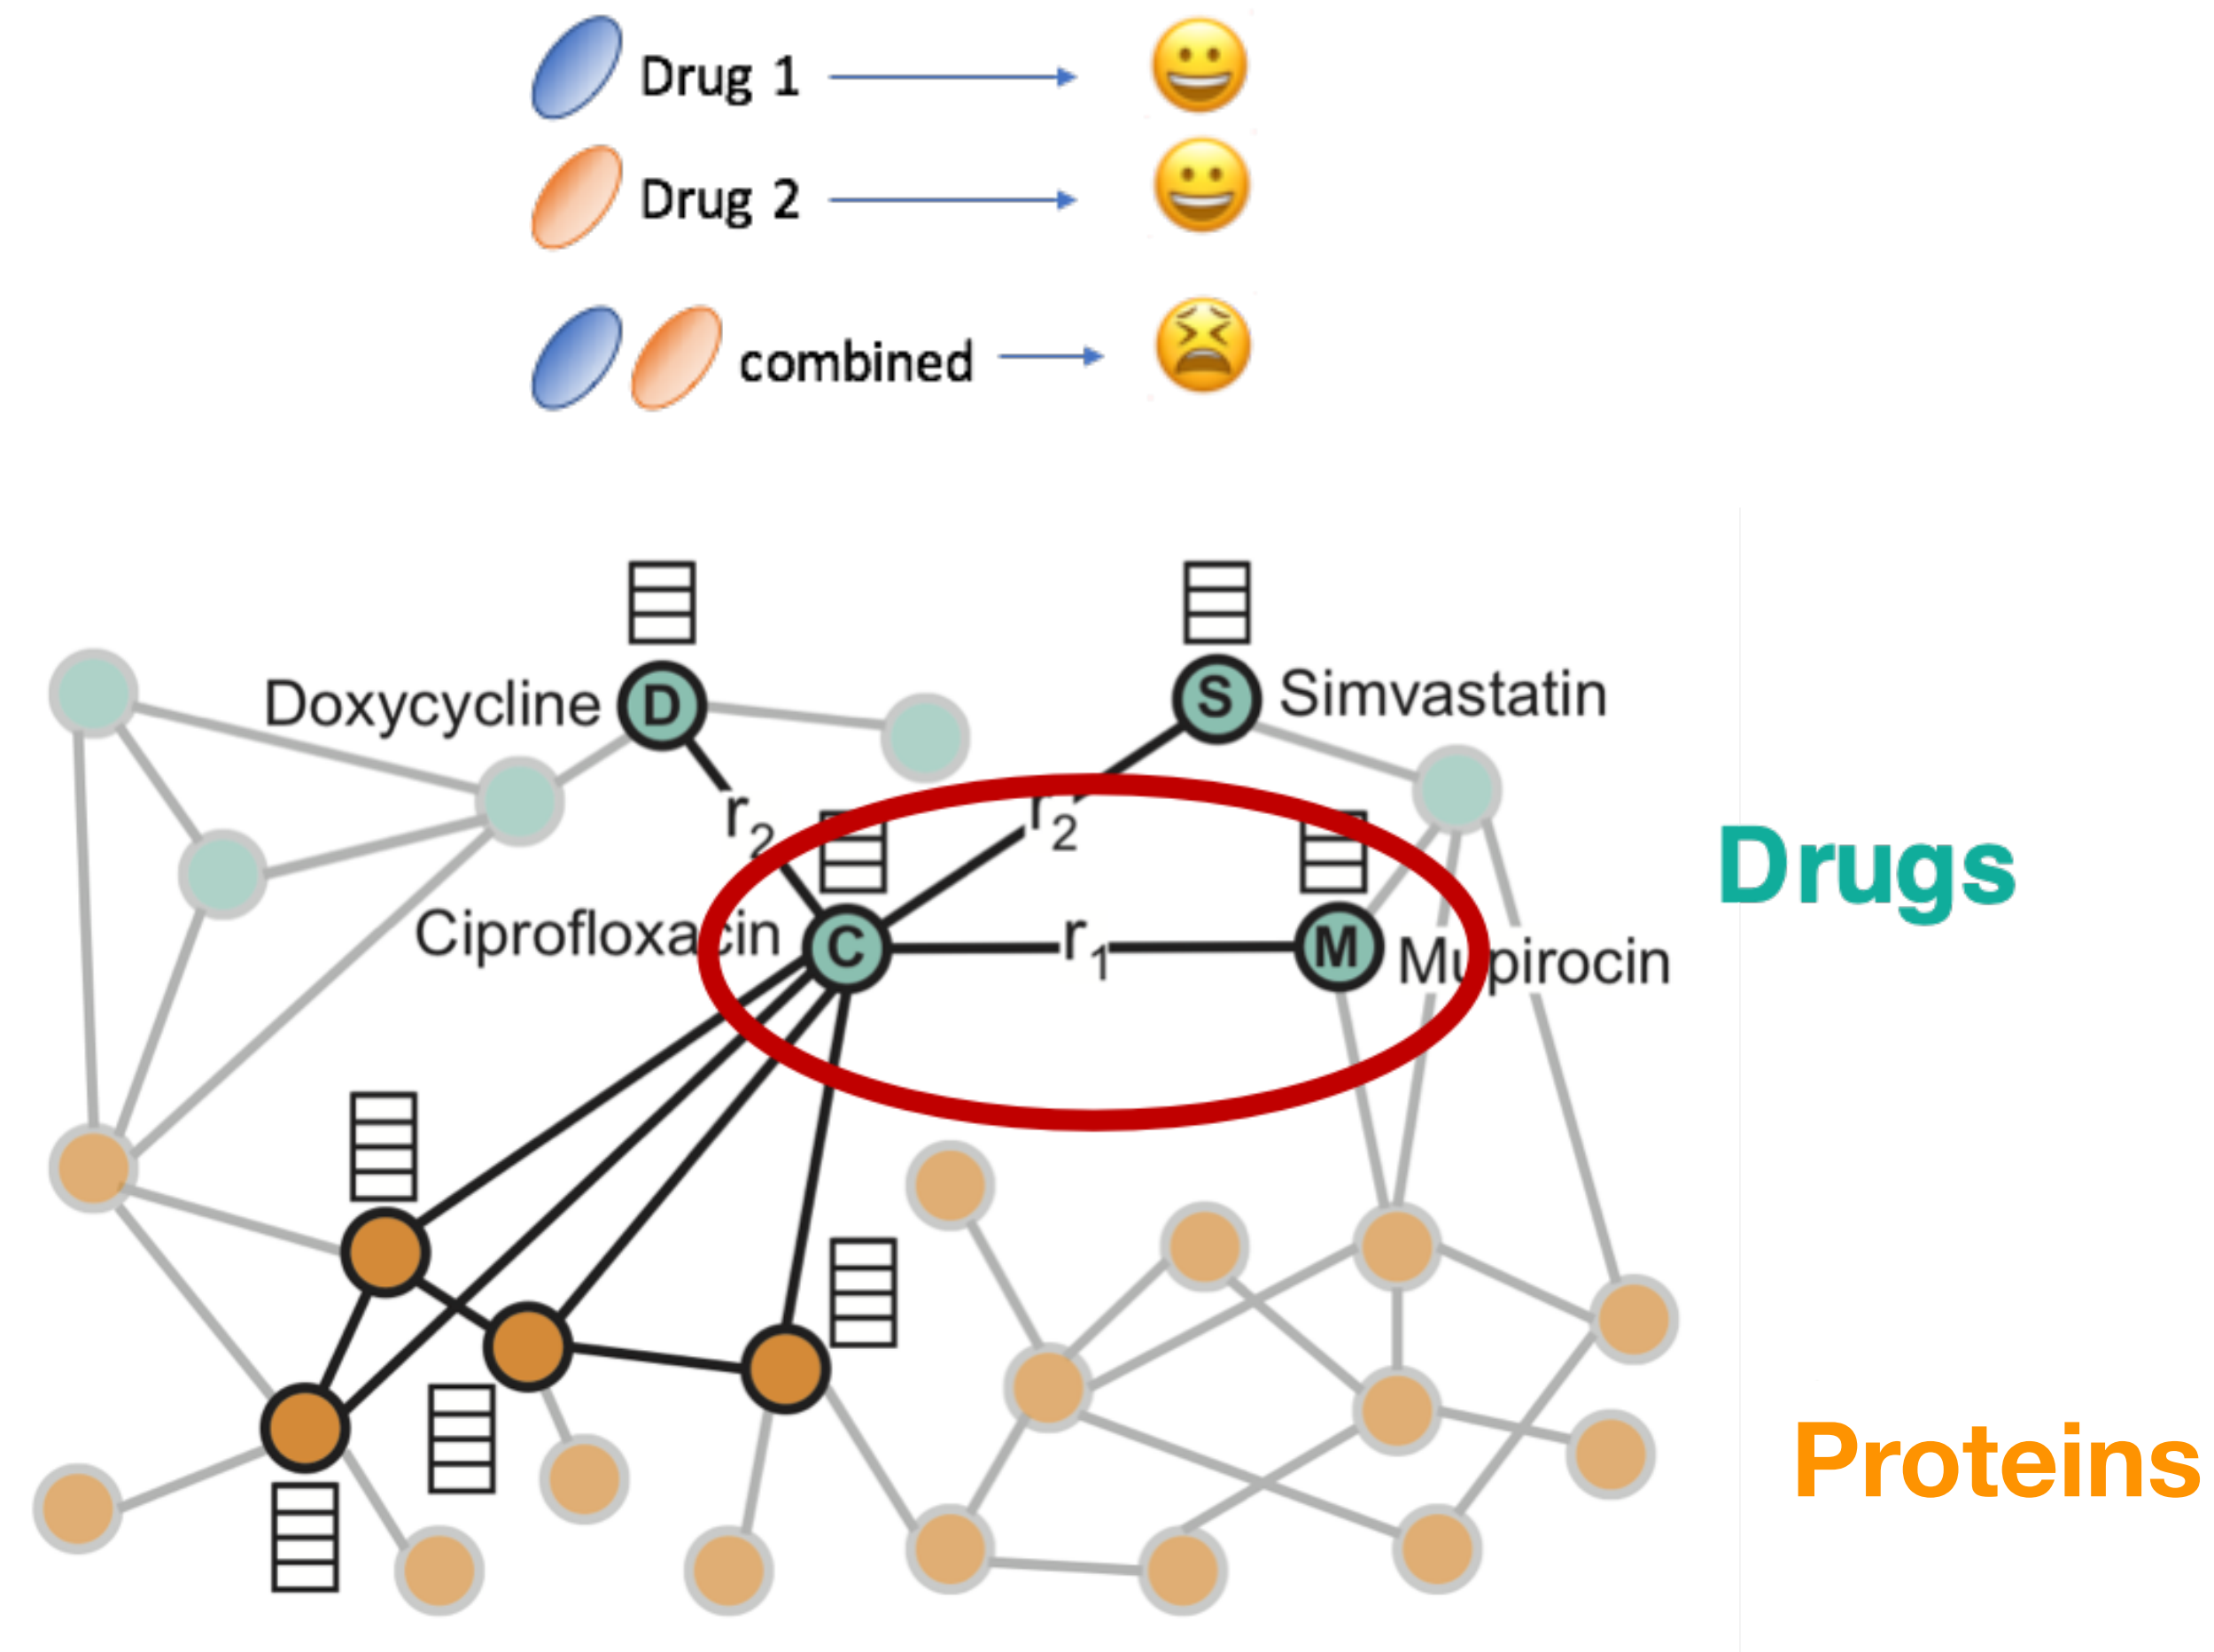

Pair of Nodes
Drugs



Edge
Interaction type

Example: Predicting traffic times




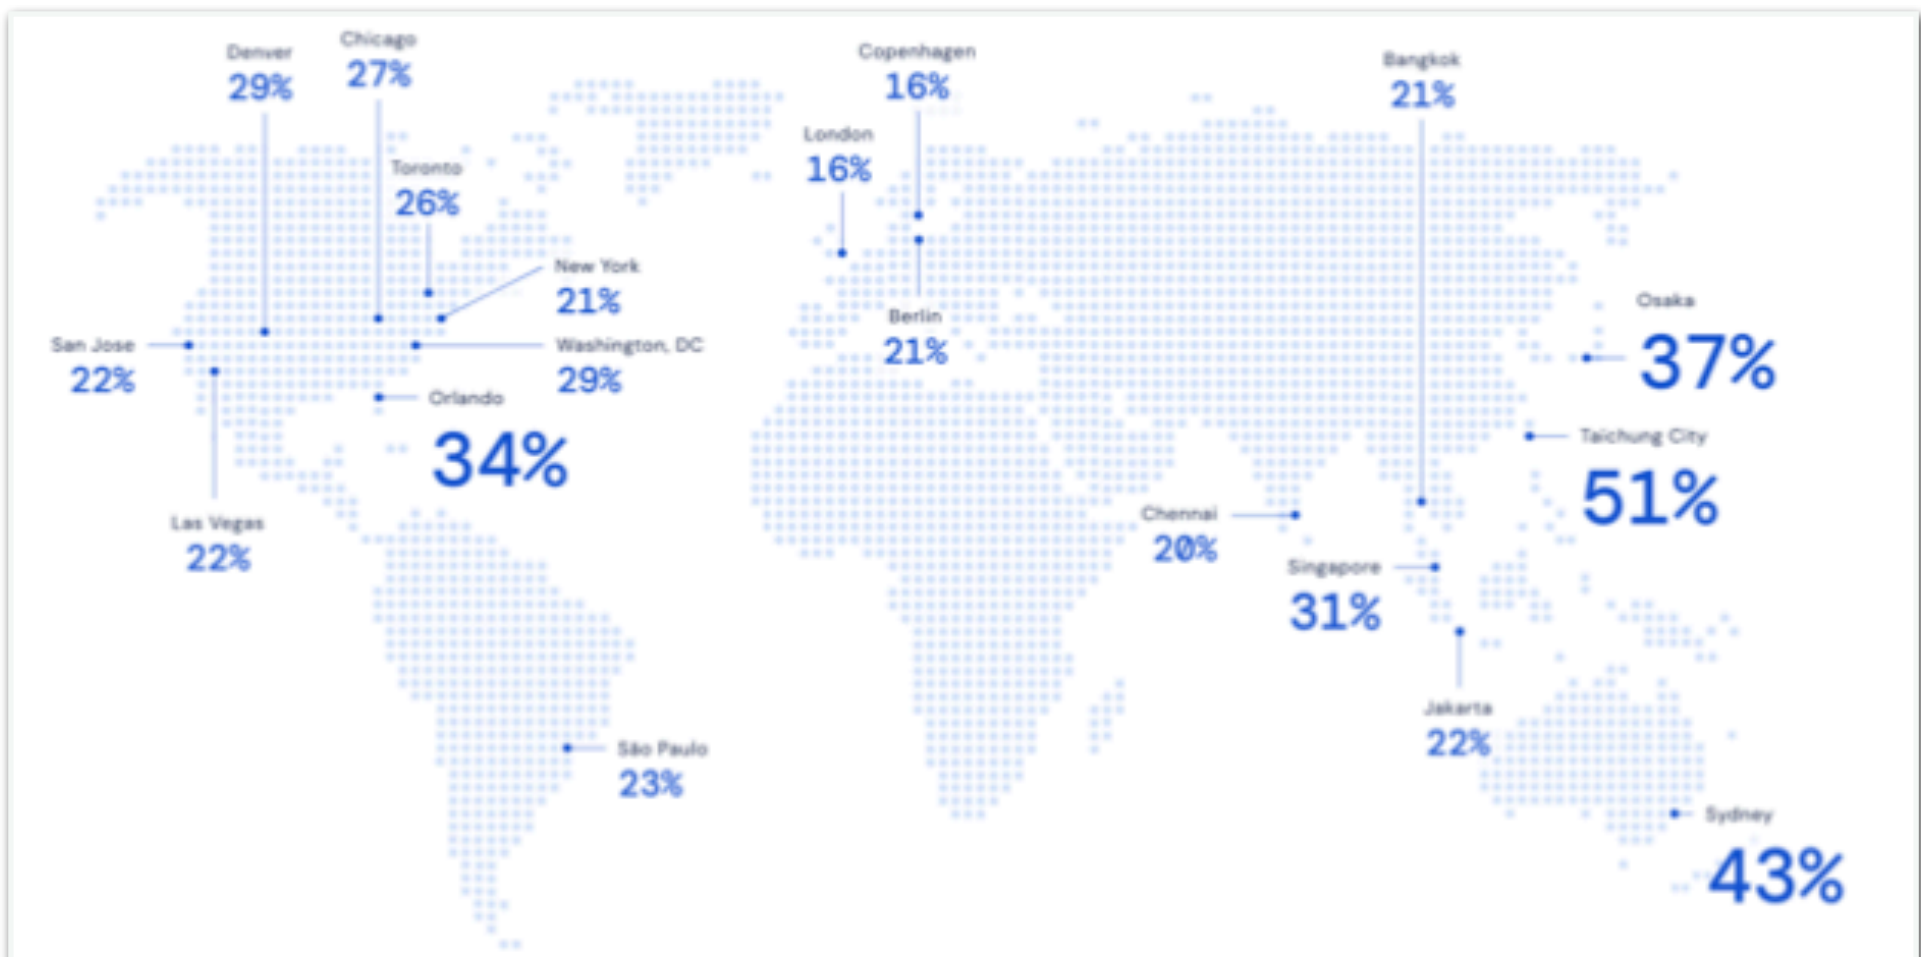


Figure 1: Google Maps estimated time-of-arrival (ETA) prediction improvements for several world regions, when using our deployed graph neural network-based estimator. Numbers represent relative reduction in negative ETA outcomes compared to the prior approach used in production. A negative ETA outcome occurs when the ETA error from the observed travel duration is over some threshold and acts as a

Example: learning to simulate physics

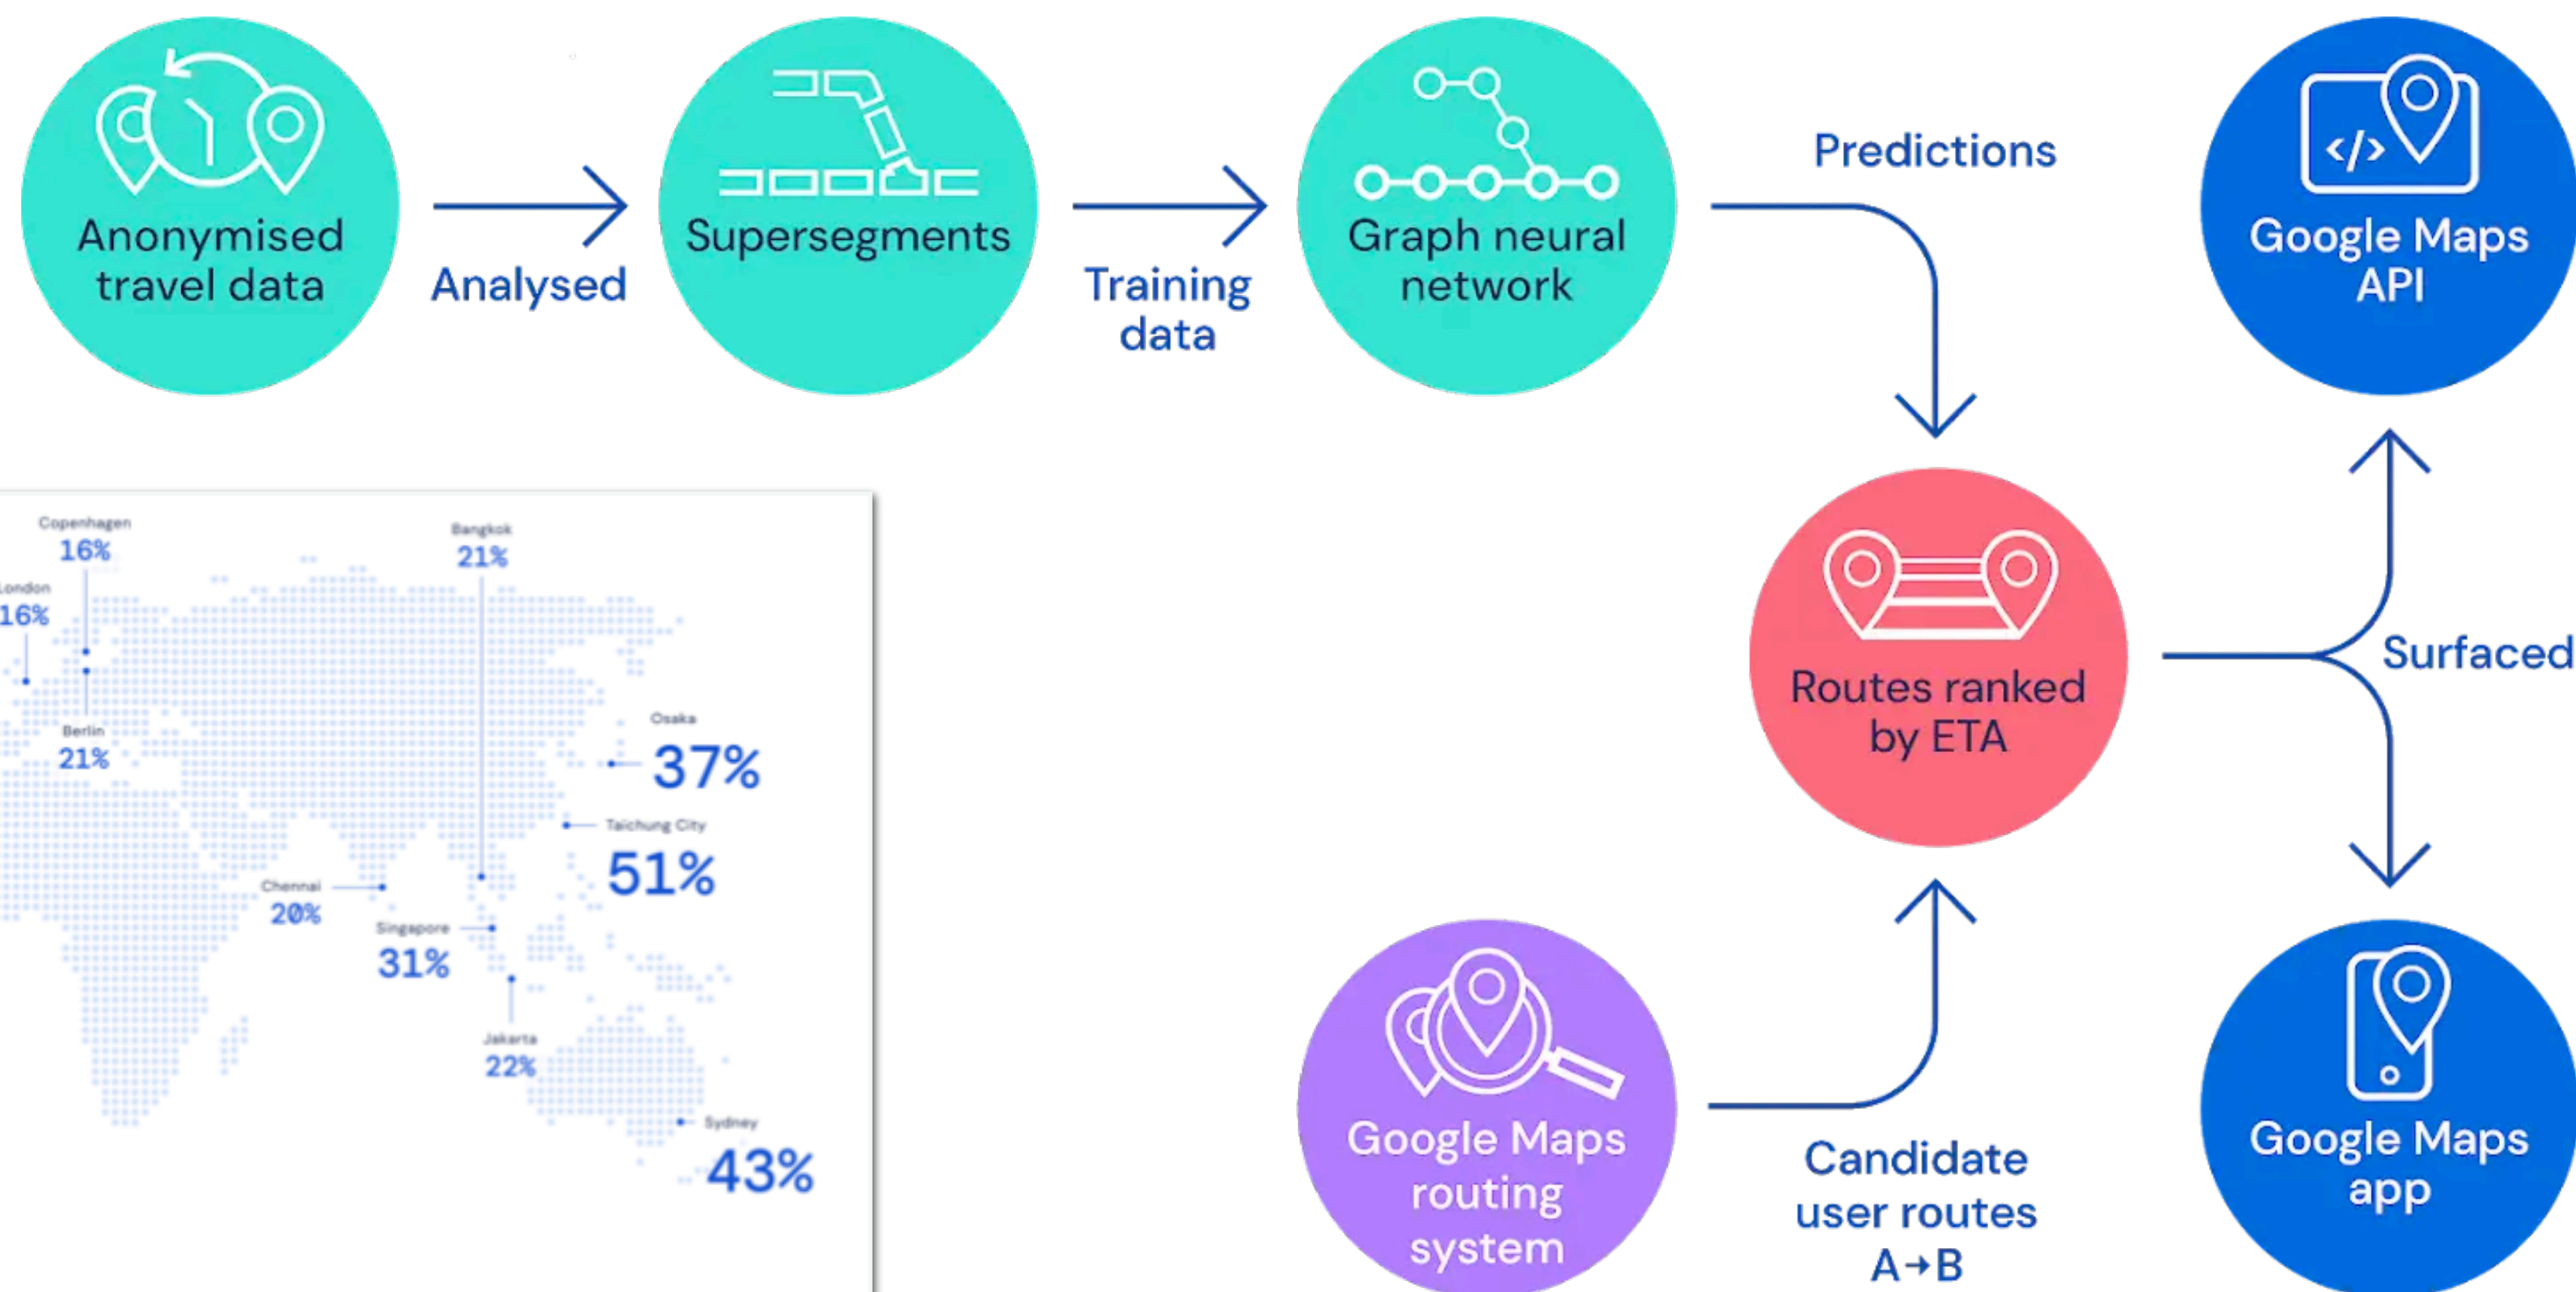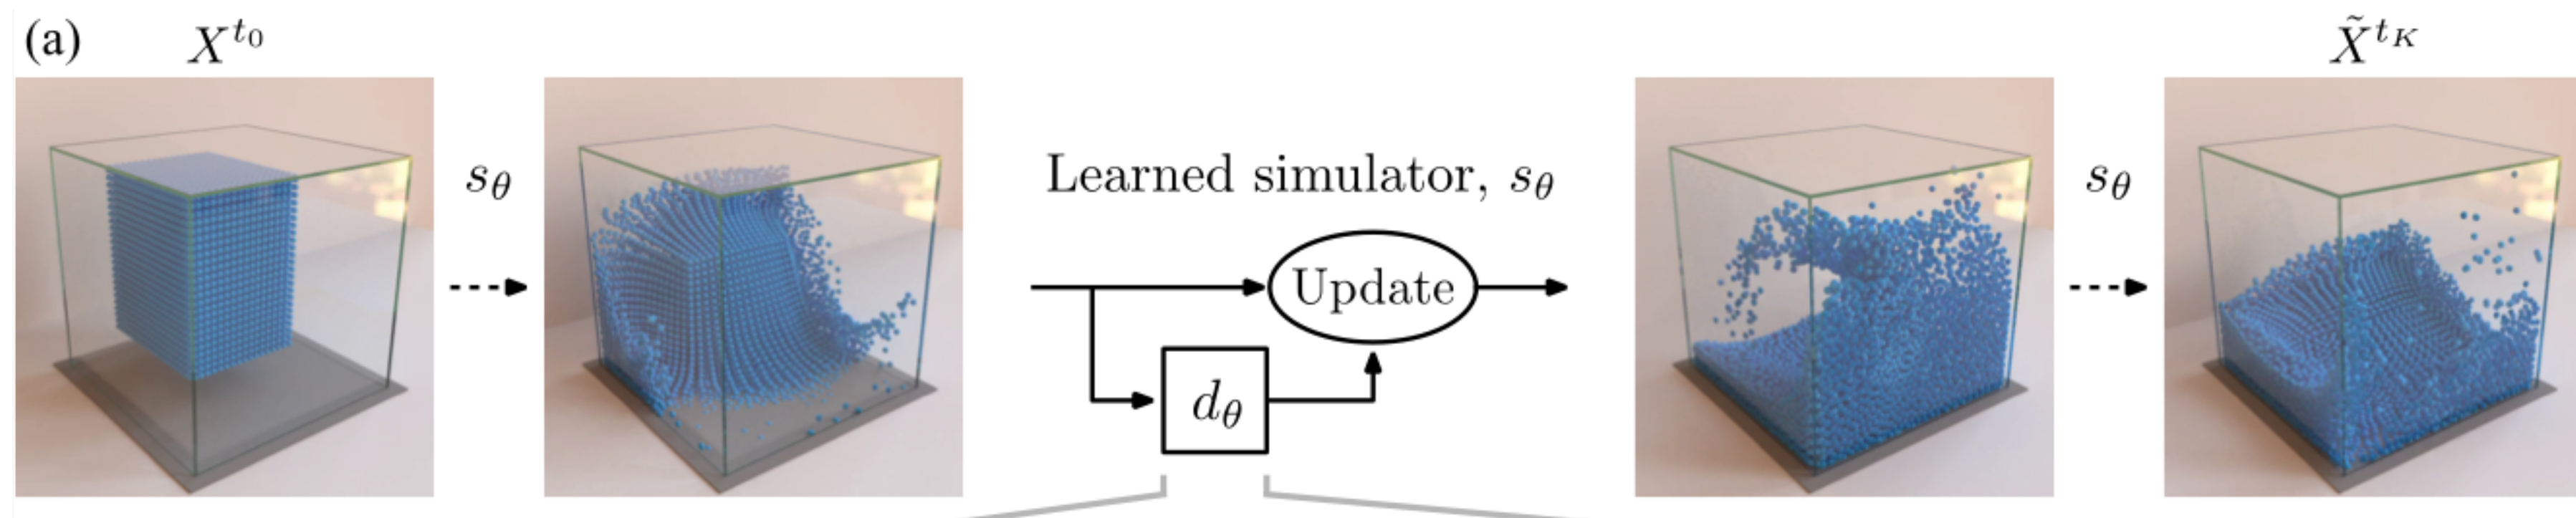

Example: learning to simulate physics

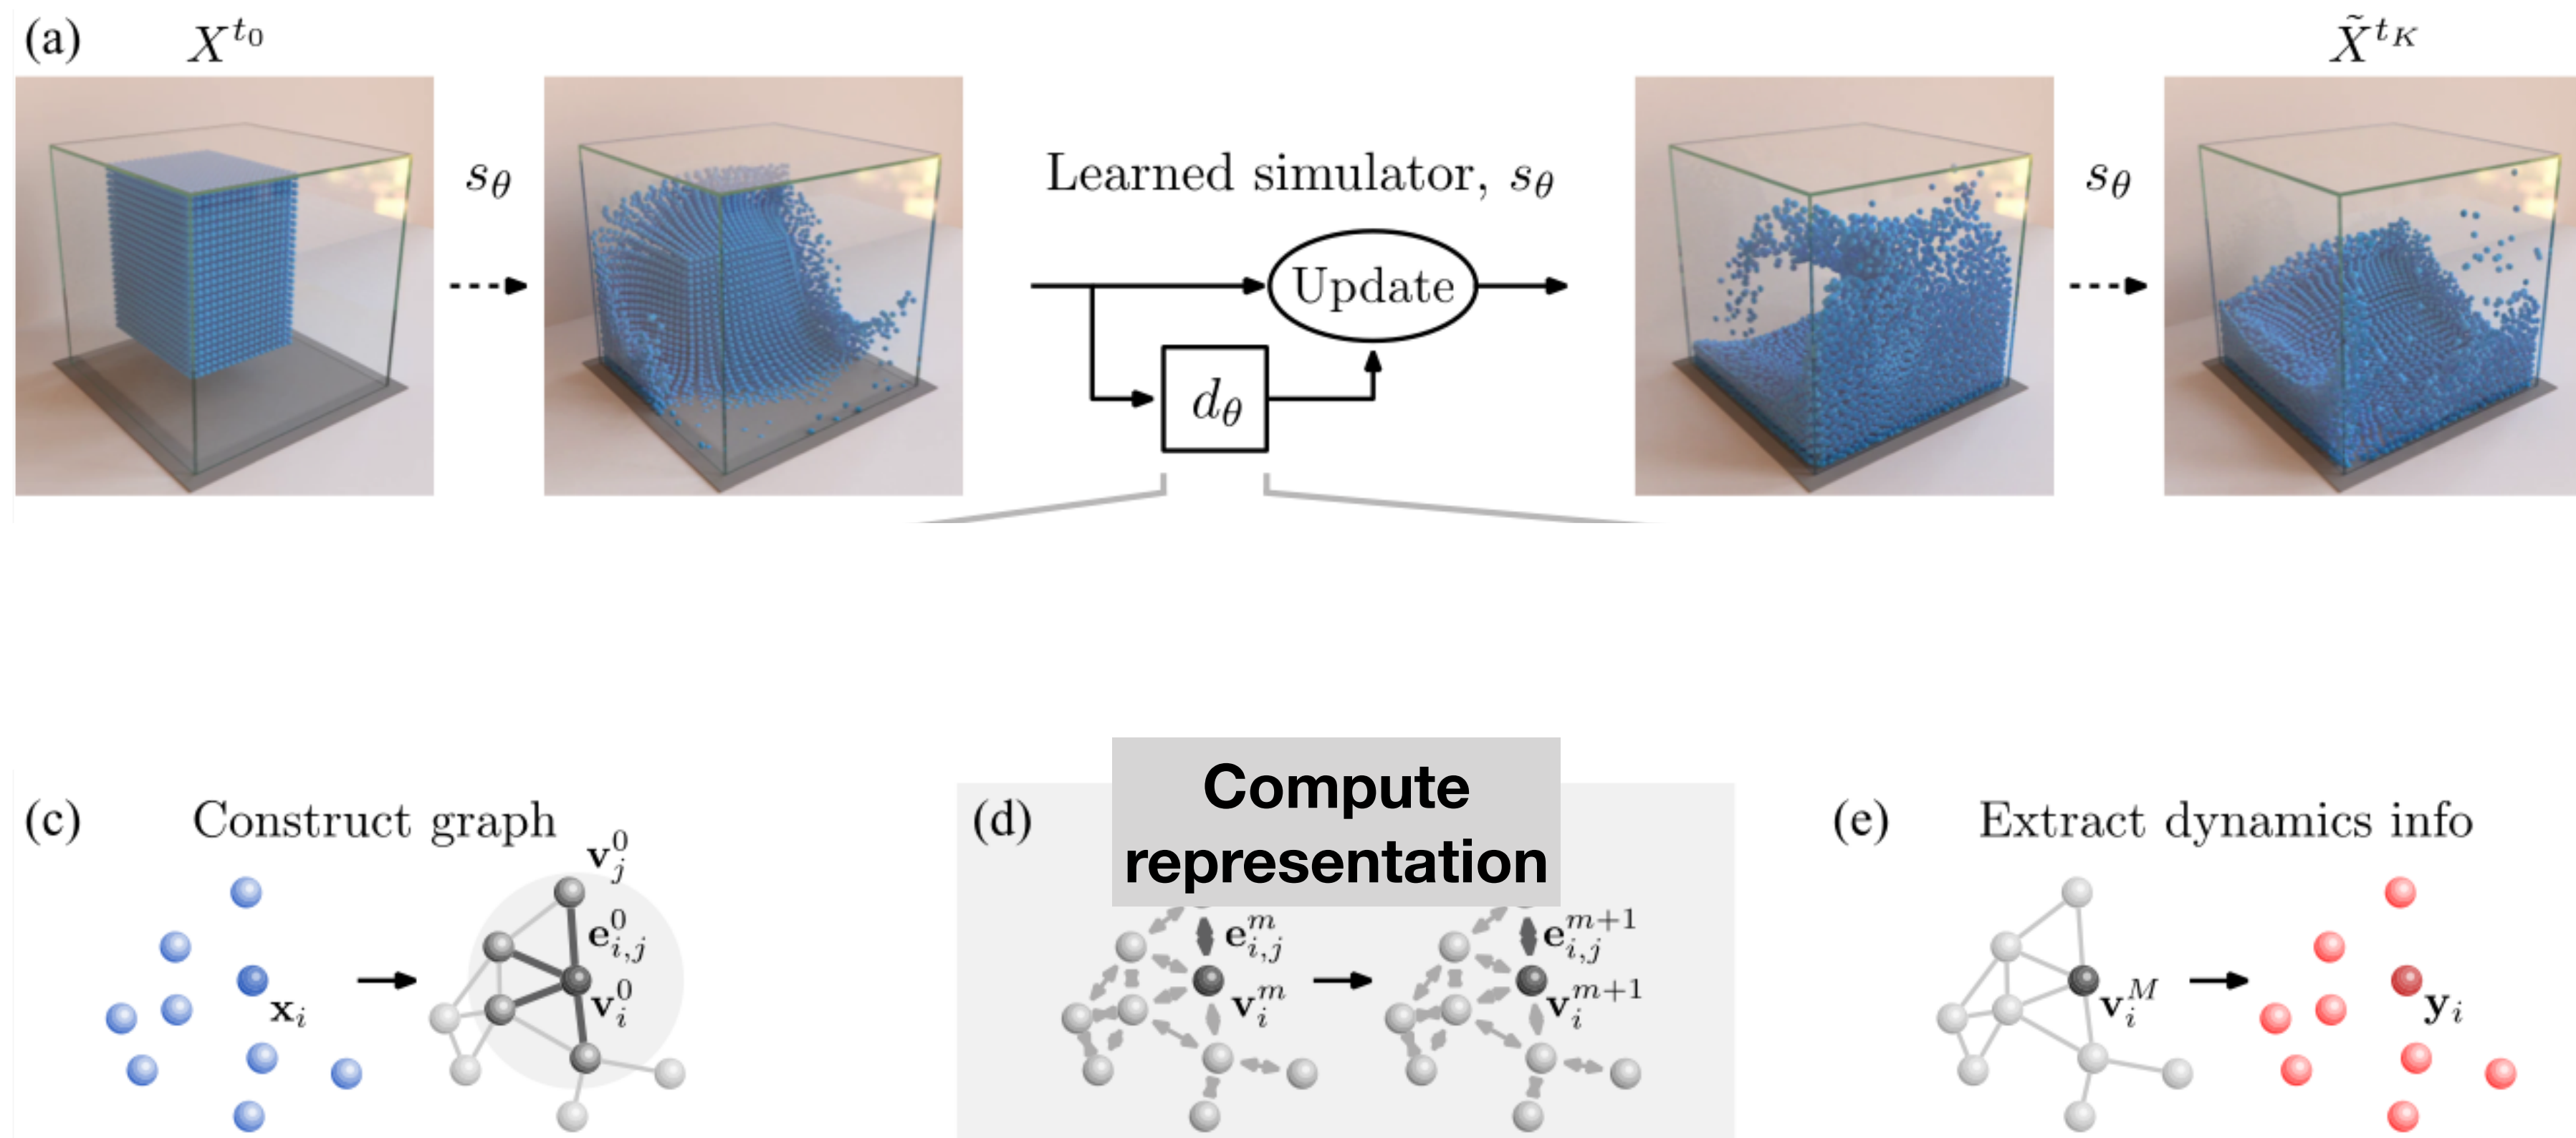


Collection of Nodes
Particles

New state


(Sanchez-Gonzalez et al, 2020)

Example: (Combinatorial) Optimization

- replace full algorithm or learn steps (e.g. branching decision)

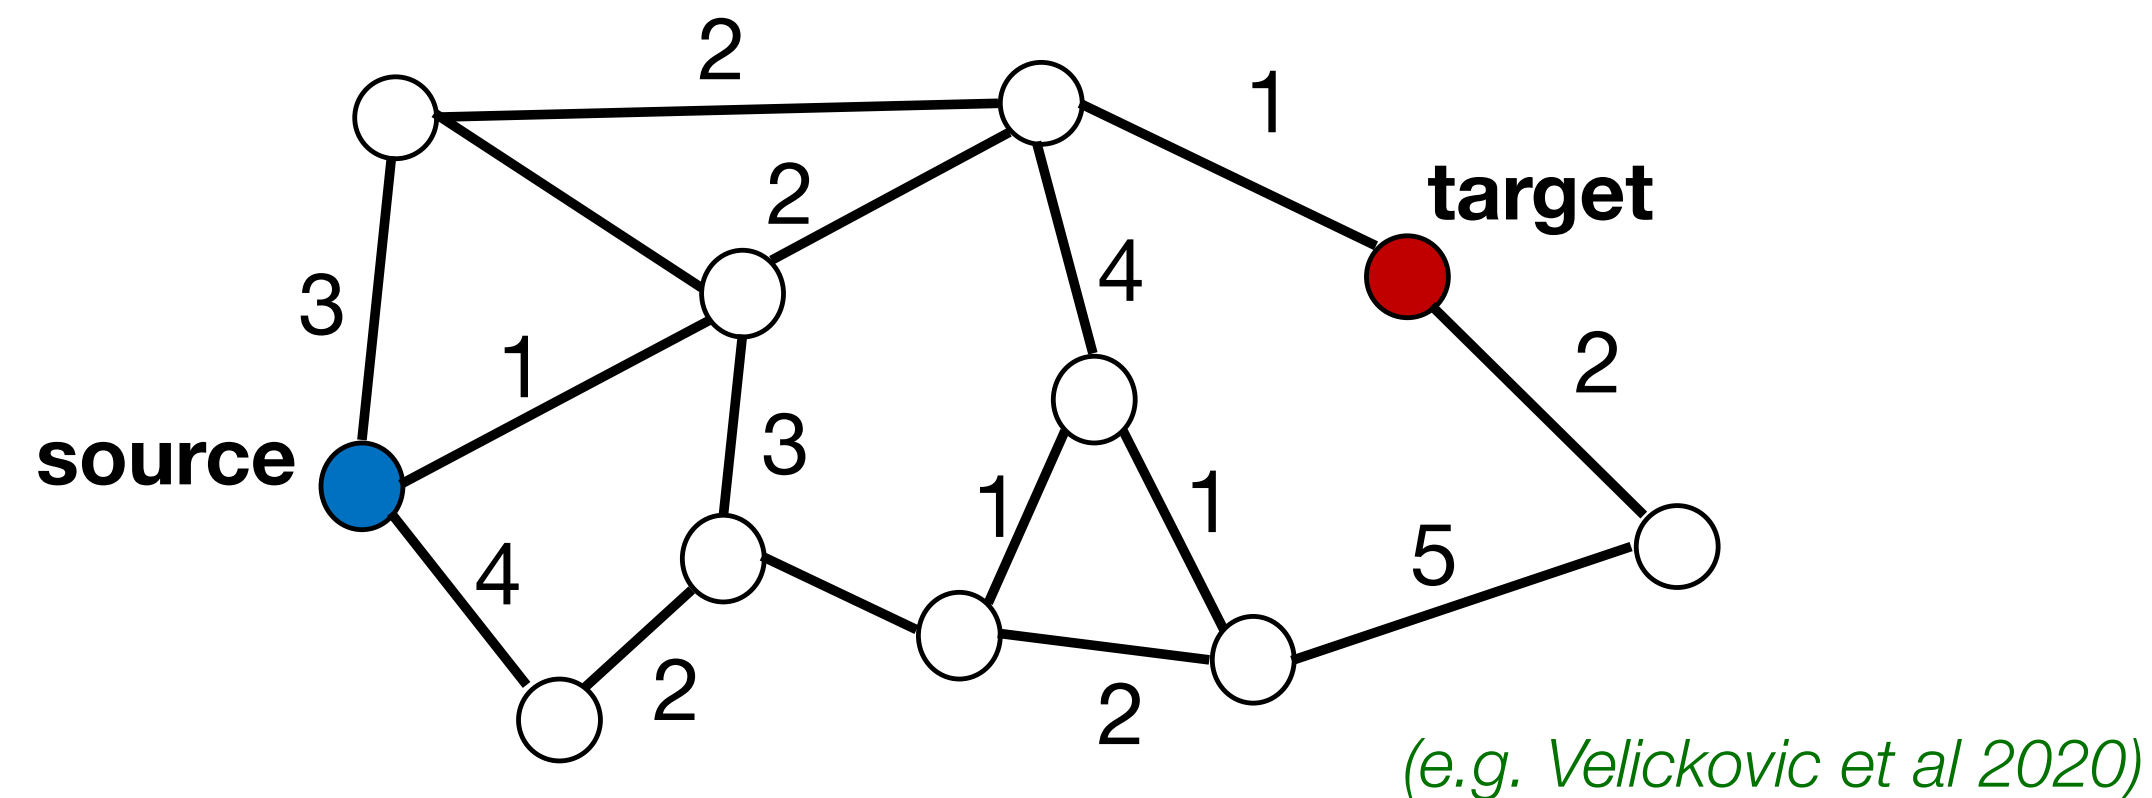


“Neural Algorithmic Reasoning”

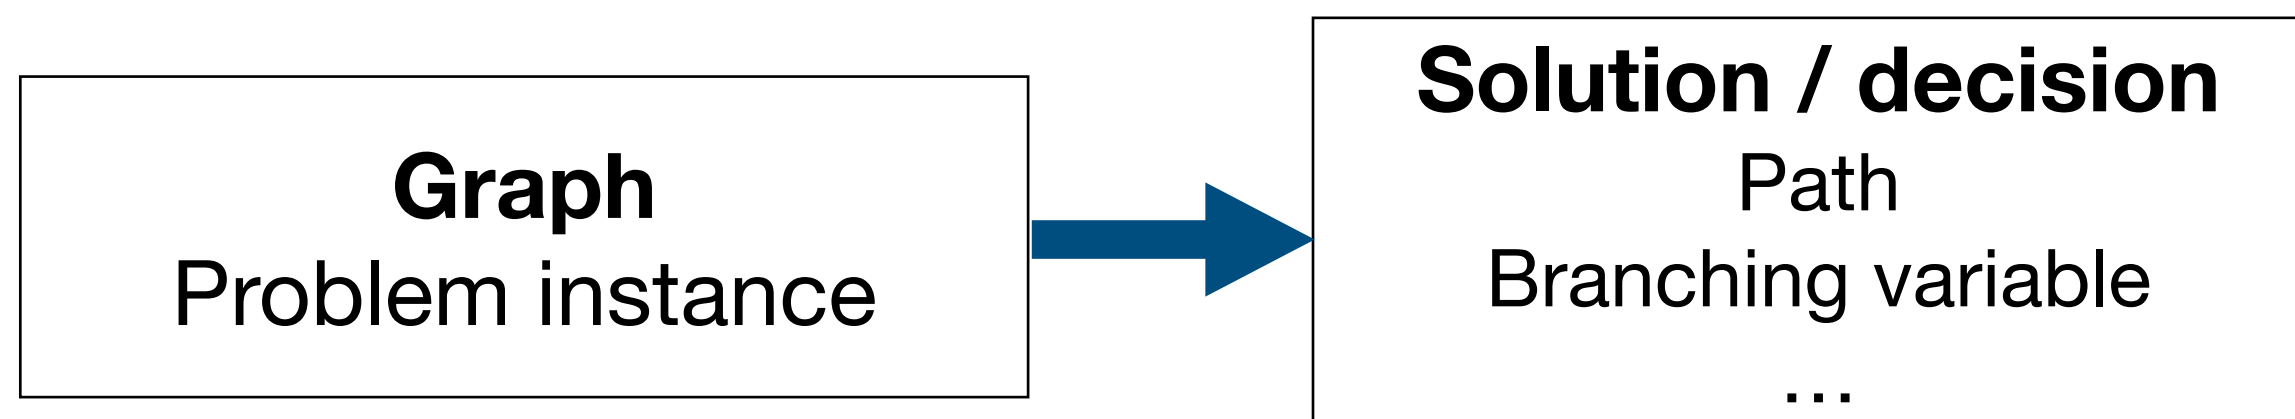

Example: (Combinatorial) Optimization

- replace full algorithm or learn steps (e.g. branching decision)

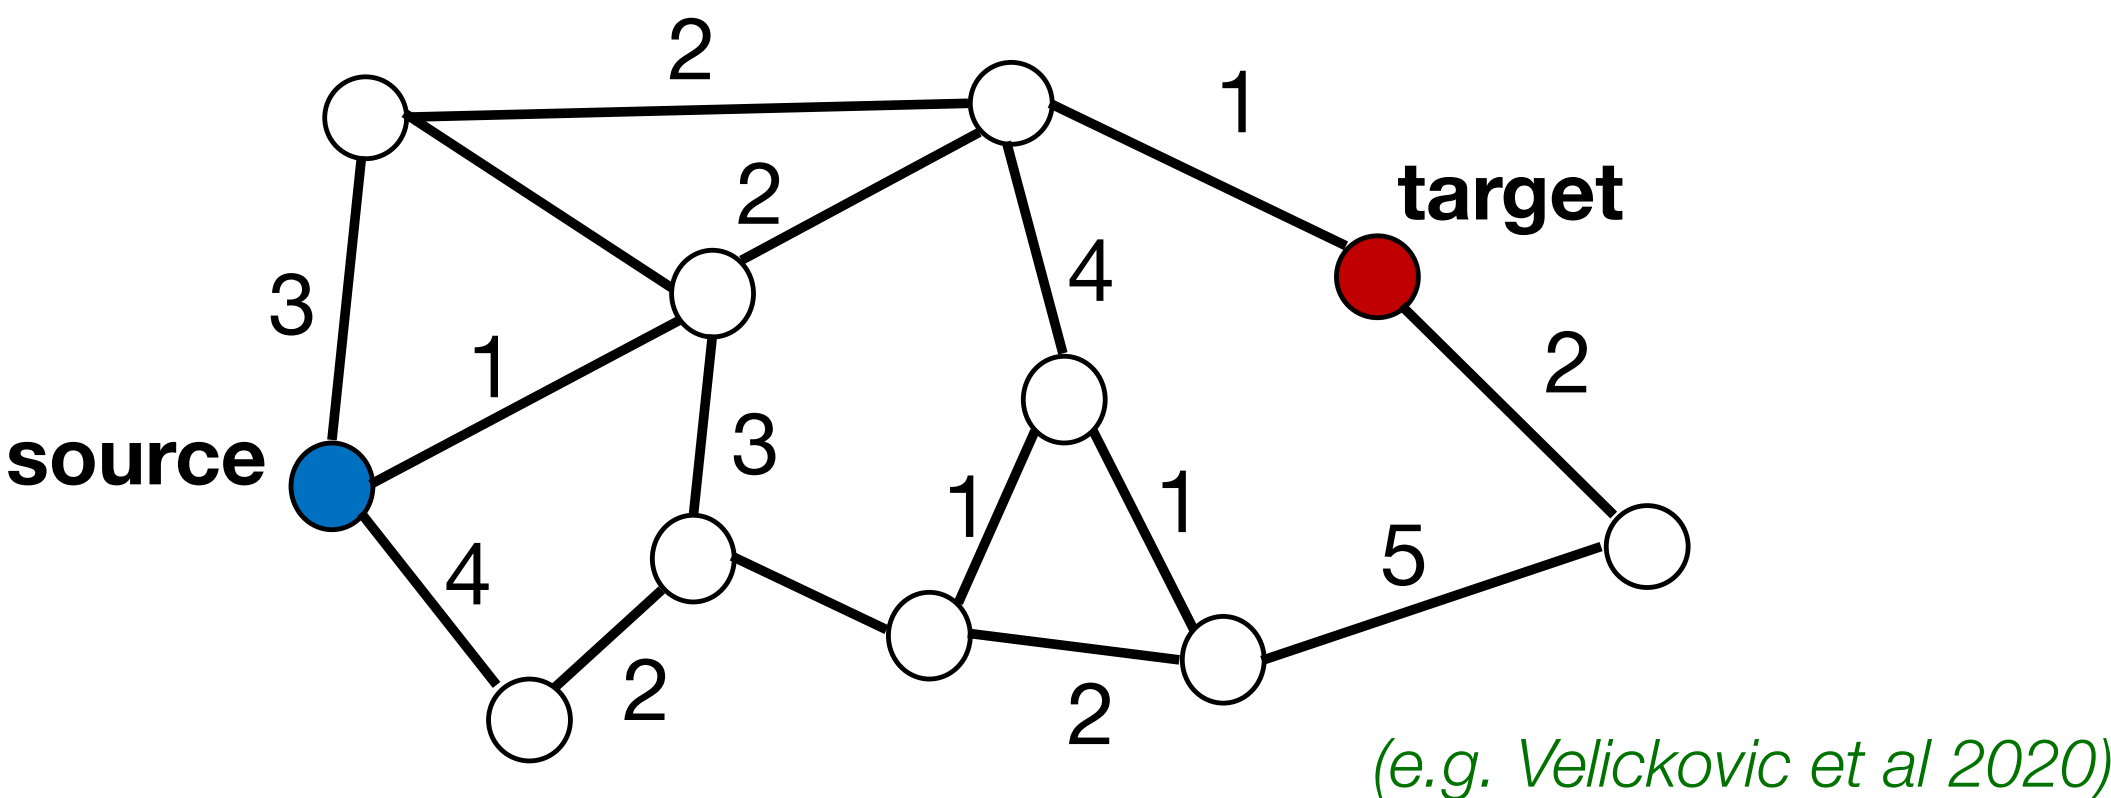



“Neural Algorithmic Reasoning”

Graph
Problem instance



Solution / decision
Path
Branching variable
...

$$\begin{aligned} \min_x \quad & c^\top x \\ & Ax \leq b \\ & l \leq x \leq u \\ & x \in \mathbb{Z}^p \times \mathbb{R}^{n-p} \end{aligned}$$

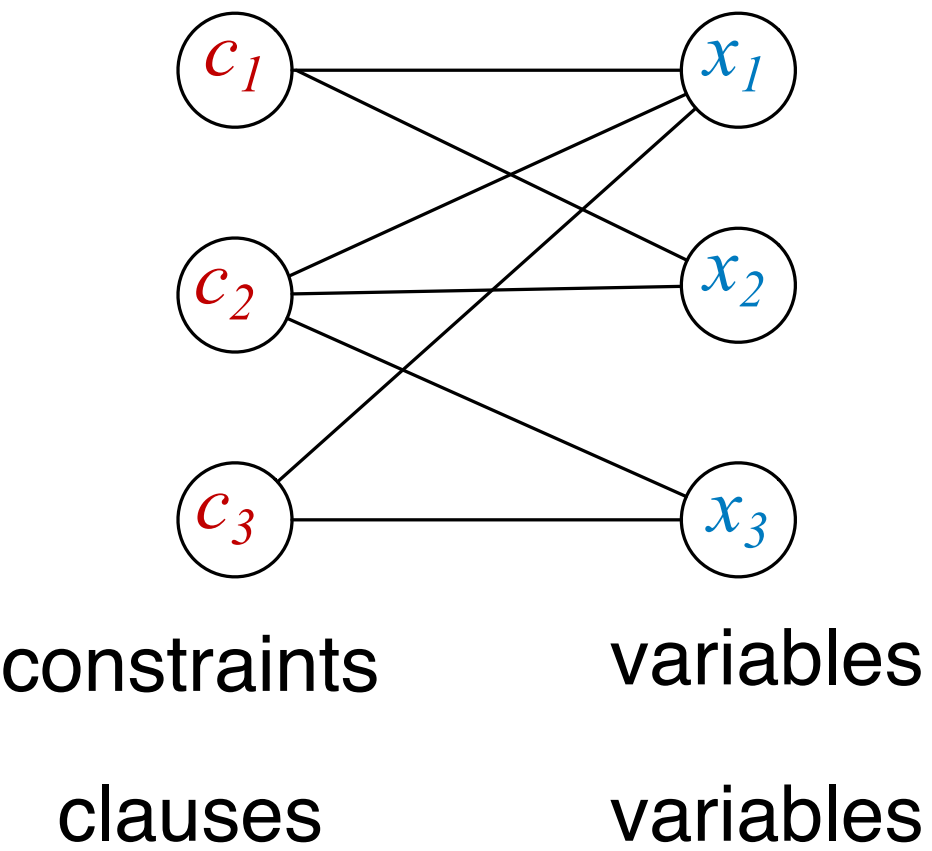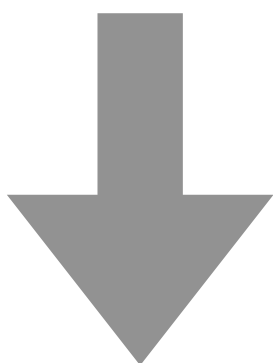


(Gasse et al 2019)

(Selsam et al 2018)

Two goals

Input: Graph + attribute vector for each node (adjacency matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$, feature matrix $\mathbf{X} \in \mathbb{R}^{n \times d}$)


1. Node embeddings

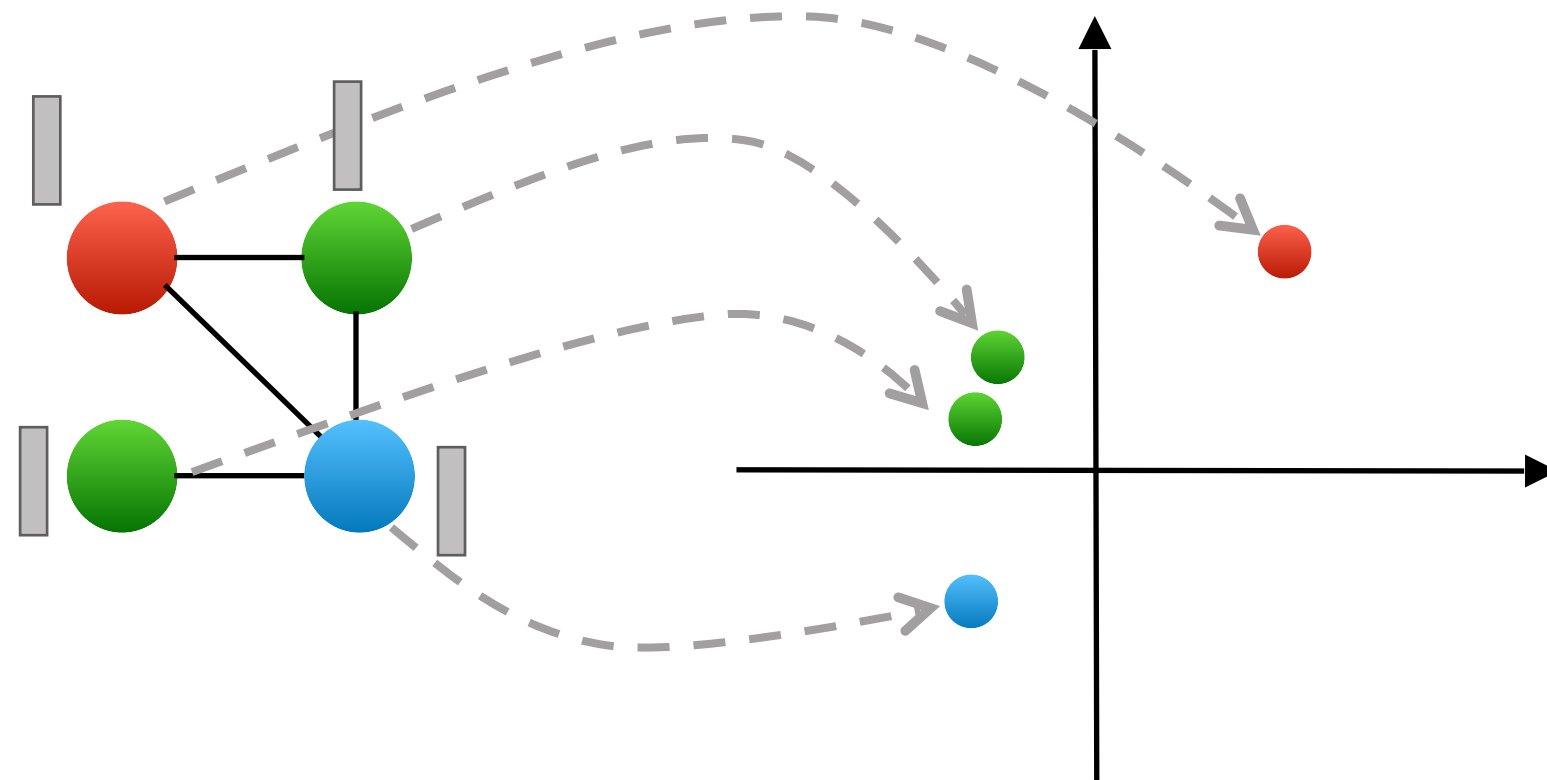


Two goals

Input: Graph + attribute vector for each node (adjacency matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$, feature matrix $\mathbf{X} \in \mathbb{R}^{n \times d}$)

1. Node embeddings

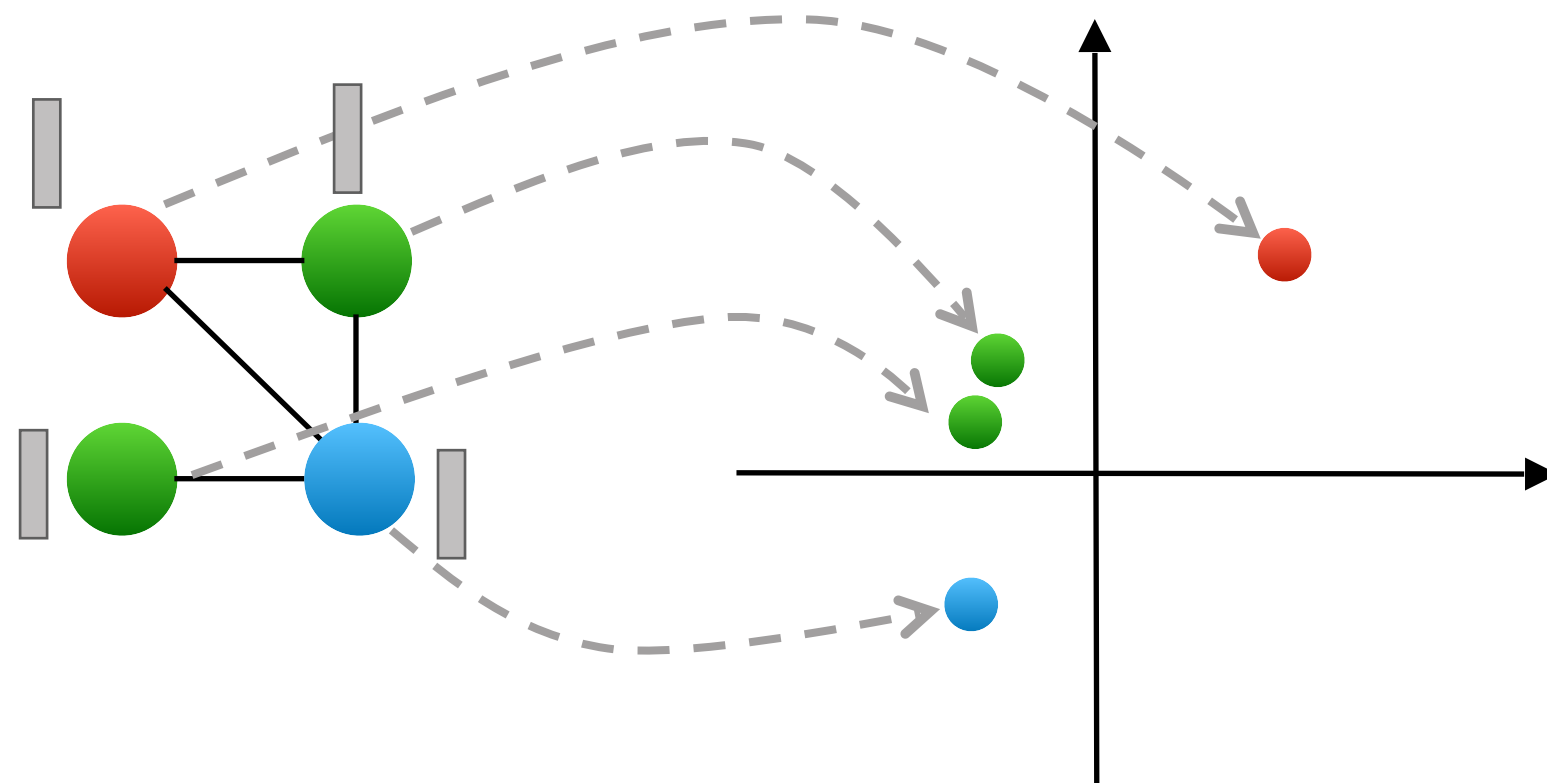


2. Graph embedding

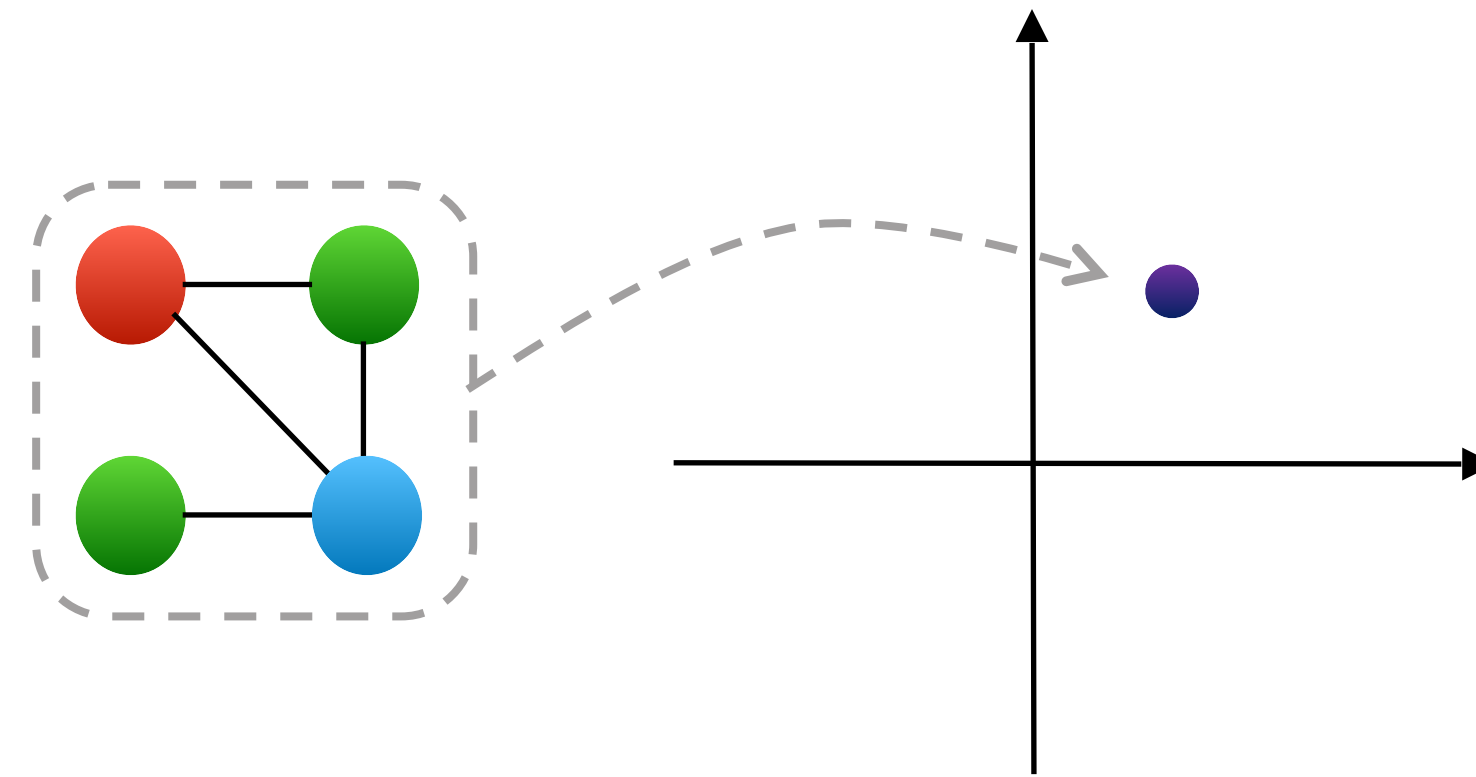


Two goals

Input: Graph + attribute vector for each node (adjacency matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$, feature matrix $\mathbf{X} \in \mathbb{R}^{n \times d}$)

1. Node embeddings

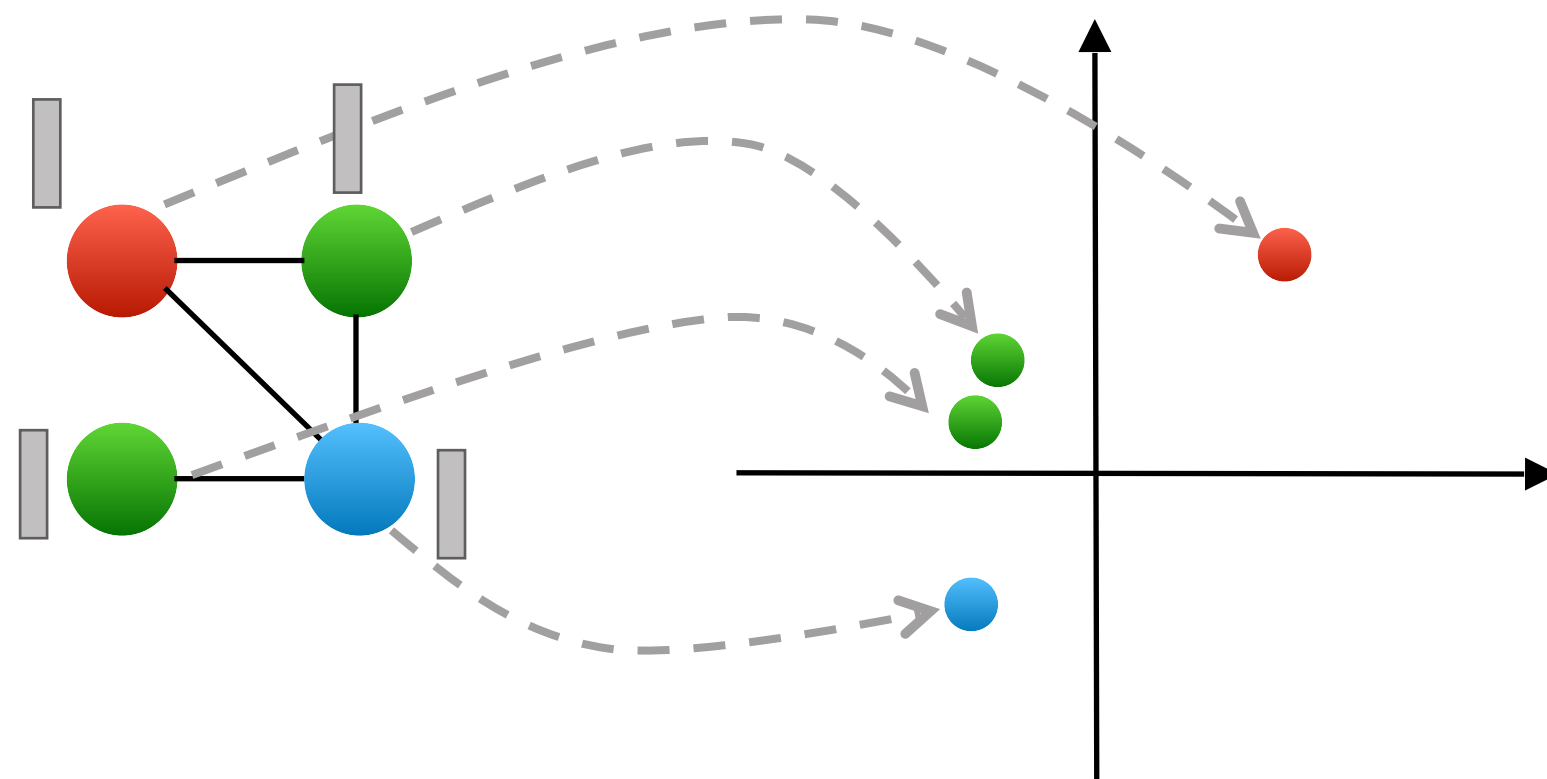

2. Graph embedding

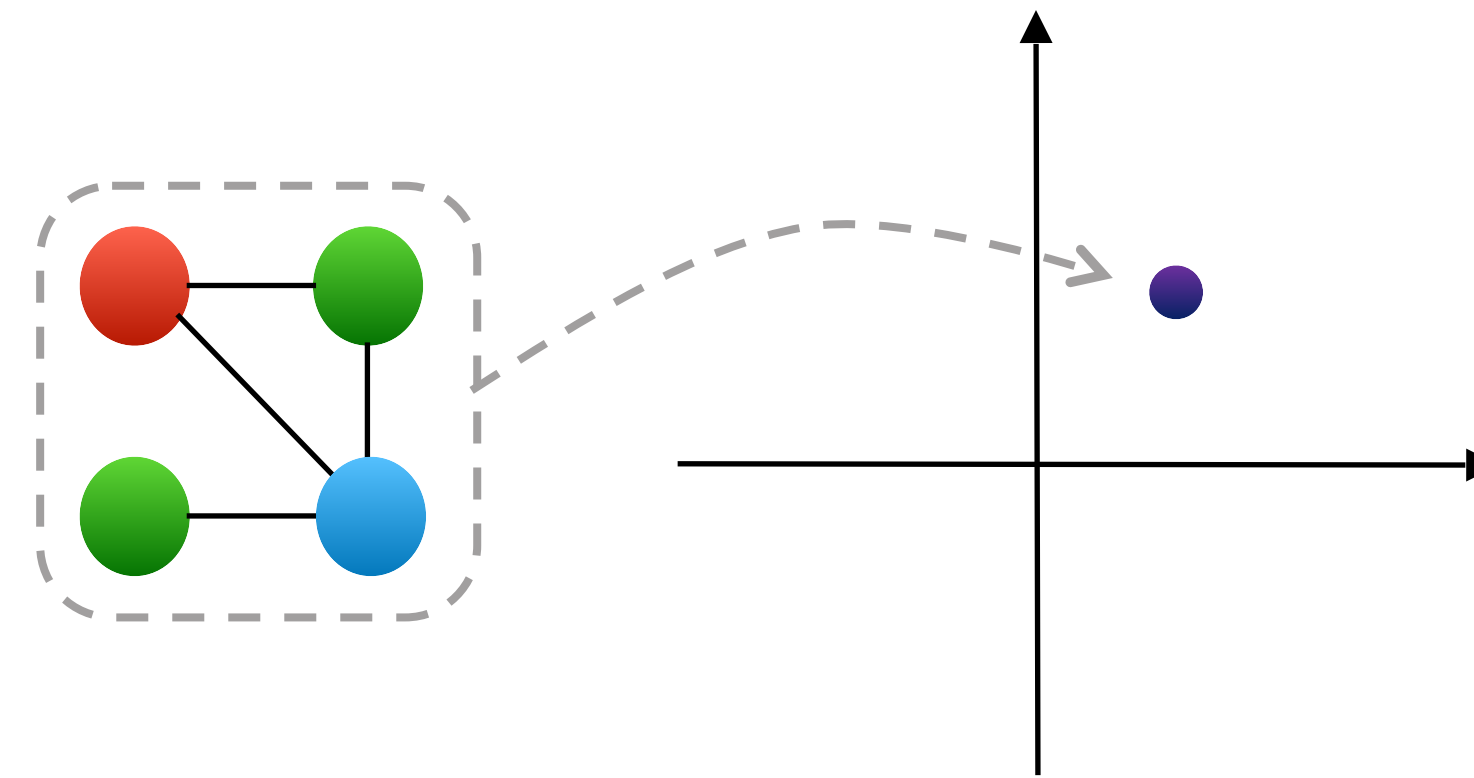


Many previous embeddings: directly learn feature vector for each node

- Did not use node attributes
- Not inductive, no parameter sharing


Two goals

Input: Graph + attribute vector for each node (adjacency matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$, feature matrix $\mathbf{X} \in \mathbb{R}^{n \times d}$)

1. Node embeddings

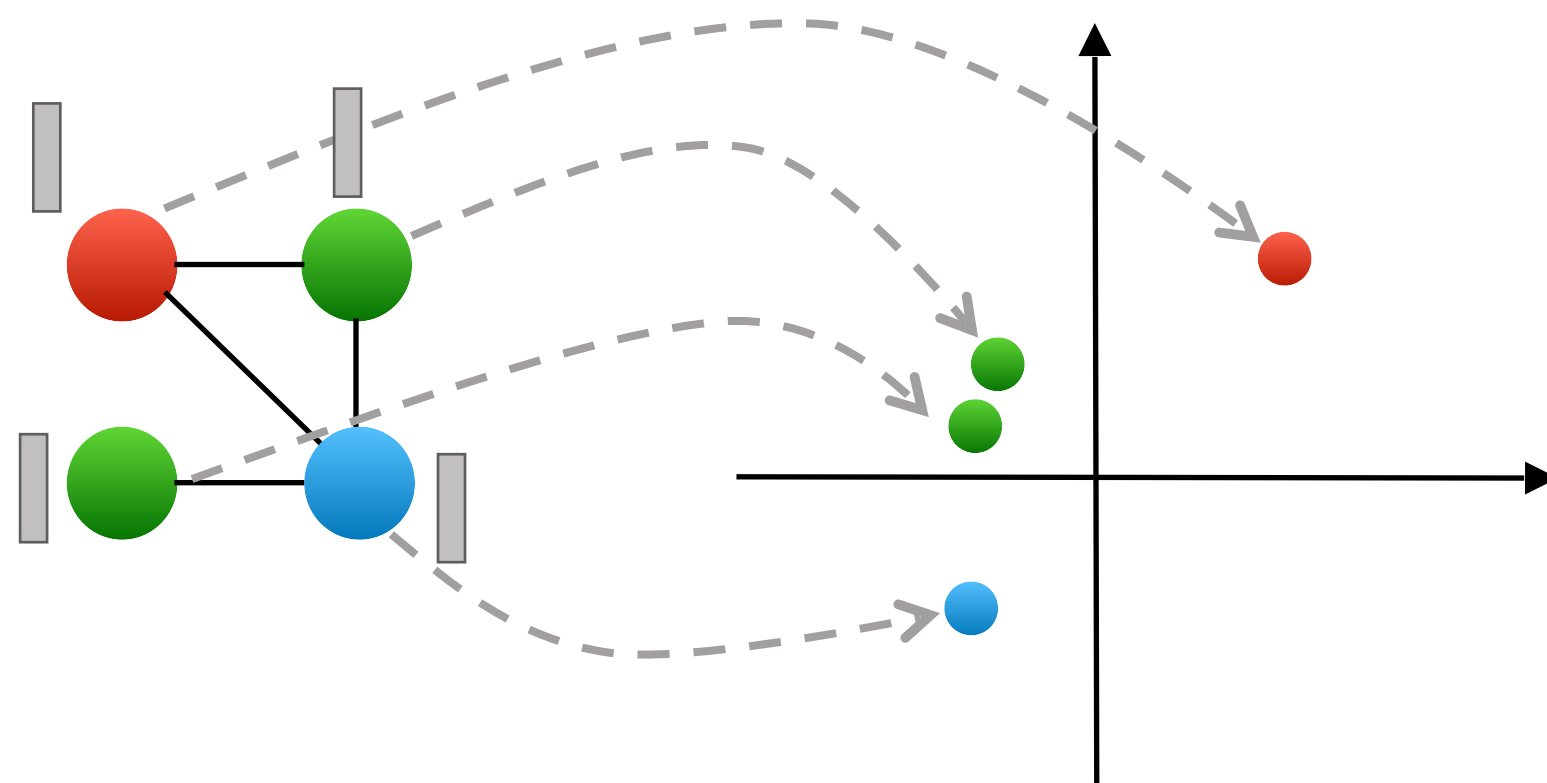

2. Graph embedding

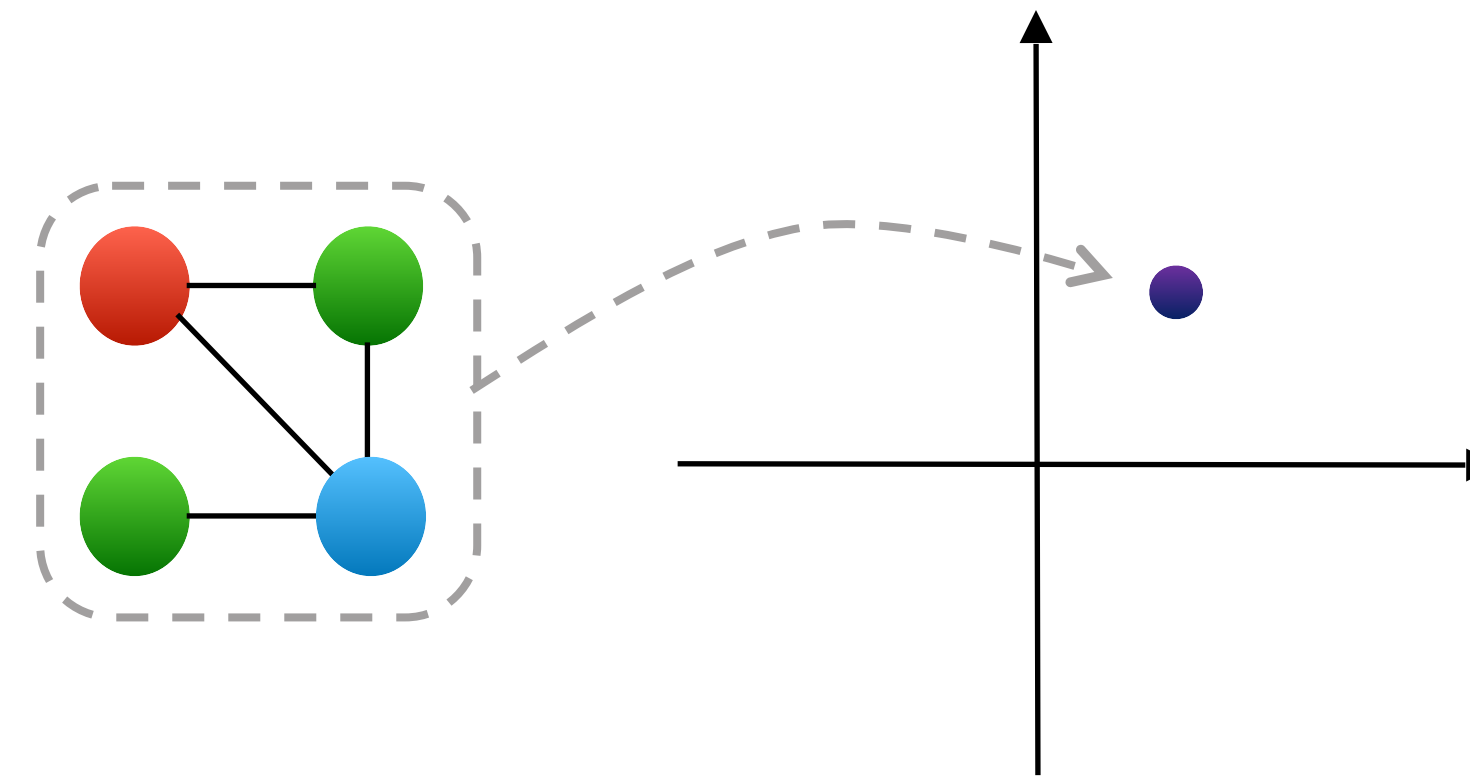

Many previous embeddings: directly learn feature vector for each node


- Did not use node attributes
- Not inductive, no parameter sharing

GNNs: learn a **function** from graph/neighborhood + node/edge attributes to vector


Idea 1: fully-connected NN?

Idea 1: Use the adjacency matrix as input to a neural network

$$\mathbf{A} = \begin{pmatrix} 0 & 1 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 1 & 1 & 0 \end{pmatrix}$$

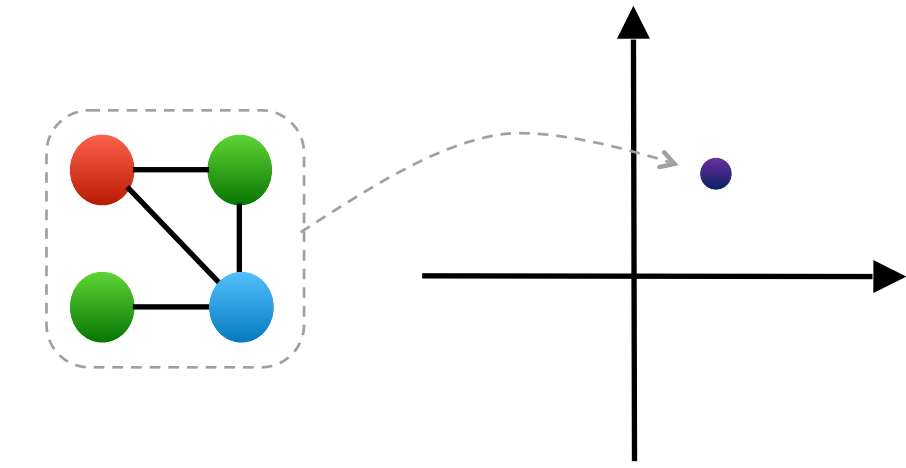

Idea 1: fully-connected NN?

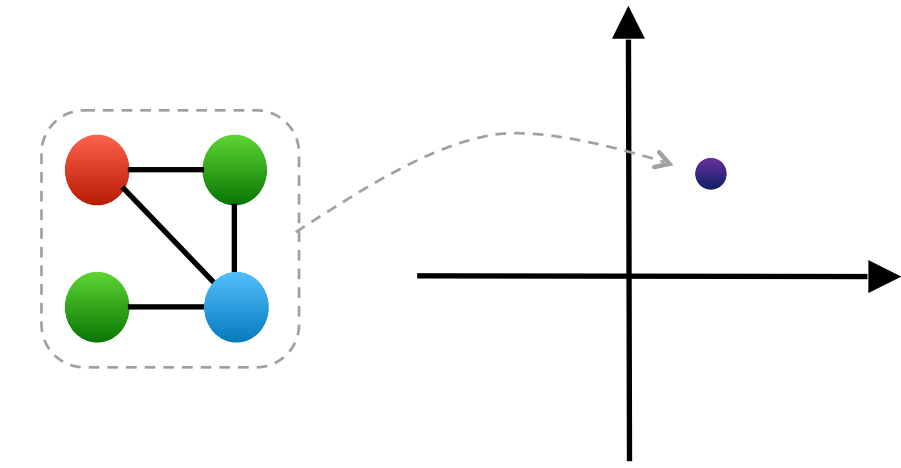


Idea 1: Use the adjacency matrix as input to a neural network

$$\mathbf{A} = \begin{pmatrix} 0 & 1 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 1 & 1 & 0 \end{pmatrix}$$

$$\mathbf{PAP}^\top = \begin{pmatrix} 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

Idea 1: fully-connected NN?

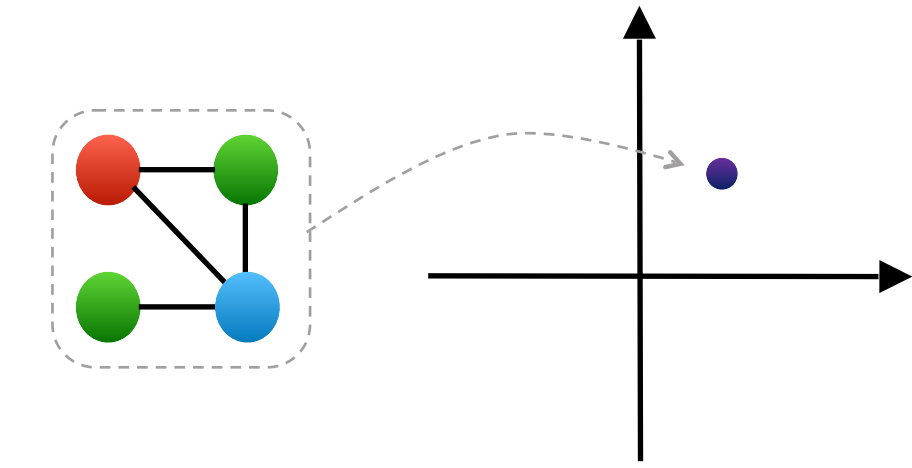

Idea 1: Use the adjacency matrix as input to a neural network

$$\mathbf{A} = \begin{pmatrix} 0 & 1 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 1 & 1 & 0 \end{pmatrix}$$


$$\mathbf{PAP}^\top = \begin{pmatrix} 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

We want:

- **Permutation invariance (graph embedding):**
(output: single vector) and

$$f(\mathbf{PAP}^\top, \mathbf{PX}) = f(\mathbf{A}, \mathbf{X})$$

Idea 1: fully-connected NN?

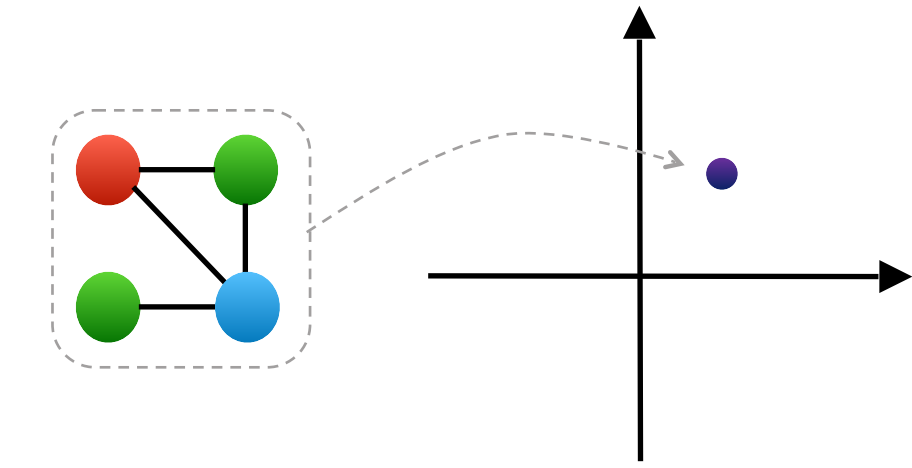

Idea 1: Use the adjacency matrix as input to a neural network

$$\mathbf{A} = \begin{pmatrix} 0 & 1 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 1 & 1 & 0 \end{pmatrix}$$


$$\mathbf{PAP}^\top = \begin{pmatrix} 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

We want:

- **Permutation invariance (graph embedding):**
(output: single vector) and
- **Permutation equivariance (node embeddings):**
(output: one vector for each node)


$$f(\mathbf{PAP}^\top, \mathbf{PX}) = f(\mathbf{A}, \mathbf{X})$$

$$f(\mathbf{PAP}^\top, \mathbf{PX}) = \mathbf{P} f(\mathbf{A}, \mathbf{X})$$

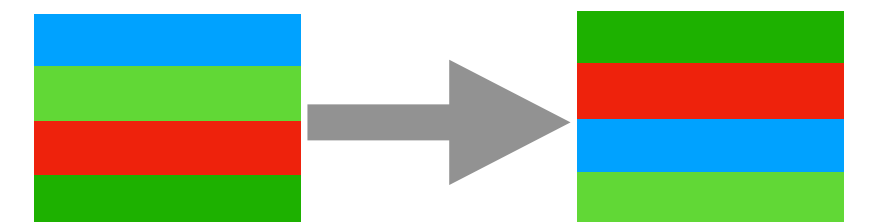



Idea 2: Images are like graphs...

- Convolution? (local operator "encodes" local neighborhoods)

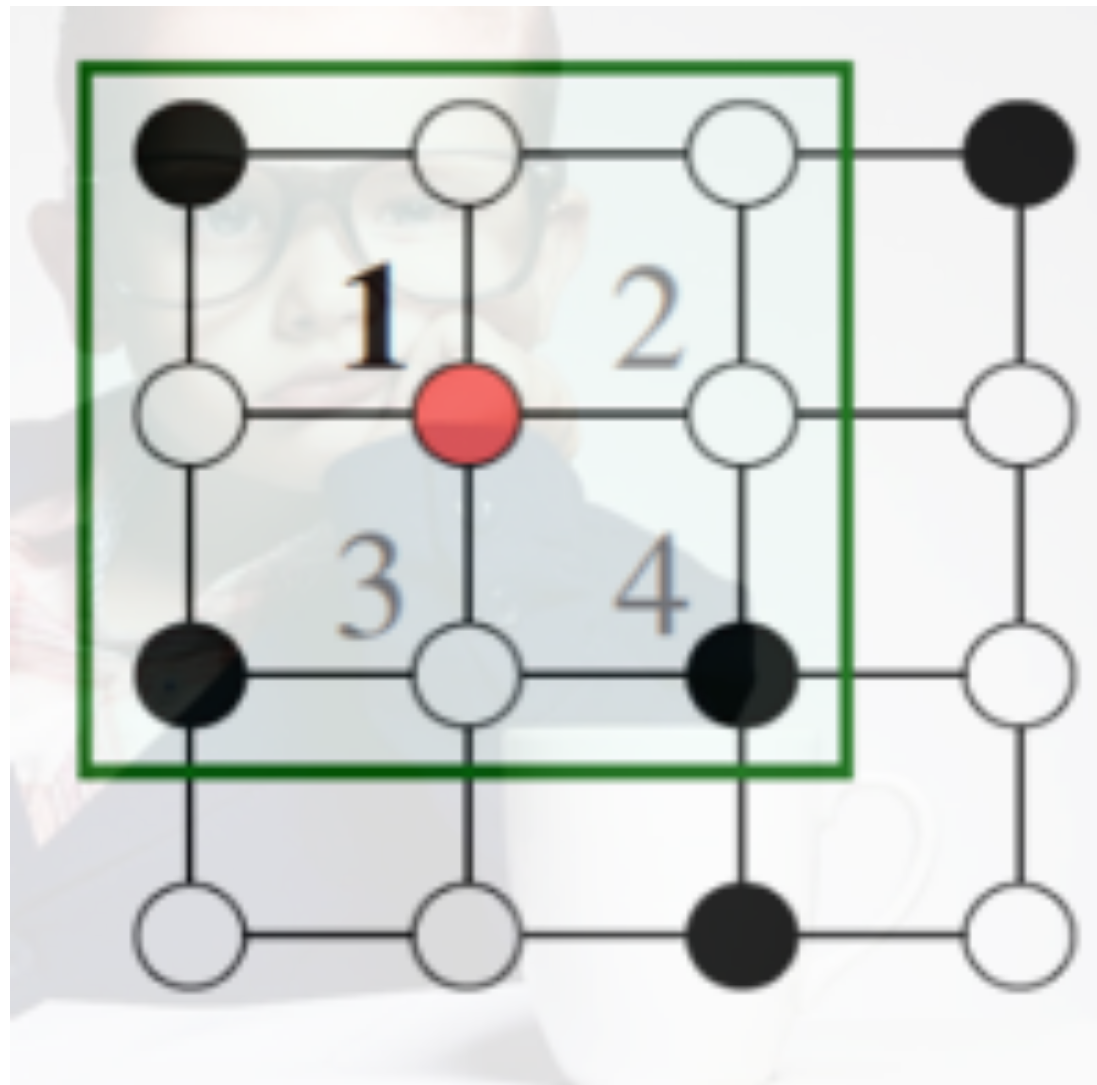



Idea 2: Images are like graphs...

- Convolution? (local operator “encodes” local neighborhoods)

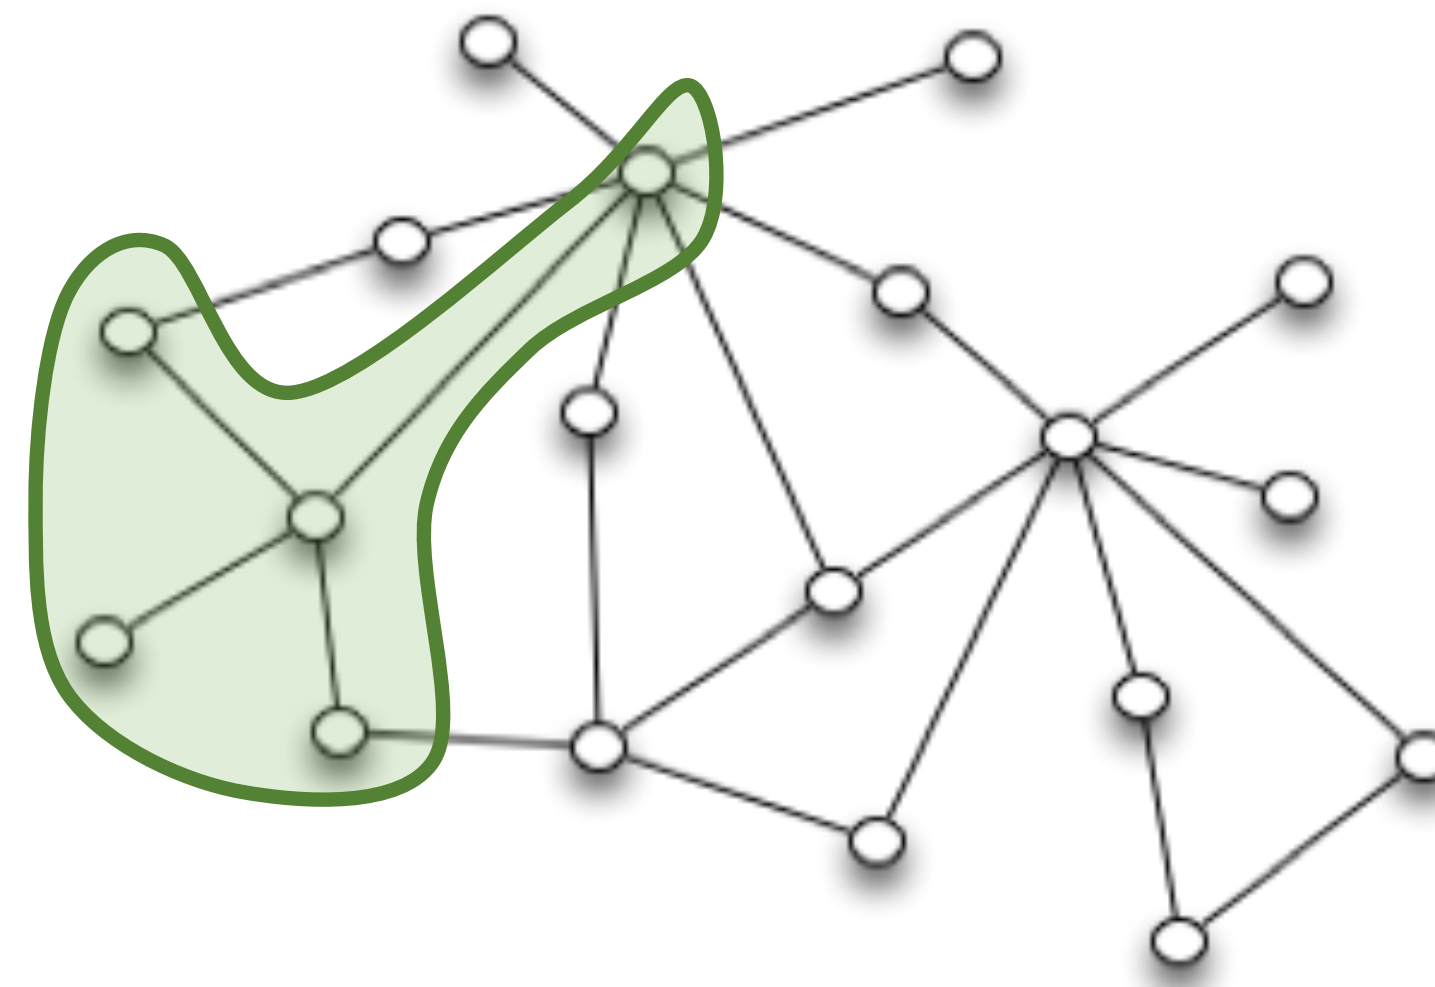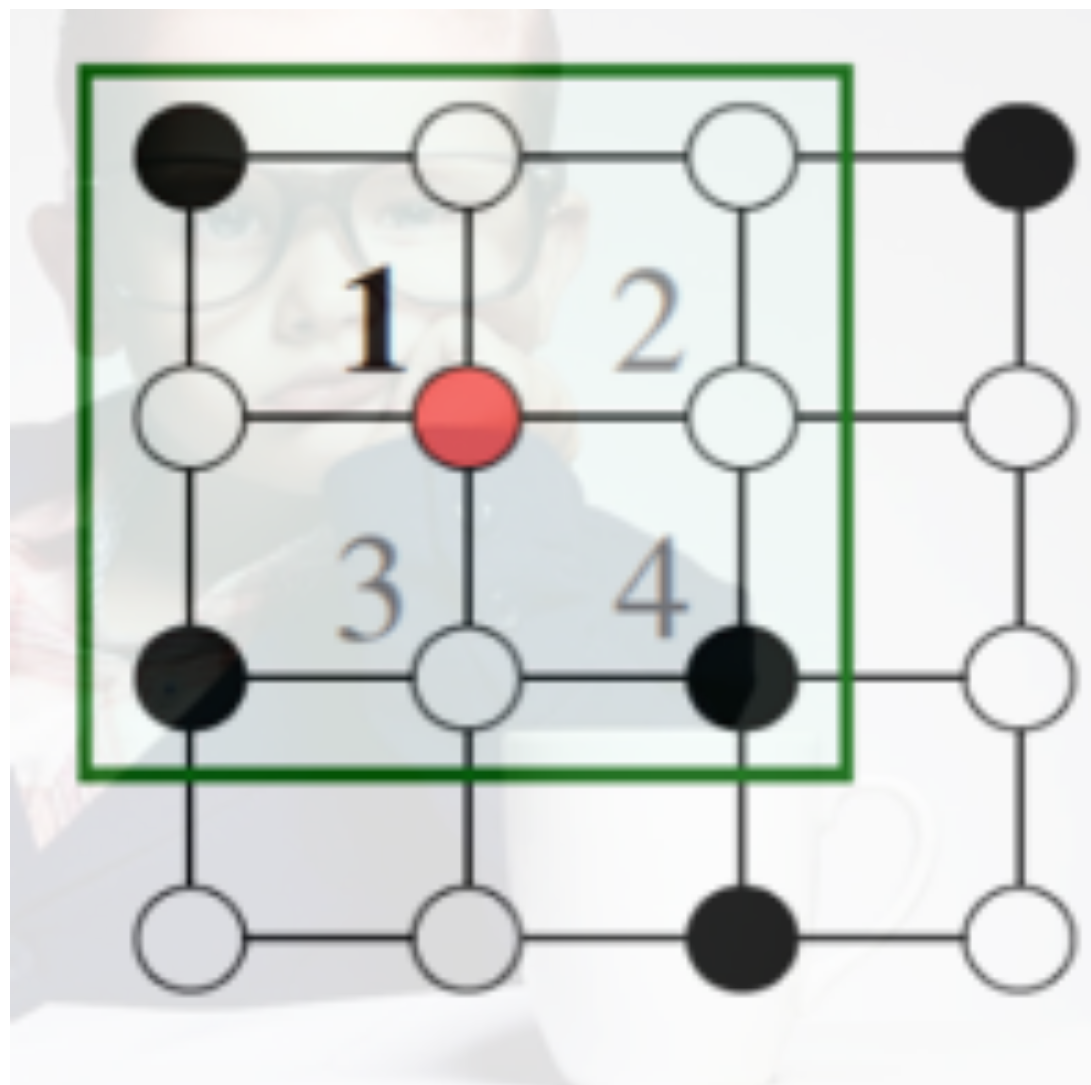

Idea 2: Images are like graphs...



- Convolution? (local operator “encodes” local neighborhoods)

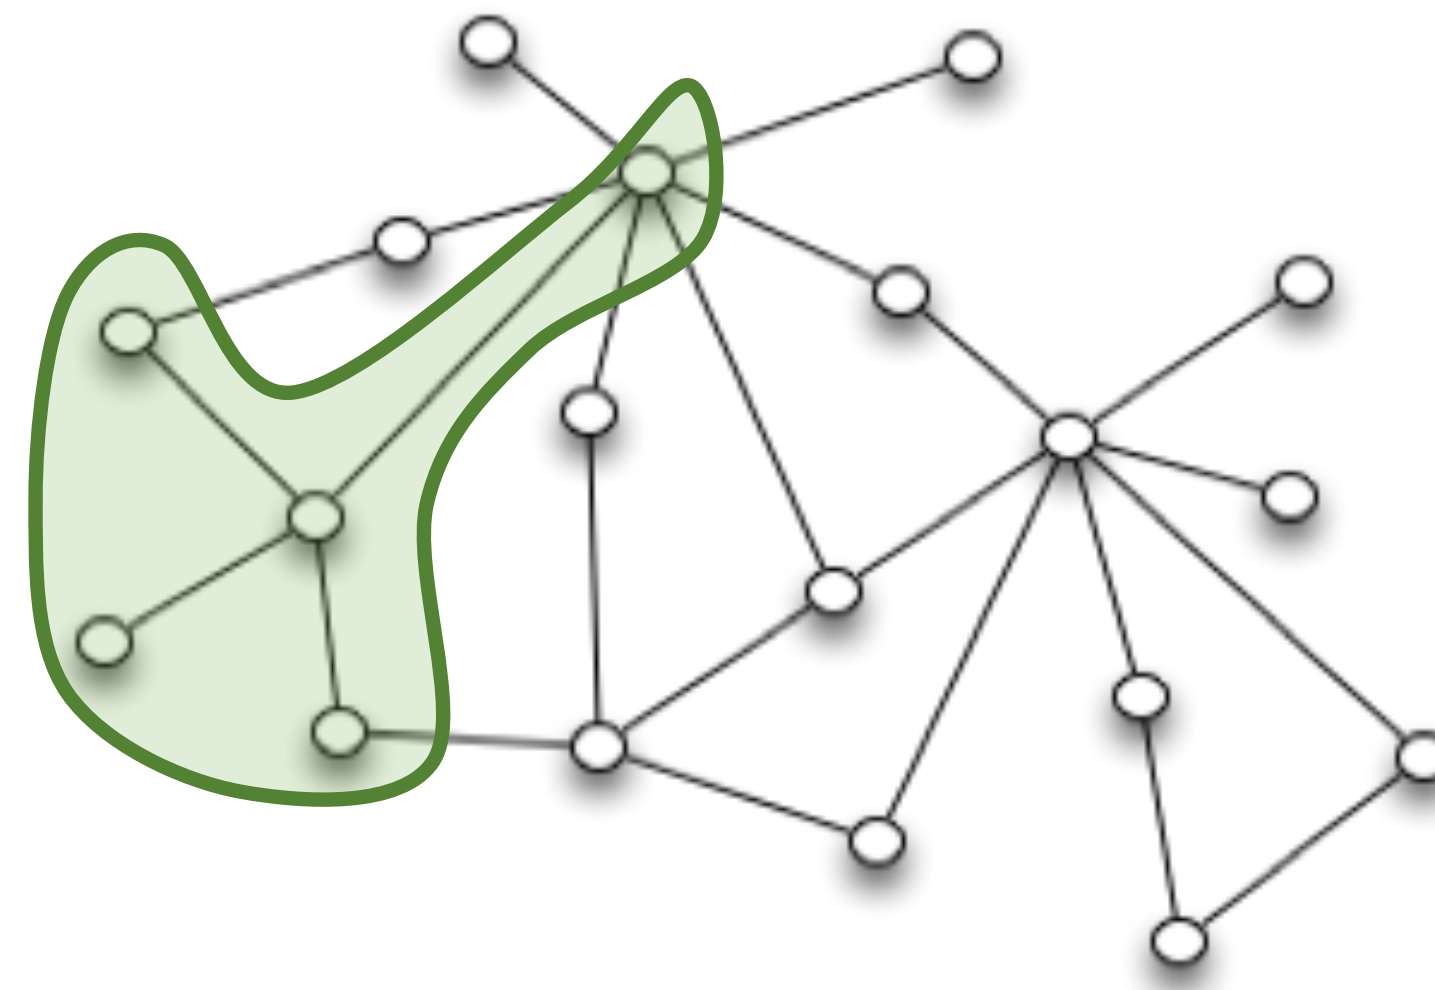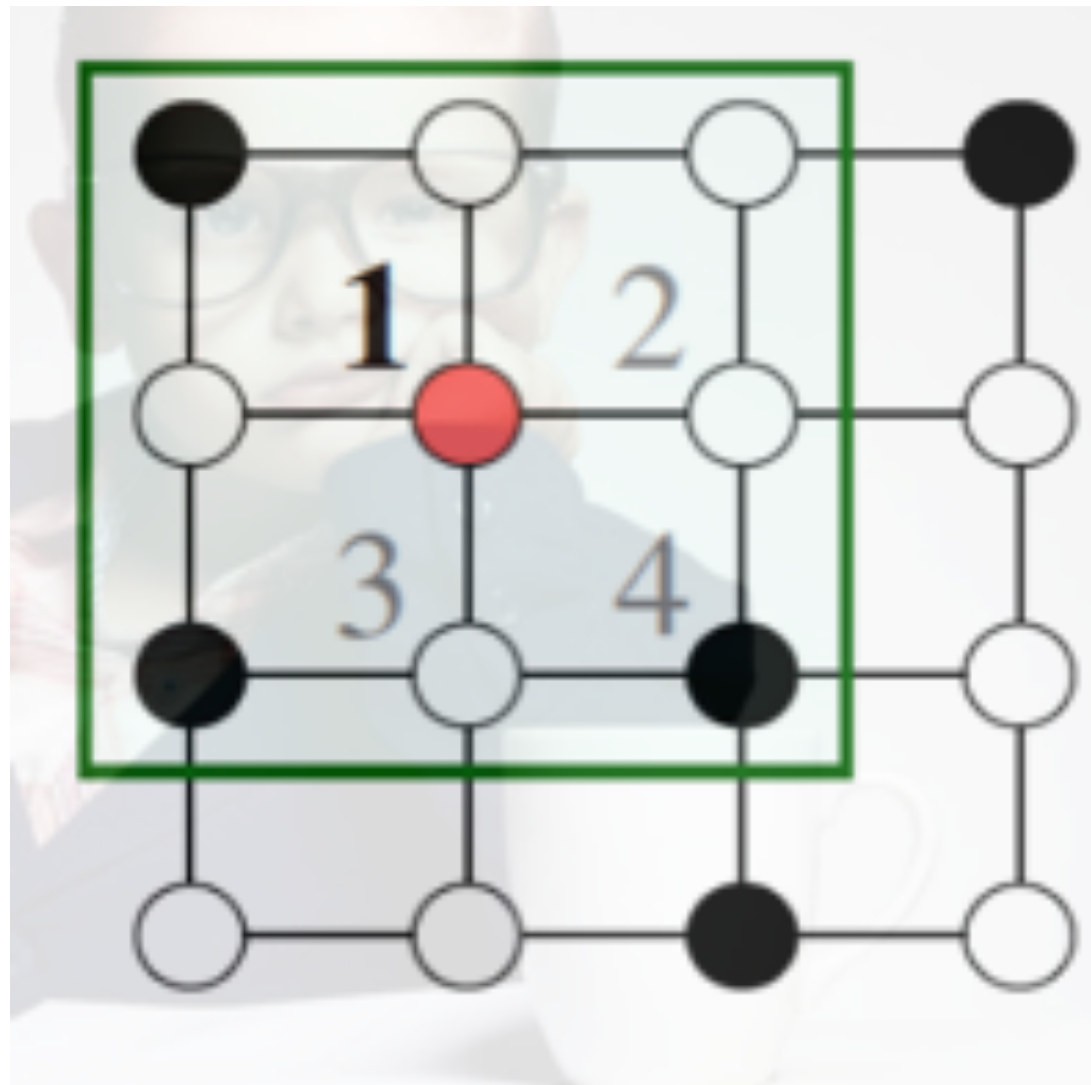

- What is different in a graph?


Idea 2: Images are like graphs...

- Convolution? (local operator “encodes” local neighborhoods)

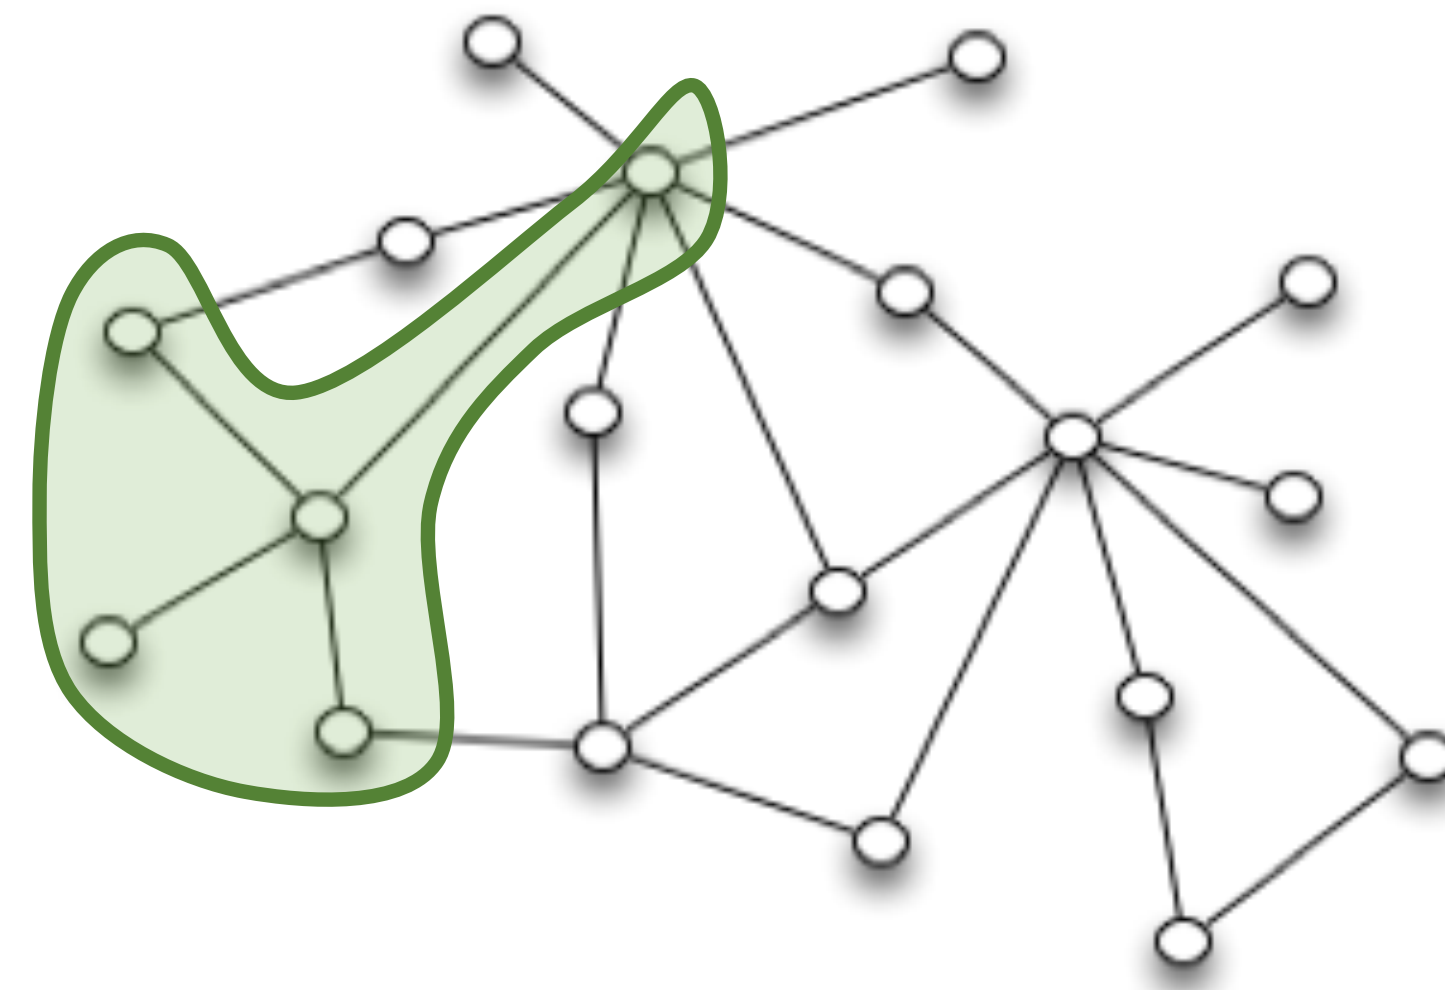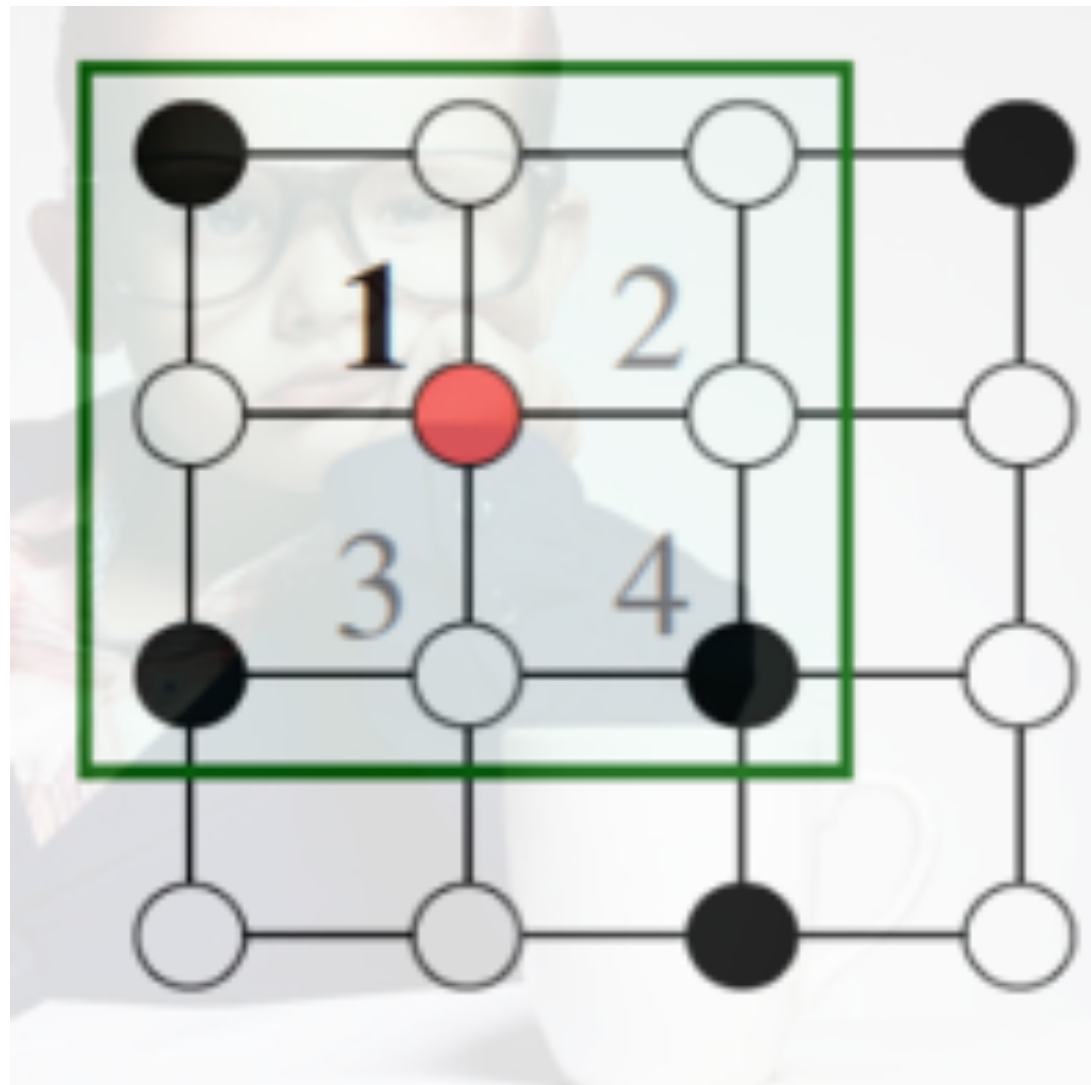

- What is different in a graph?
- Commonalities: **local operations, weight sharing, input can have varying size**


Graph neural networks

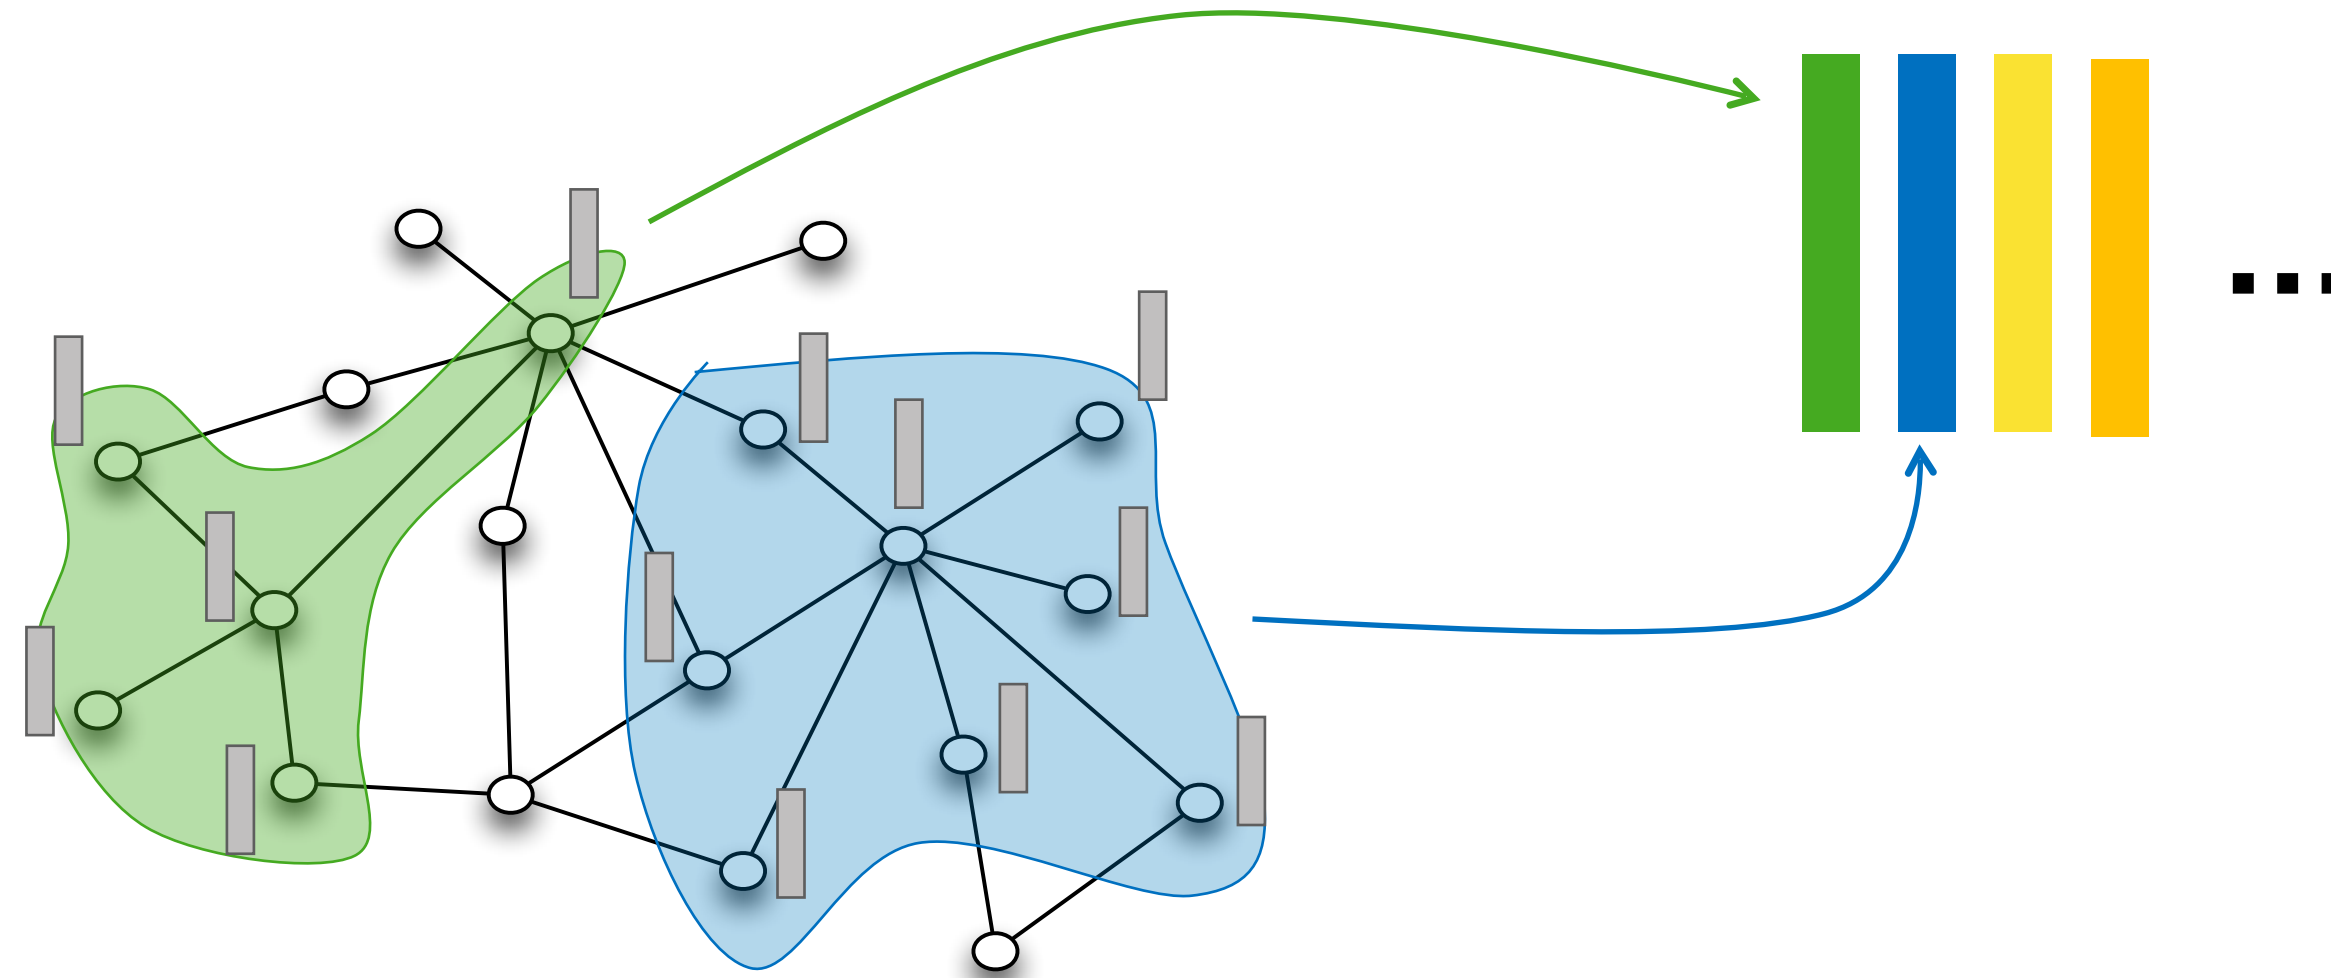

Idea:

1. Encode each node (based on message passing between nodes)
2. Aggregate set of node embeddings into a graph embedding

Encoding neighborhoods: general form

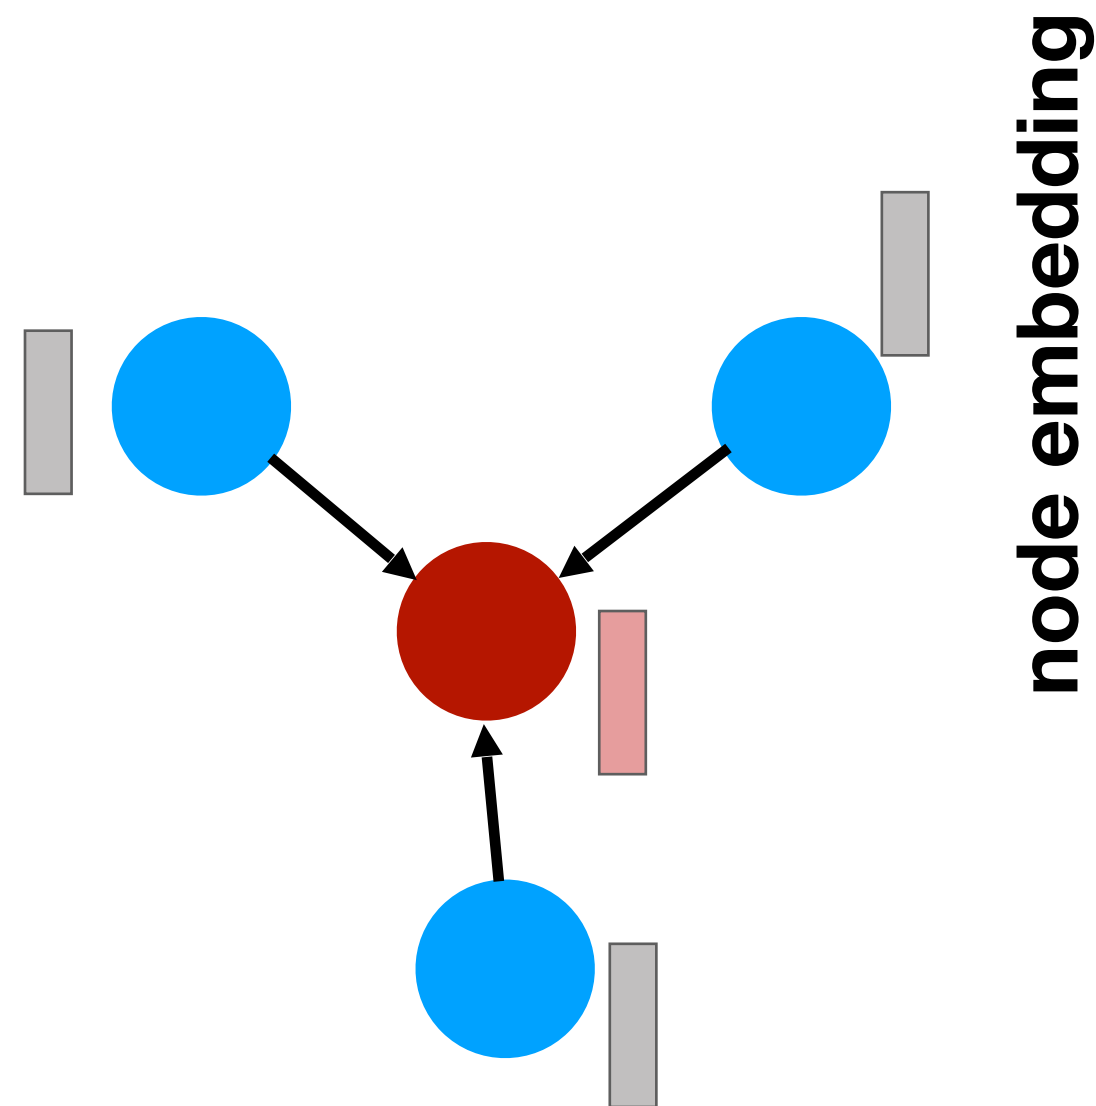

In each round k :

Aggregate information from neighbors


$$\mathbf{m}_{\mathcal{N}(v)}^{(k)} = \text{AGGREGATE}^{(k)}(\{\mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v)\})$$

*feature description
of node u in round $k-1$*

Update current node representation by incorporating messages from neighbors

$$\mathbf{h}_v^{(k)} = \text{UPDATE}^{(k)}(\mathbf{h}_v^{(k-1)}, \mathbf{m}_{\mathcal{N}(v)}^{(k)})$$

Encoding neighborhoods: general form

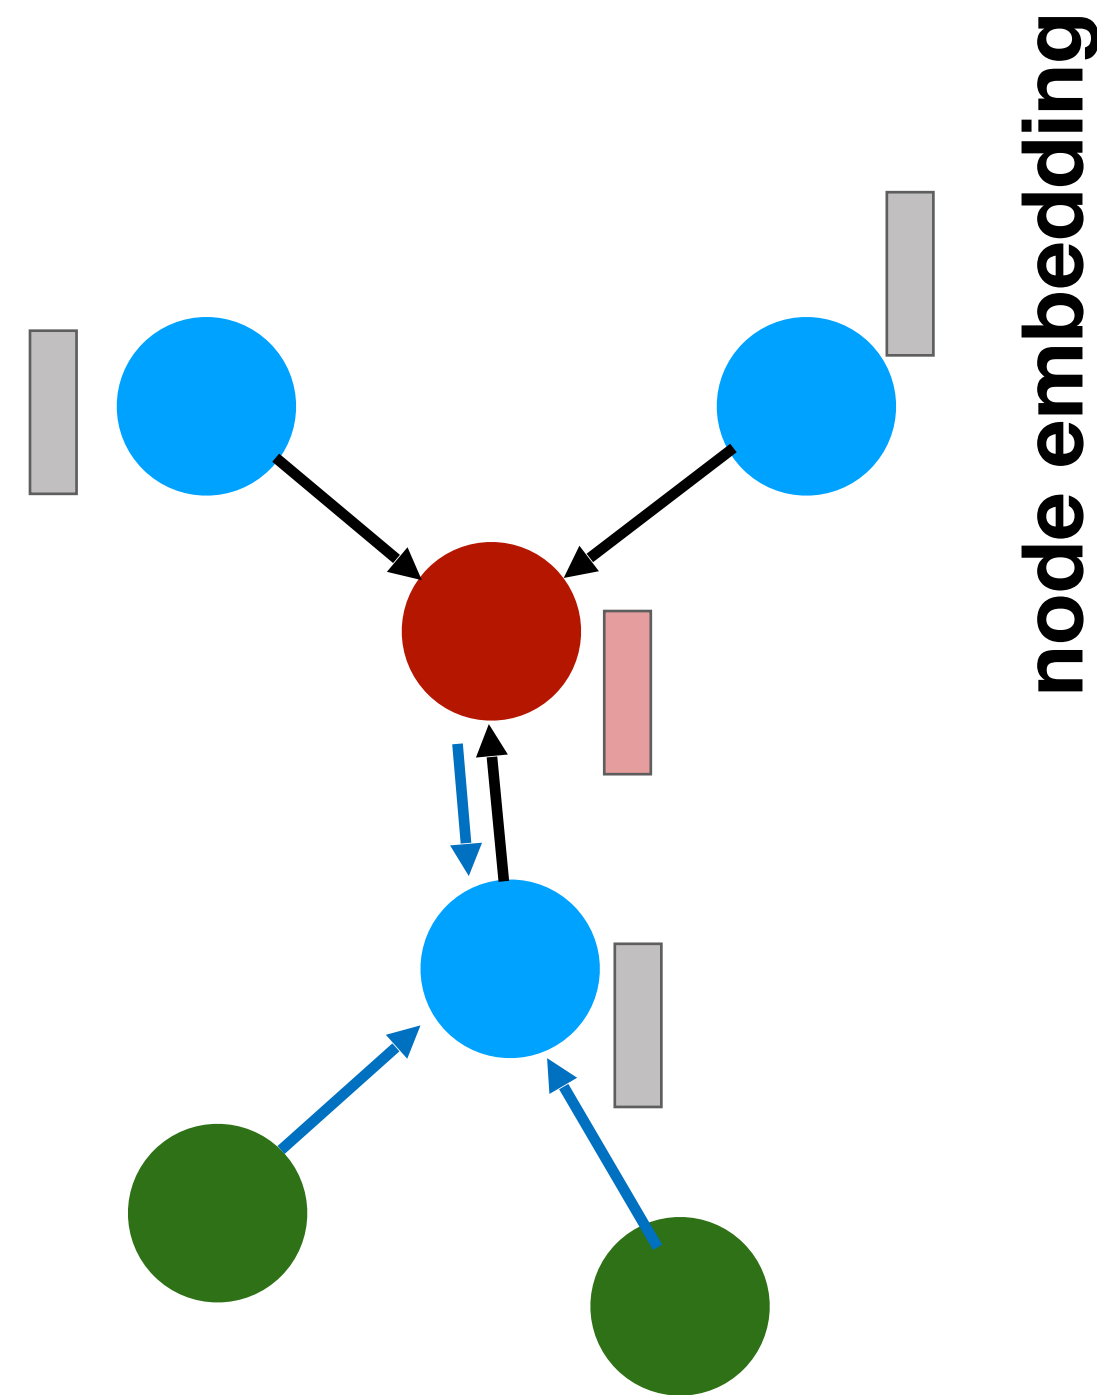

In each round k :

Aggregate information from neighbors

$$\mathbf{m}_{\mathcal{N}(v)}^{(k)} = \text{AGGREGATE}^{(k)}(\{\mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v)\})$$


*feature description
of node u in round $k-1$*

Update current node representation by incorporating messages from neighbors

$$\mathbf{h}_v^{(k)} = \text{UPDATE}^{(k)}(\mathbf{h}_v^{(k-1)}, \mathbf{m}_{\mathcal{N}(v)}^{(k)})$$

What are the aggregation functions?


$$\mathbf{m}_{\mathcal{N}(v)}^{(k)} = \text{AGGREGATE}^{(k)} \left(\{ \mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v) \} \right)$$

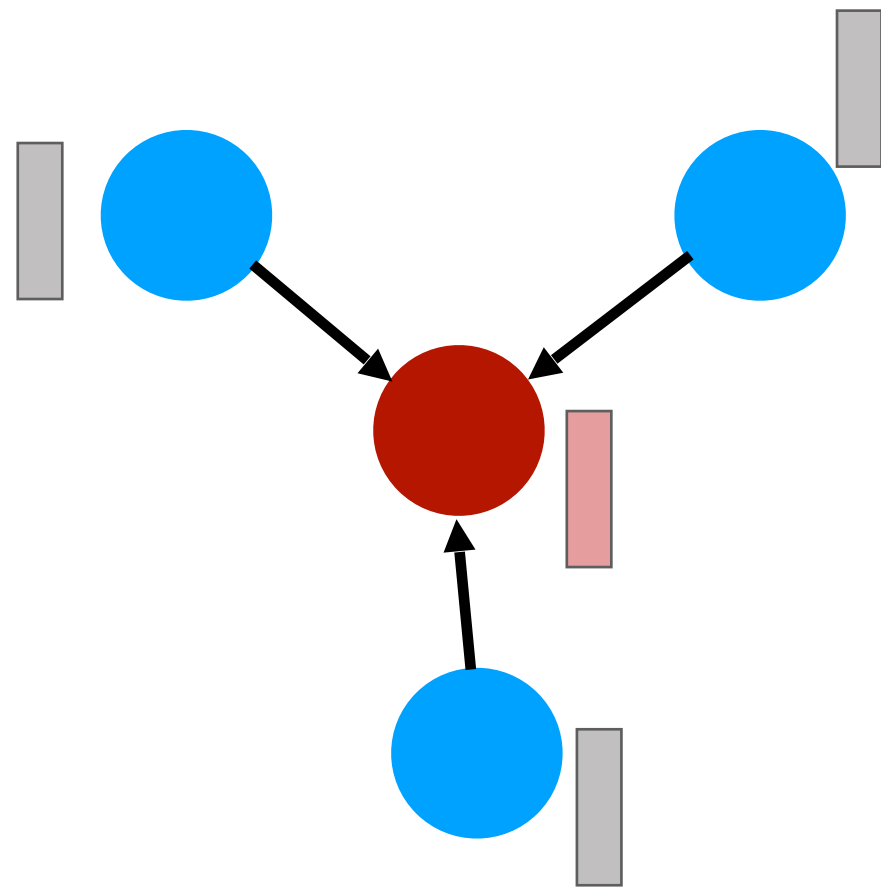

$$\mathbf{h}_v^{(k)} = \text{UPDATE}^{(k)} \left(\mathbf{h}_v^{(k-1)}, \mathbf{m}_{\mathcal{N}(v)}^{(k)} \right)$$

$\mathcal{N}(v) = \{u \mid \exists(u, v) \in E(\mathcal{G})\}$ node's neighborhood

What are the aggregation functions?

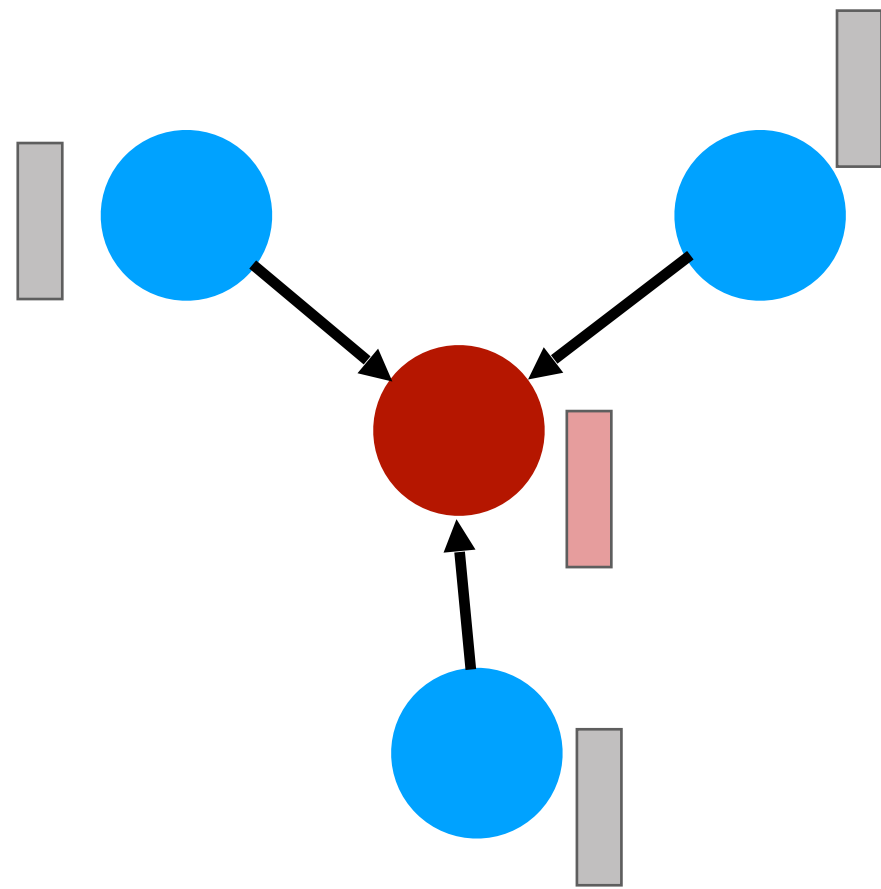

$$\mathbf{m}_{\mathcal{N}(v)}^{(k)} = \text{AGGREGATE}^{(k)} \left(\{ \mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v) \} \right)$$


$$= \left(\bigoplus_{u \in \mathcal{N}(v)} \right) \psi^{(k)} \left(\mathbf{h}_u^{(k-1)}, \mathbf{h}_v^{(k-1)} \right)$$

$$\mathbf{h}_v^{(k)} = \text{UPDATE}^{(k)} \left(\mathbf{h}_v^{(k-1)}, \mathbf{m}_{\mathcal{N}(v)}^{(k)} \right)$$

$\mathcal{N}(v) = \{u \mid \exists(u, v) \in E(\mathcal{G})\}$ node's neighborhood

What are the aggregation functions?

Aggregate: permutation invariant, multi-set function

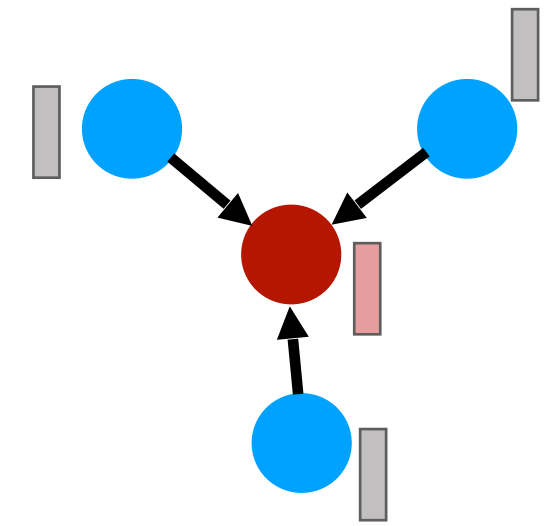

- Sum, average, ...
$$\mathbf{m}_{\mathcal{N}(v)} = \frac{1}{|\mathcal{N}(v)|} \sum_{u \in \mathcal{N}(v)} \mathbf{h}_u$$


(Merkwirth & Lengauer 2005, Scarselli et al 2009)

$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \frac{\mathbf{h}_u}{\sqrt{|\mathcal{N}(v)| |\mathcal{N}(u)|}}$$

(Kipf & Welling 2016, Hamilton et al 2017)

What are the aggregation functions?

Aggregate: permutation invariant, multi-set function

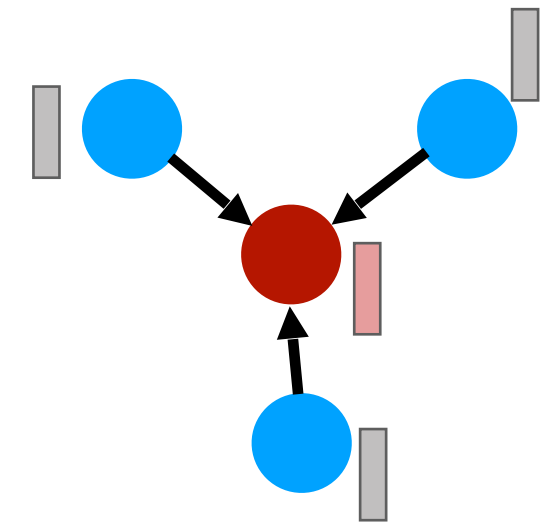

- Sum, average, ...
$$\mathbf{m}_{\mathcal{N}(v)} = \frac{1}{|\mathcal{N}(v)|} \sum_{u \in \mathcal{N}(v)} \mathbf{h}_u$$
$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \frac{\mathbf{h}_u}{\sqrt{|\mathcal{N}(v)| |\mathcal{N}(u)|}}$$

(Merkwirth & Lengauer 2005, Scarselli et al 2009)


(Kipf & Welling 2016, Hamilton et al 2017)

- Min / max (coordinate-wise)

$$\mathbf{m}_{\mathcal{N}(v)} = \max \{ \mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v) \}$$

What are the aggregation functions?

Aggregate: permutation invariant, multi-set function

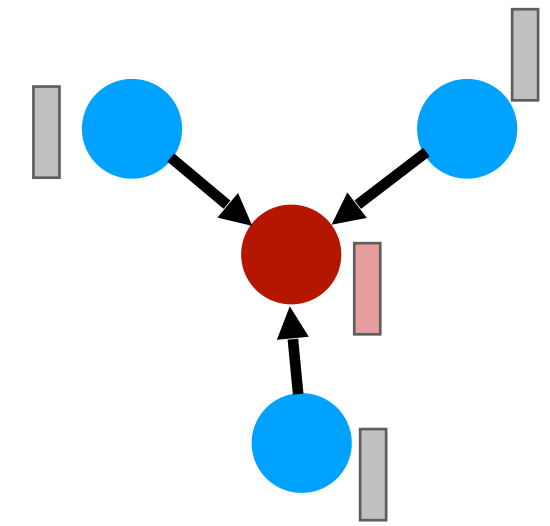

- Sum, average, ...
$$\mathbf{m}_{\mathcal{N}(v)} = \frac{1}{|\mathcal{N}(v)|} \sum_{u \in \mathcal{N}(v)} \mathbf{h}_u$$
$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \frac{\mathbf{h}_u}{\sqrt{|\mathcal{N}(v)| |\mathcal{N}(u)|}}$$

(Merkwirth & Lengauer 2005, Scarselli et al 2009)

(Kipf & Welling 2016, Hamilton et al 2017)

- Min / max (coordinate-wise)

$$\mathbf{m}_{\mathcal{N}(v)} = \max \{ \mathbf{h}_u^{(k-1)} : u \in \mathcal{N}(v) \}$$

Can implement e.g. shortest path: $d_v^{(k)} = \min_{u \in \mathcal{N}(v)} d_u^{(k-1)} + \text{cost}(u, v)$

Learning a shortest path algorithm

Bellman-Ford

for $k = 1 \dots |S| - 1$:

for u in S :

$$d[k][u] = \min_v d[k-1][v] + \text{cost}(v, u)$$

GNN

for $k = 1 \dots \text{GNN iter}$:

for u in S :

$$h_u^{(k)} = \sum_v \text{MLP}(h_v^{(k-1)}, h_u^{(k-1)})$$



sum or max pooling




Aggregation functions and updates

Aggregate: General form (*universal approximation of multi-set functions*): (Zaheer et al 2017, Qi et al 2017, Xu et al 2019)

$$\mathbf{m}_{\mathcal{N}(v)} = \text{MLP}_2 \left(\sum_{u \in \mathcal{N}(v)} \text{MLP}_1(\mathbf{h}_u, \mathbf{h}_v) \right)$$

*Learned
aggregation
function*

$$\mathbf{h}_v^{(k)} = \sigma(\mathbf{W}_{\text{self}} \mathbf{h}_v^{(k-1)} + \mathbf{W}_{\text{neigh}} \mathbf{m}_{\mathcal{N}(v)}^{(k)} + b)$$

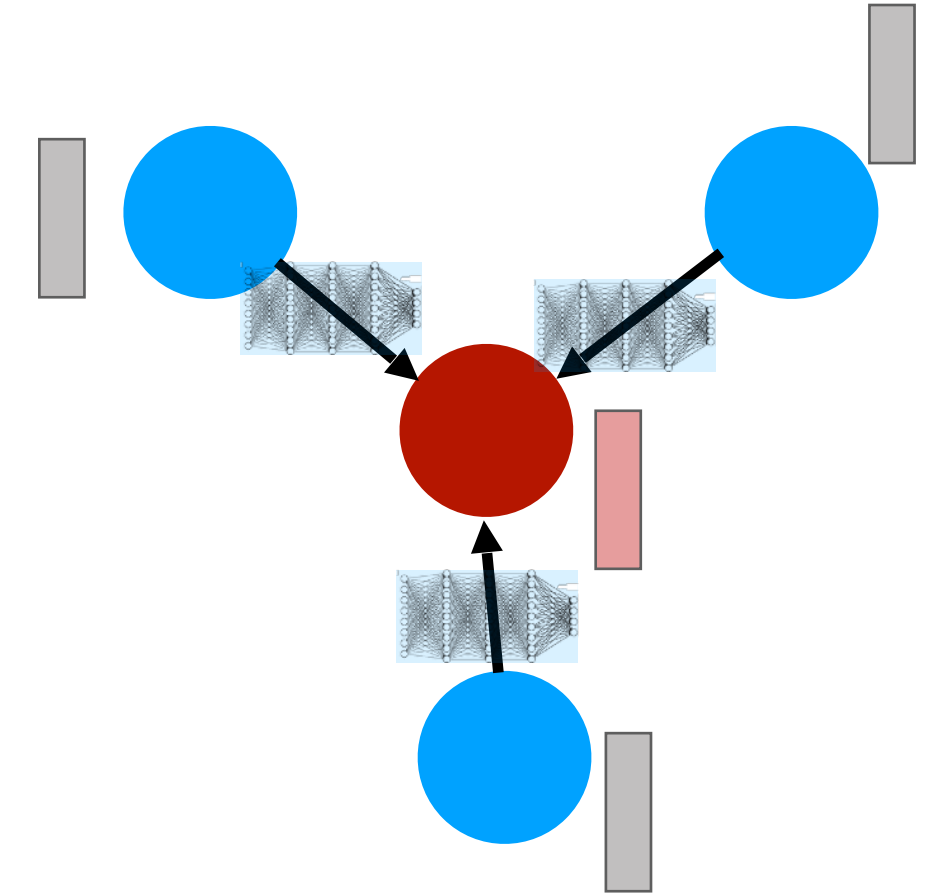

Aggregation functions and updates


Aggregate: General form (*universal approximation of multi-set functions*): (Zaheer et al 2017, Qi et al 2017, Xu et al 2019)

$$\mathbf{m}_{\mathcal{N}(v)} = \text{MLP}_2 \left(\sum_{u \in \mathcal{N}(v)} \text{MLP}_1(\mathbf{h}_u, \mathbf{h}_v) \right)$$


Learned aggregation function

Update: e.g. $\mathbf{h}_v^{(k)} = \sigma(\mathbf{W}_{\text{self}} \mathbf{h}_v^{(k-1)} + \mathbf{W}_{\text{neigh}} \mathbf{m}_{\mathcal{N}(v)}^{(k)} + b)$

learned

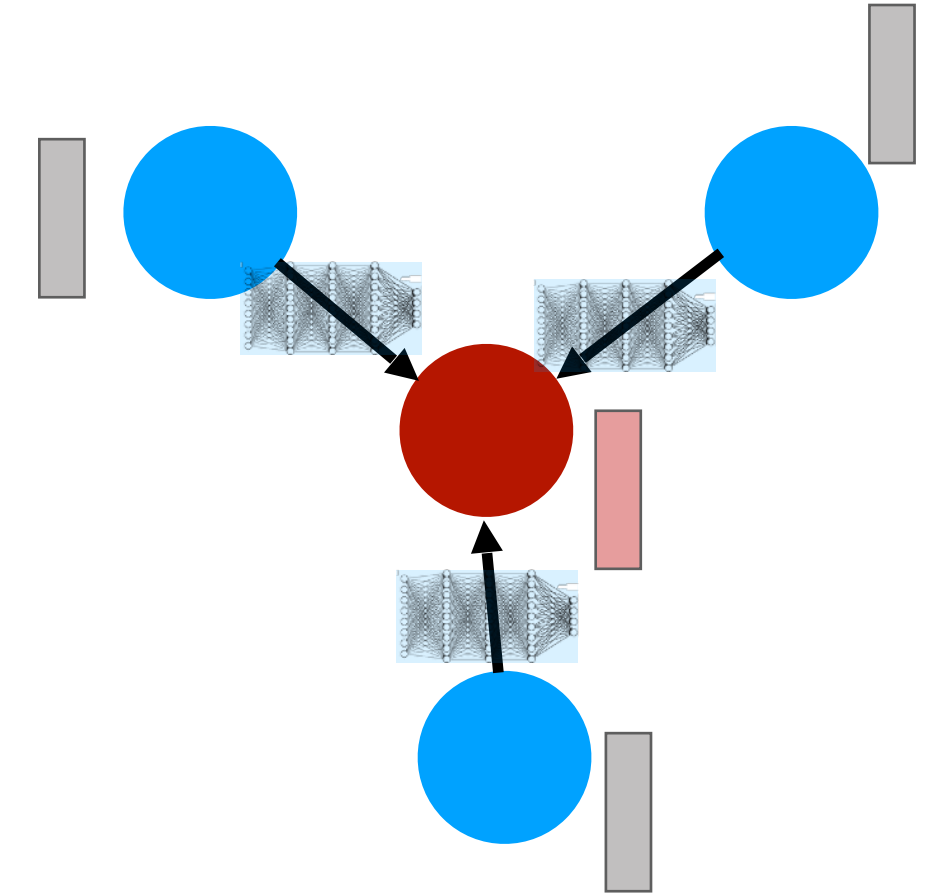



Graph embeddings

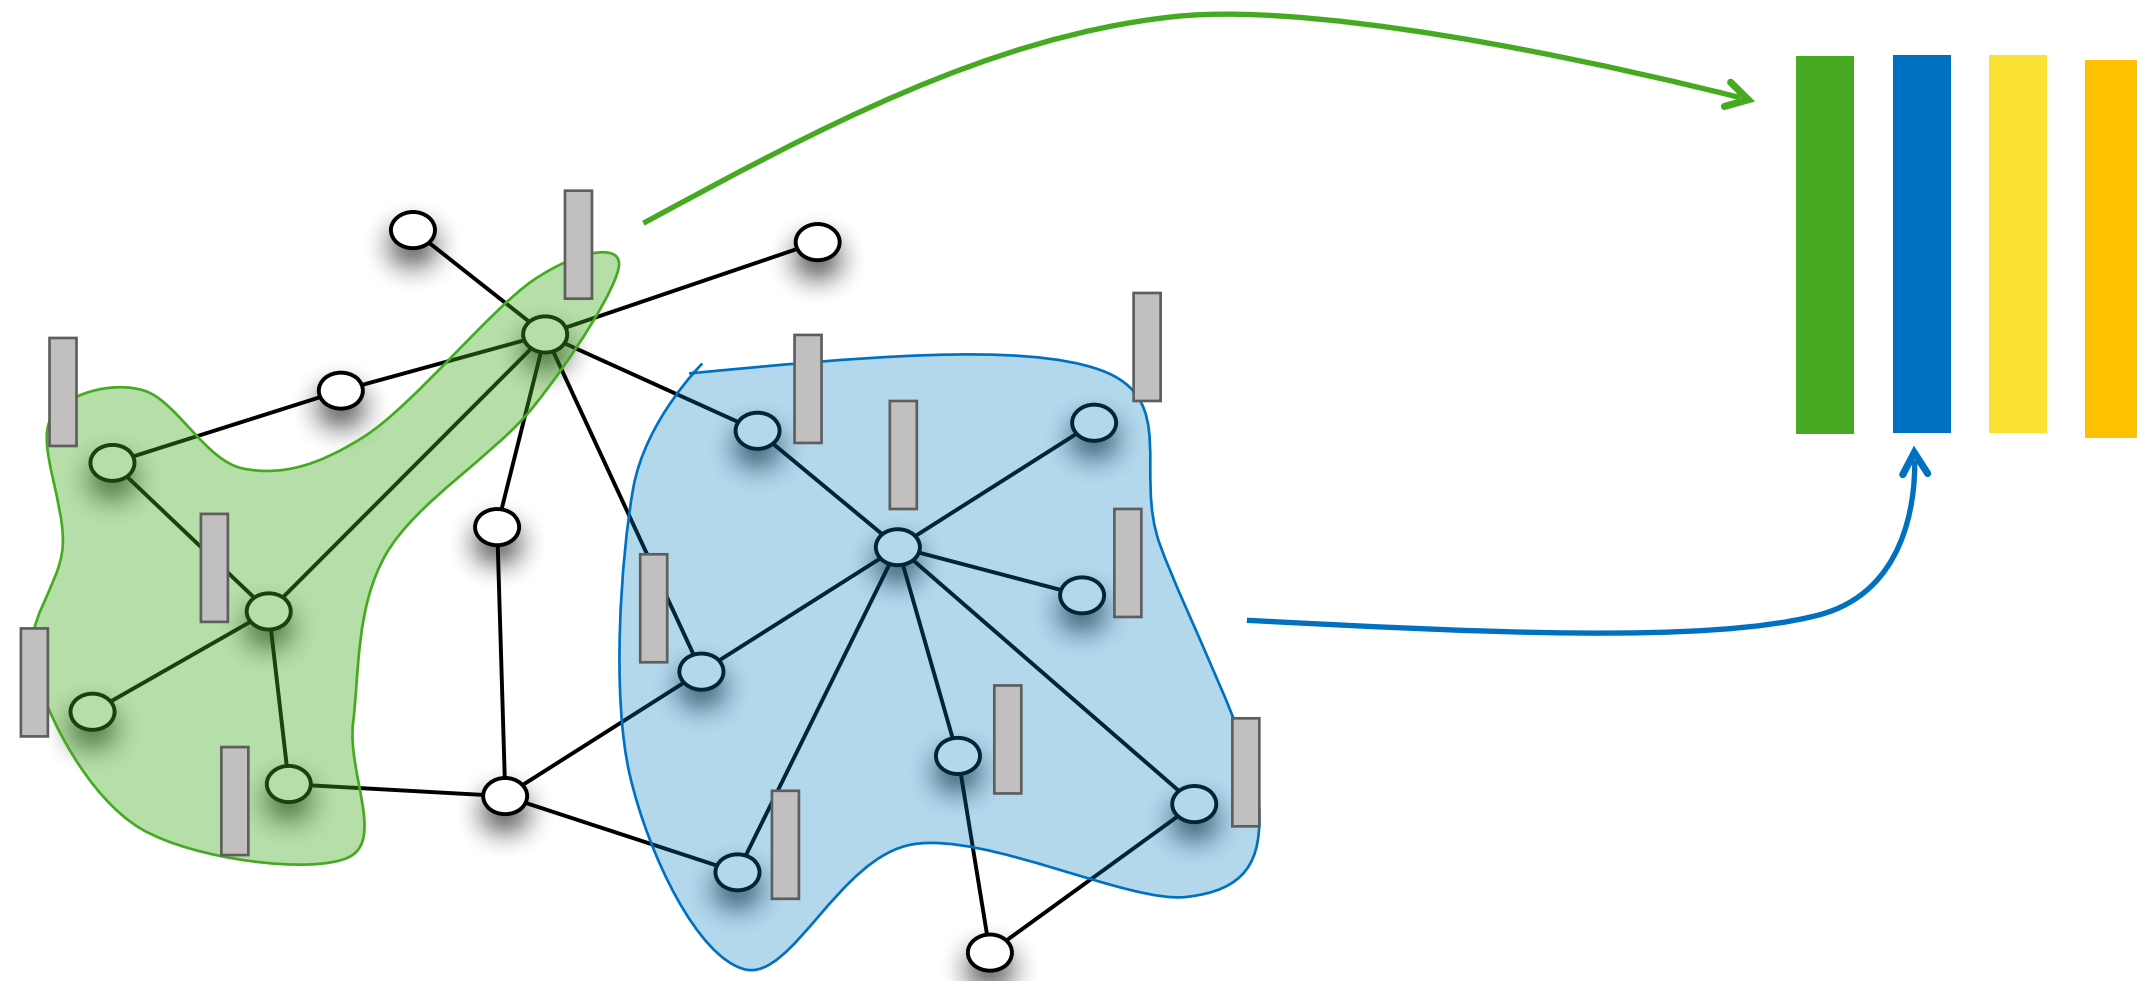

Idea:

1. Encode each node (based on message passing between nodes)
2. **Aggregate set of node embeddings into a graph embedding**


Graph embeddings

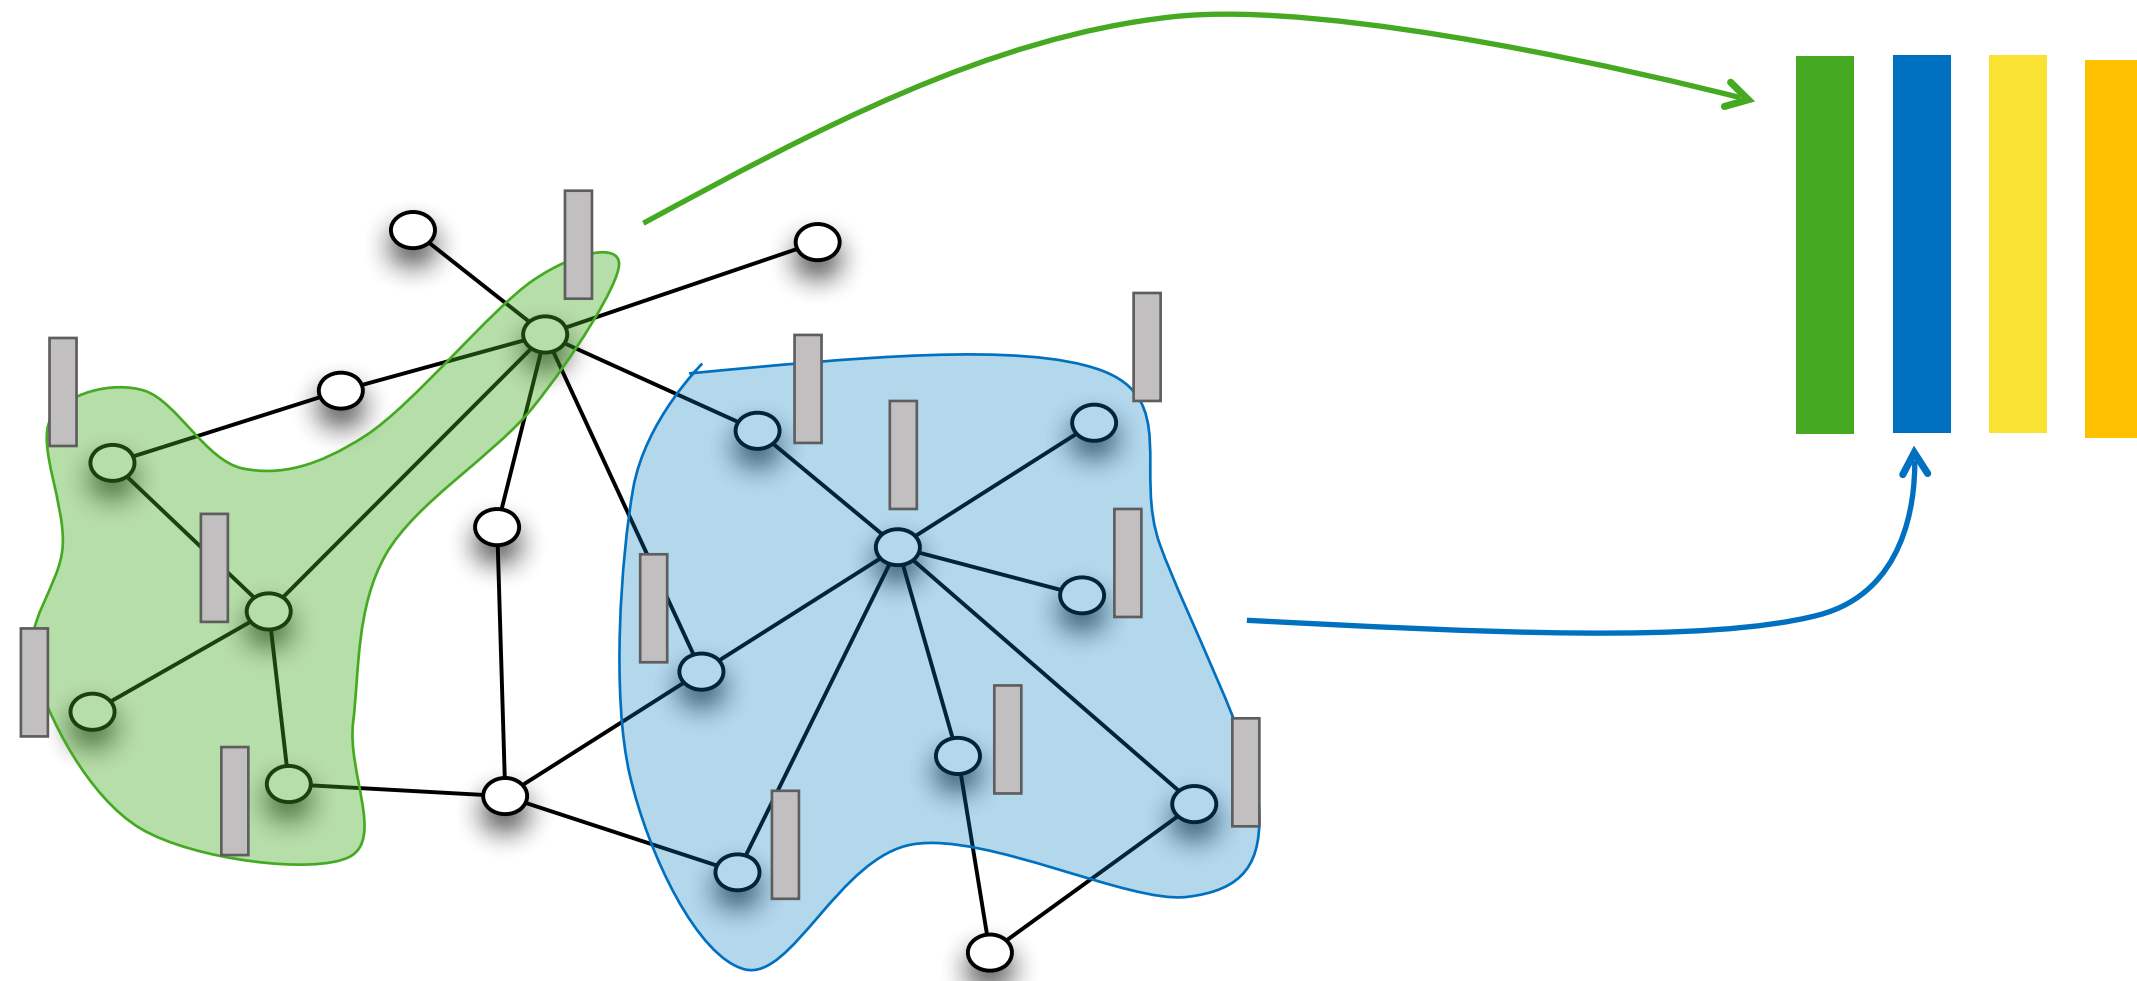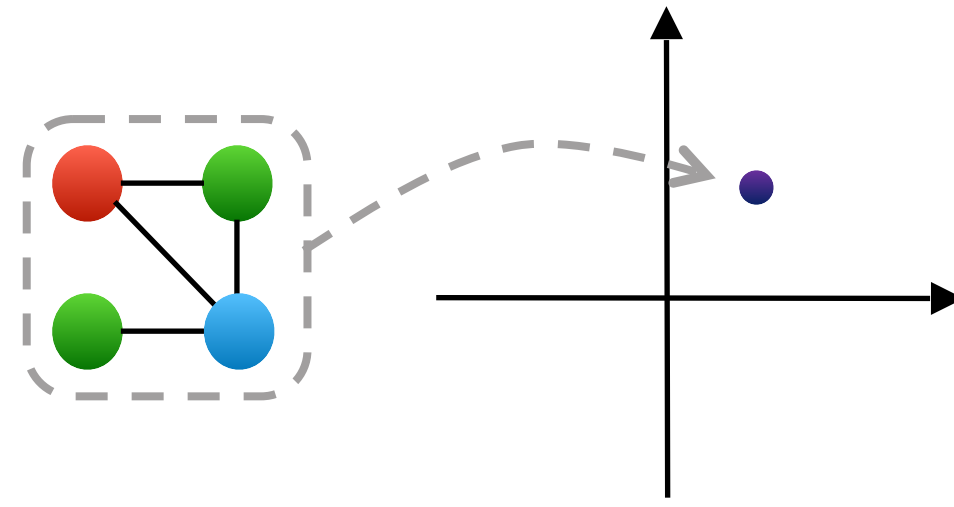

Idea:

1. Encode each node (based on message passing between nodes)
2. **Aggregate set of node embeddings into a graph embedding**


Graph embeddings

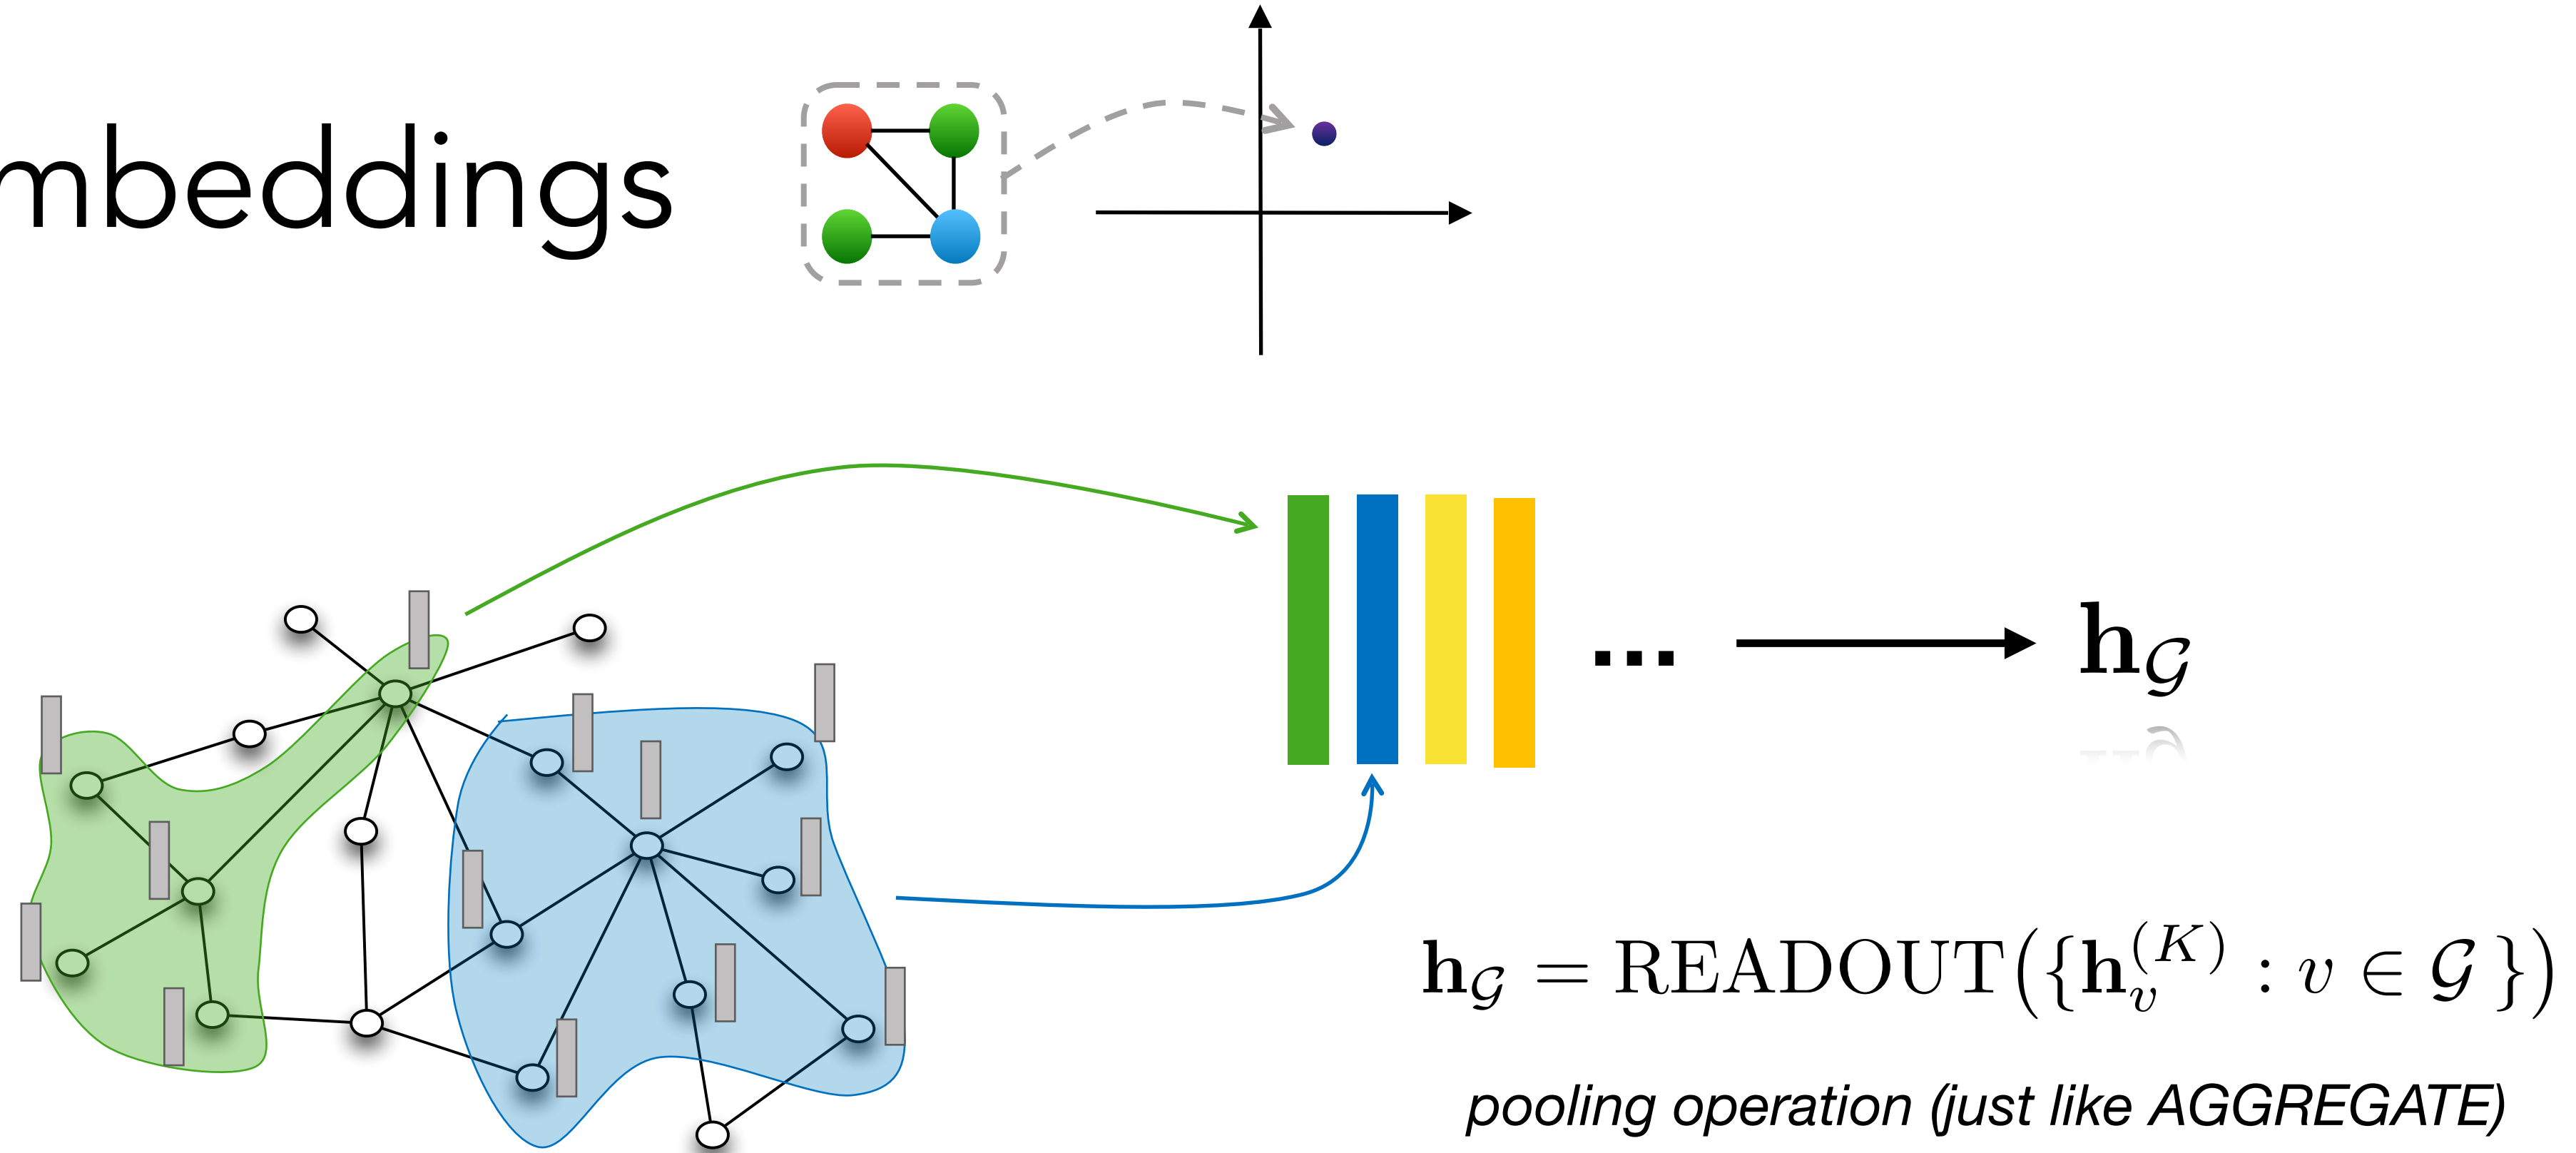


Idea:

1. Encode each node (based on message passing between nodes)
2. **Aggregate set of node embeddings into a graph embedding**


GNNs unrolled

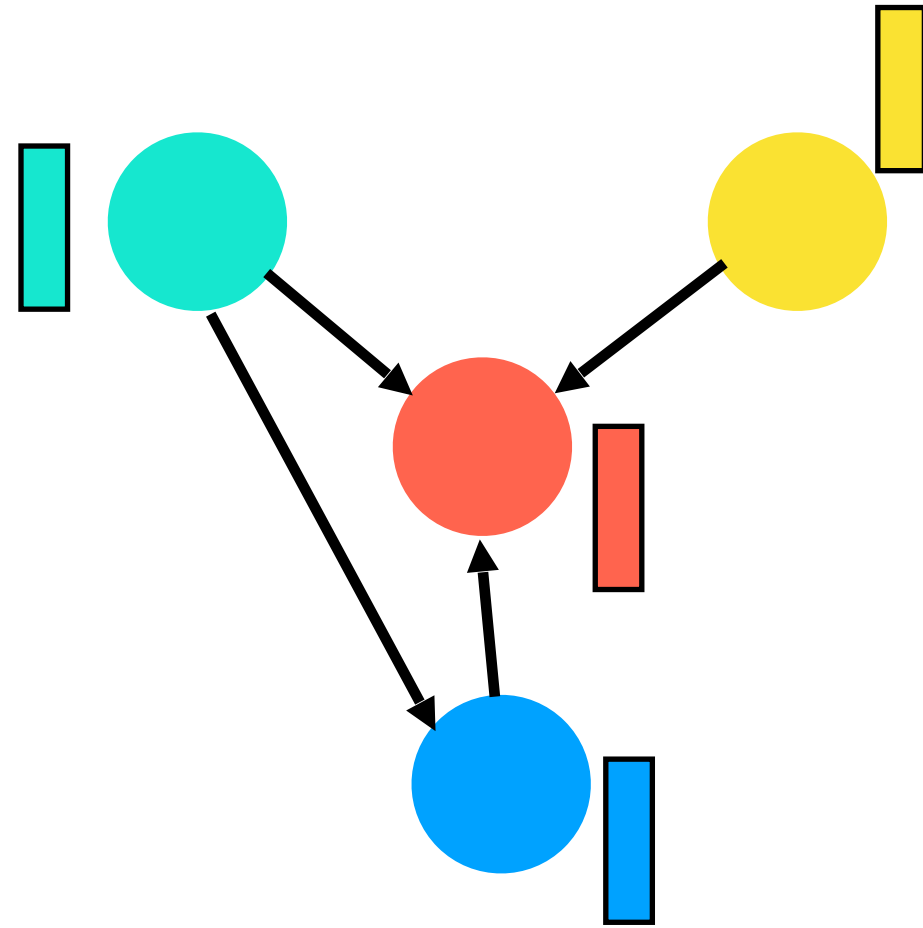


- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

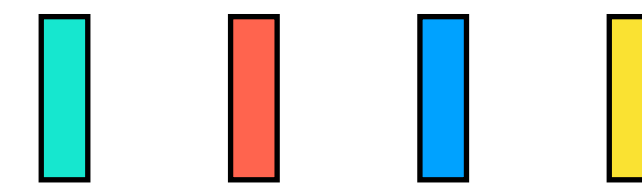


GNNs unrolled

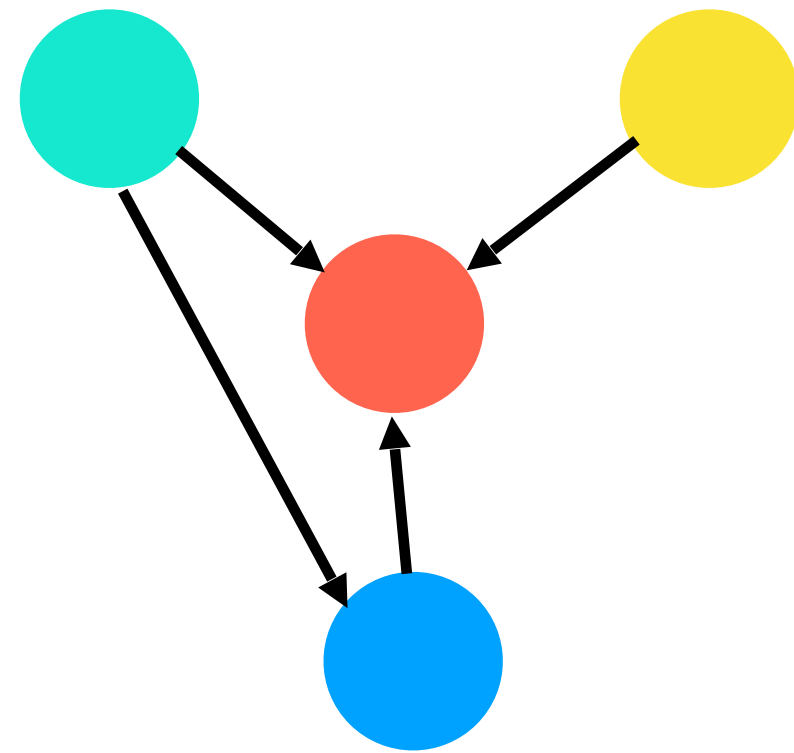


- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

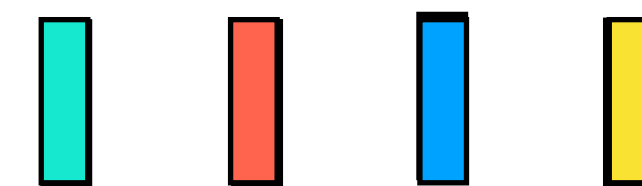


GNNs unrolled

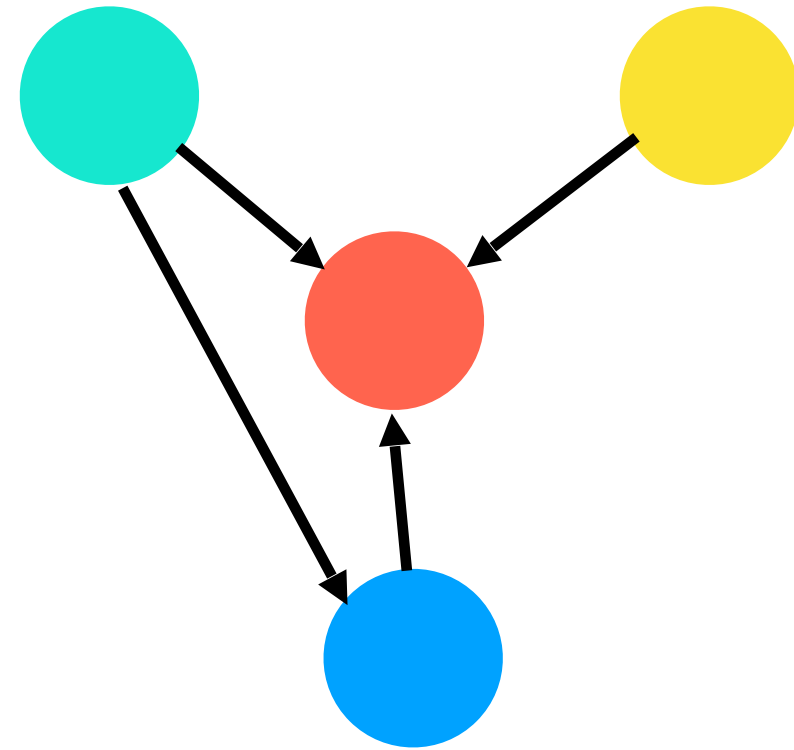


- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

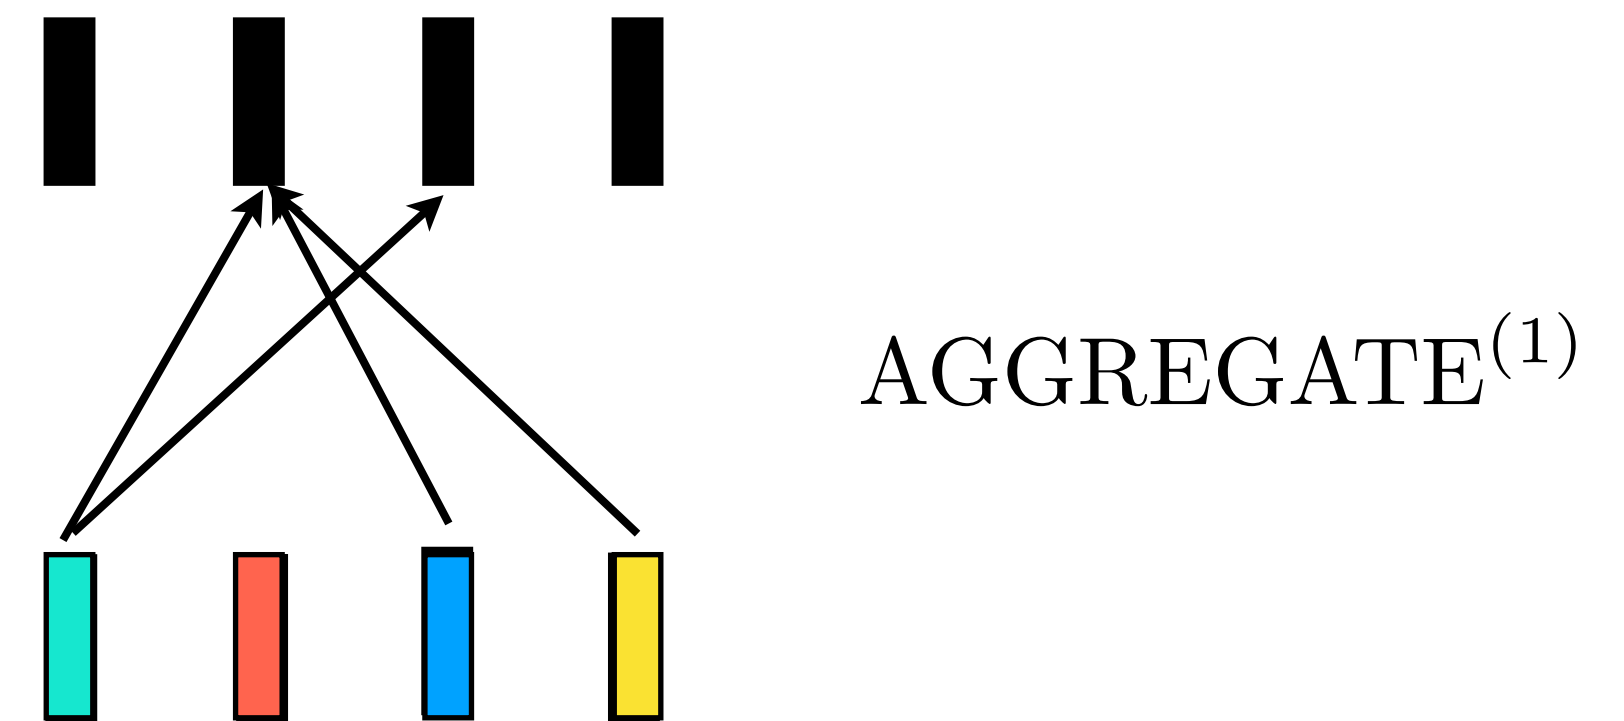

GNNs unrolled

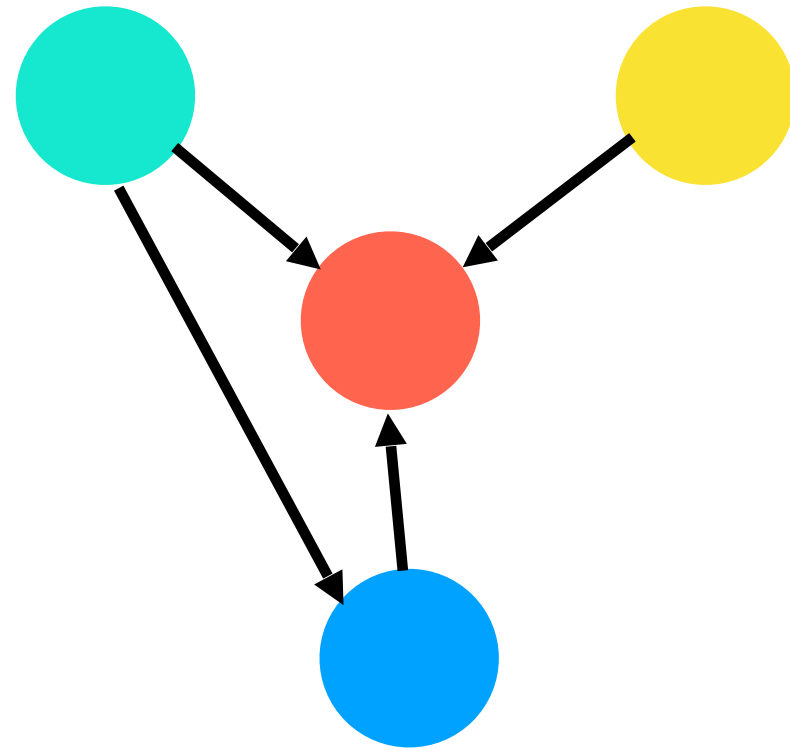


- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

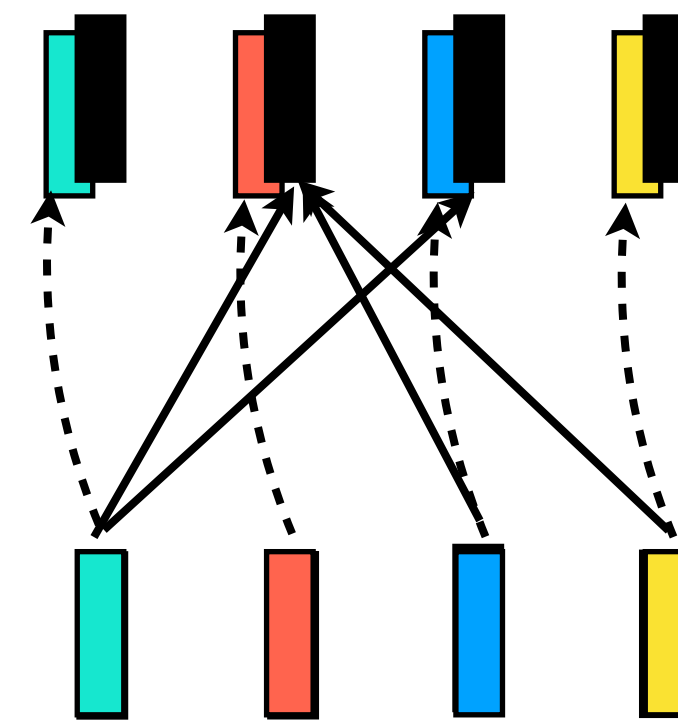


AGGREGATE⁽¹⁾


GNNs unrolled

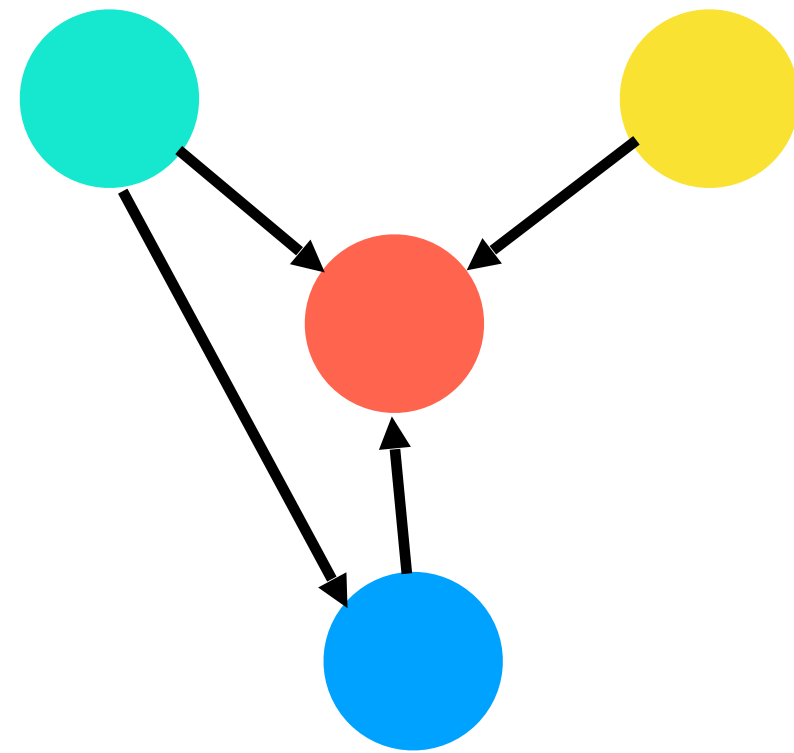


- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

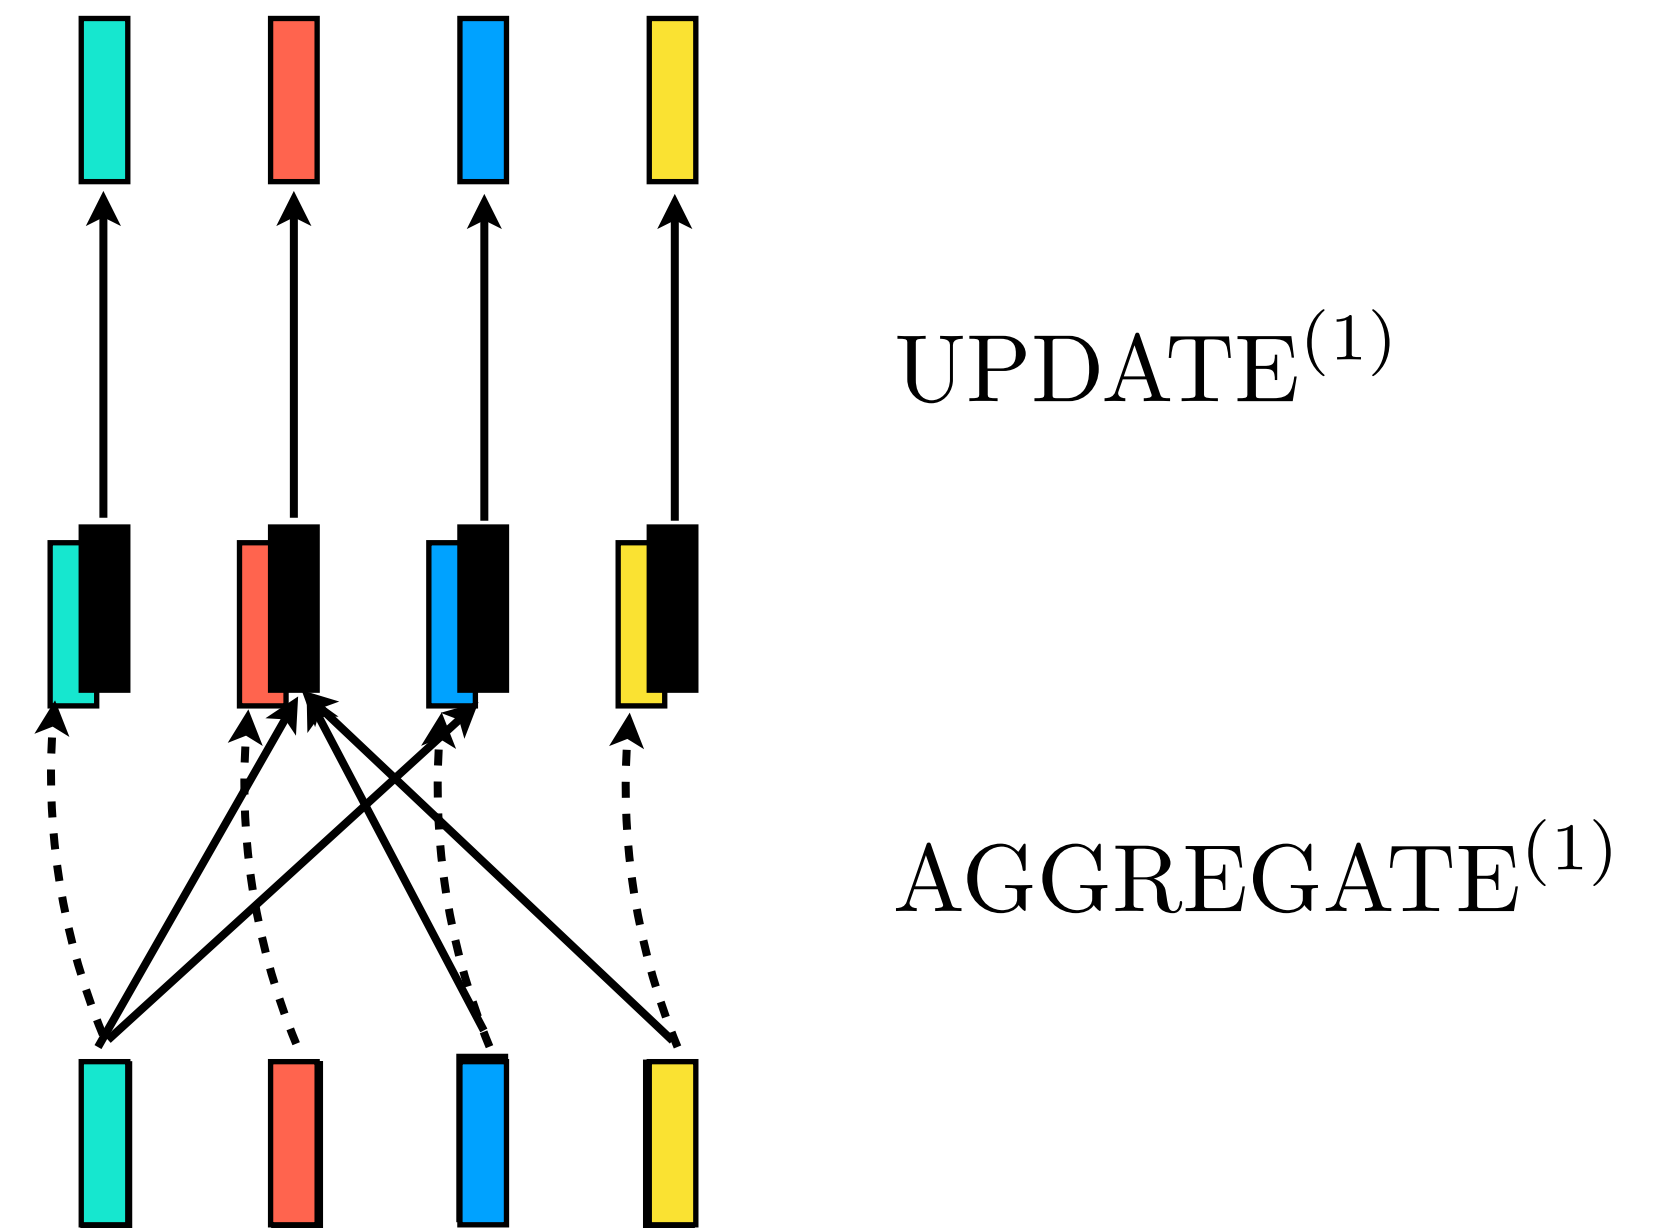

GNNs unrolled

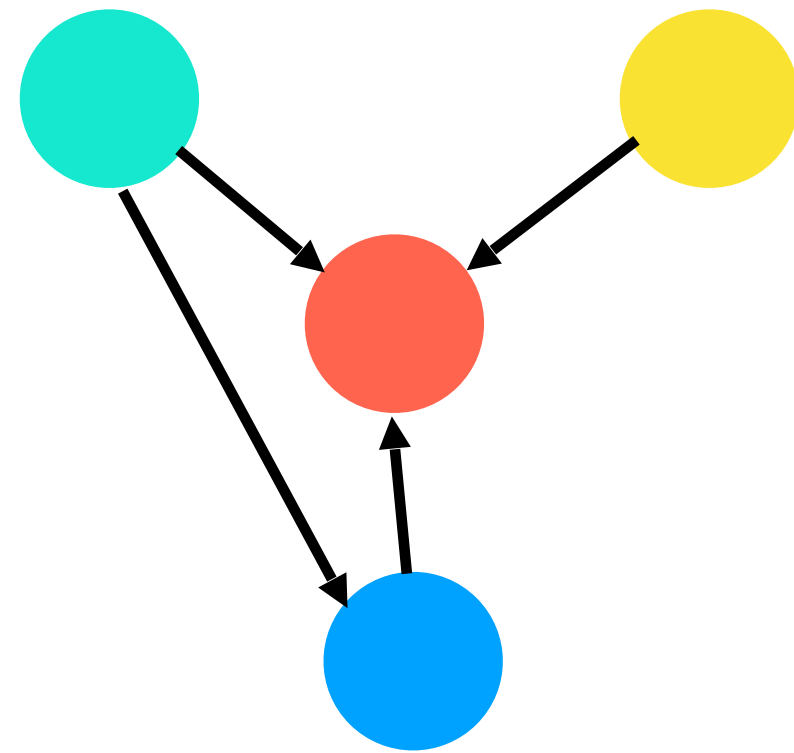

- Like an MLP, but nodes are vectors rather than scalars, edges are potentially complex functions (e.g., an edge can be an MLP)
- Each iteration of GNN message passing is a layer
 - AGGREGATE is akin to a linear layer
 - UPDATE is akin to a pointwise layer

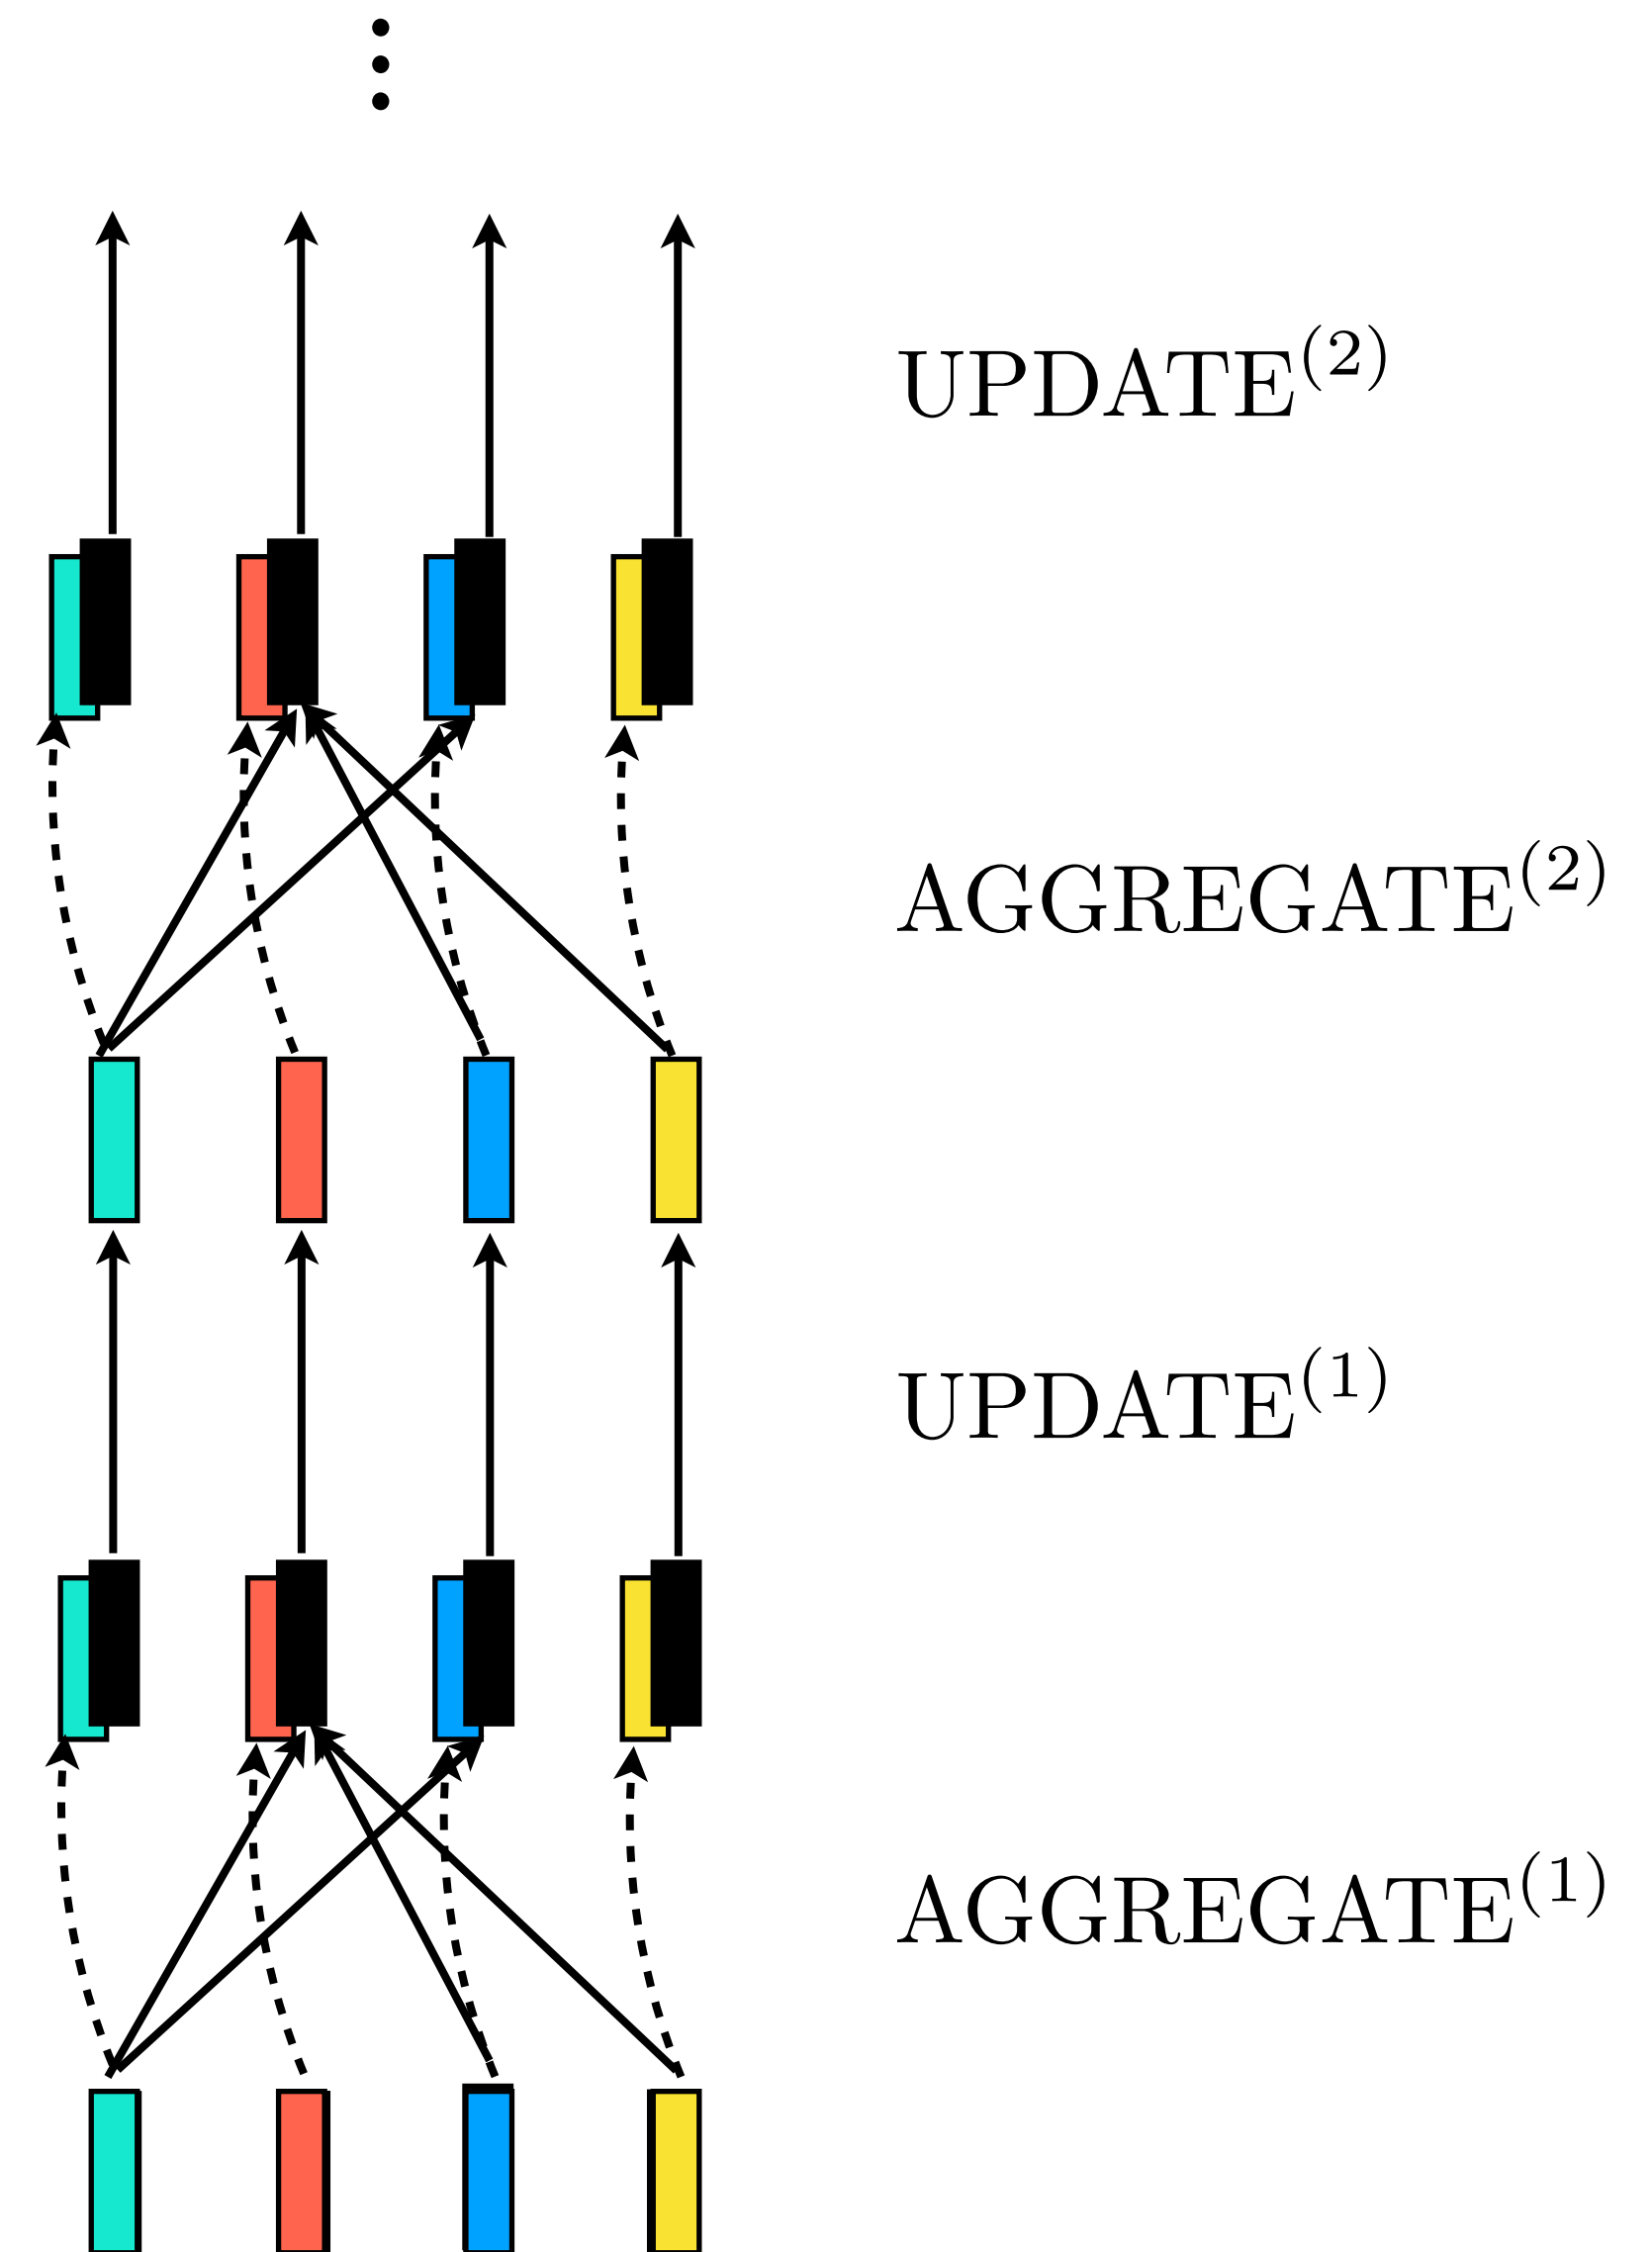

Generalizations


- Use **edge attributes** / features in aggregation

$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \text{MLP}^{(k)}(\mathbf{h}_u^{(k-1)}, \mathbf{h}_v^{(k-1)}, \mathbf{w}_{uv})$$

Generalizations

- Use **edge attributes** / features in aggregation
- **Multi-relational**: multiple “channels”
different aggregations for different types of edges

$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \text{MLP}^{(k)}(\mathbf{h}_u^{(k-1)}, \mathbf{h}_v^{(k-1)}, \mathbf{w}_{uv})$$

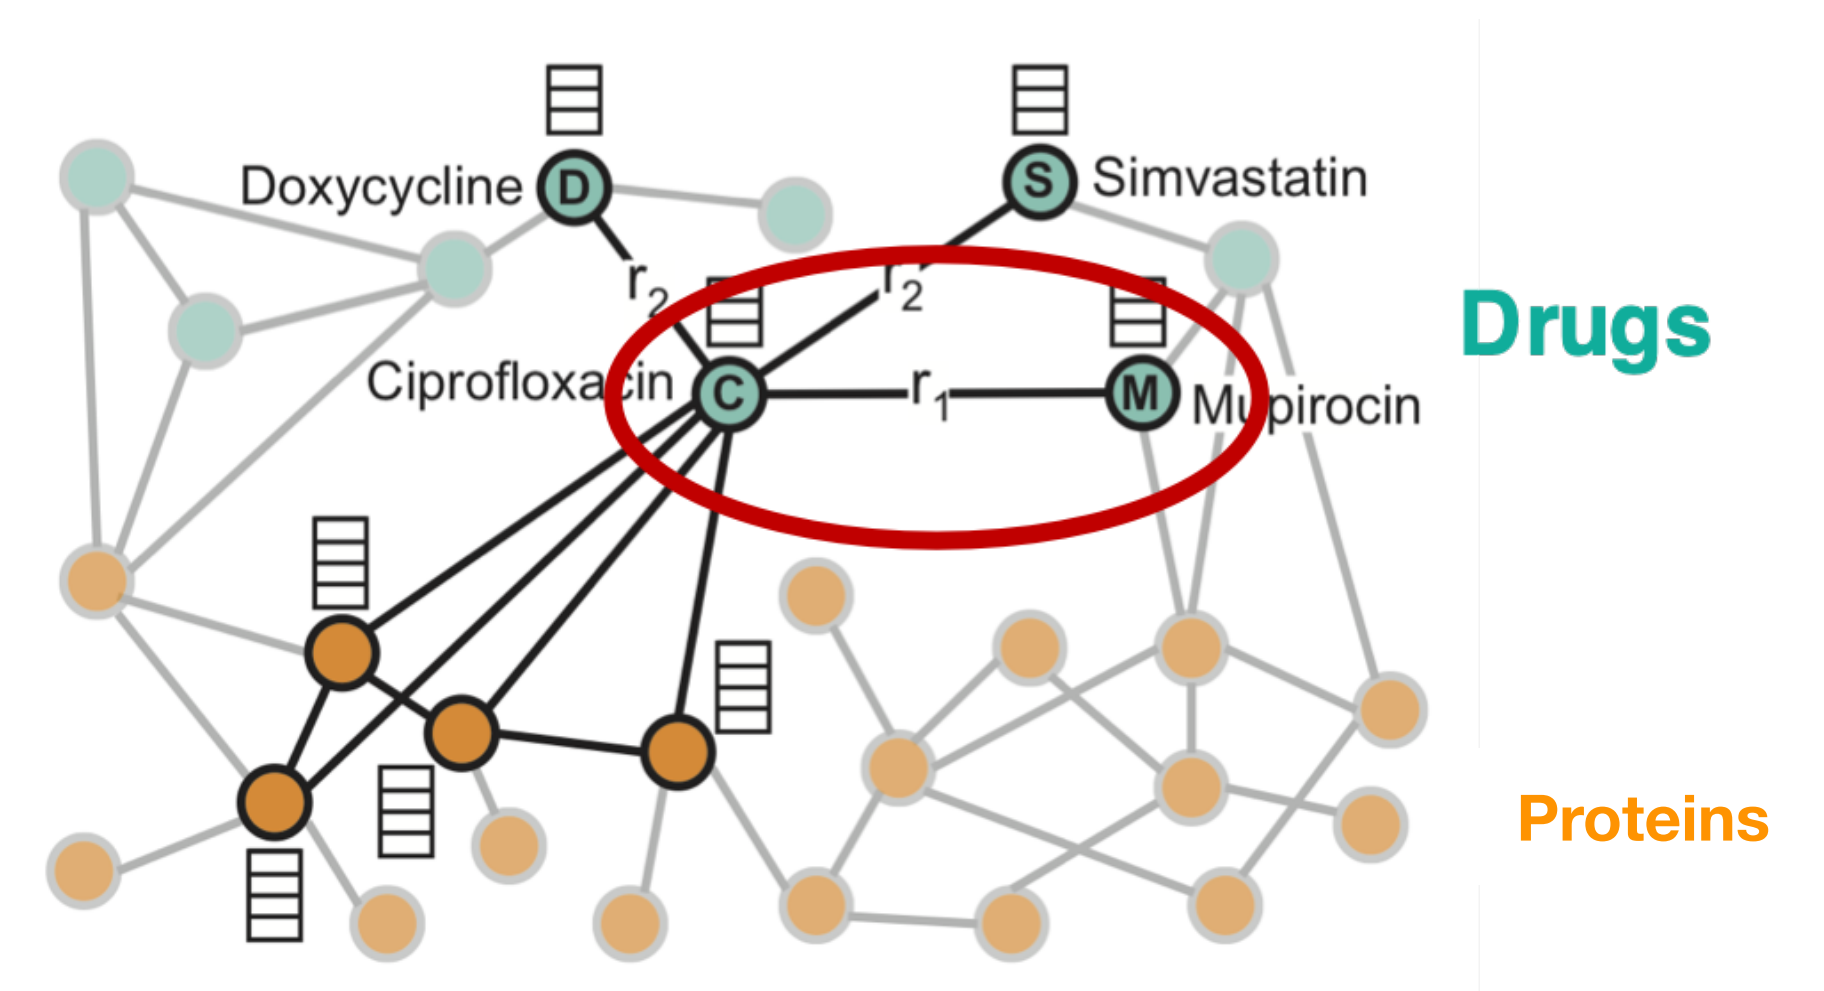

(Zitnik et al, 2018)

Generalizations


- Use **edge attributes** / features in aggregation
- **Multi-relational**: multiple “channels”
different aggregations for different types of edges

- **Attention** (Velickovic et al 2018):

$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \alpha_{v,u} \mathbf{h}_u$$


- Janossy pooling (Murphy et al 2018)
permutation-sensitive function averaged over permutations

$$\mathbf{m}_{\mathcal{N}(v)} = \sum_{u \in \mathcal{N}(v)} \text{MLP}^{(k)}(\mathbf{h}_u^{(k-1)}, \mathbf{h}_v^{(k-1)}, \mathbf{w}_{uv})$$


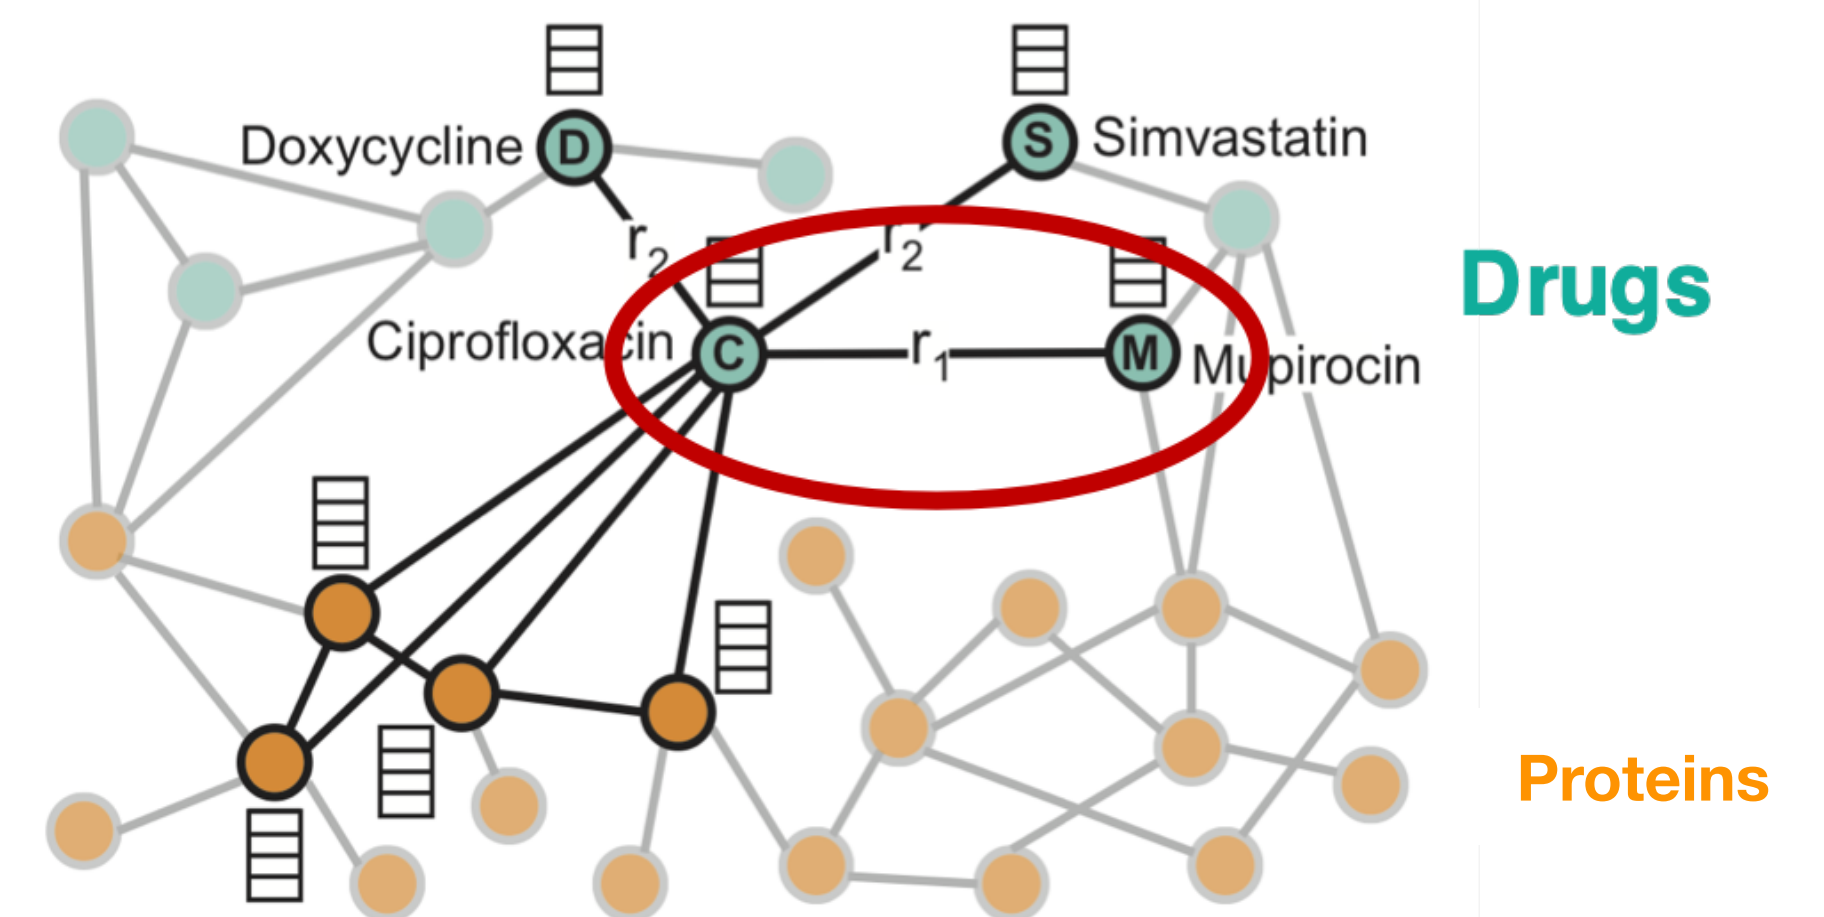


(Zitnik et al, 2018)

Node embeddings: tree view

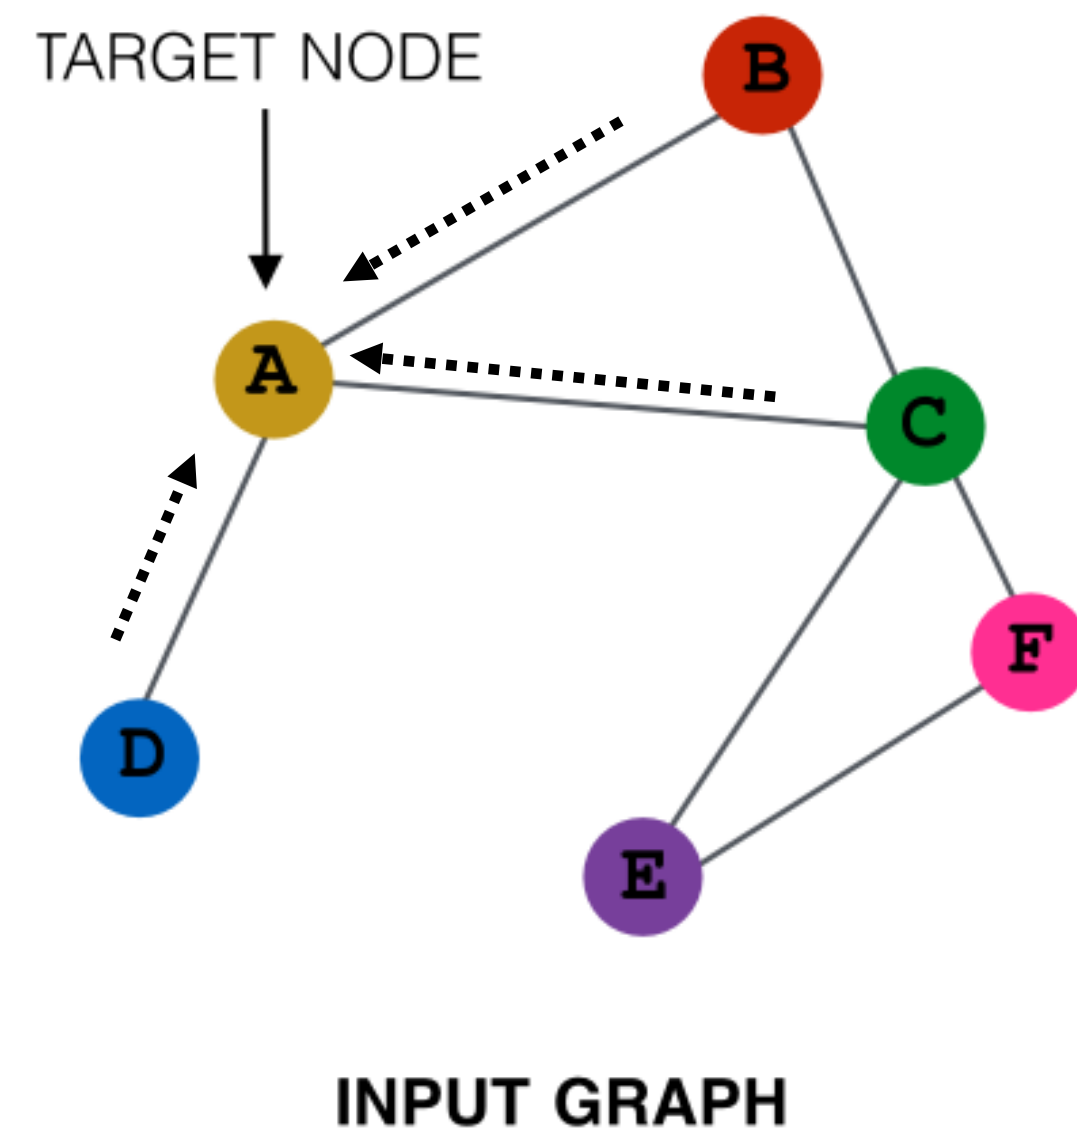


Node embeddings: tree view

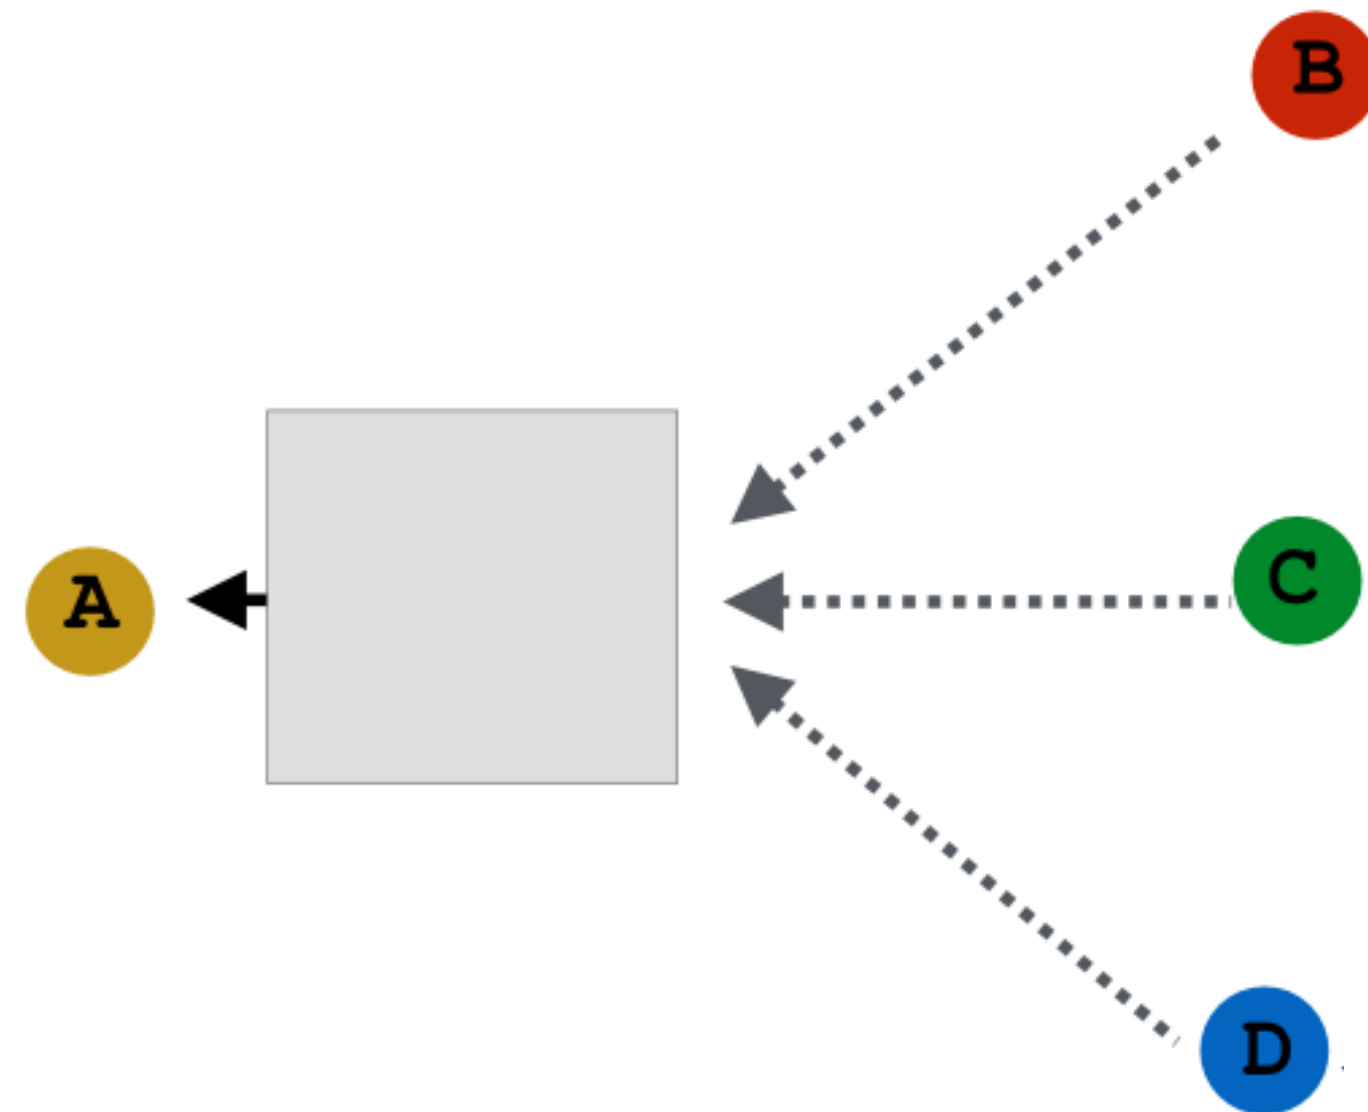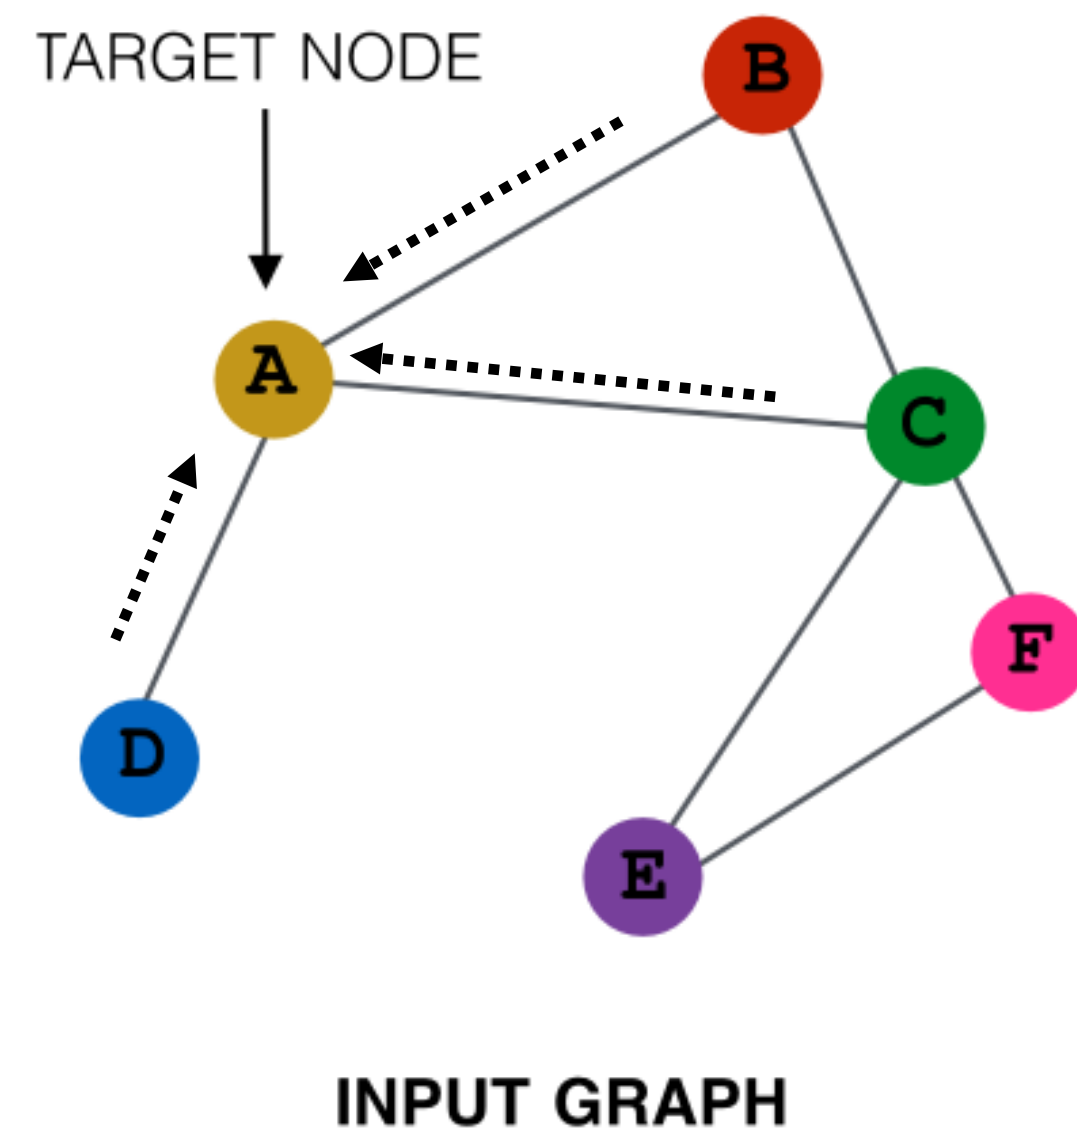



grey boxes: aggregation functions that we learn

Node embeddings: tree view

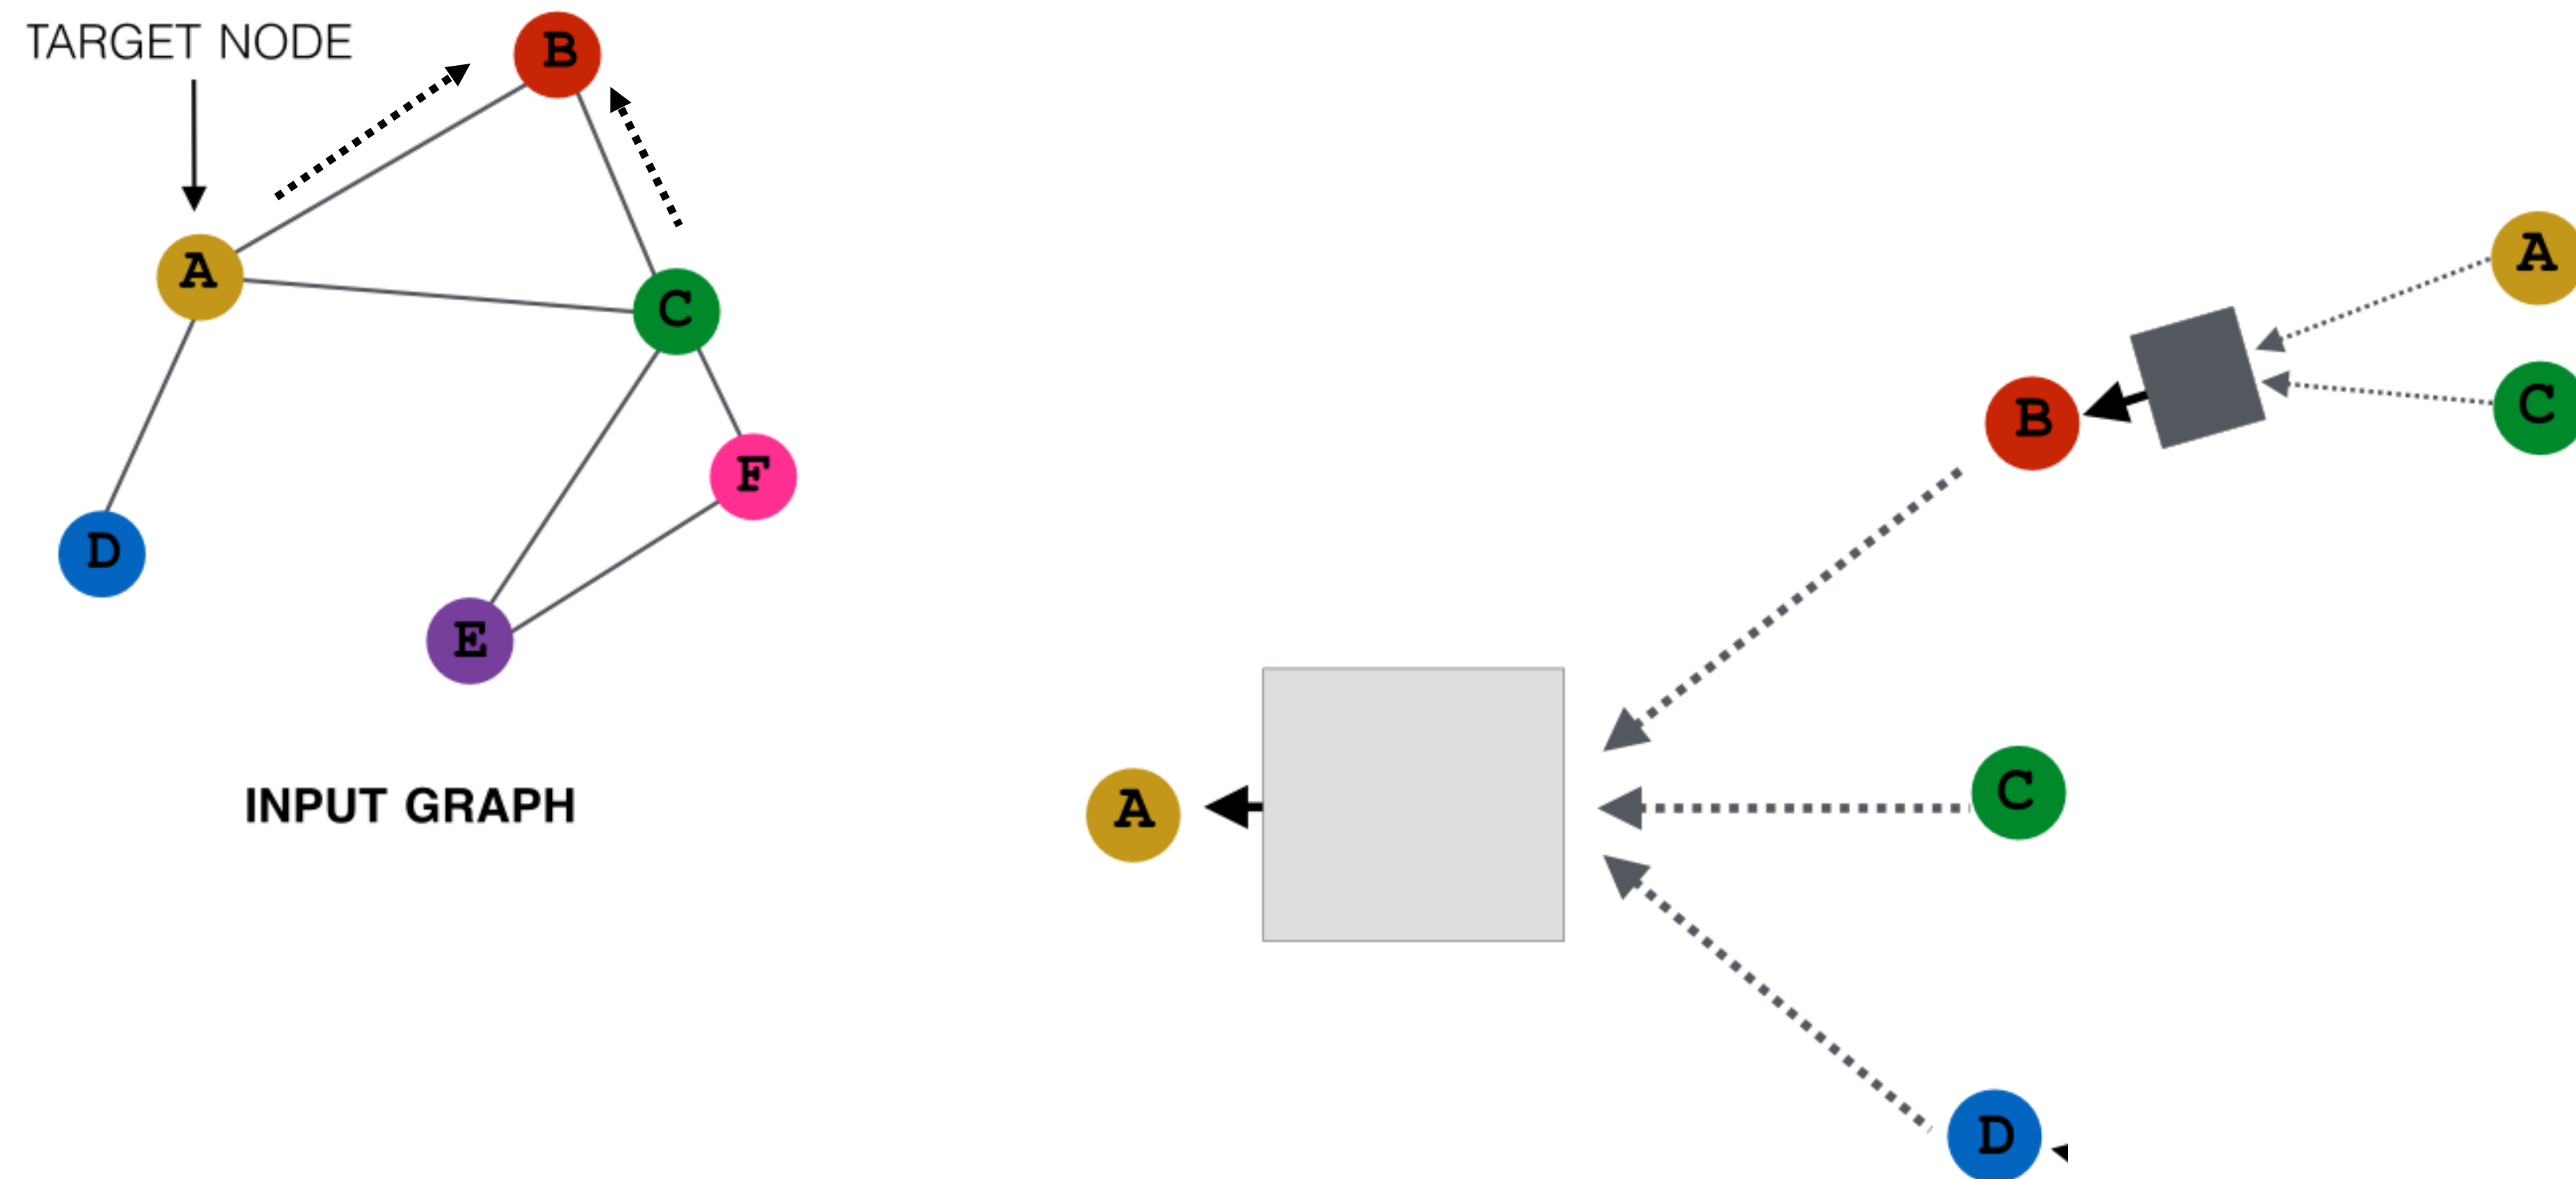


grey boxes: aggregation functions that we learn

Node embeddings: tree view

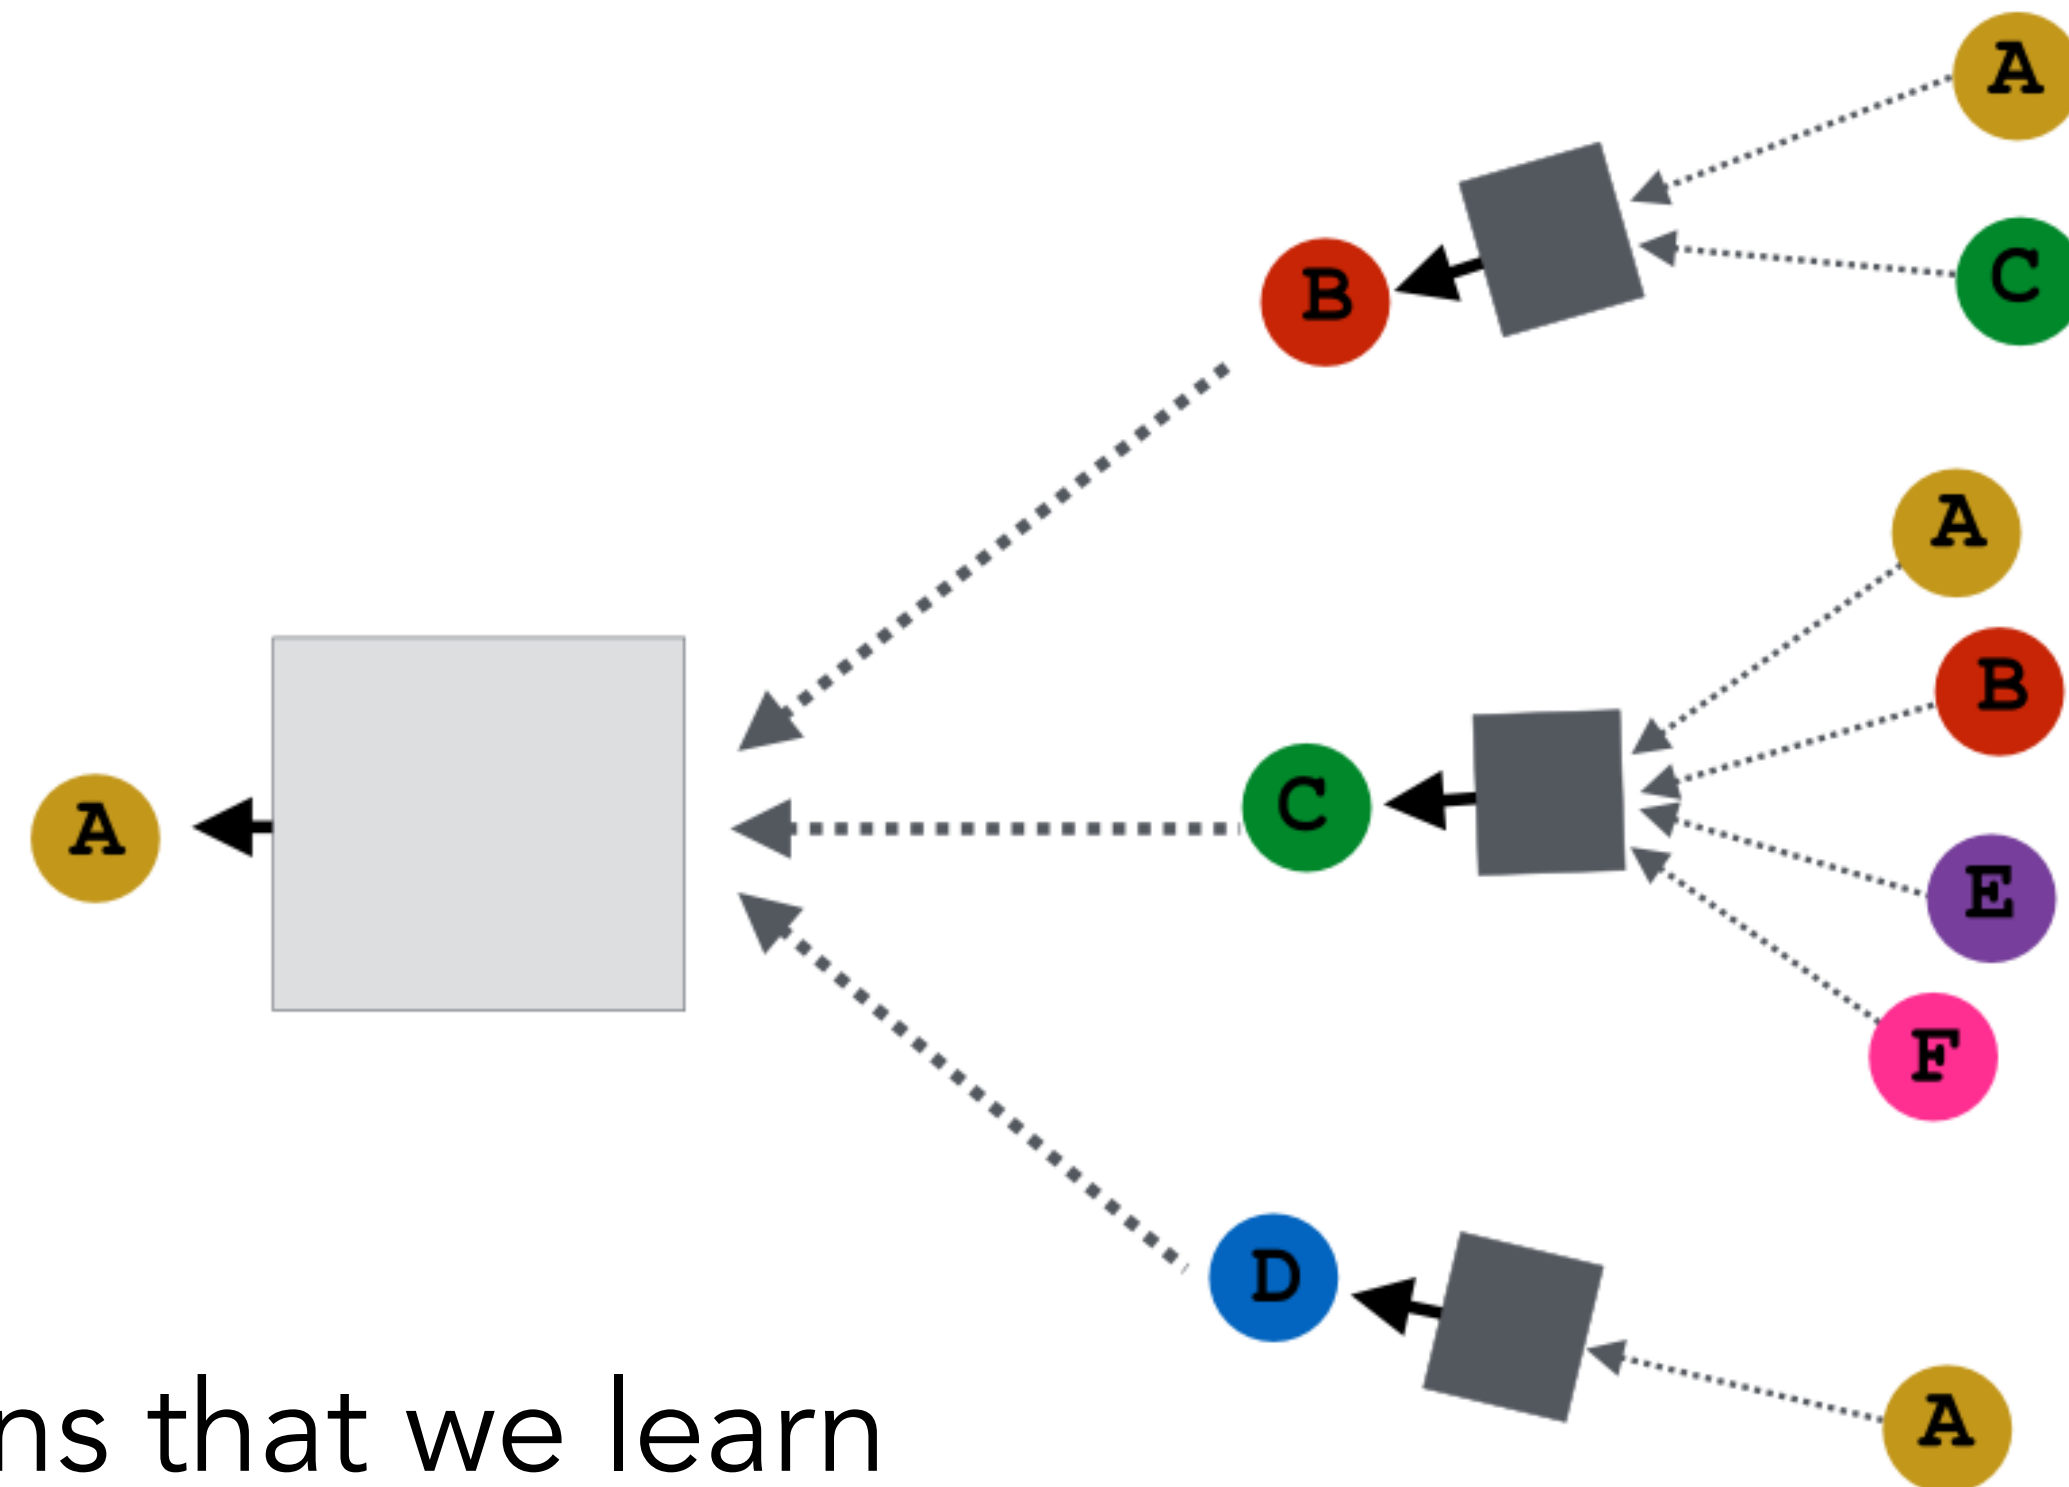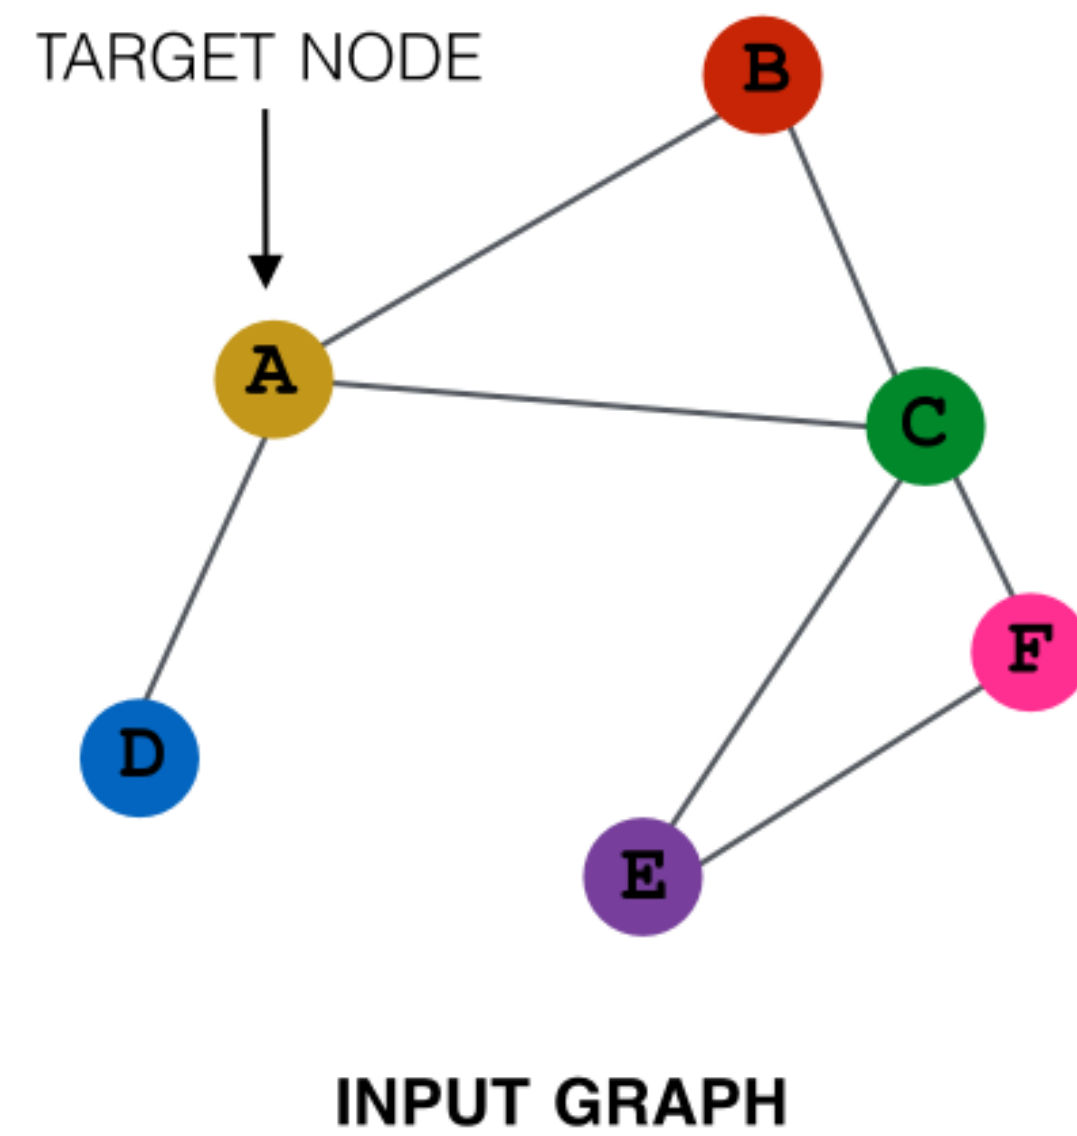


grey boxes: aggregation functions that we learn


Node embeddings: tree view

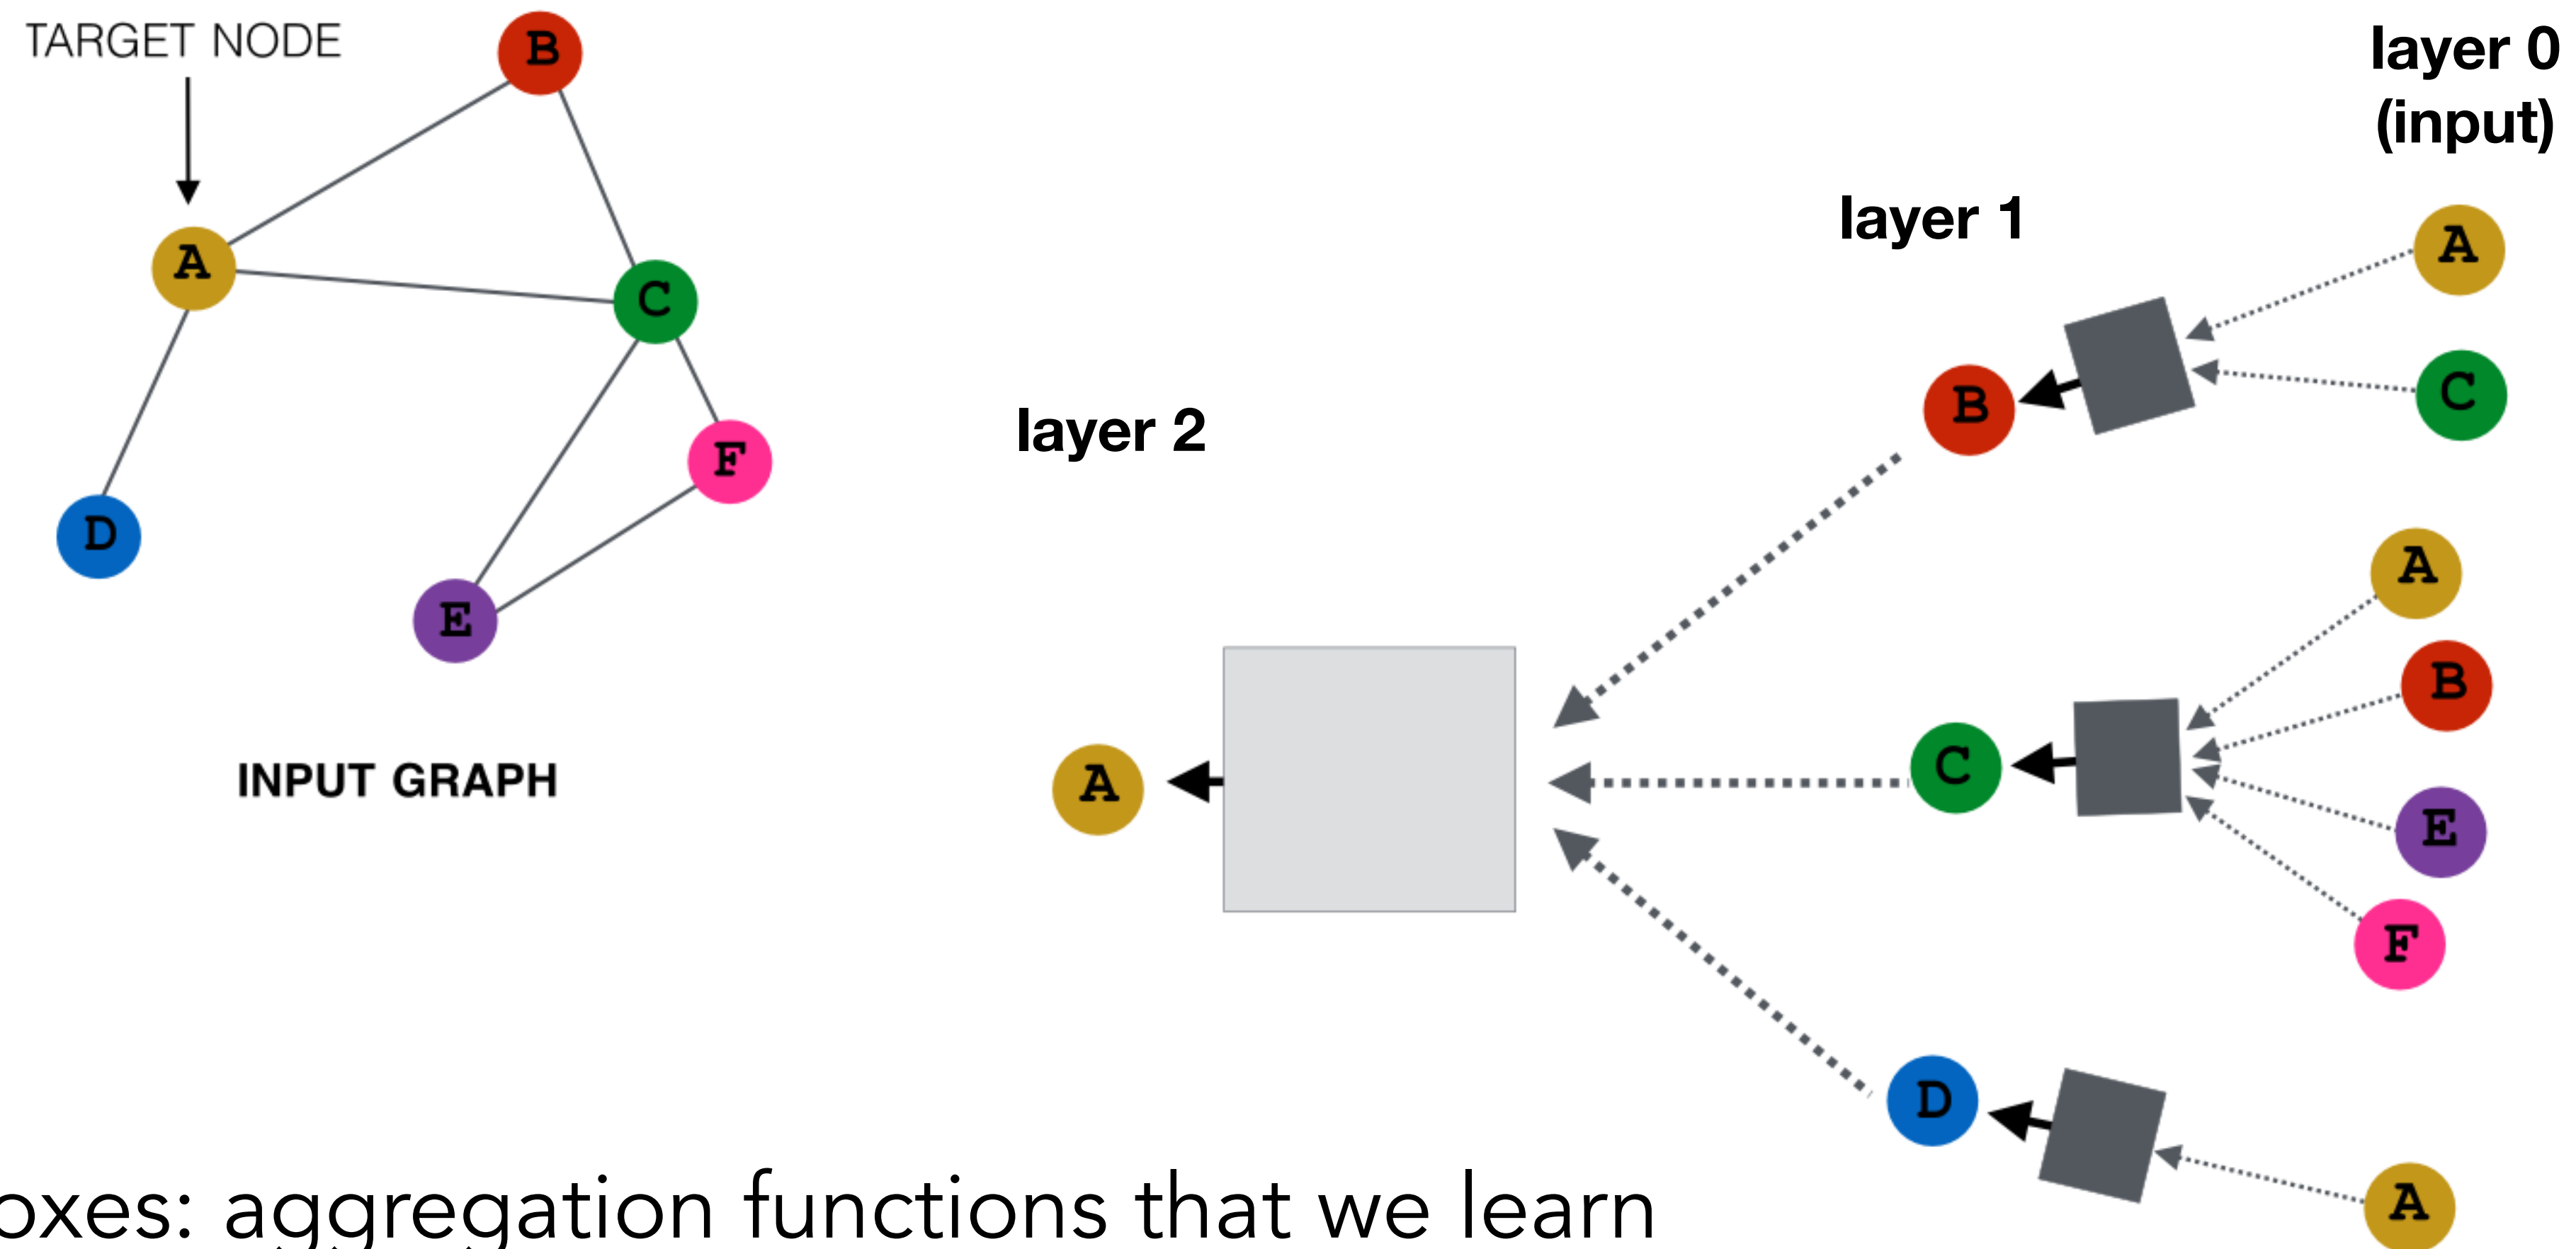

Node embeddings: tree view

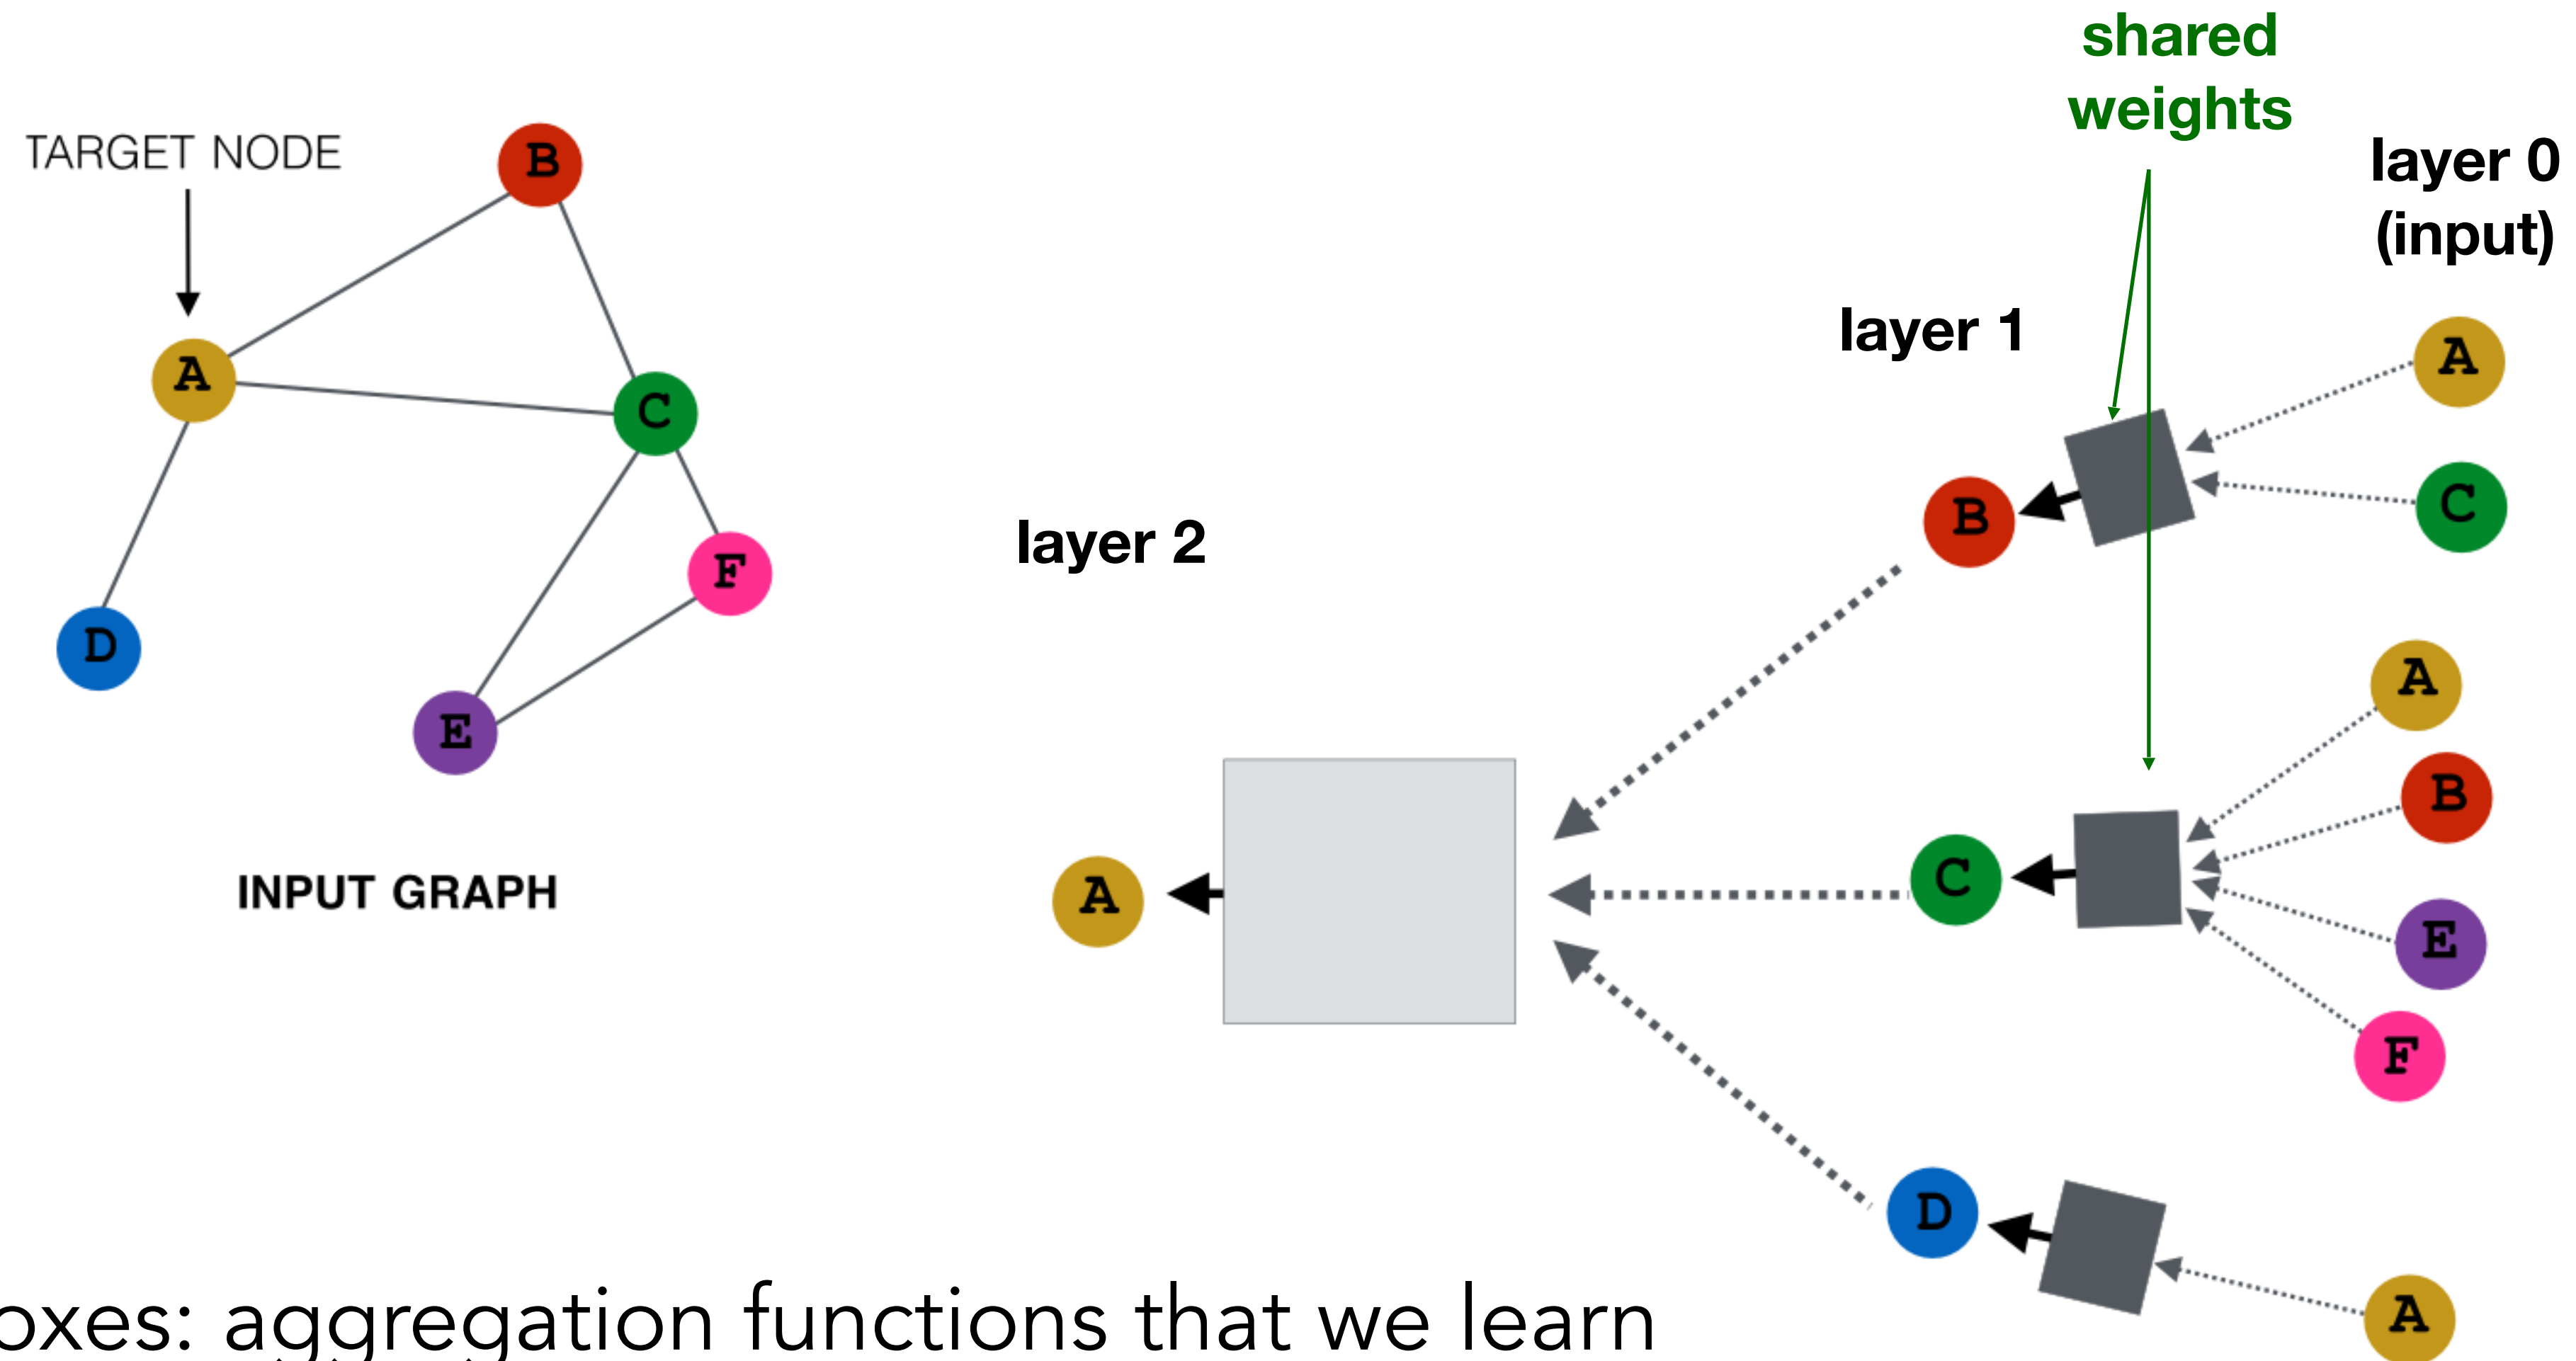


Weight sharing

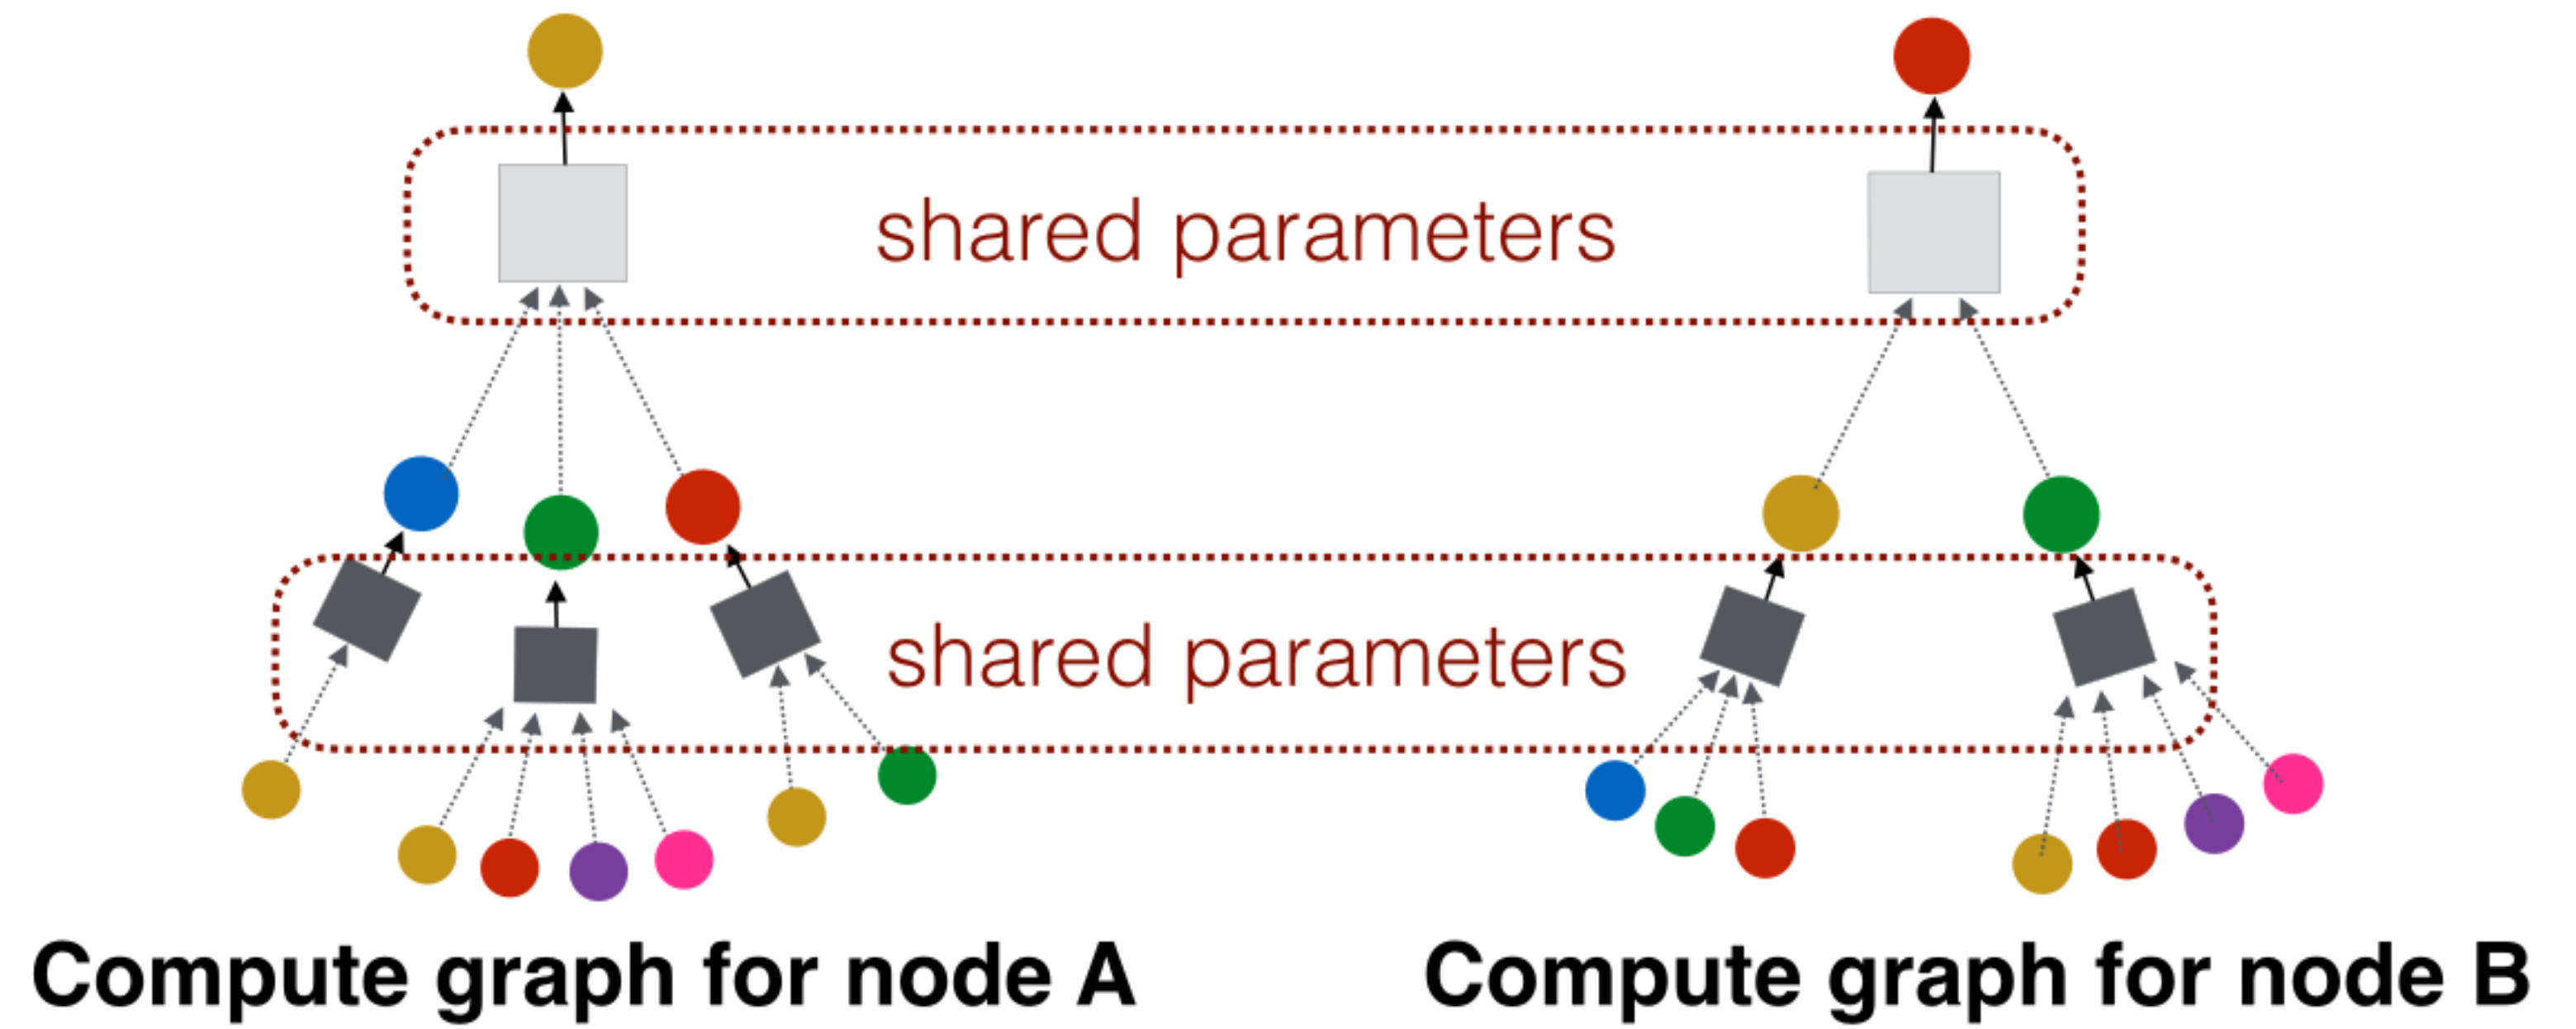

Weight sharing


- We use the same aggregation functions for all nodes.

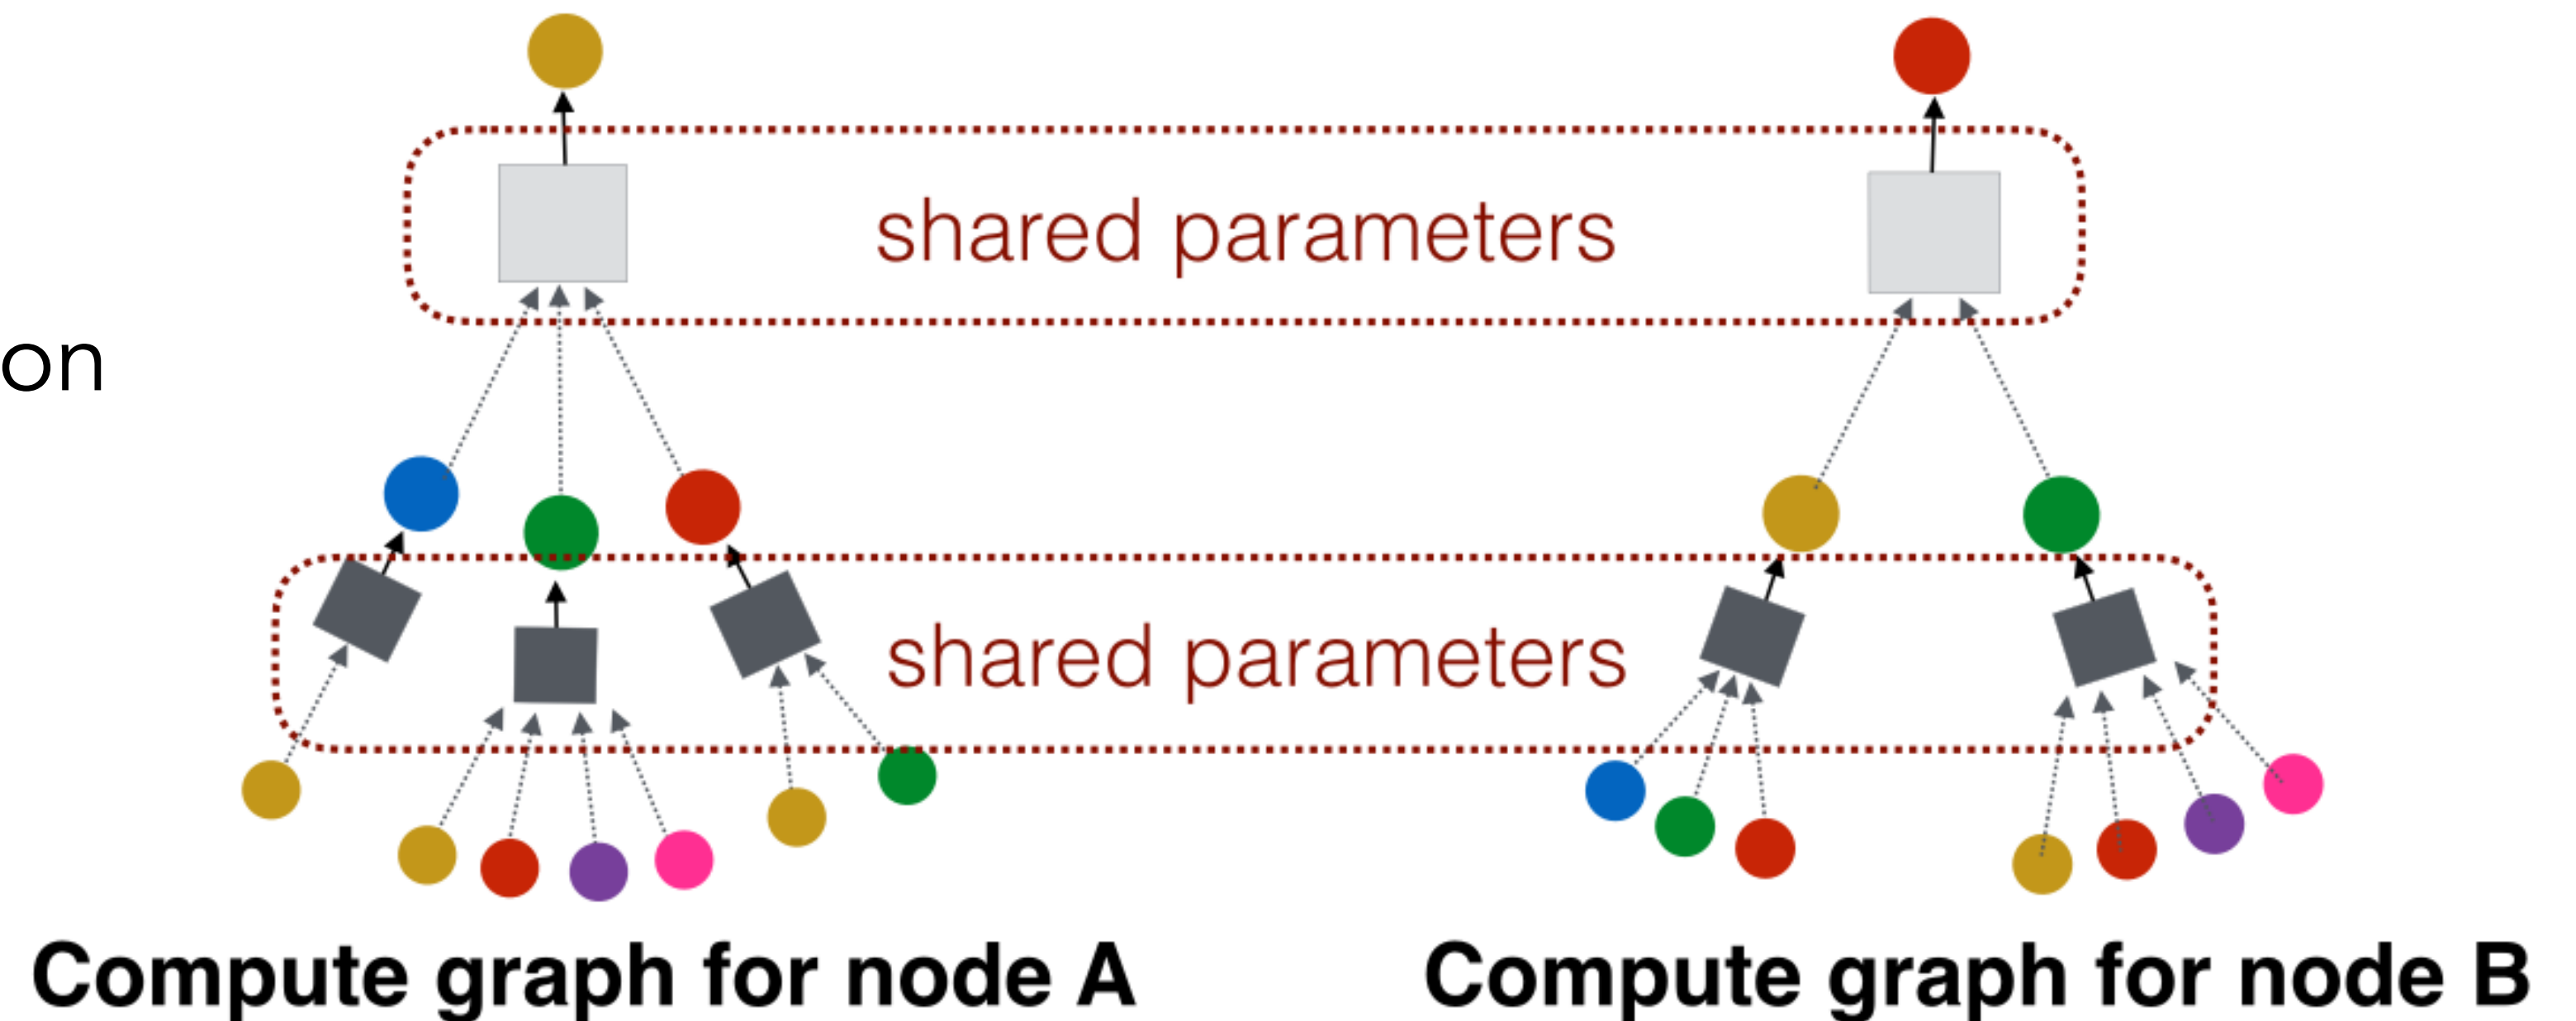


- So we can generate encodings for **previously unseen nodes & graphs** too!
(dynamic graphs, different molecules, ...)

Weight sharing

- We use the same aggregation functions for all nodes.

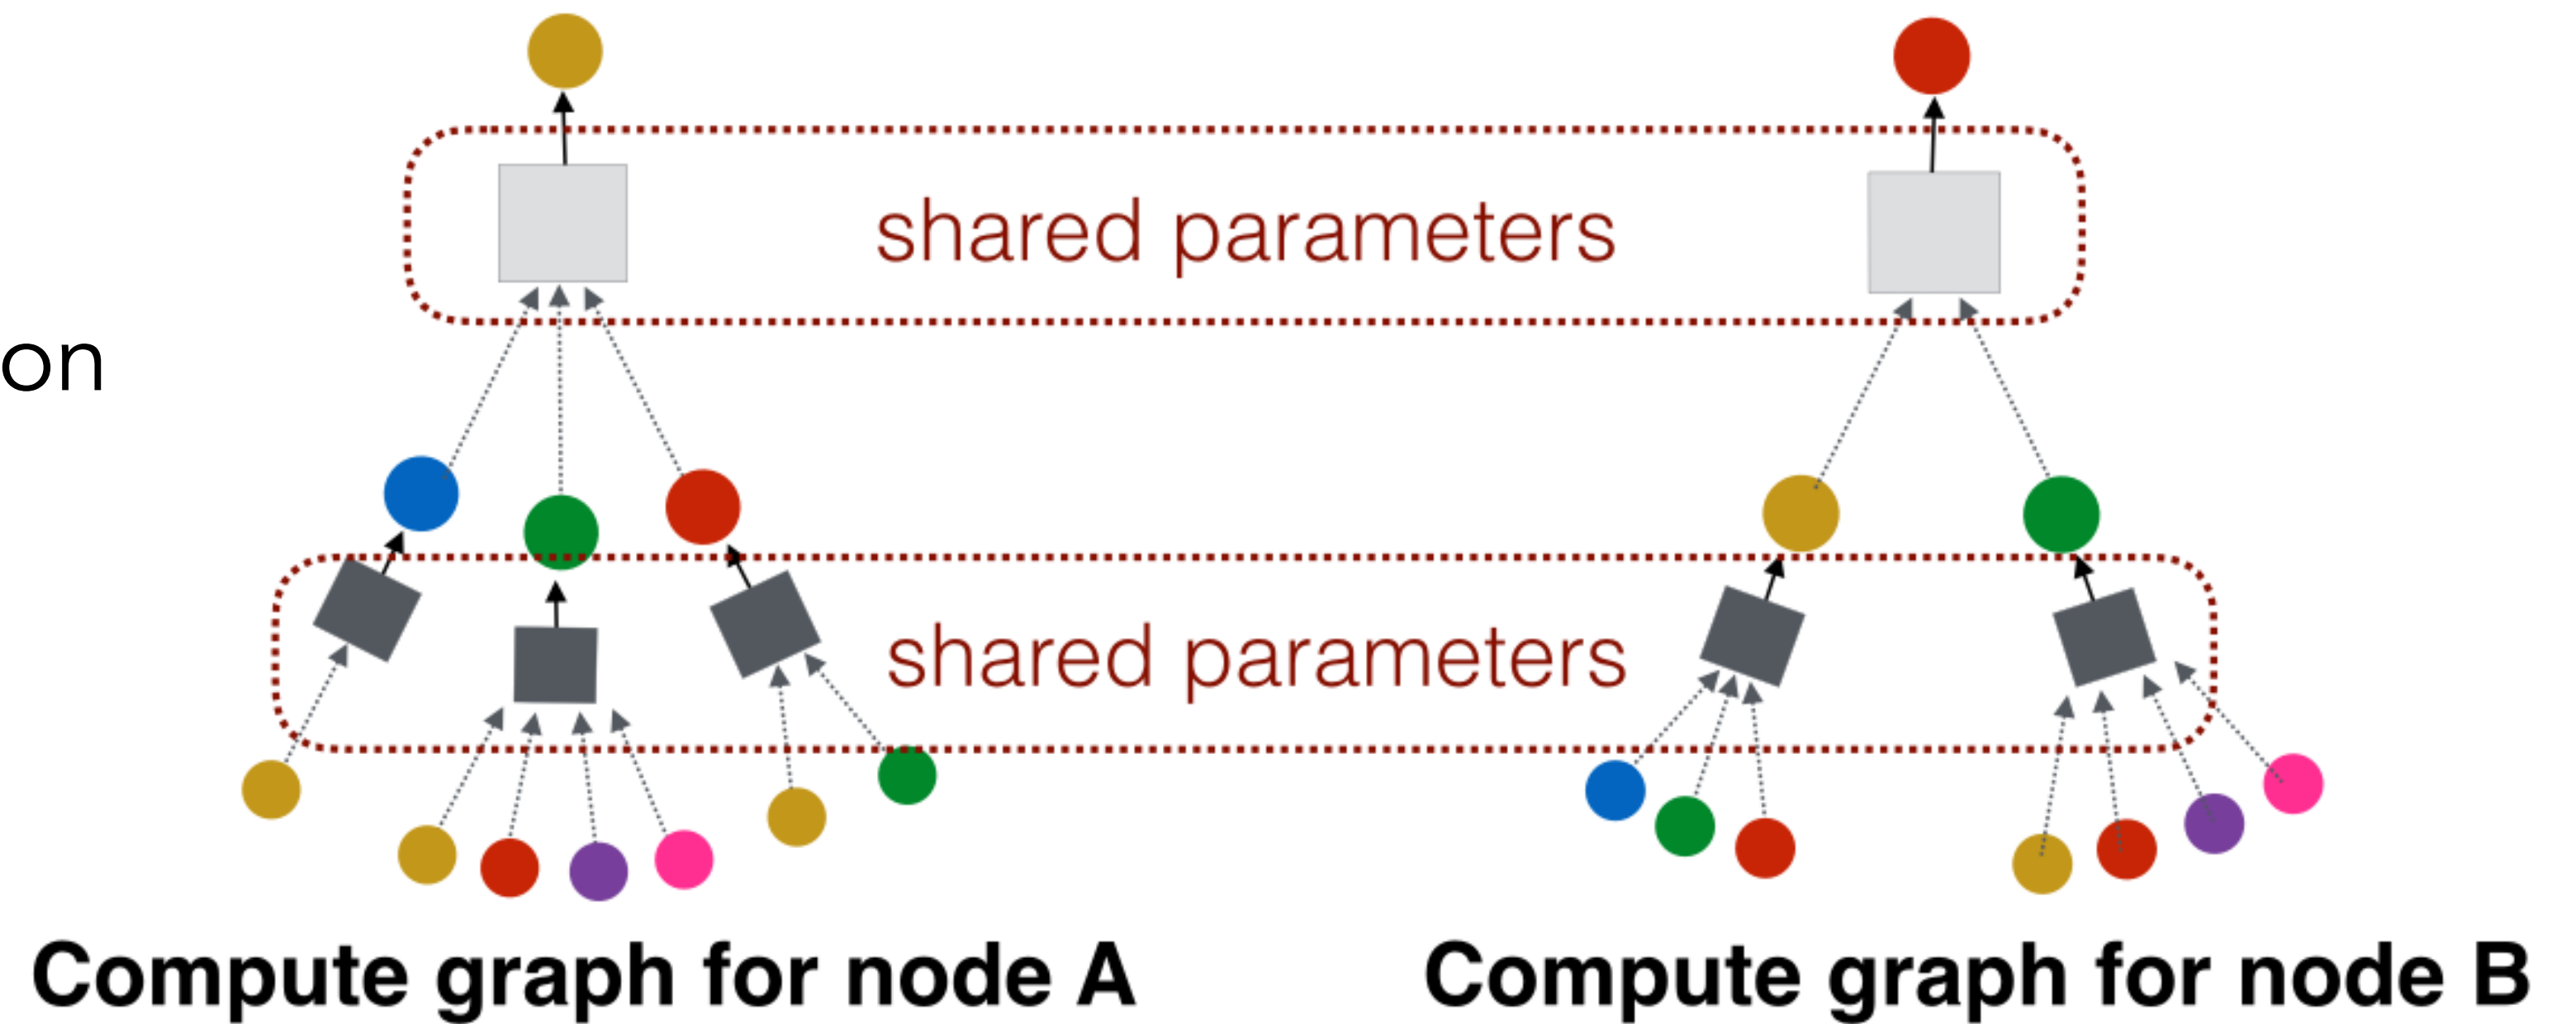

- So we can generate encodings for **previously unseen nodes & graphs** too!
(dynamic graphs, different molecules, ...)

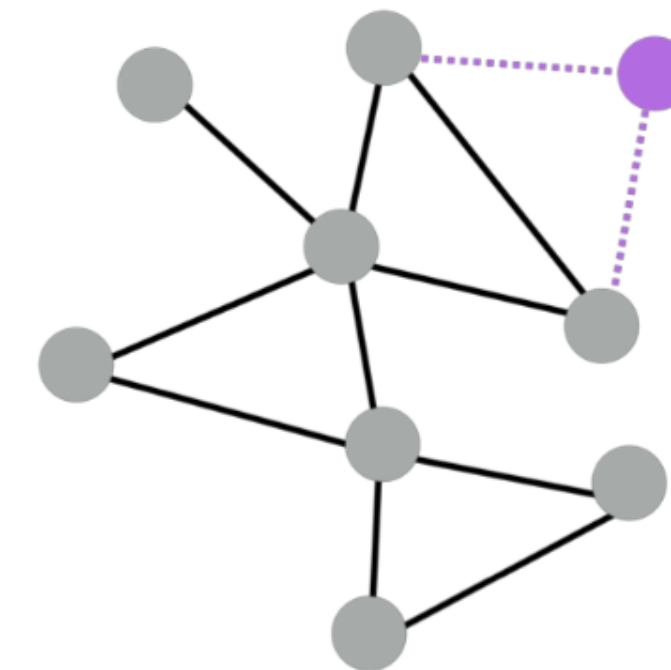


Training a GNN

- What is a data point?
- What to specify?
 - Aggregate, updates and readout functions
 - Loss function on prediction

Training a GNN

- What is a data point?

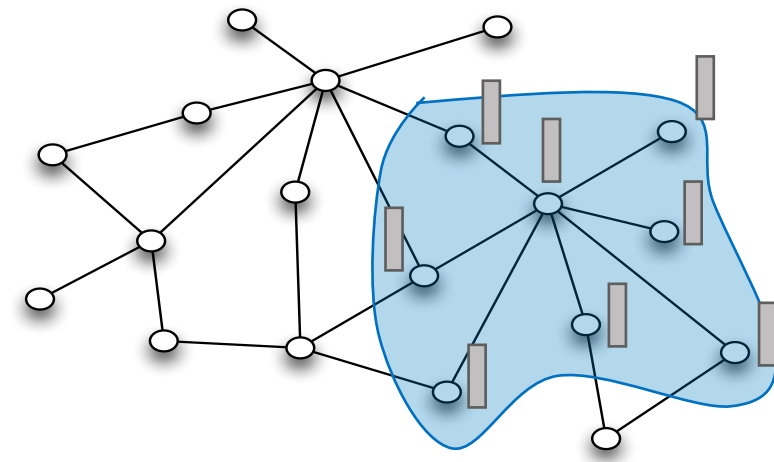


{node, label} pairs


- What to specify?
 - Aggregate, updates and readout functions
 - Loss function on prediction

Training a GNN

- What is a data point?

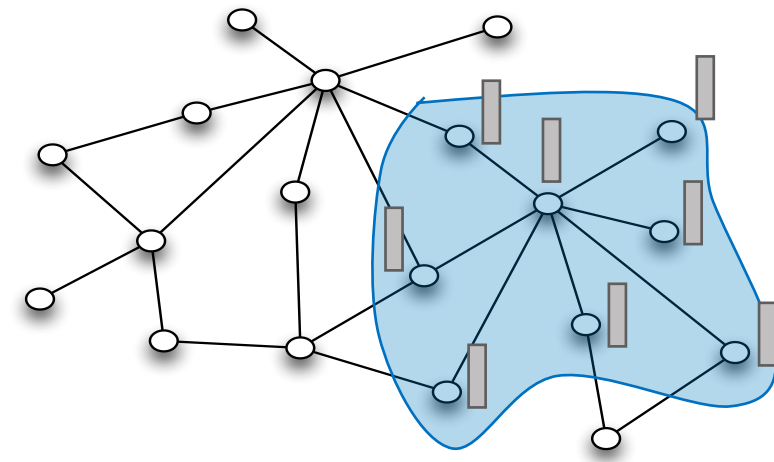

{node, label} pairs

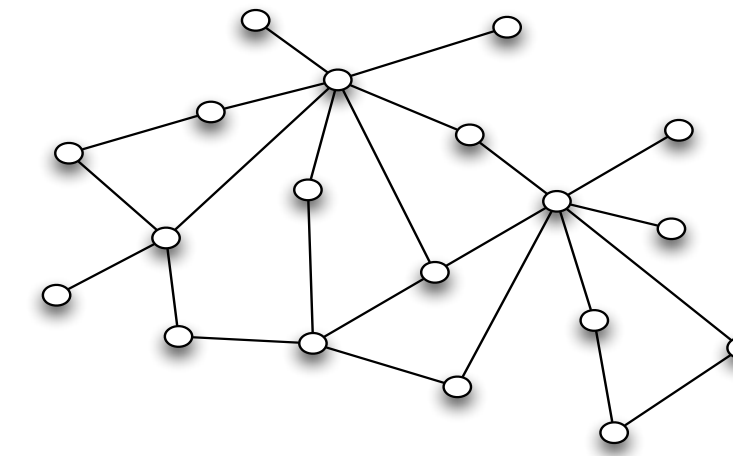


{graph, label} pairs


- What to specify?
 - Aggregate, updates and readout functions
 - Loss function on prediction

Training a GNN

- What is a data point?

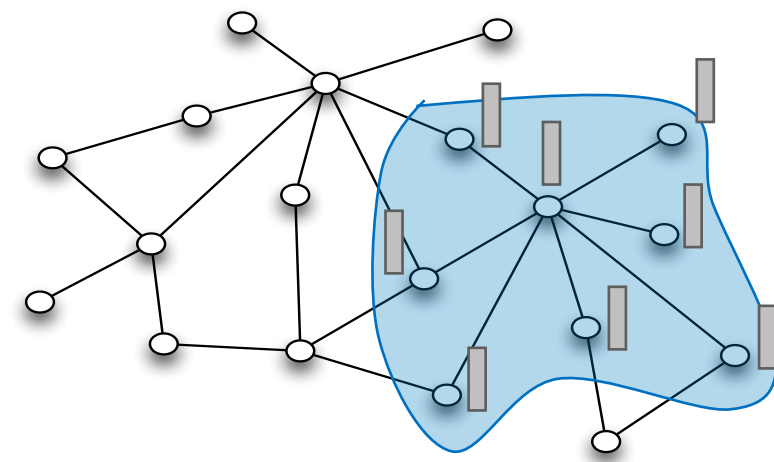

{node, label} pairs


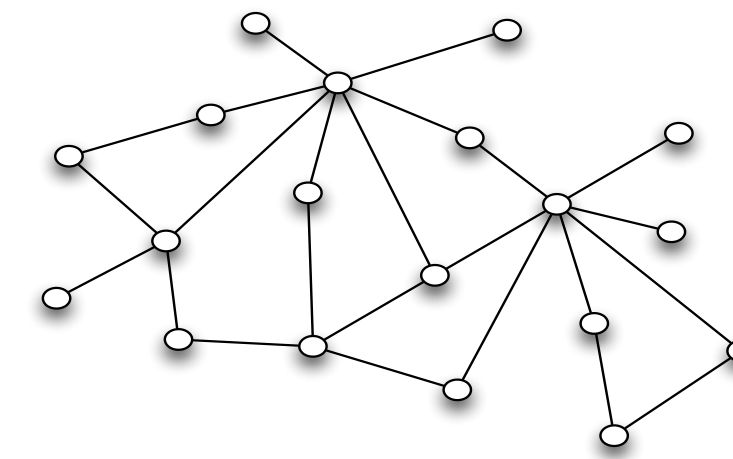


{graph, label} pairs

- What to specify?
 - Aggregate, updates and readout functions
 - Loss function on prediction
- Train with SGD

Example architecture 1: polypharmacy

- Different types of edges: drug-drug, drug-protein, protein-protein

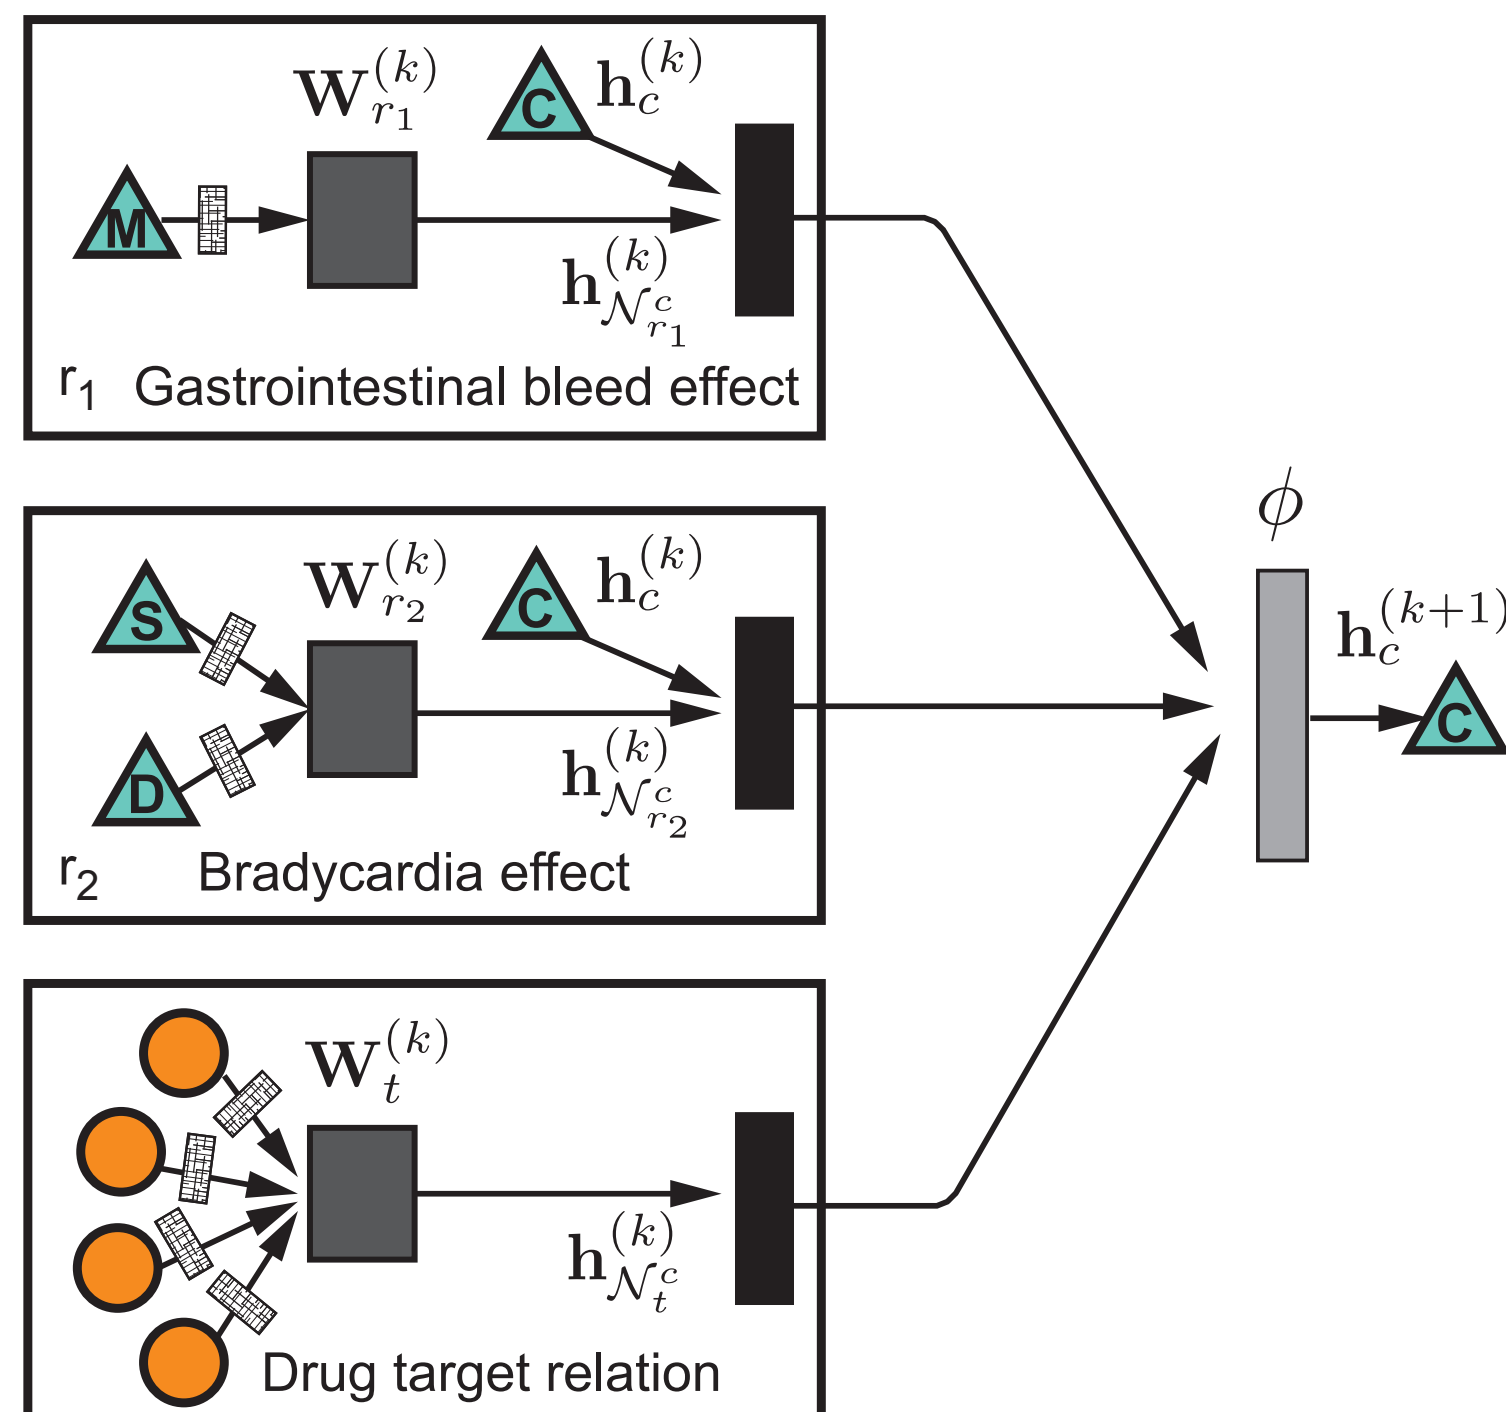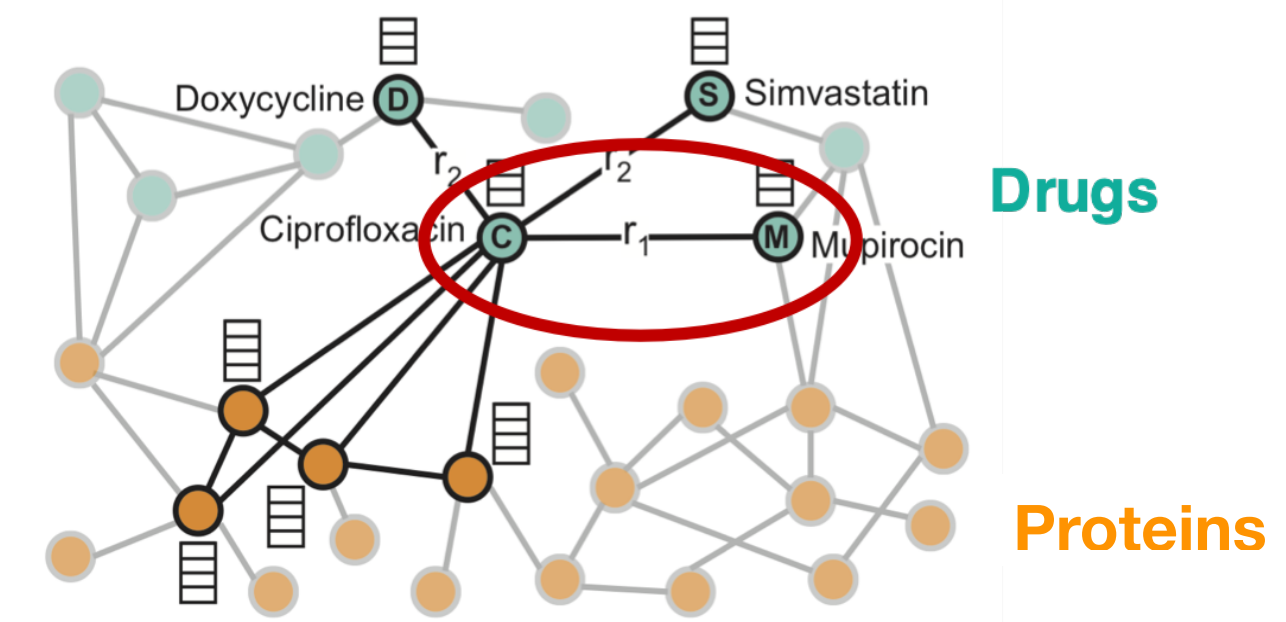

$$\mathbf{h}_v^{(k+1)} = \text{ReLU} \left(\sum_r \left(\sum_{u \in \mathcal{N}_r(v)} c^{vu} \mathbf{W}_r^{(k)} \mathbf{h}_u^{(k)} + c_r^v \mathbf{h}_v^{(k)} \right) \right)$$




*separate aggregation per edge type r ,
then sum them up*

**Modeling Polypharmacy Side Effects with
Graph Convolutional Networks**

Marinka Zitnik¹, Monica Agrawal¹ and Jure Leskovec^{1,2,*}

Example architecture 2: Google Maps




- segments v (50-100m), supersegments u (ca 20 segments);
input features: historical travel times, road type, traffic pattern at prediction time

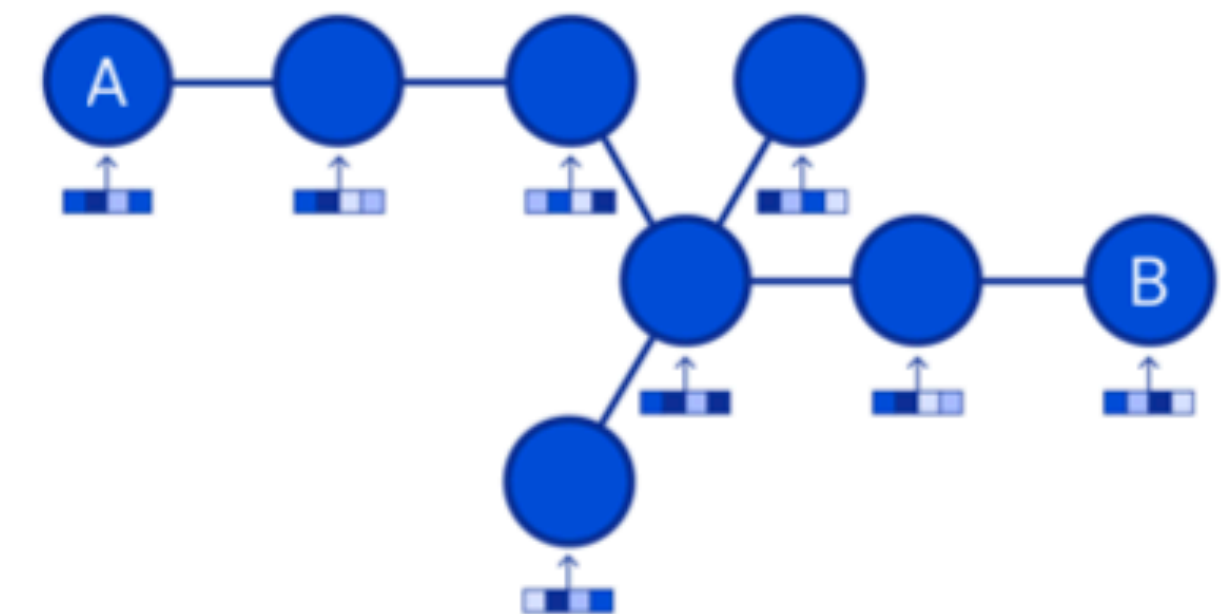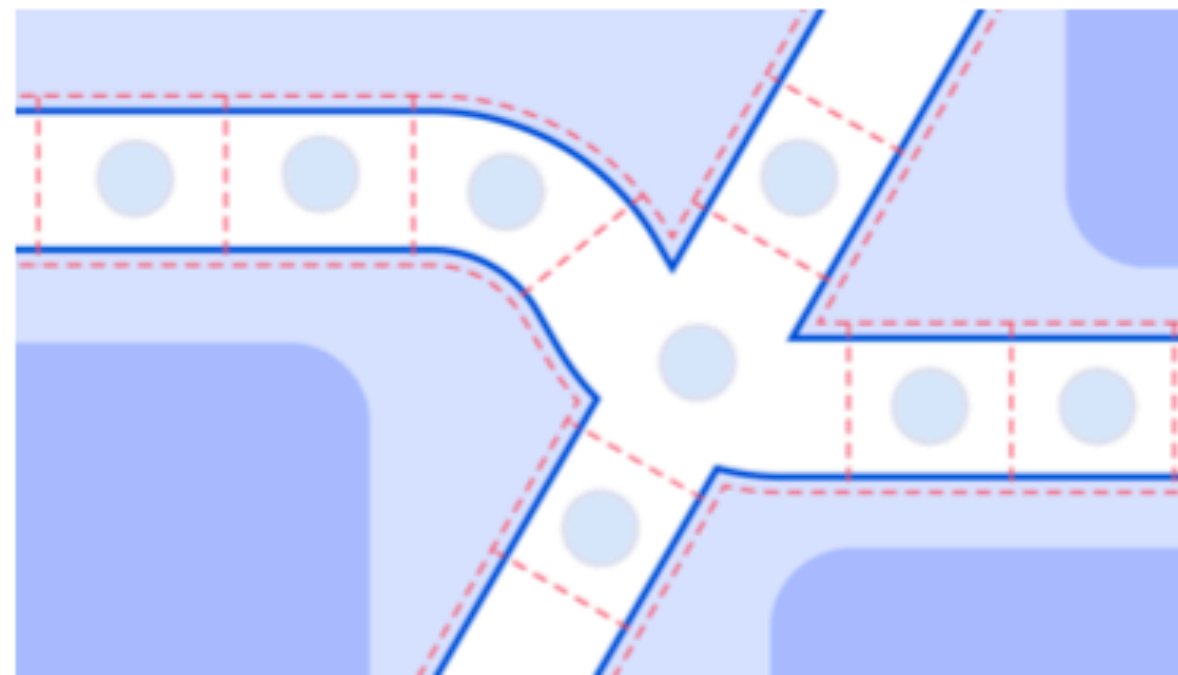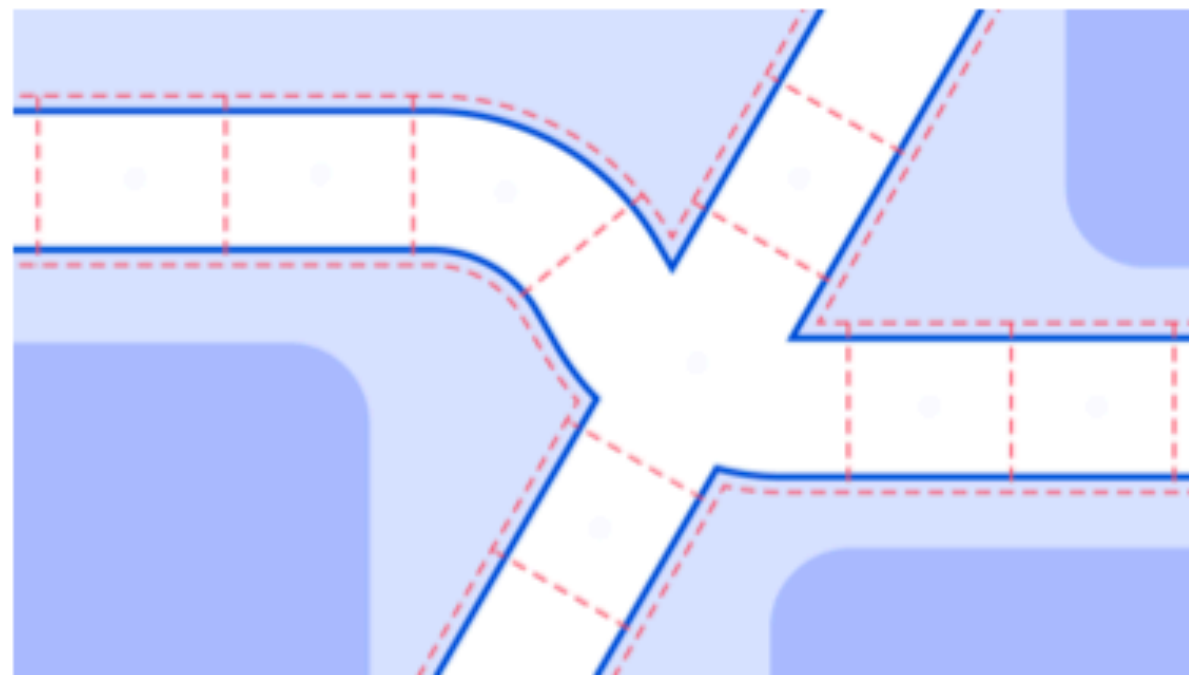

(Derrow-Pinion et al., ETA Prediction with Graph Neural Networks in Google Maps, CIKM 2021)




Example architecture 2: Google Maps

- segments v (50-100m), supersegments u (ca 20 segments);
input features: historical travel times, road type, traffic pattern at prediction time
- 3 aggregation/update operations: \mathbf{h}_v 's (using adjacent edges \mathbf{h}_e , \mathbf{h}_u),
edges \mathbf{h}_e (using adjacent segments \mathbf{h}_v and \mathbf{h}_u),
 \mathbf{h}_u (using segments \mathbf{h}_v and edges \mathbf{h}_e in supersegment)

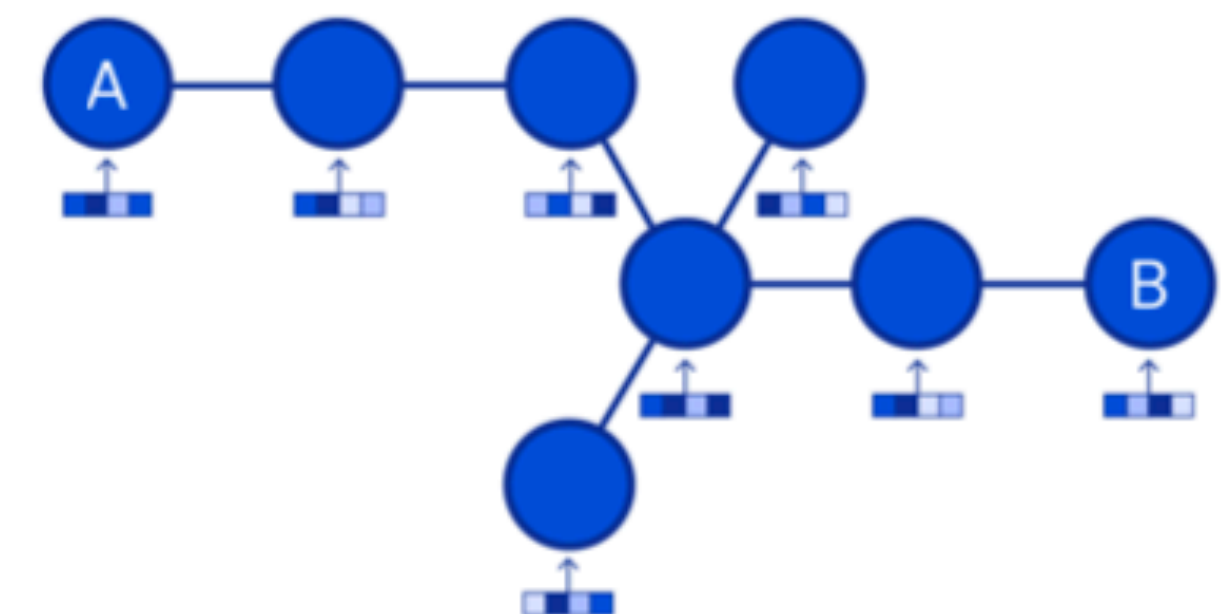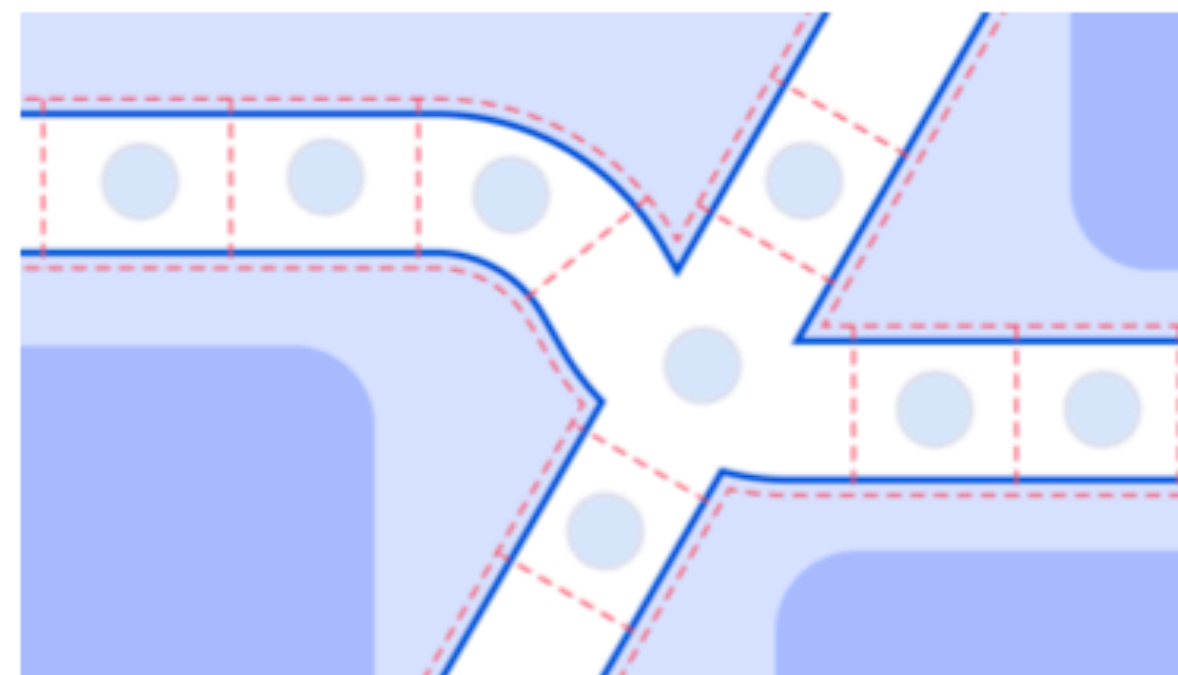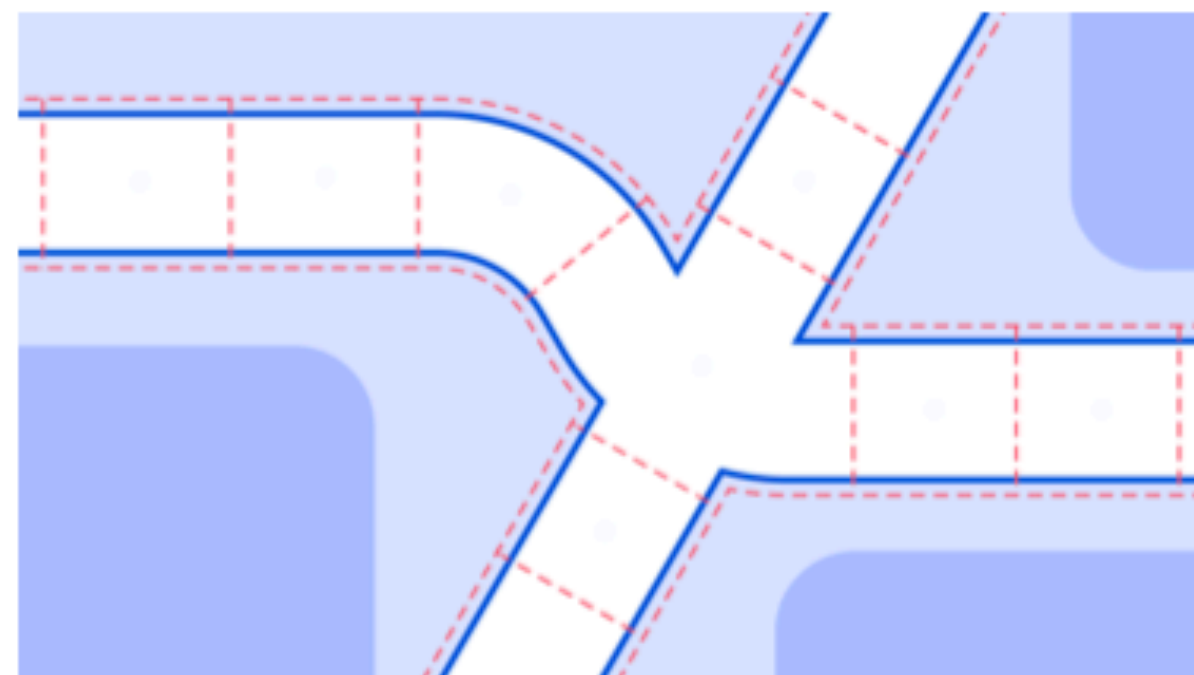




Example architecture 2: Google Maps

- segments v (50-100m), supersegments u (ca 20 segments);
input features: historical travel times, road type, traffic pattern at prediction time
- 3 aggregation/update operations: \mathbf{h}_v 's (using adjacent edges \mathbf{h}_e , \mathbf{h}_u),
edges \mathbf{h}_e (using adjacent segments \mathbf{h}_v and \mathbf{h}_u),
 \mathbf{h}_u (using segments \mathbf{h}_v and edges \mathbf{h}_e in supersegment)
- combination of pooling operations for each aggregation

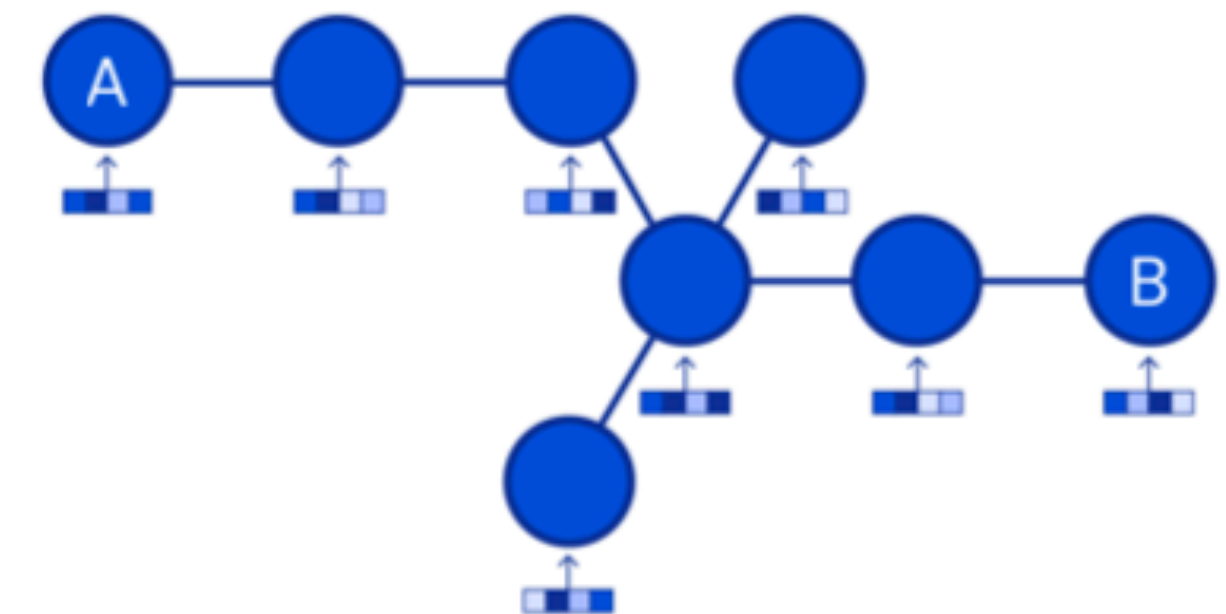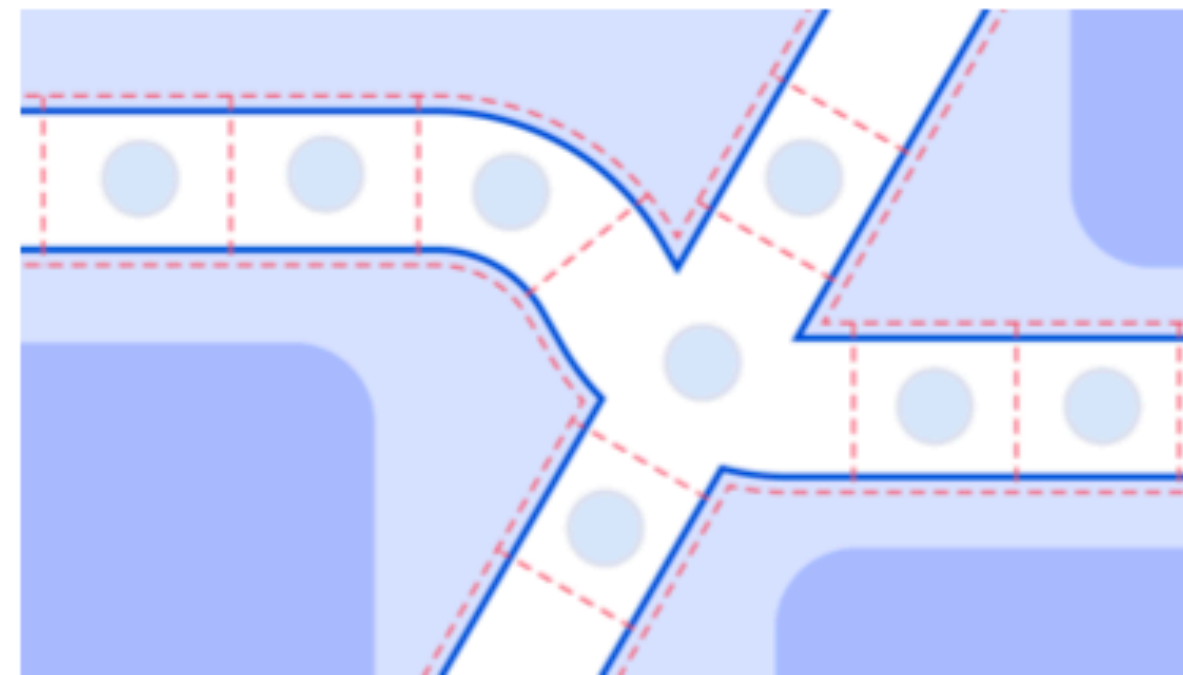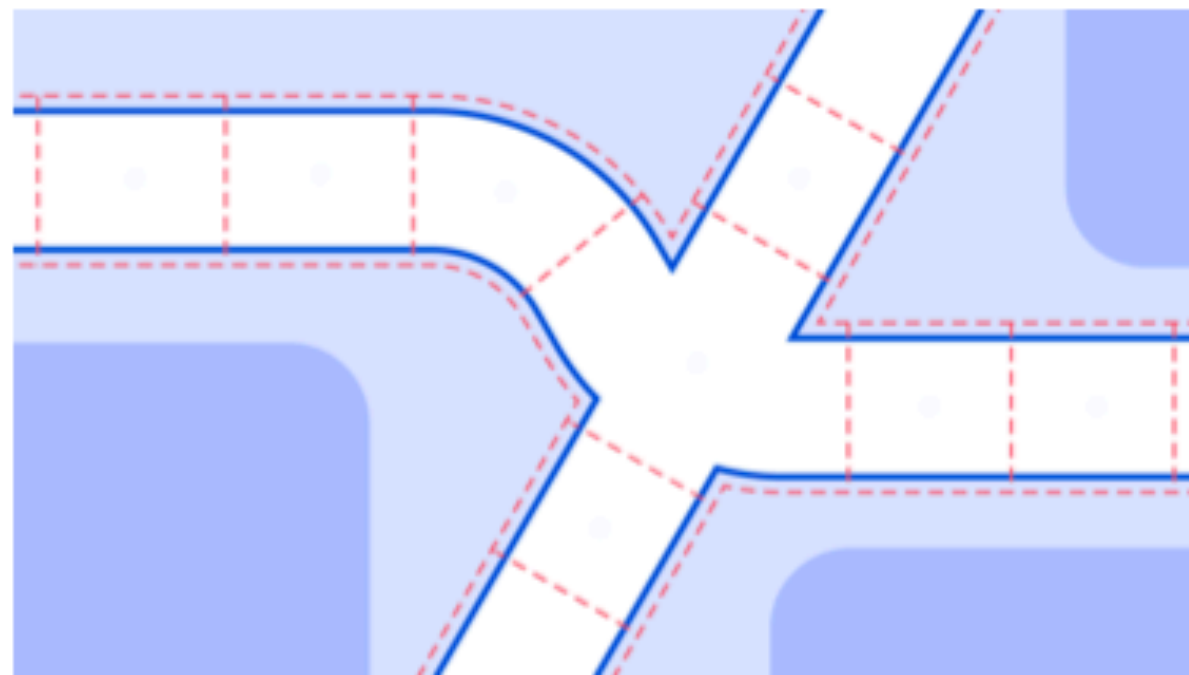

Example architecture 2: Google Maps


- segments v (50-100m), supersegments u (ca 20 segments);
input features: historical travel times, road type, traffic pattern at prediction time
- 3 aggregation/update operations: \mathbf{h}_v 's (using adjacent edges \mathbf{h}_e , \mathbf{h}_u),
edges \mathbf{h}_e (using adjacent segments \mathbf{h}_v and \mathbf{h}_u),
 \mathbf{h}_u (using segments \mathbf{h}_v and edges \mathbf{h}_e in supersegment)
- combination of pooling operations for each aggregation
- linear combination of losses per time horizon (segment travel time, super segment time, cumulative segment time, self-supervised / generative loss)

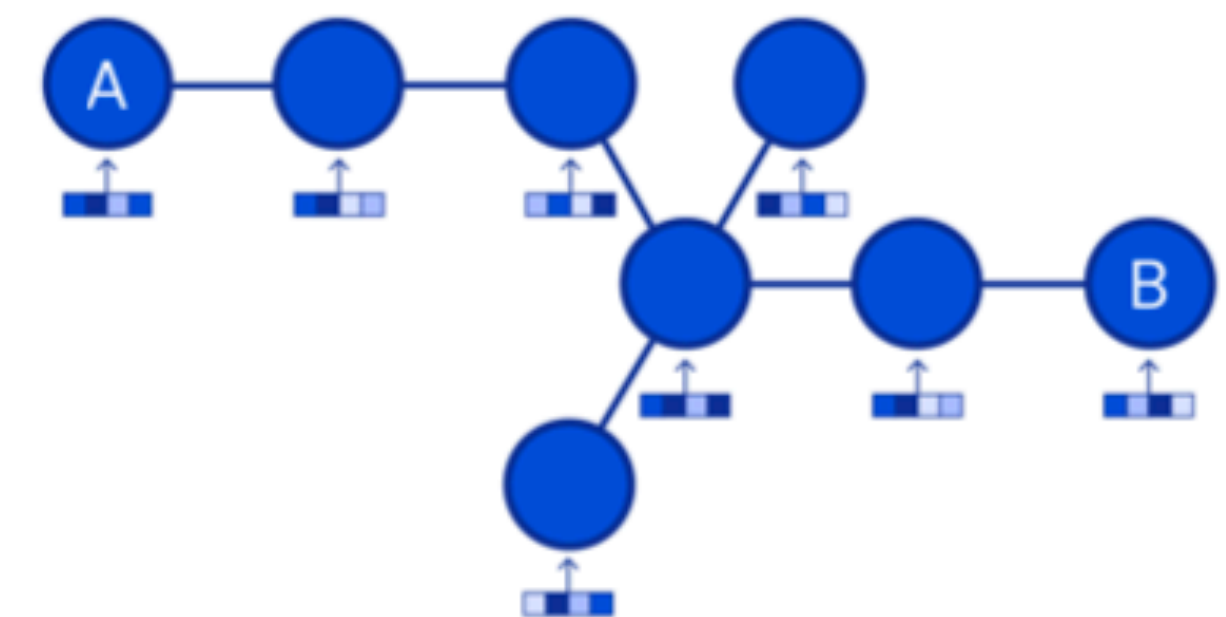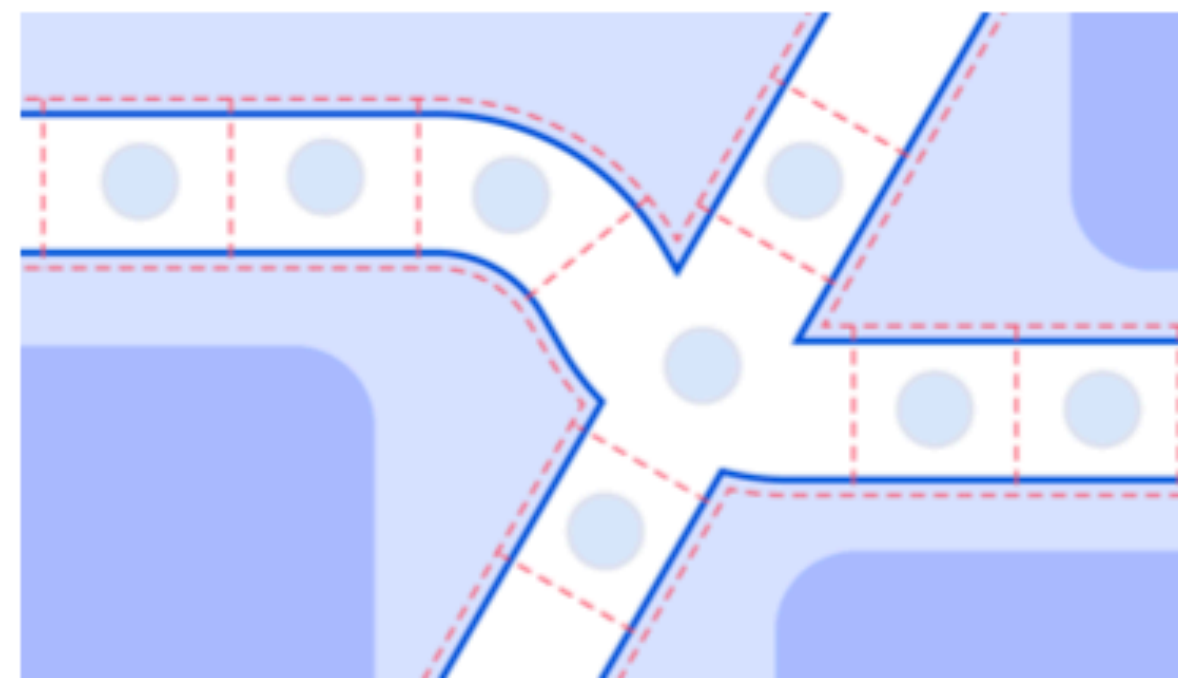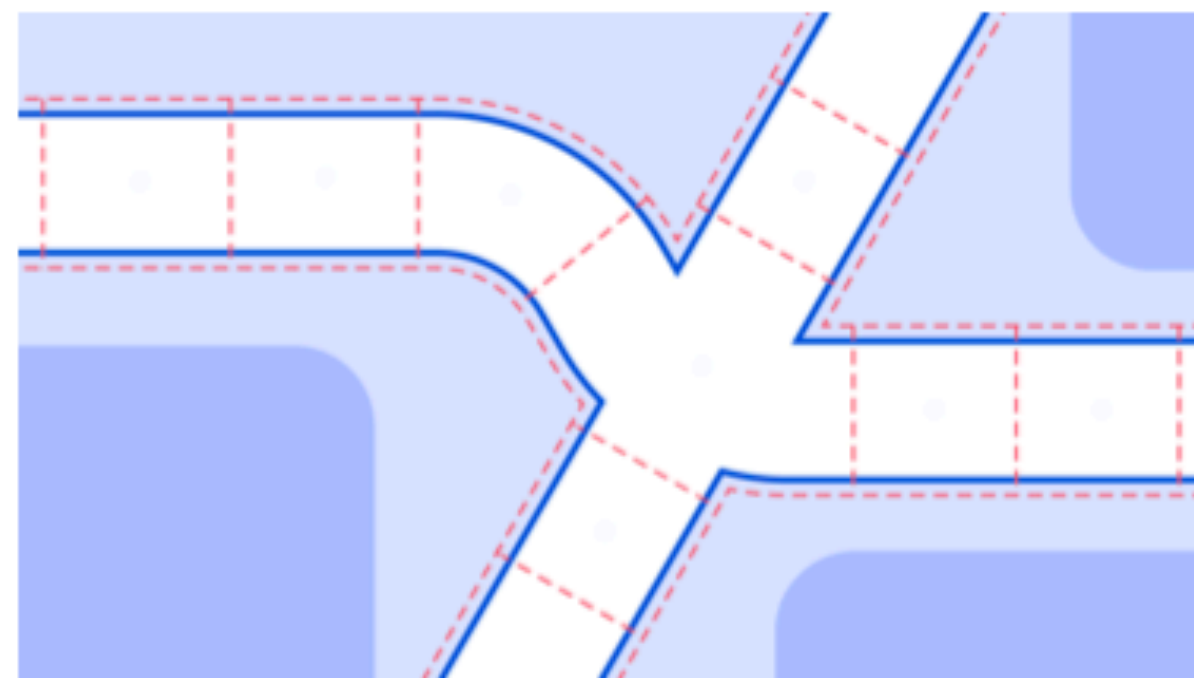

Roadmap


- Learning tasks with graphs
- Message passing GNNs
- Connections
- Approximation Power

Many connections

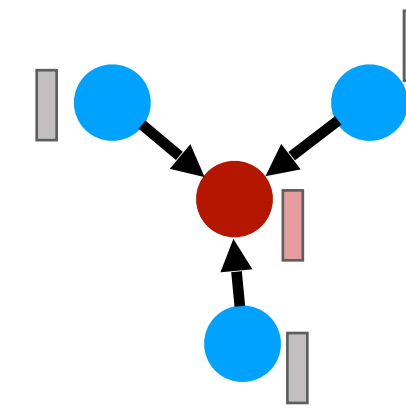


Many connections

- **Graph signal processing and convolutions**
- **Inference in graphical models** *(Dai et al 2016)*
 - Node embeddings = latent variables
 - Given node features and graph, infer latent variables
 - “Neural message passing”

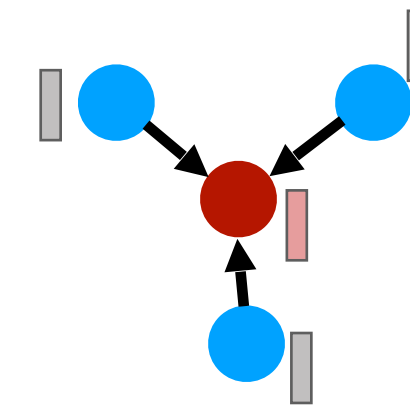


Many connections

- **Graph signal processing and convolutions**
- **Inference in graphical models** *(Dai et al 2016)*
 - Node embeddings = latent variables
 - Given node features and graph, infer latent variables
 - “Neural message passing”
- **Distributed / Local algorithms** *(Sato et al 2019, Loukas 2020)*
 - Bounds for detection, verification, computation with GNNs

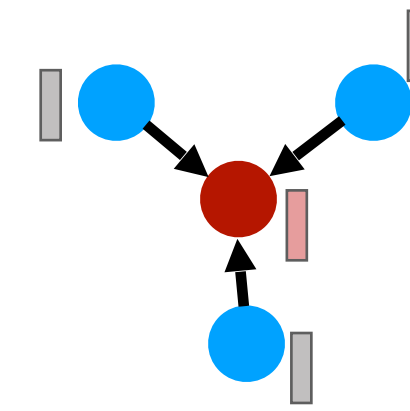

Many connections


- **Graph signal processing and convolutions**
- **Inference in graphical models** *(Dai et al 2016)*
 - Node embeddings = latent variables
 - Given node features and graph, infer latent variables
 - “Neural message passing”
- **Distributed / Local algorithms** *(Sato et al 2019, Loukas 2020)*
 - Bounds for detection, verification, computation with GNNs
- **Random walks** *(Xu et al 2018)*
 - Oversmoothing, graph structure and depth
 - (Adaptive) skip connections
- **Graph isomorphism testing** *(Morris et al 2019, Xu et al 2019)*

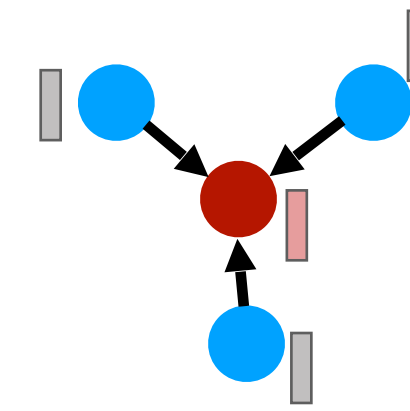

Roadmap

- Learning tasks with graphs
- Message passing GNNs
- Connections
- Approximation Power


Which functions can GNNs approximate?

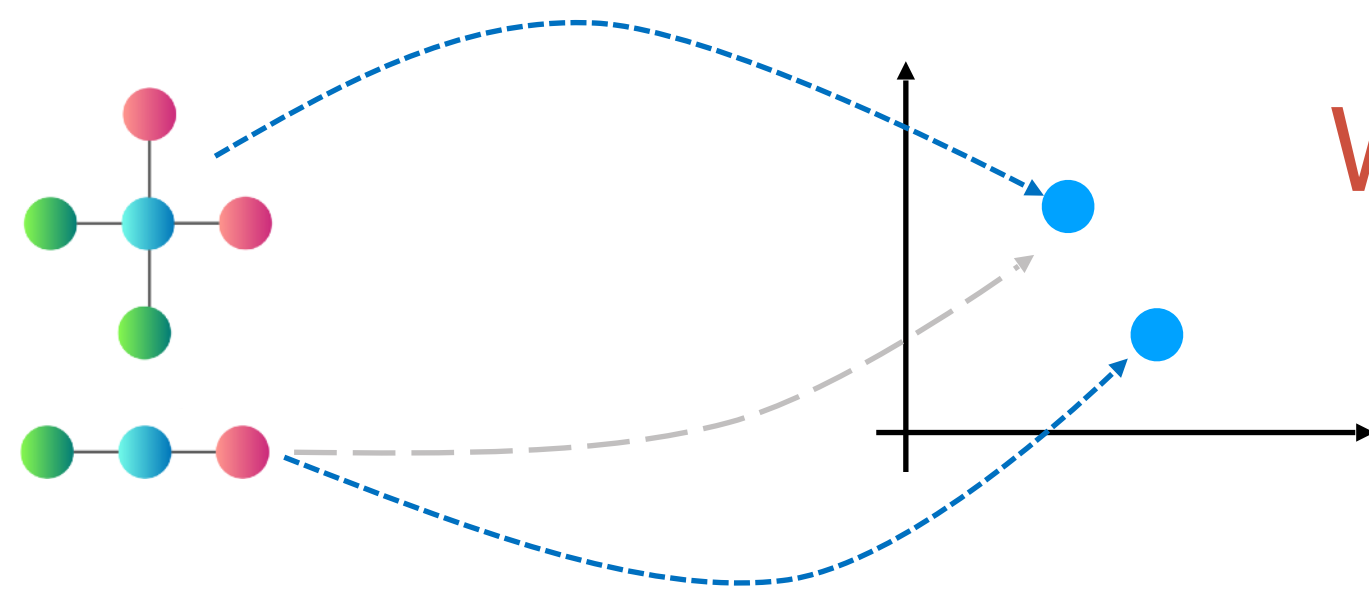

Which graphs can GNNs distinguish?

$$f(G) \neq f(G')?$$

Which functions can GNNs approximate?

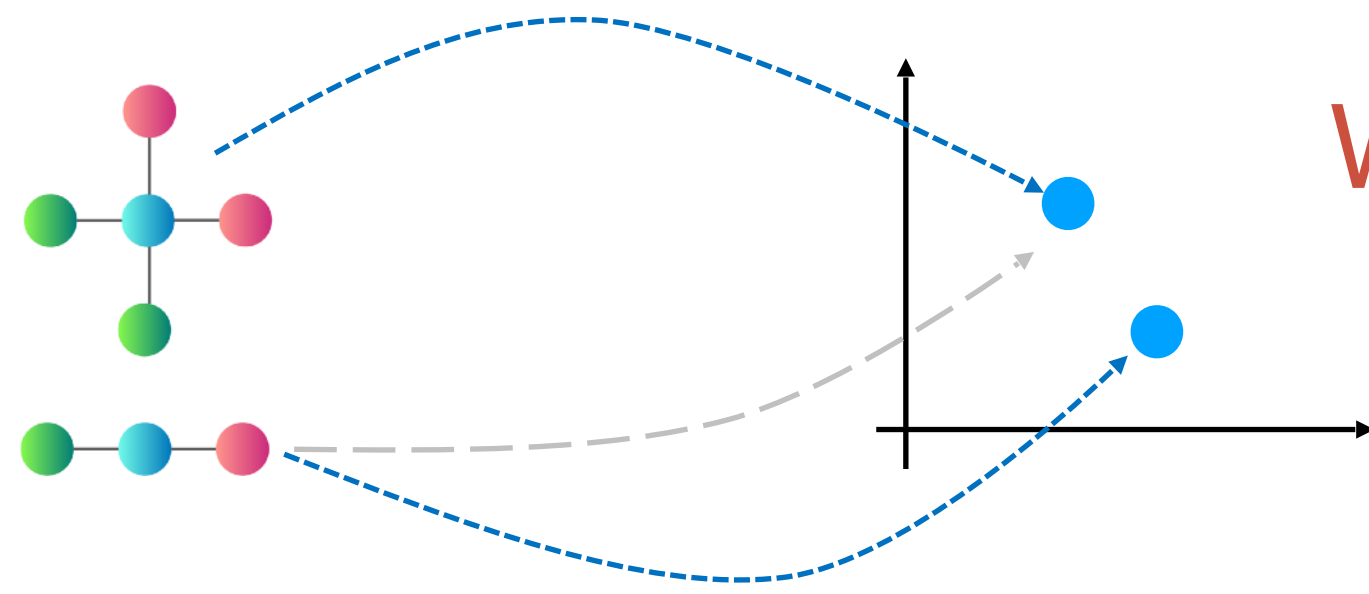


Which graphs can GNNs distinguish?

$$f(G) \neq f(G')?$$

Distinction implies function approximation
for node and graph predictions

(Symmetric Stone-Weierstrass theorem)


(Azizian & Lelarge 21, Chen-Villar-Chen-Bruna 19, Keriven & Peyré 19, Maron-Fetaya-Segol-Lipman 19)

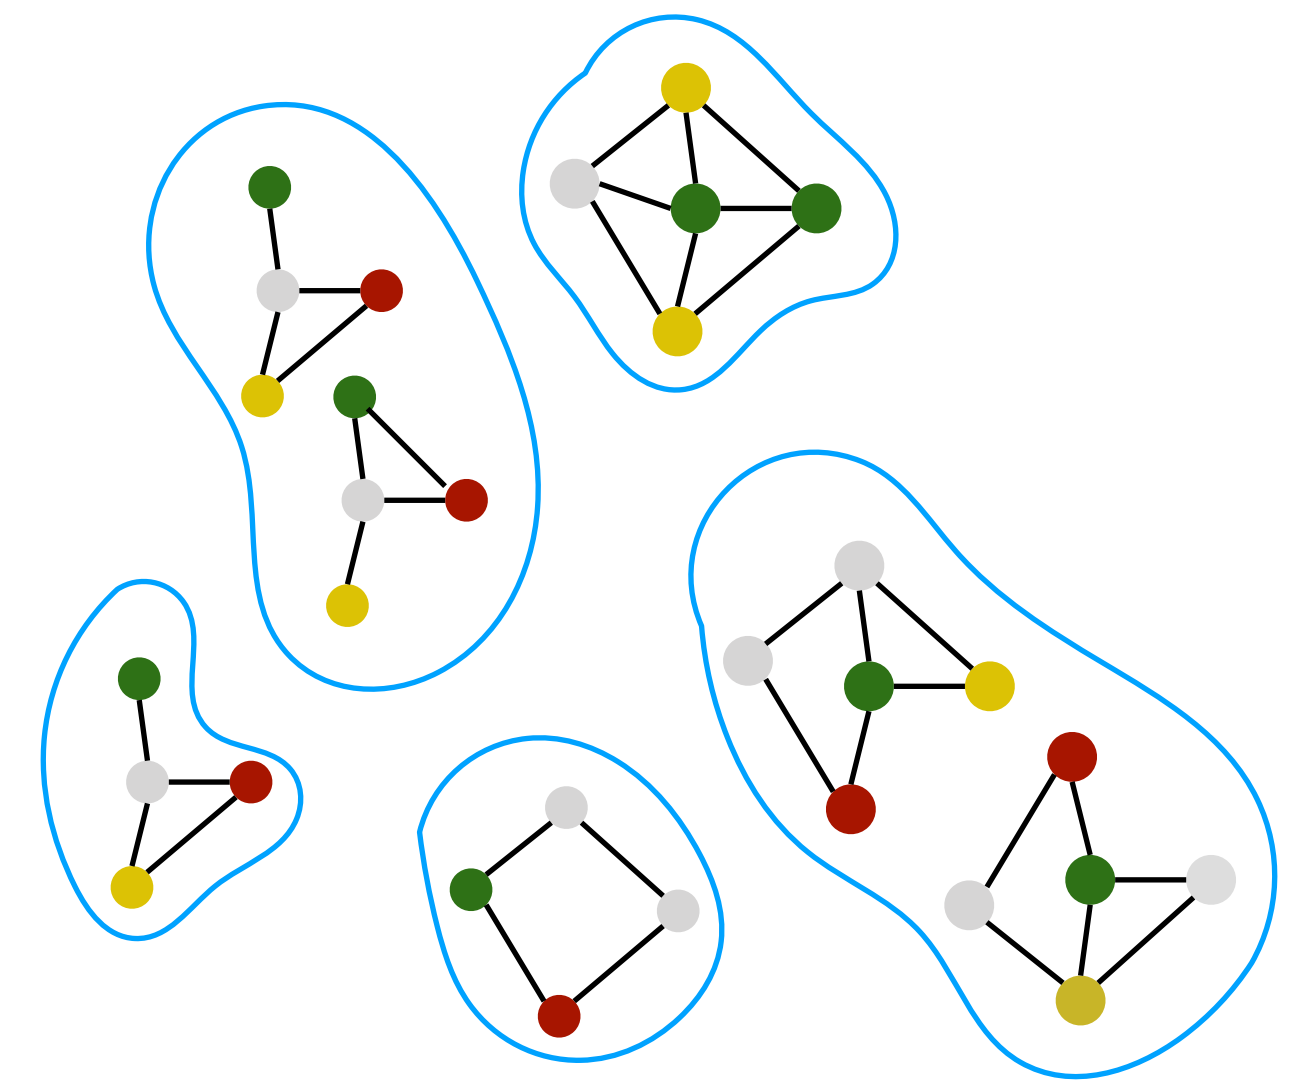

$$(G, G') \in \rho(\mathcal{F}) \Leftrightarrow$$

$$\forall F \in \mathcal{F}, F(G) = F(G')$$

Which functions can GNNs approximate?

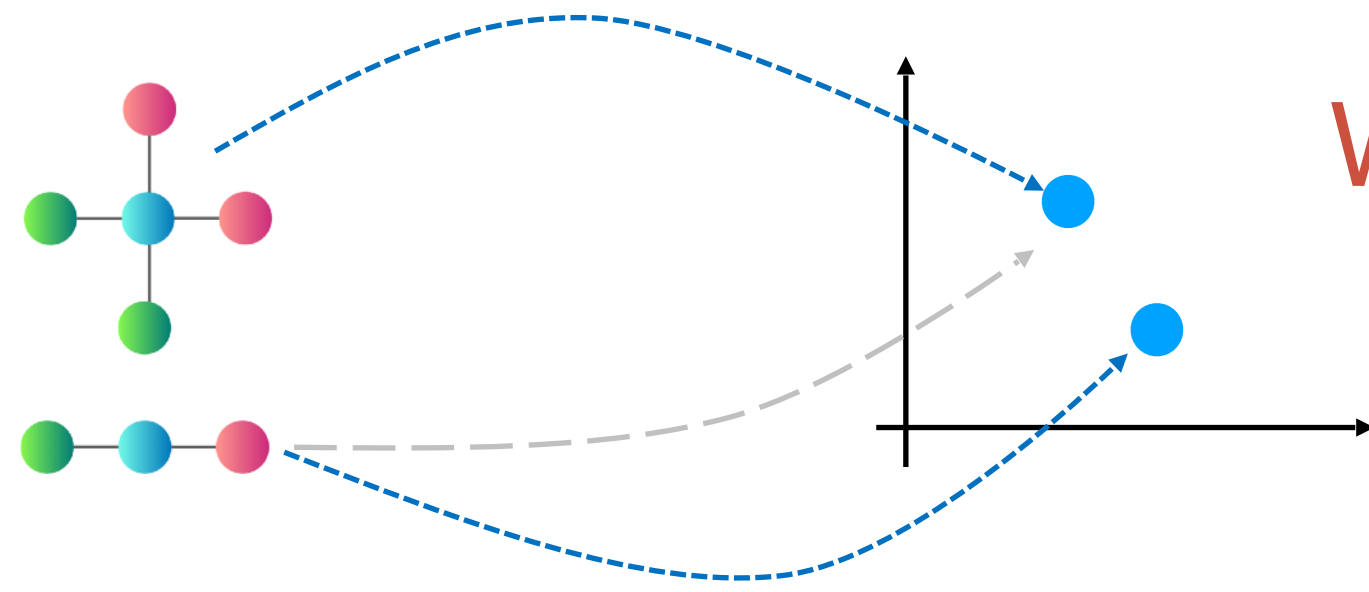


Which graphs can GNNs distinguish?

$$f(G) \neq f(G')?$$

Distinction implies function approximation
for node and graph predictions

(Symmetric Stone-Weierstrass theorem)

(Azizian & Lelarge 21, Chen-Villar-Chen-Bruna 19, Keriven & Peyré 19, Maron-Fetaya-Segol-Lipman 19)

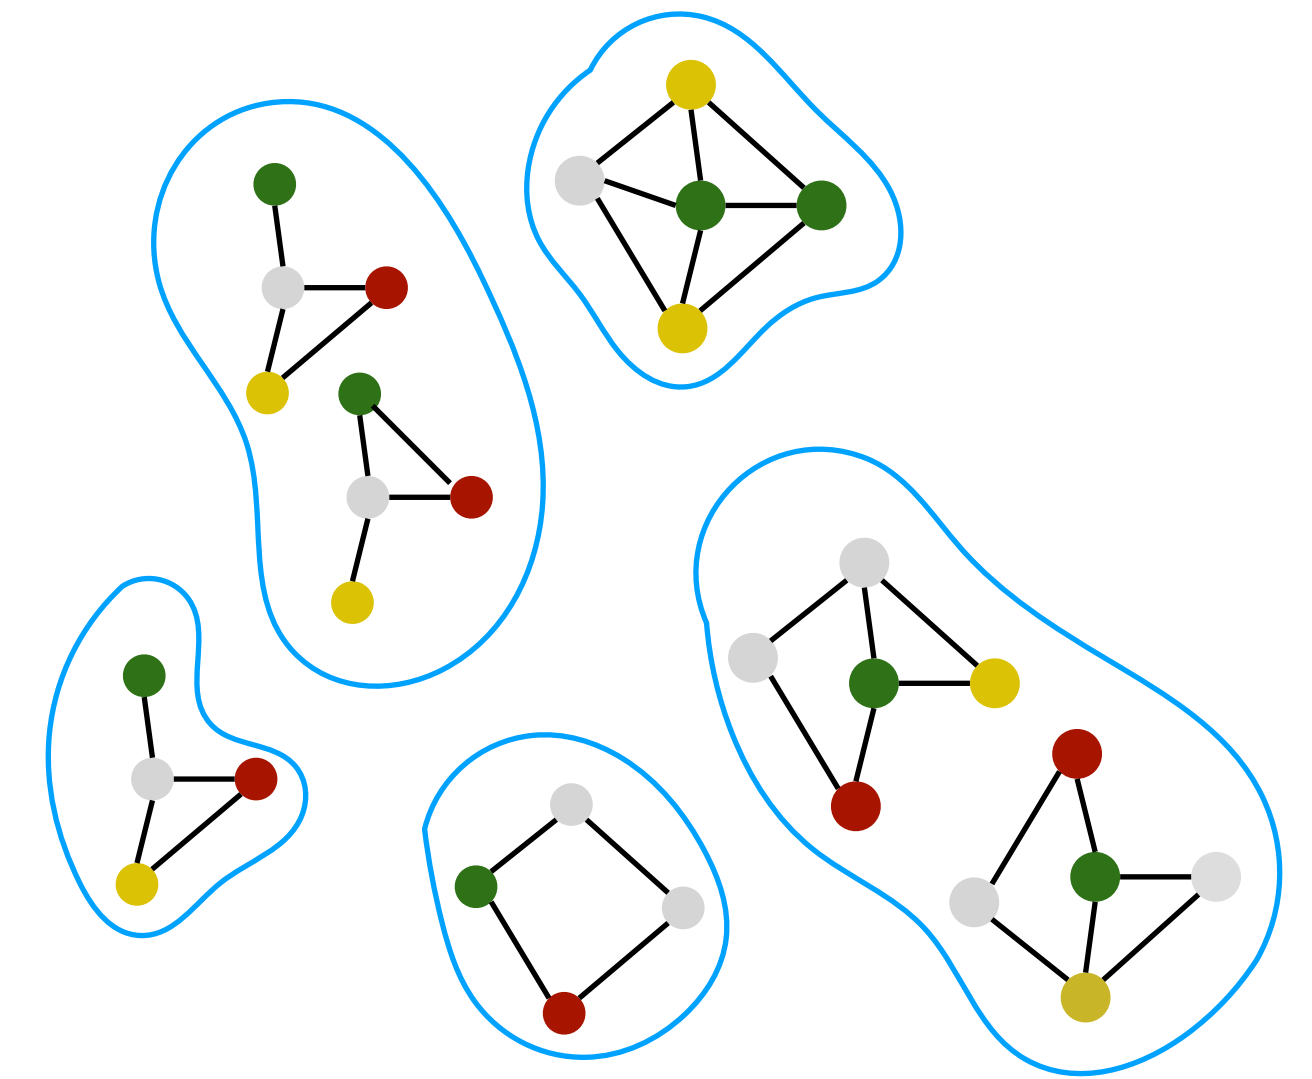

$$(G, G') \in \rho(\mathcal{F}) \Leftrightarrow$$

$$\forall F \in \mathcal{F}, F(G) = F(G')$$

Theorem.



If function H on a compact domain does not assign different labels to graphs in one equivalence class, then it can be approximated by message passing GNNs:

$$\forall \epsilon > 0, \exists F \in \mathcal{F}^{\text{GNN}} : \sup_{G \in K} \|H(G) - F(G)\| \leq \epsilon$$



Discriminative Power




Discriminative Power

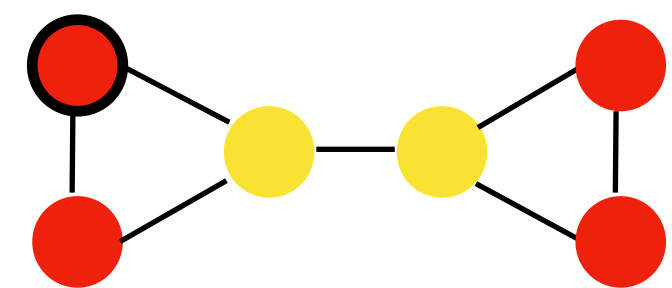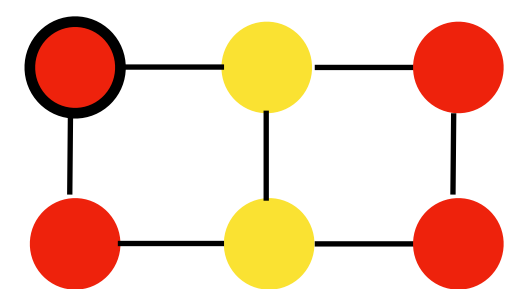

Discriminative Power



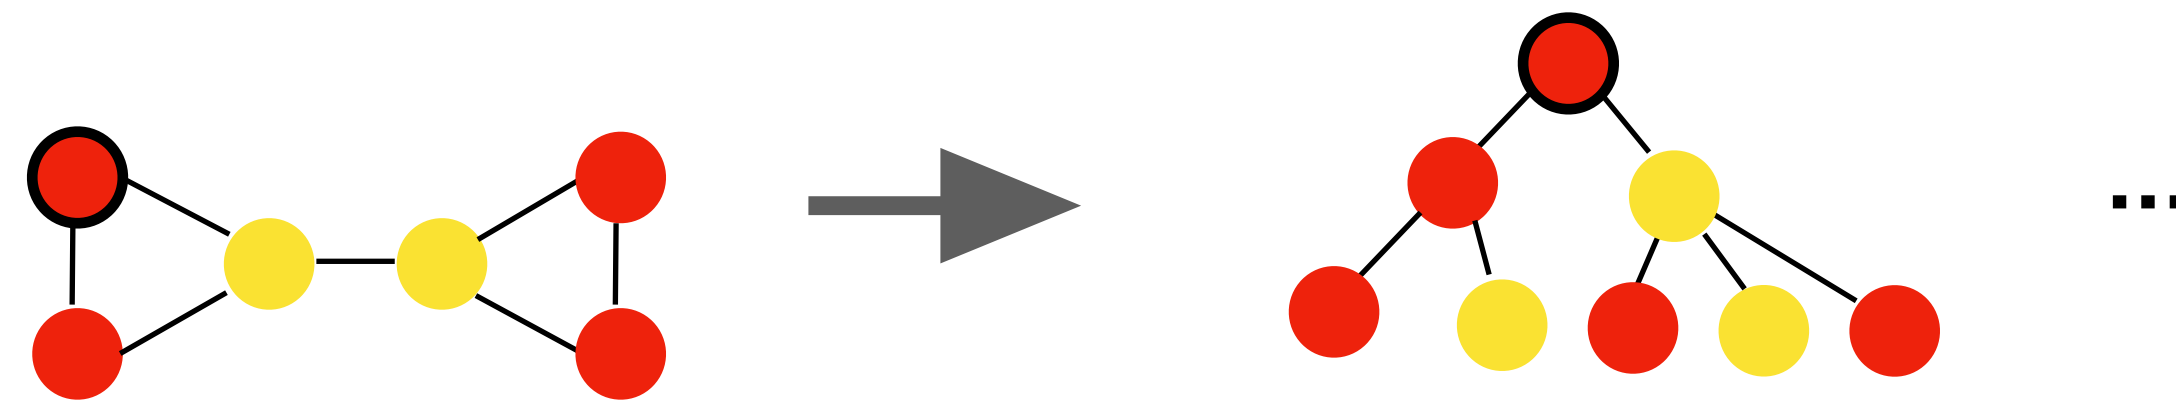
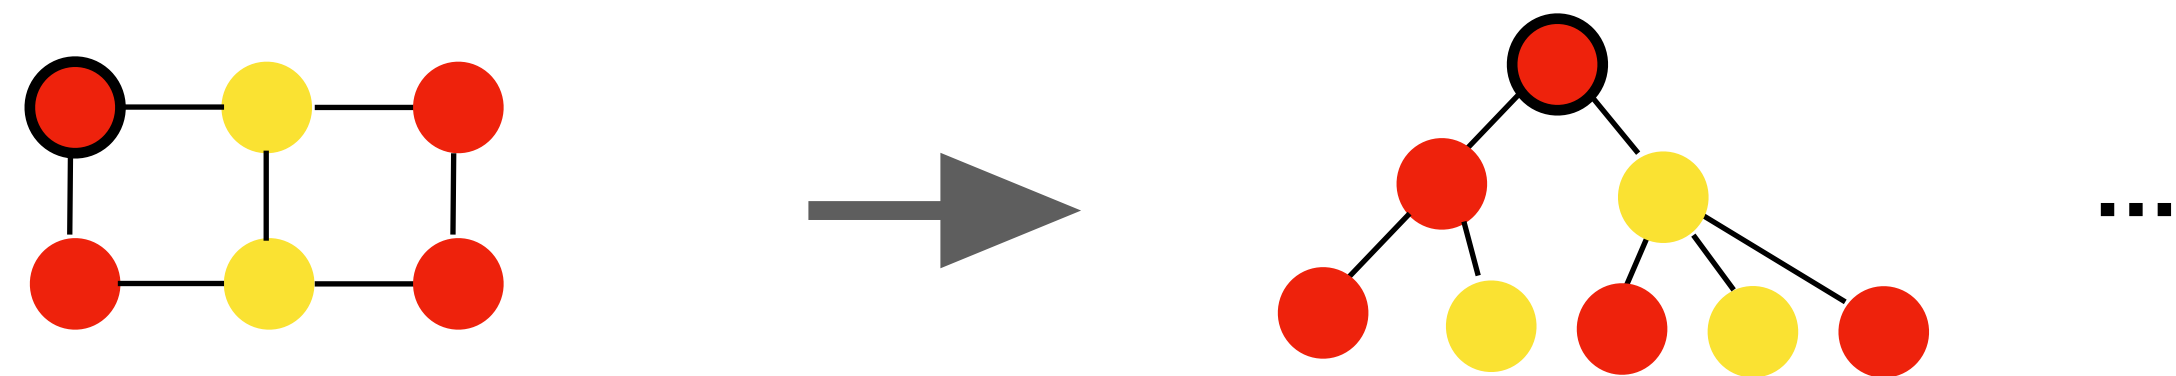


Discriminative Power

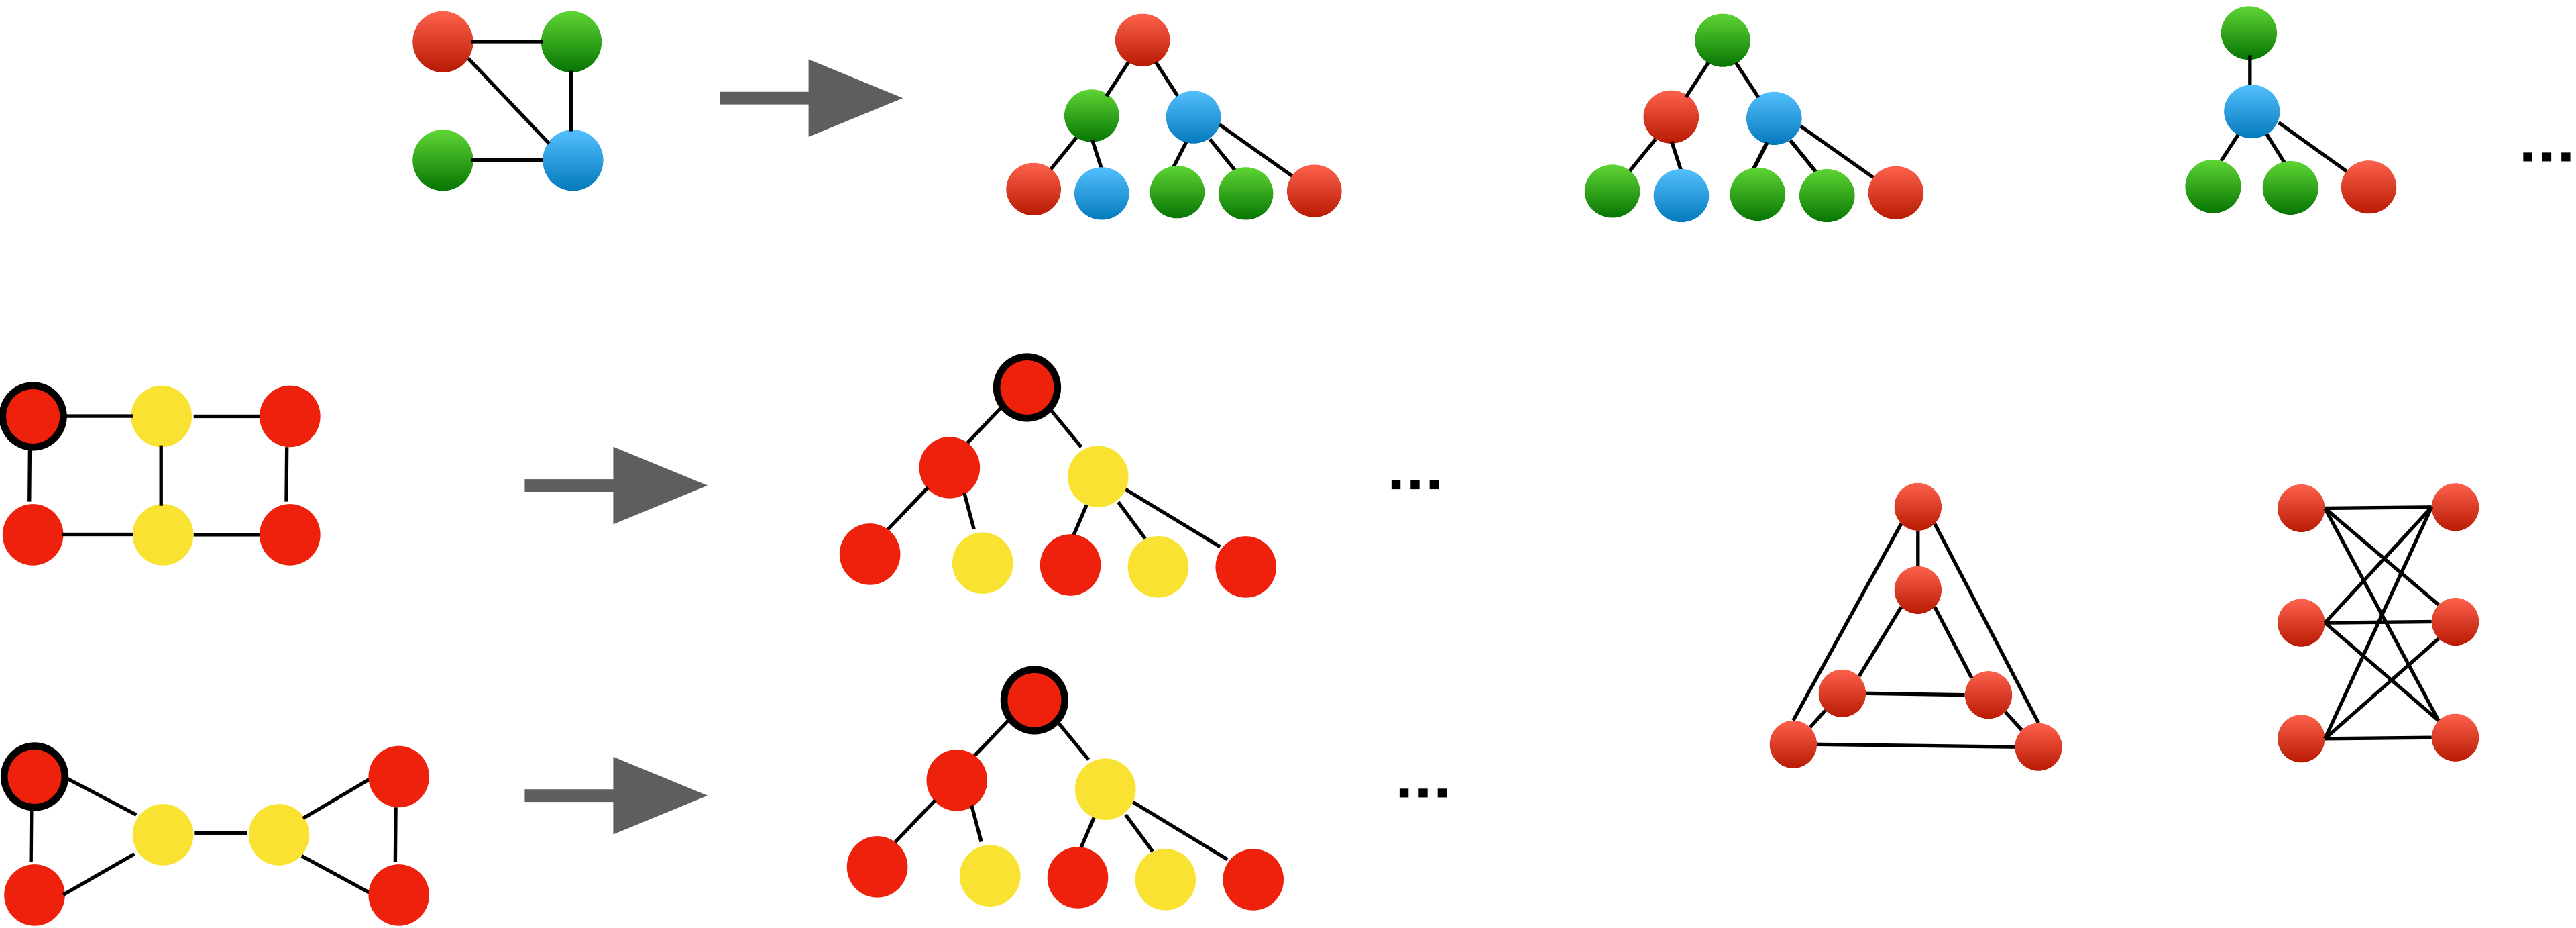


Discriminative Power

Equivalence class

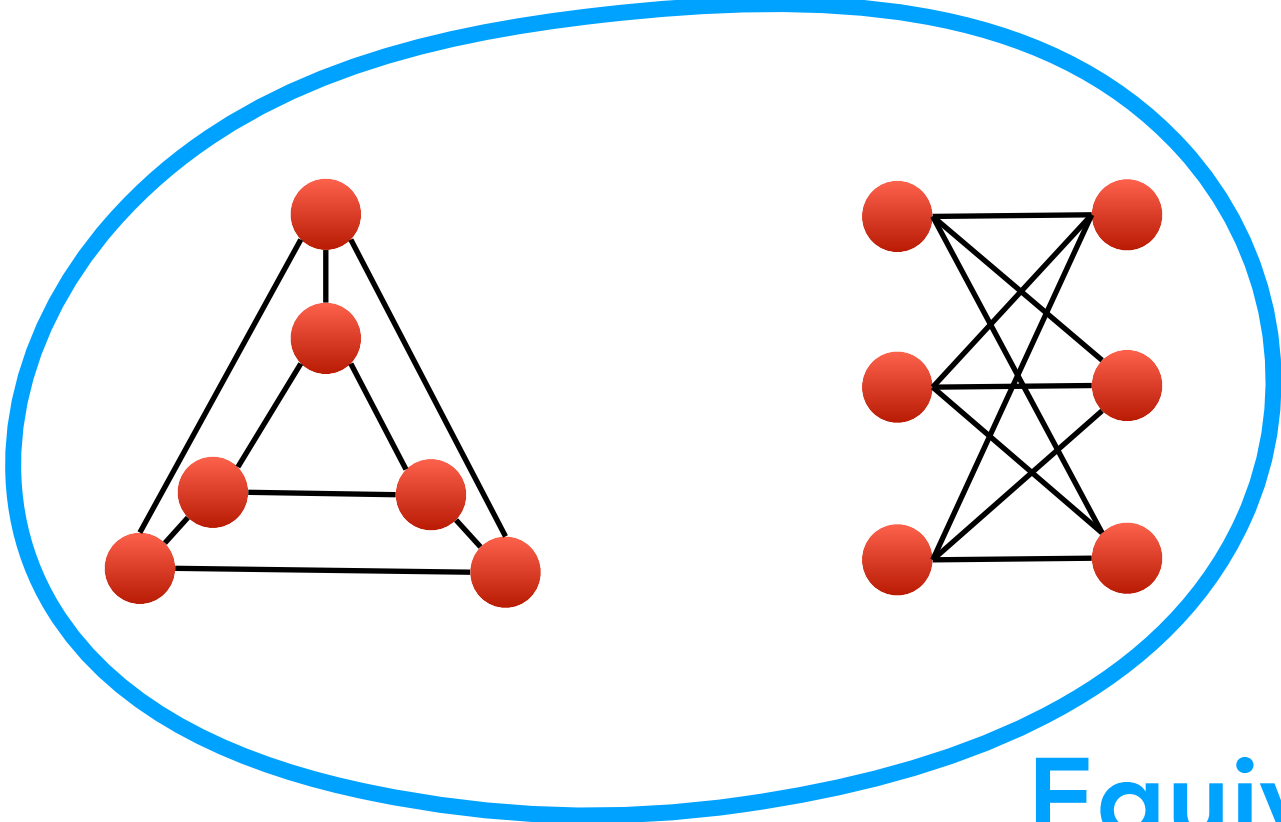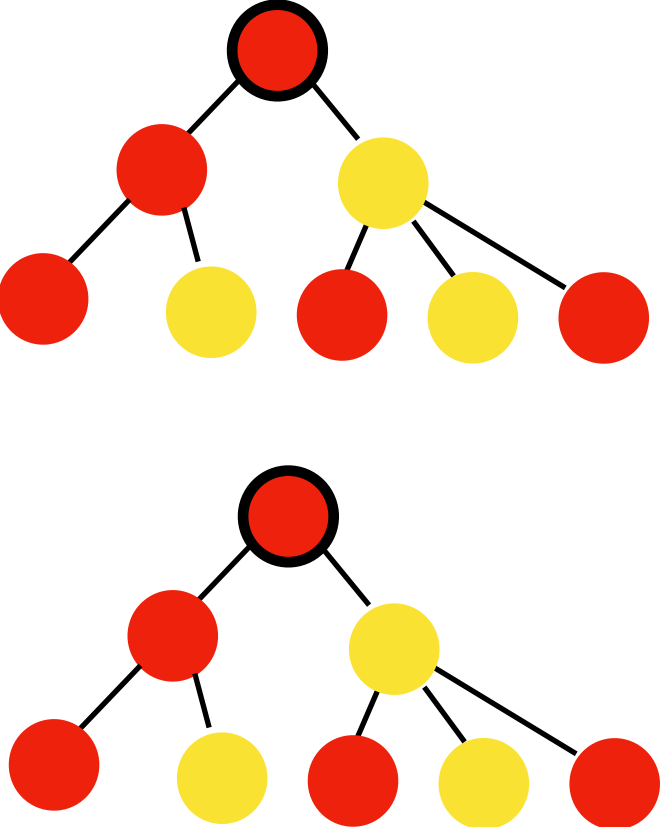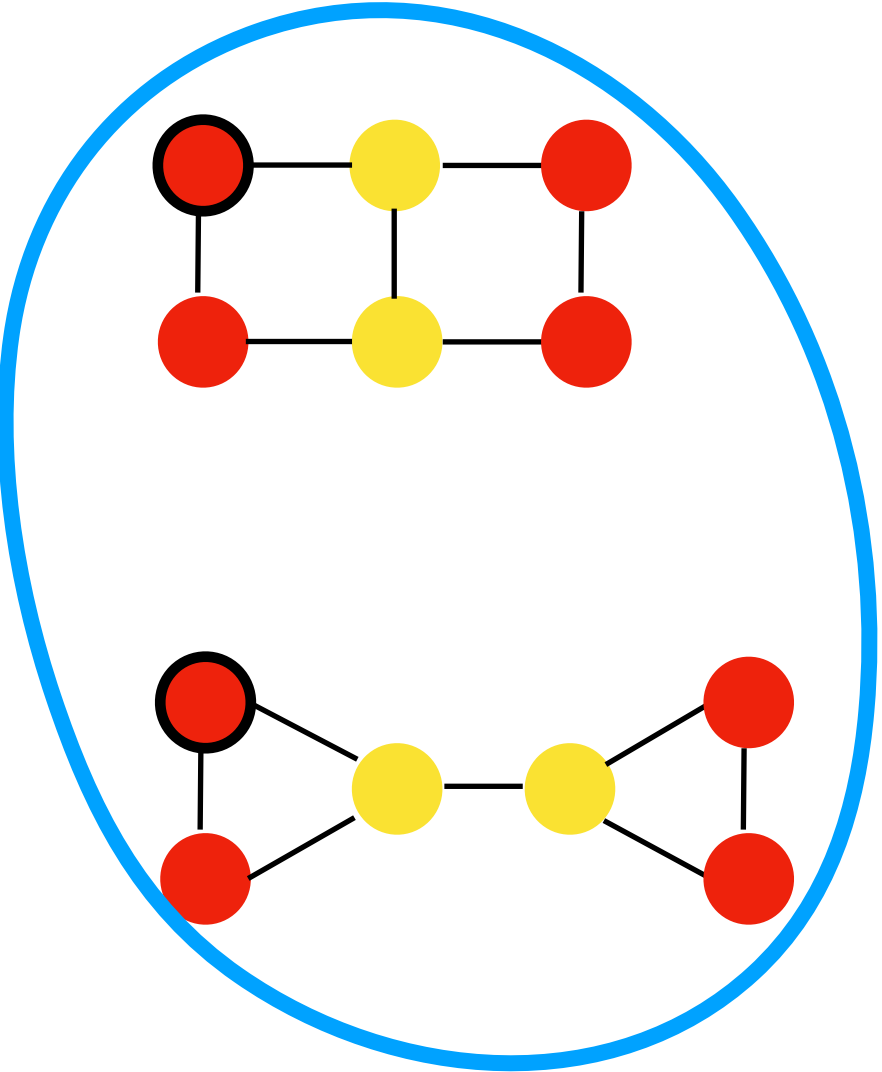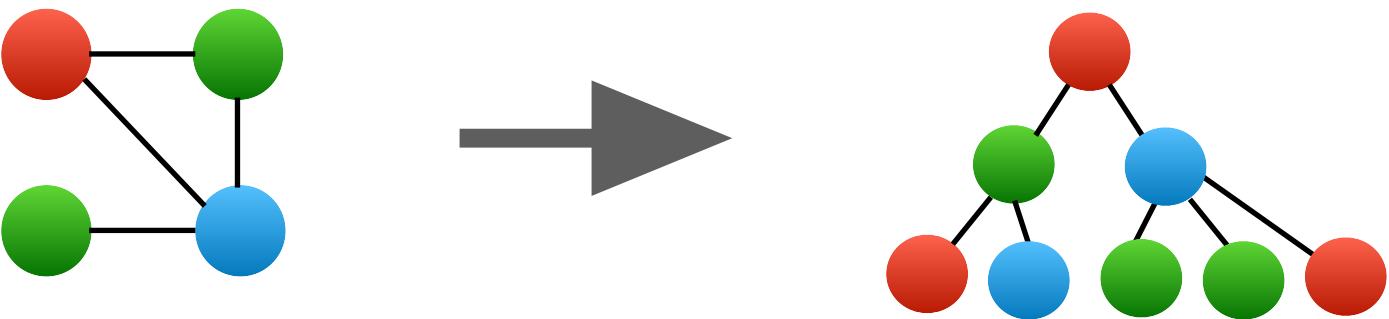

Equivalence class

Discriminative Power

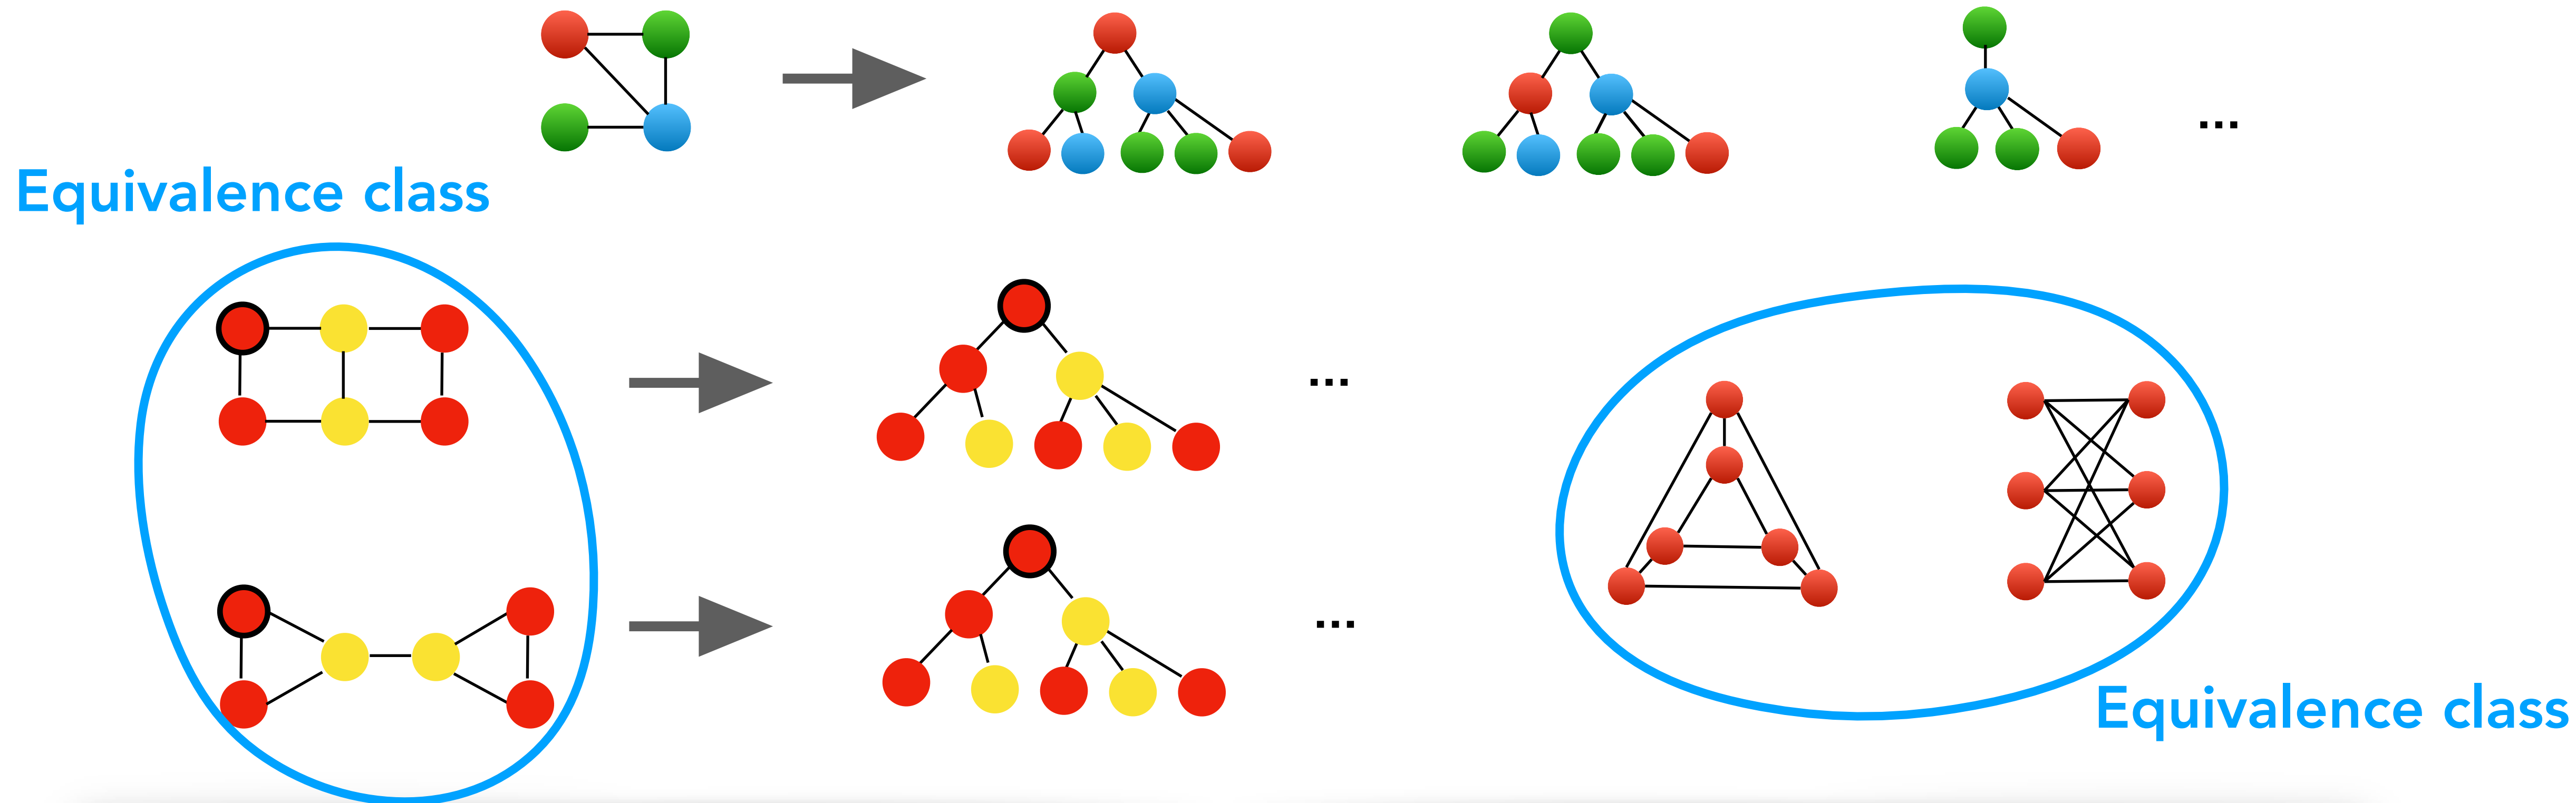

Theorem *(Morris-Ritzert-Fey-Hamilton-Lenssen-Rattan-Grohe 19, Xu-Hu-Leskovec-Jegelka 19)*
Any GNN can at best distinguish the same graphs as the 1-dim WL algorithm.

Color refinement / Weisfeiler-Leman algorithm

(Morgan 65, Weisfeiler & Leman 68)



coloring $c^{(t)} : V(G) \rightarrow \Sigma$

$$c^{(t)}(v) = \text{Hash}\left(c^{(t-1)}(v), c^{(t-1)}(u) \mid u \in \mathcal{N}(v)\right)$$

isomorphism test: $\{c^{(t_\infty)}(v) \mid v \in V(G)\} \neq \{c^{(t_\infty)}(v') \mid v' \in V(G')\}?$

Color refinement / Weisfeiler-Leman algorithm

(Morgan 65, Weisfeiler & Leman 68)



coloring $c^{(t)} : V(G) \rightarrow \Sigma$

$$c^{(t)}(v) = \text{Hash}\left(c^{(t-1)}(v), c^{(t-1)}(u) \mid u \in \mathcal{N}(v)\right)$$

vs GNN: $\mathbf{h}_v^{(t)} = f_{\text{Update}}\left(\mathbf{h}_v^{(t-1)}, f_{\text{Agg}}\left(\{\mathbf{h}_u^{(t-1)} \mid u \in \mathcal{N}(v)\}\right)\right)$

Color refinement / Weisfeiler-Leman algorithm

(Morgan 65, Weisfeiler & Leman 68)



coloring $c^{(t)} : V(G) \rightarrow \Sigma$

$$c^{(t)}(v) = \text{Hash}\left(c^{(t-1)}(v), c^{(t-1)}(u) \mid u \in \mathcal{N}(v)\right)$$

vs GNN: $\mathbf{h}_v^{(t)} = f_{\text{Update}}\left(\mathbf{h}_v^{(t-1)}, f_{\text{Agg}}\left(\{\mathbf{h}_u^{(t-1)} \mid u \in \mathcal{N}(v)\}\right)\right)$

Theorem (Morris-Ritzert-Fey-Hamilton-Lenssen-Rattan-Grohe 19, Xu-Hu-Leskovec-J 19)

Any GNN can at best distinguish the same graphs as the 1-dim WL algorithm.

For any n , there exists a GNN such that for any t , $c^{(t)} \equiv h^{(t)}$.

How could we ensure that the aggregation is injective?

- Any (multi-)set function can be represented with nonlinear functions g_1, g_2 as:

$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

How could we ensure that the aggregation is injective?

- Any (multi-)set function can be represented with nonlinear functions g_1, g_2 as:

$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

- We can universally approximate g_1 and g_2 by MLPs! (see a few slides ago)

$$\mathbf{m}_{\mathcal{N}(v)}^{(k)} = \text{MLP}_2 \sum_{u \in \mathcal{N}(v)} \text{MLP}_1(\mathbf{h}_u^{(k-1)})$$

Does this make a difference in practice?


- vary g and pooling operation

$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

Does this make a difference in practice?

- vary g and pooling operation


$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

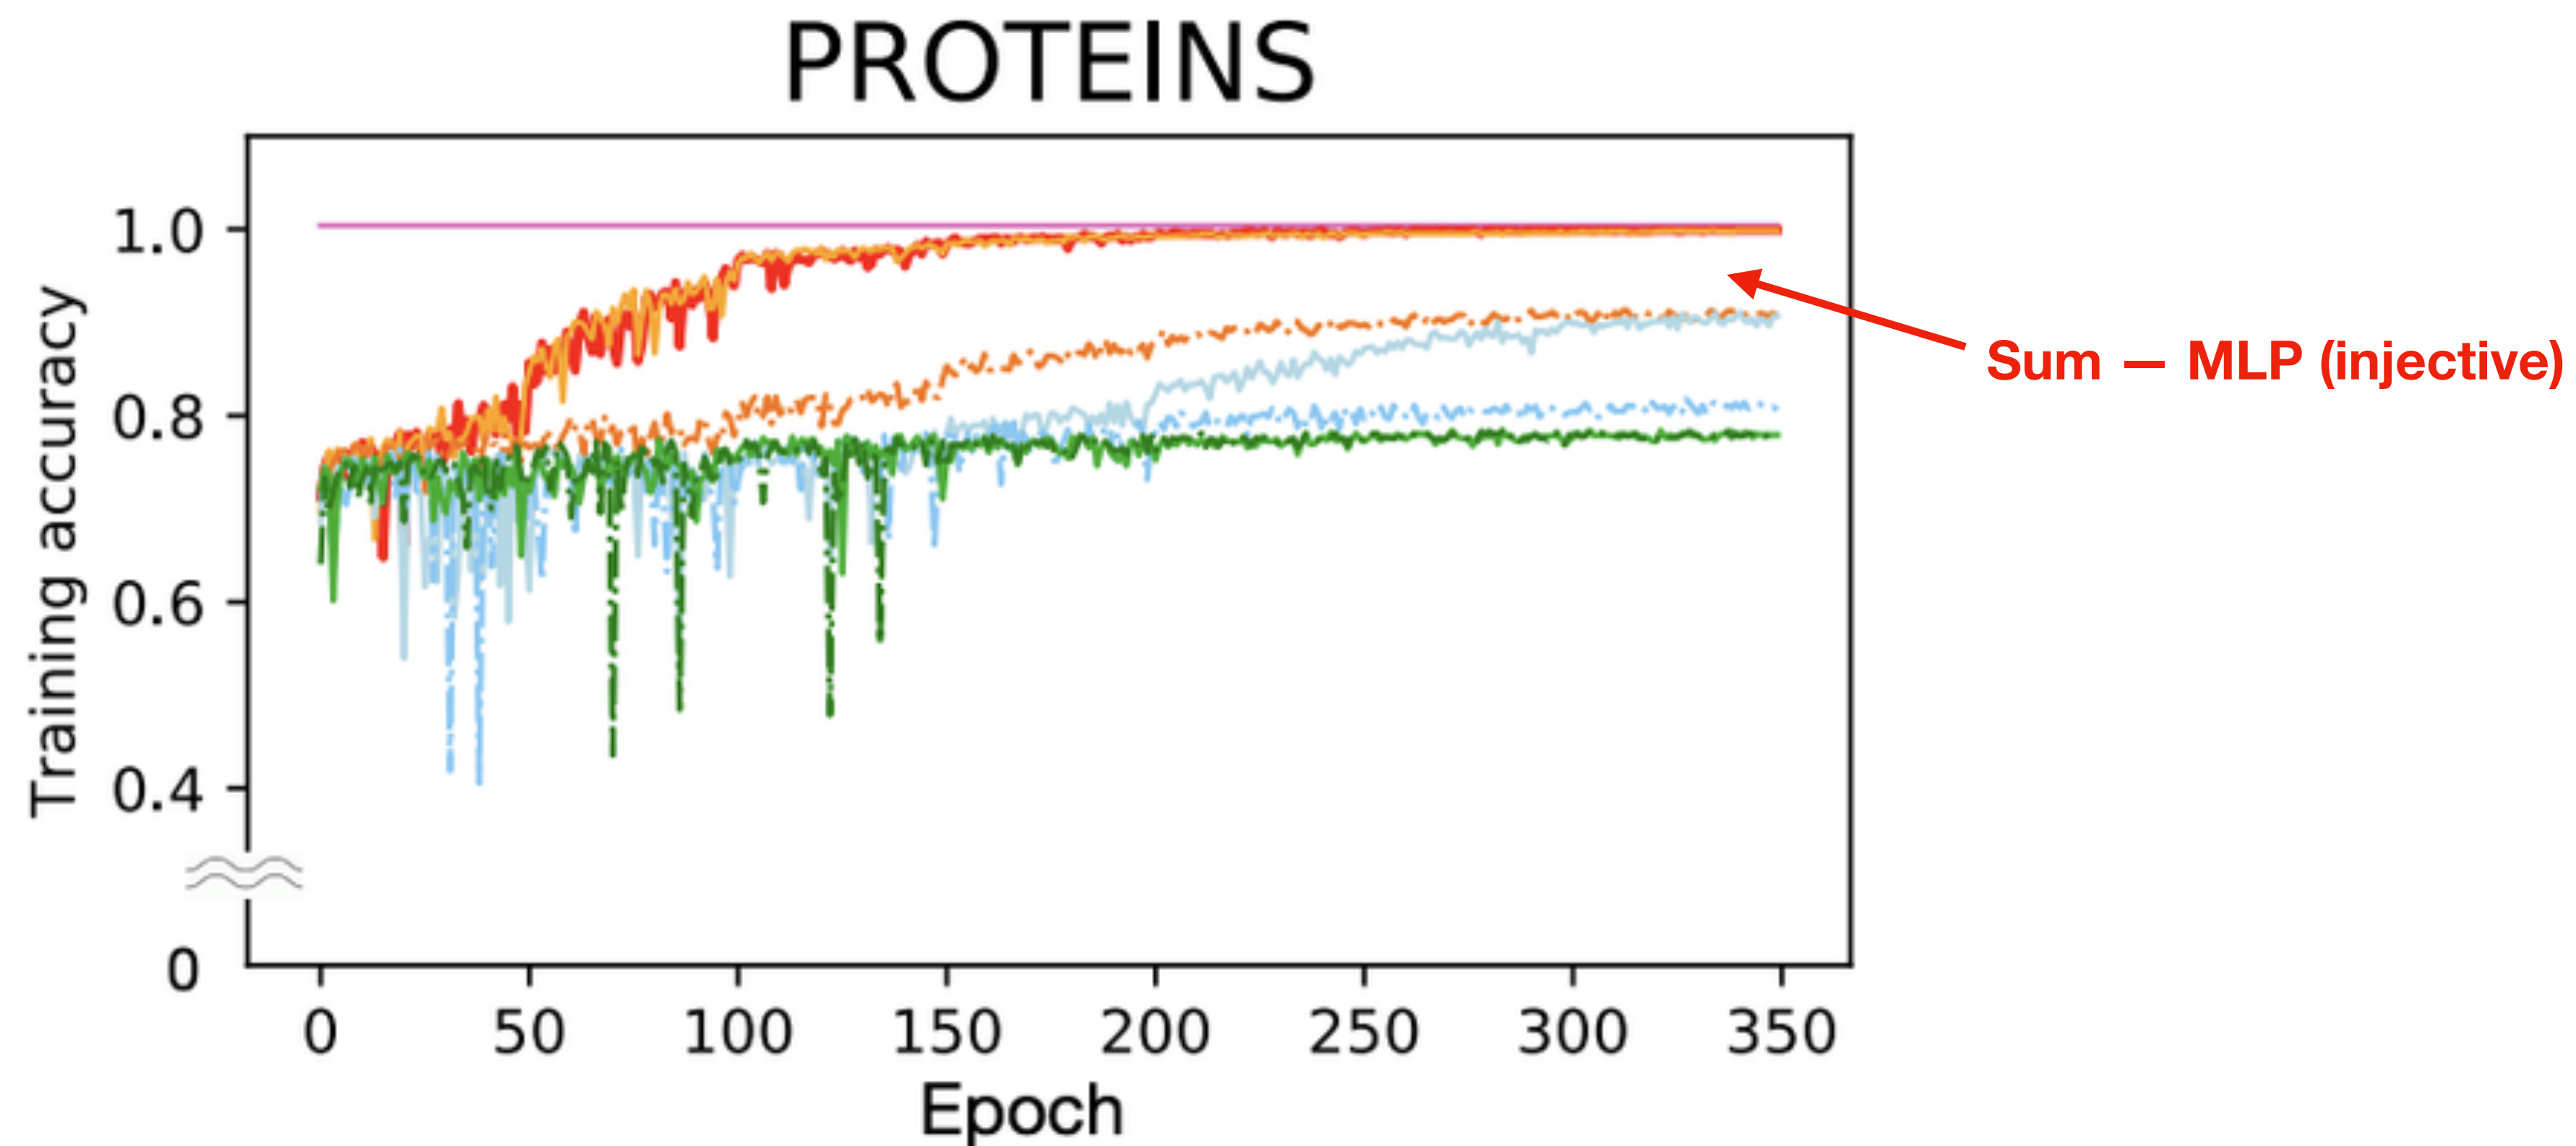

Does this make a difference in practice?

- vary g and pooling operation


$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

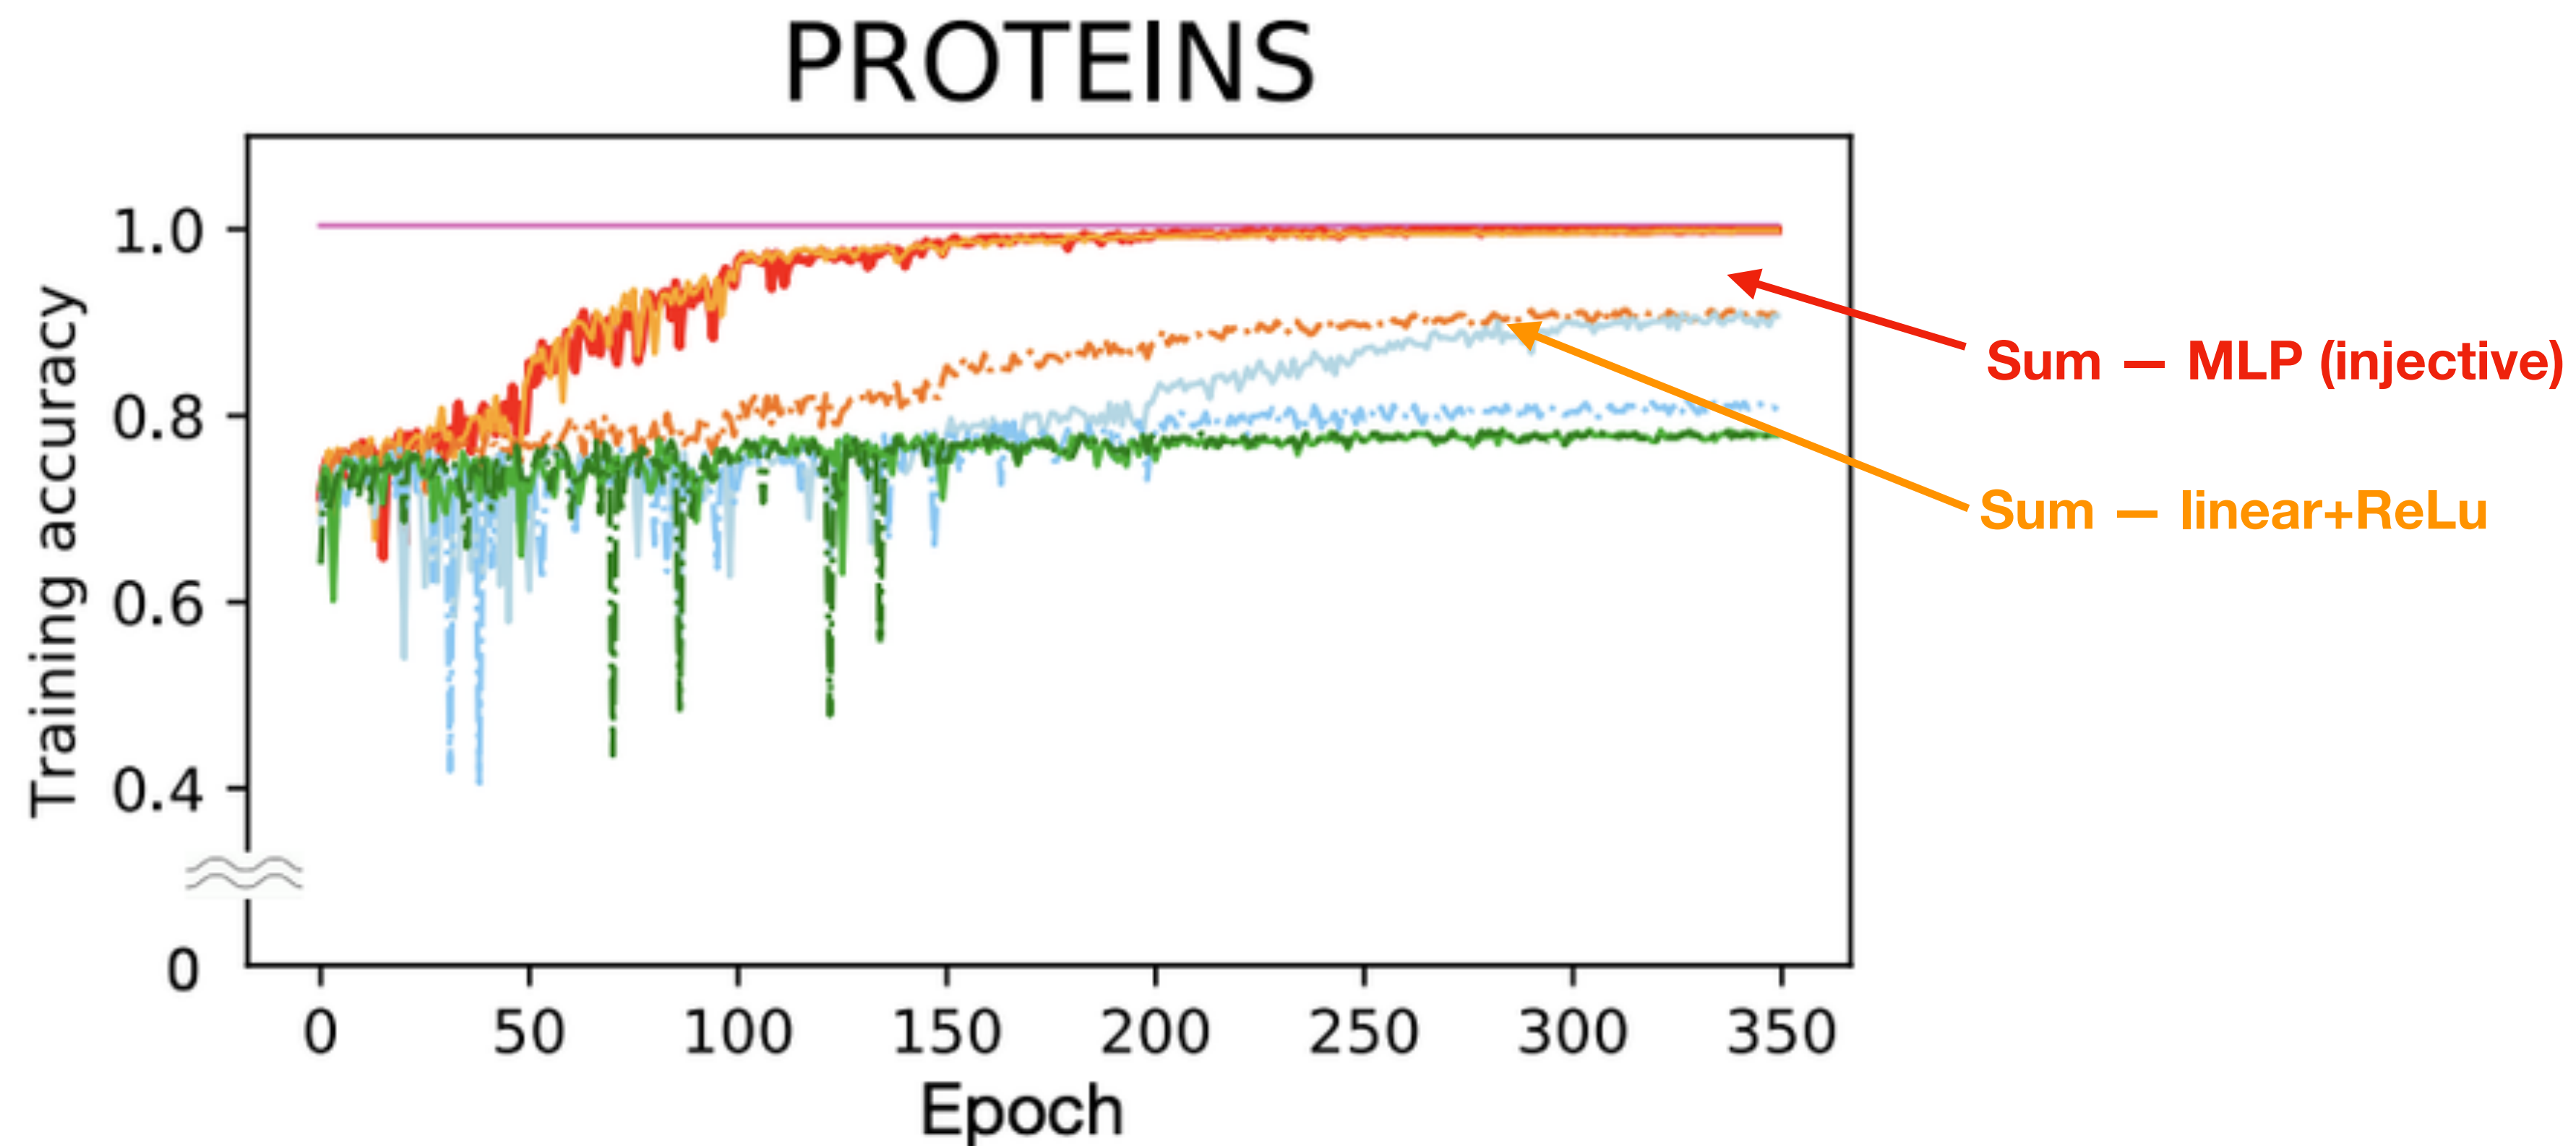

Does this make a difference in practice?

- vary g and pooling operation


$$f_{\text{Agg}}(S) = g_1 \left(\sum_{\mathbf{h} \in S} g_2(\mathbf{h}) \right)$$

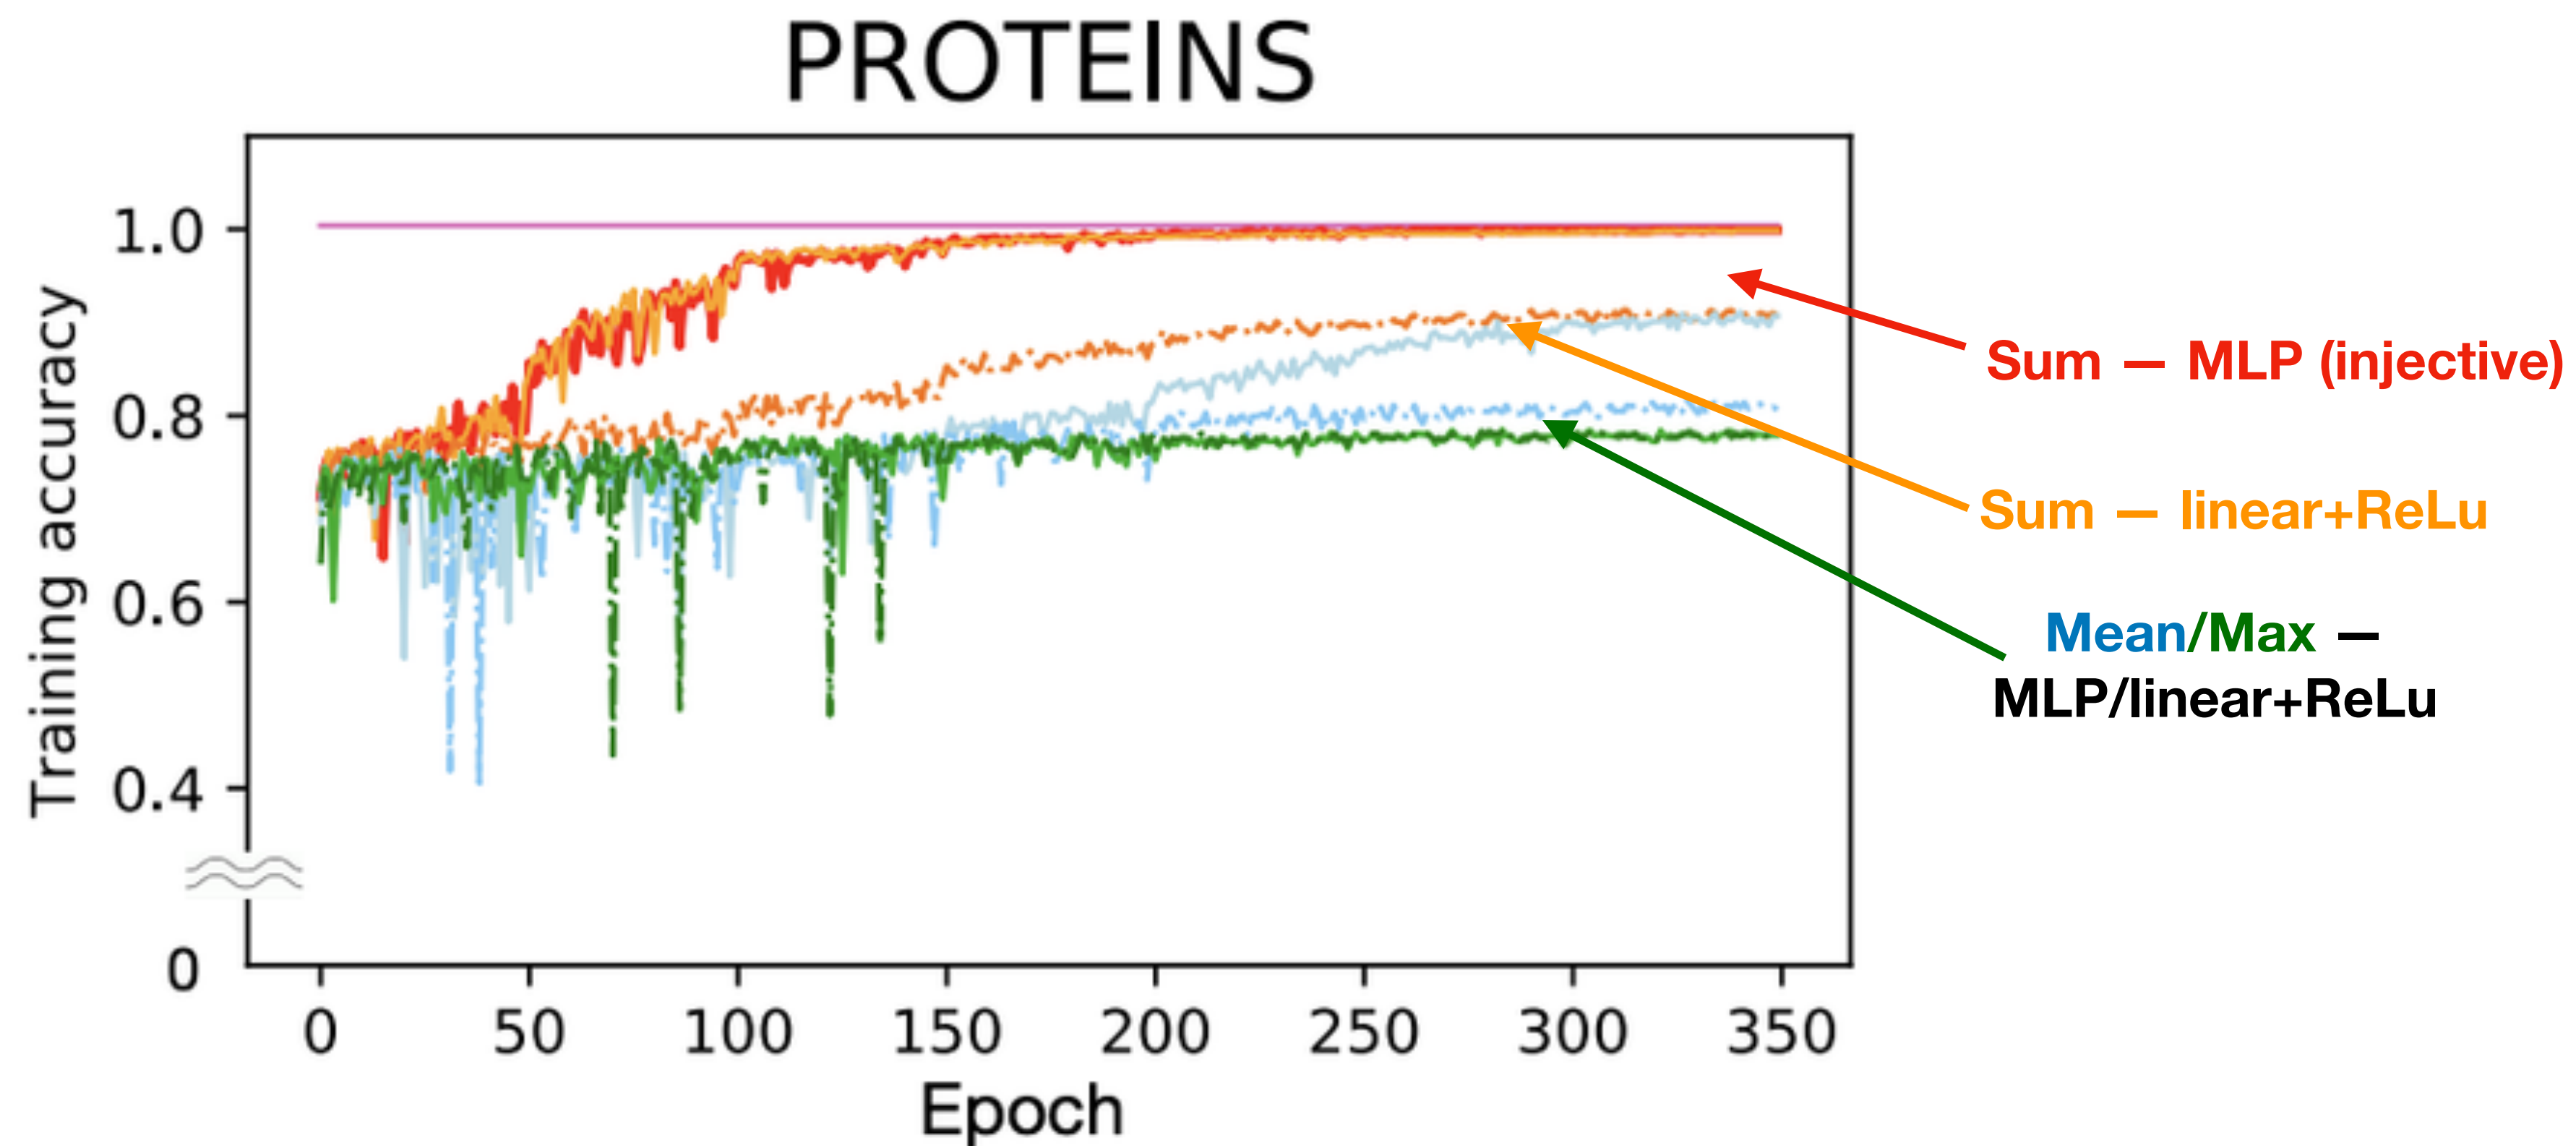

Learning structural graph properties

Can GNNs compute:

- the length of the shortest / longest cycle?
- diameter of the graph?
- the number of occurrences of a motif?

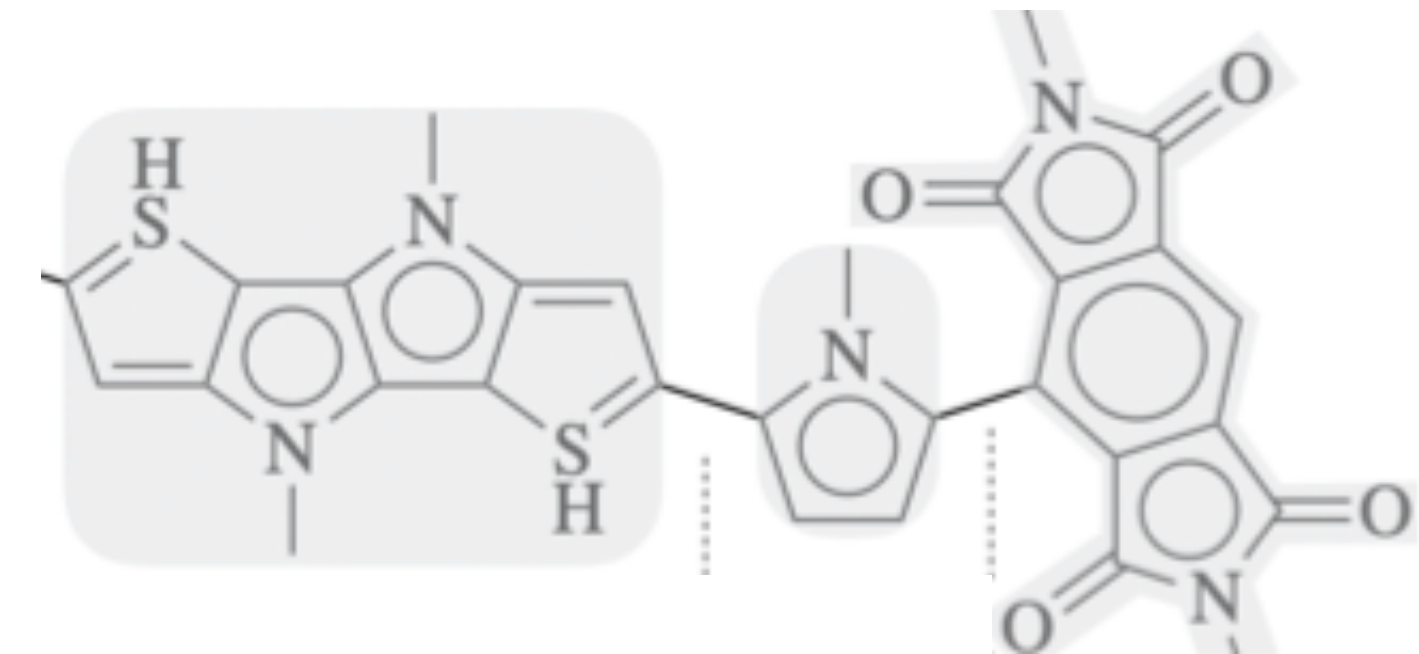


Lemma *(Garg et al 2020, Chen et al 2020)*

Learning structural graph properties

Can GNNs compute:

- the length of the shortest / longest cycle?
- diameter of the graph?
- the number of occurrences of a motif?

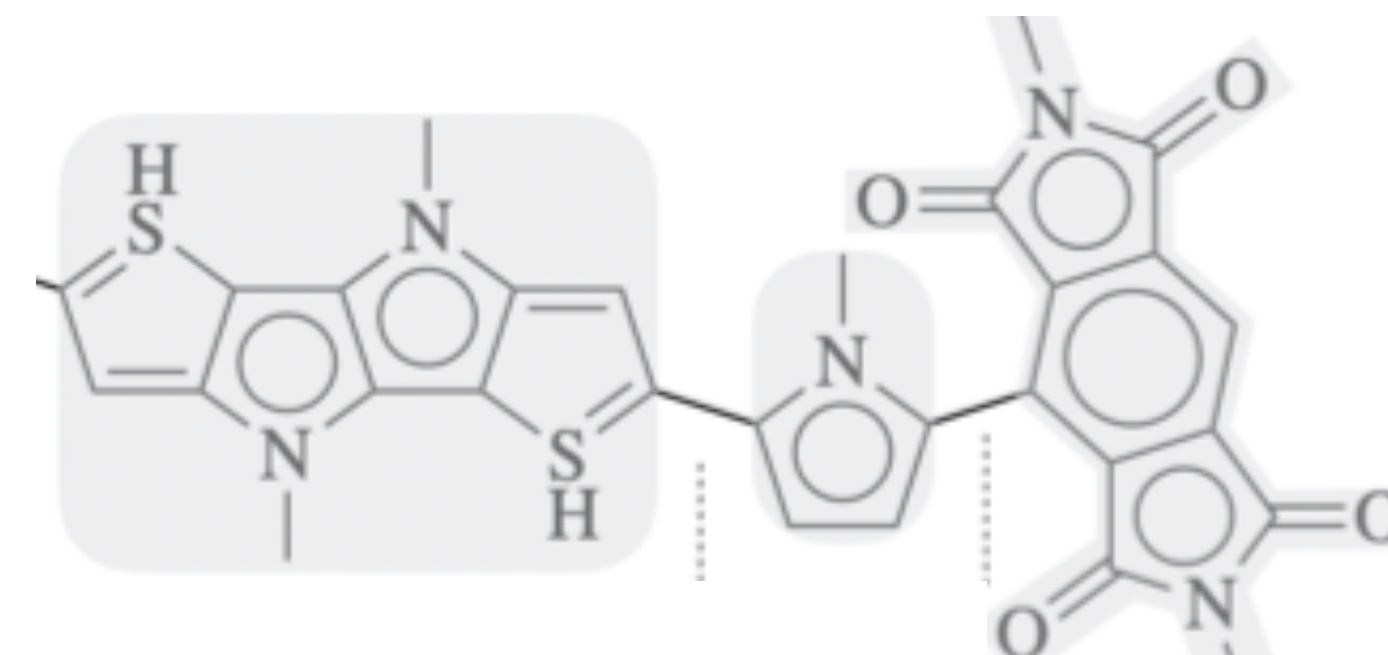


Lemma *(Garg et al 2020, Chen et al 2020)*

No! Message Passing GNNs (as discussed here) cannot compute these in general.

Improving discriminative power

1. GNNs on k-tuples (“higher-order GNNs”)
2. Encode subgraphs & aggregate results
3. Node identifiers
4. Other augmentations of $h_v^{(0)}$
 - structural information (subgraphs, random walks...)
 - Laplacian eigenvectors ...

Improves in theory & practice

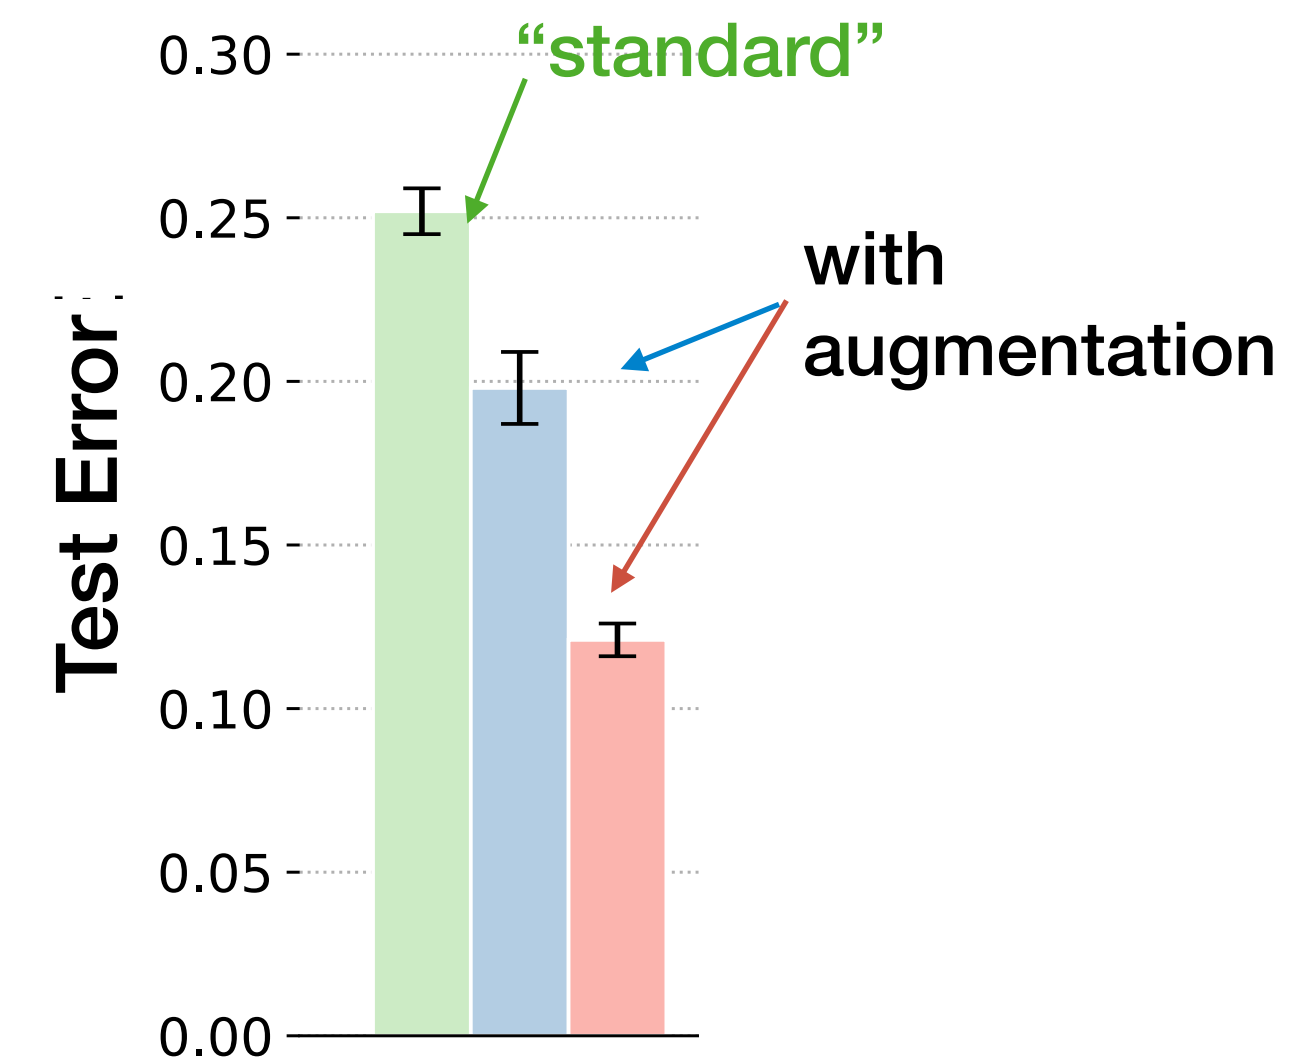


from: Lim-Robinson-Zhao-Smidt-Sra-Maron-J 22

Molecule regression


Node IDs and Distributed algorithms

Analogies to distributed algorithms give (im)possibility results for GNNs with node IDs (Sato et al 2019, Loukas 2020a,b)



Node IDs and Distributed algorithms


Analogies to distributed algorithms give (im)possibility results for GNNs with node IDs *(Sato et al 2019, Loukas 2020a,b)*




- Sufficiently deep and wide network can compute anything that a Turing machine can compute (including graph isomorphism)

Node IDs and Distributed algorithms

Analogies to distributed algorithms give (im)possibility results for GNNs with node IDs (*Sato et al 2019, Loukas 2020a,b*)




- Sufficiently deep and wide network can compute **anything that a Turing machine can compute** (including graph isomorphism)
- Lower bounds on *depth*, *width*, *message size* for combinatorial computations (cycle detection, min spanning tree, diameter, shortest path, ...) and graph isomorphism
- Approximation results for combinatorial problems (approximation algorithms that GNNs can implement)

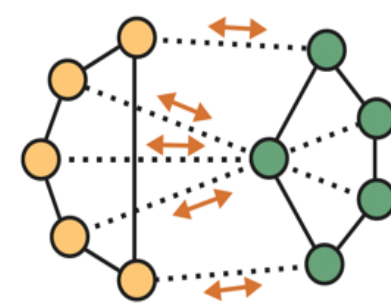

Communication capacity: information MPNN can send across two subgraphs

\geq

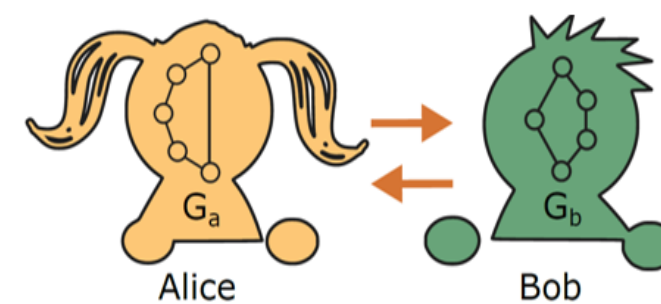


Communication complexity: minimal amount of information needed for task.


<https://andreasloukas.blog/2020/11/02/how-hard-is-to-distinguish-graphs-with-gnns/>

Node IDs and Distributed algorithms

Analogies to distributed algorithms give (im)possibility results for GNNs with node IDs *(Sato et al 2019, Loukas 2020a,b)*




- Sufficiently deep and wide network can compute **anything that a Turing machine can compute** (including graph isomorphism)
- Lower bounds on *depth*, *width*, *message size* for combinatorial computations (cycle detection, min spanning tree, diameter, shortest path, ...) and graph isomorphism
- Approximation results for combinatorial problems (approximation algorithms that GNNs can implement)
- **Practical challenge: permutation invariance.**
Random node attributes achieve a high-probability universal approximation *(Abboud-Ceylan-Grohe-Lukasiewicz 19)*

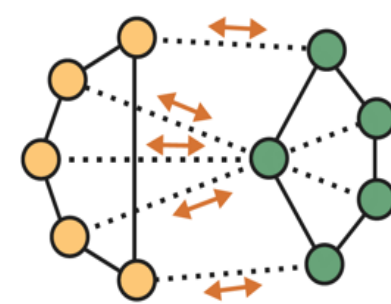

Communication capacity: information MPNN can send across two subgraphs

\geq

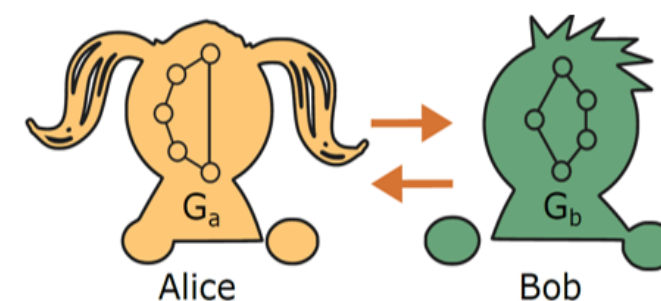

Communication complexity: minimal amount of information needed for task.

<https://andreasloukas.blog/2020/11/02/how-hard-is-to-distinguish-graphs-with-gnns/>

Positional encodings


- Add node input features that encode “position” in the graph

Positional encodings

- Add node input features that encode “position” in the graph
- For instance: eigenvectors of the graph Laplacian (or its normalized versions)

$$\mathbf{L} = \mathbf{D} - \mathbf{A}$$

Diagonal matrix with node degrees *Adjacency matrix*

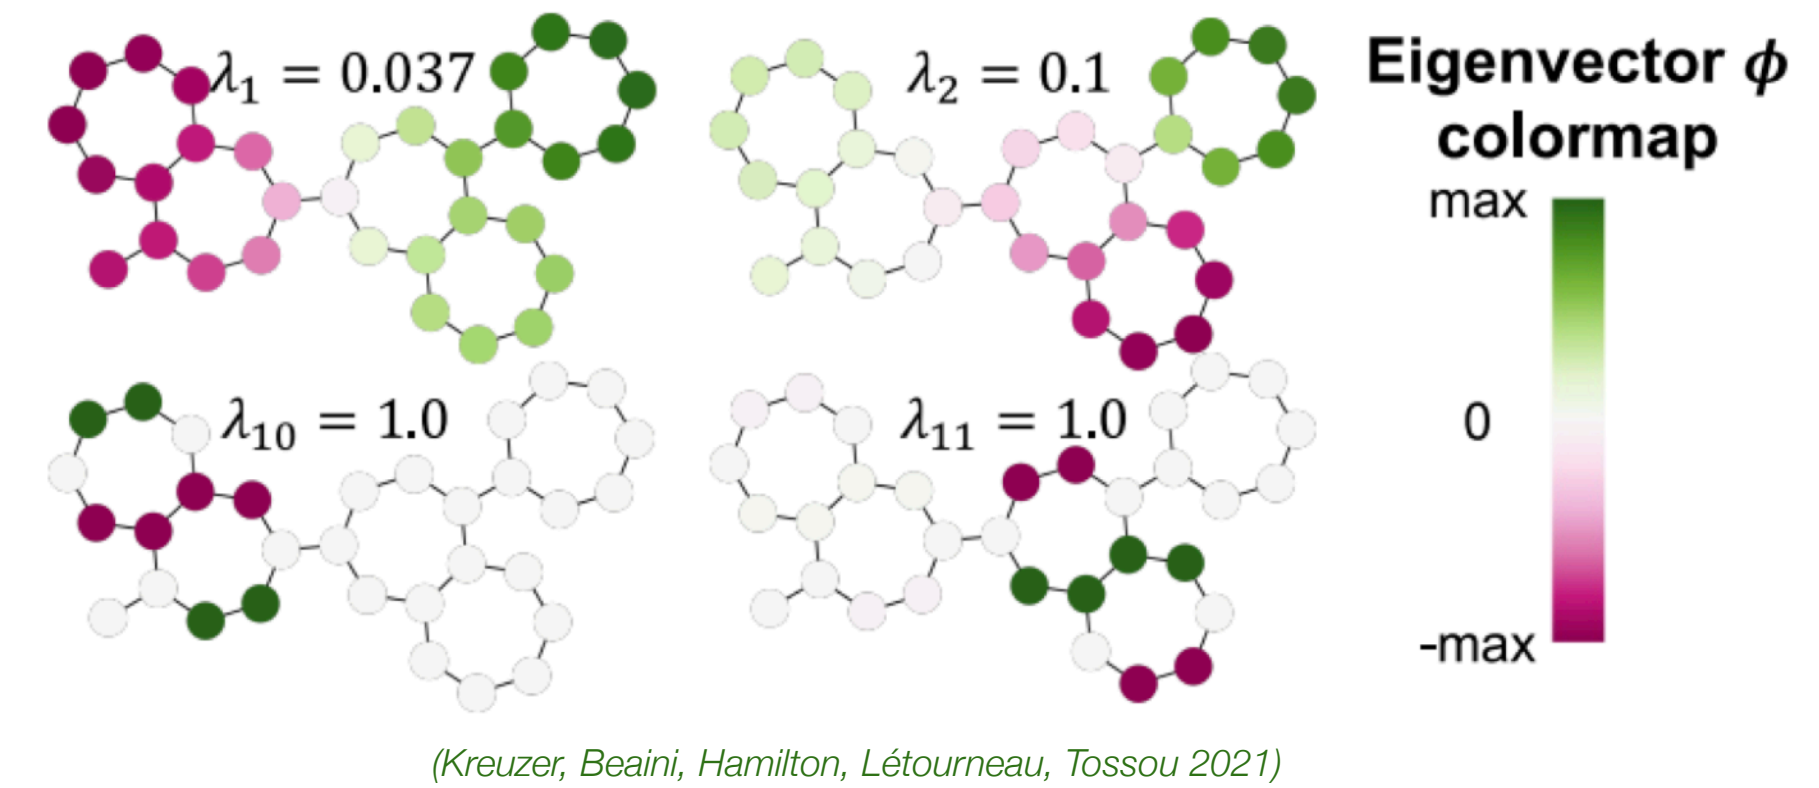

Positional encodings


- Add node input features that encode “position” in the graph

- For instance: eigenvectors of the graph Laplacian (or its normalized versions)

$$\mathbf{L} = \mathbf{D} - \mathbf{A}$$

Diagonal matrix with node degrees *Adjacency matrix*

- adds global structural information

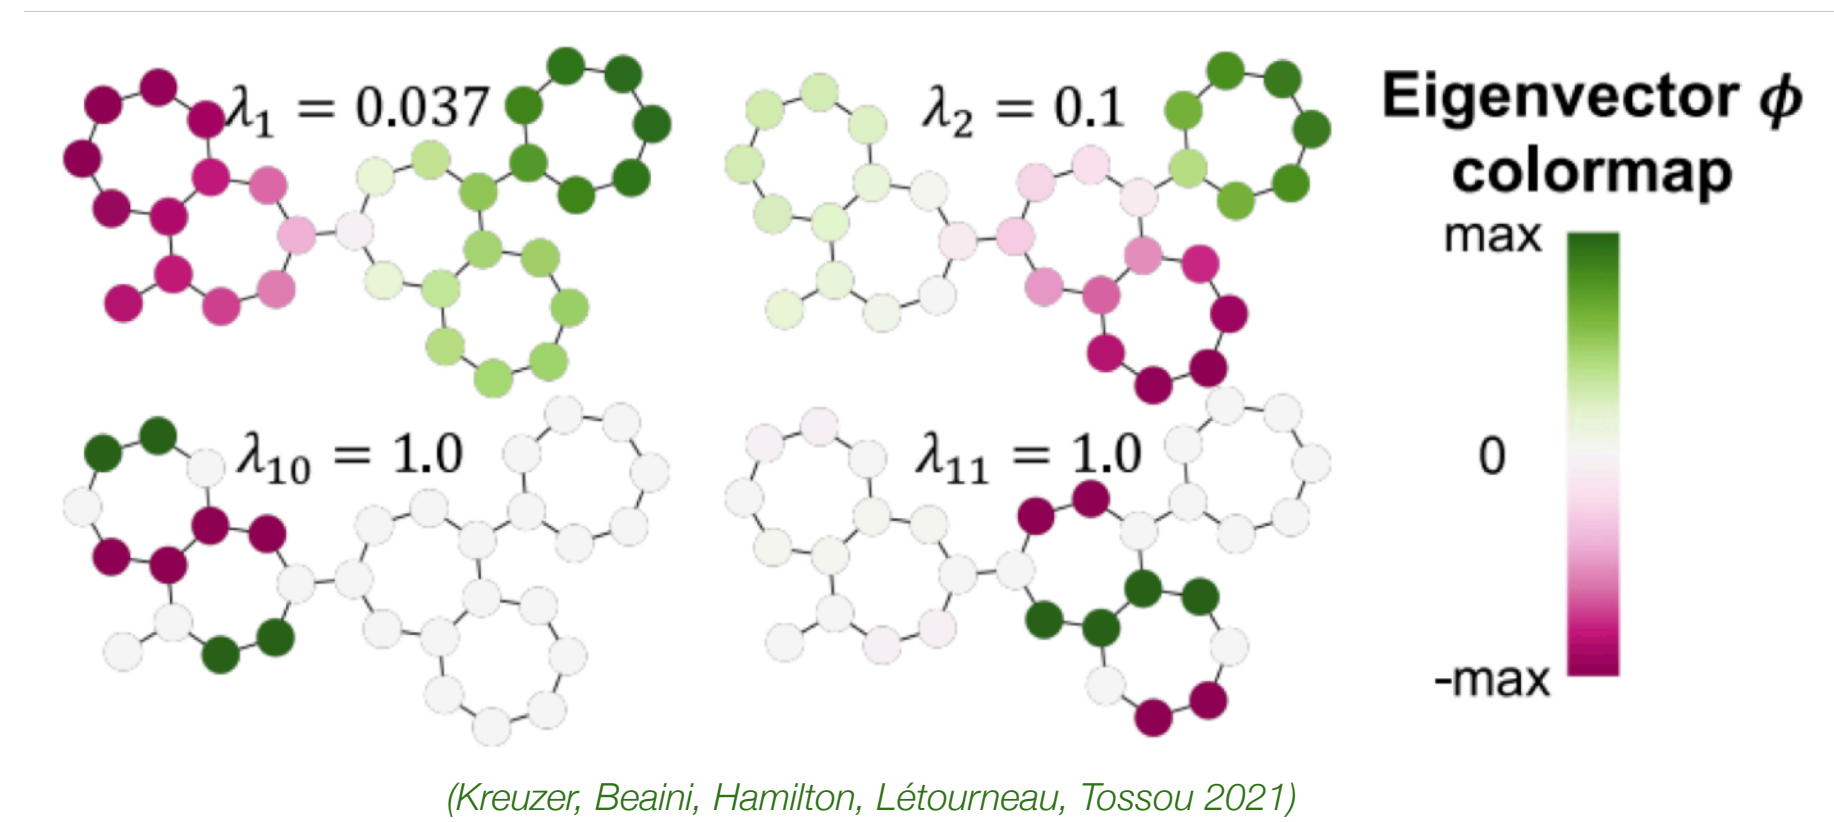

Positional encodings



- Add node input features that encode “position” in the graph

- For instance: eigenvectors of the graph Laplacian (or its normalized versions)

$$\mathbf{L} = \mathbf{D} - \mathbf{A}$$

Diagonal matrix with node degrees *Adjacency matrix*

- adds global structural information

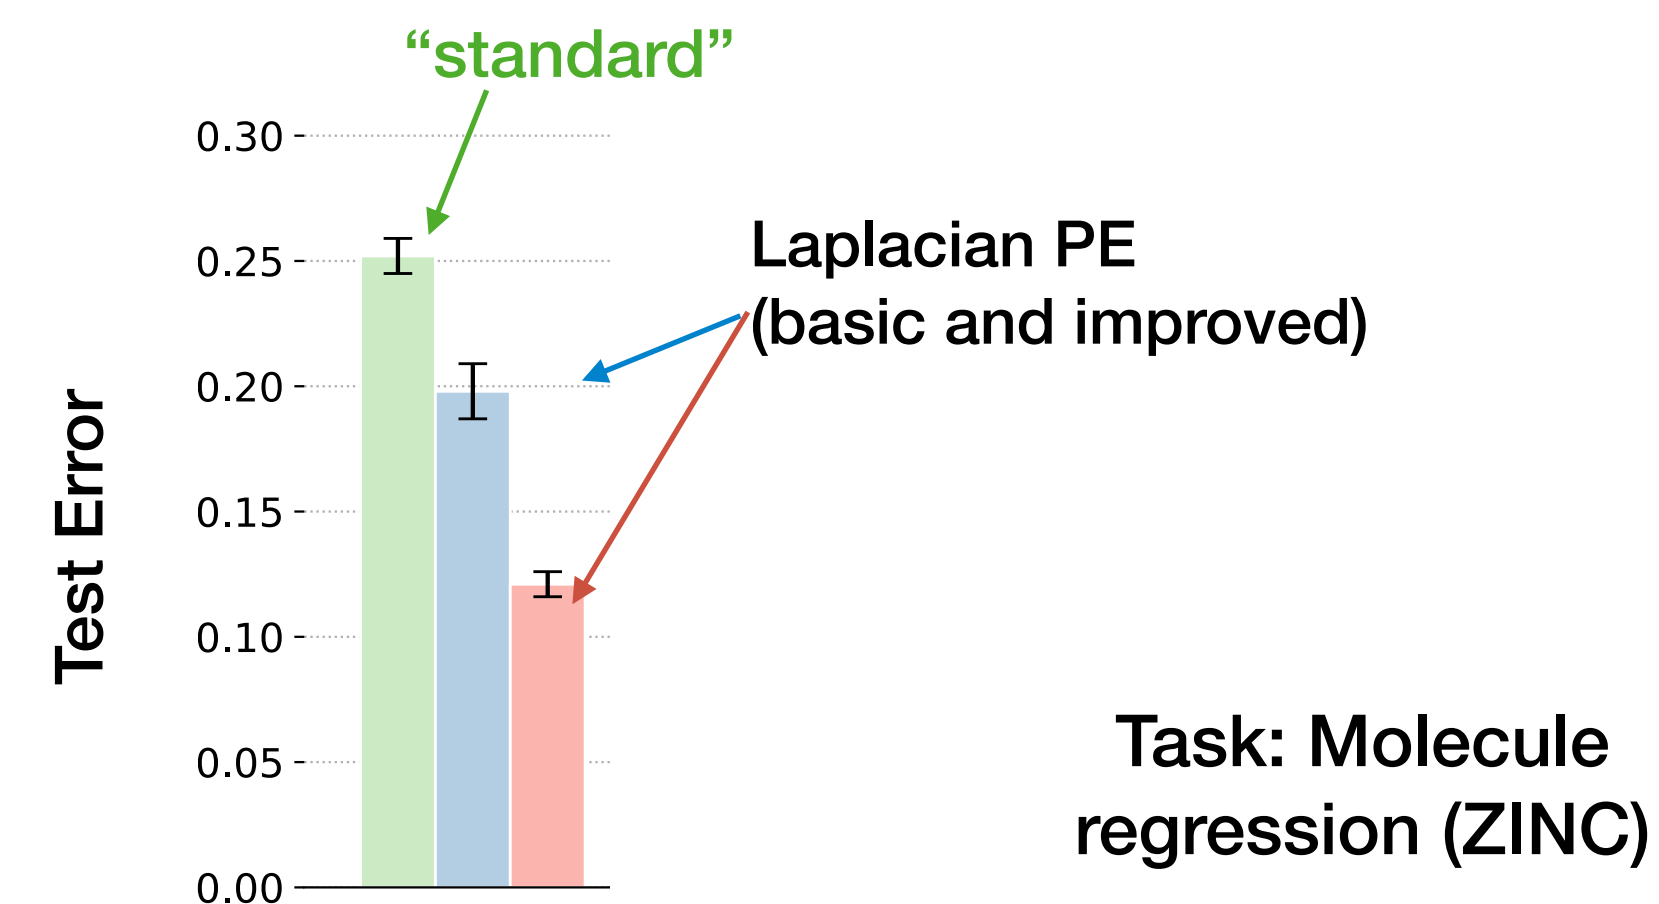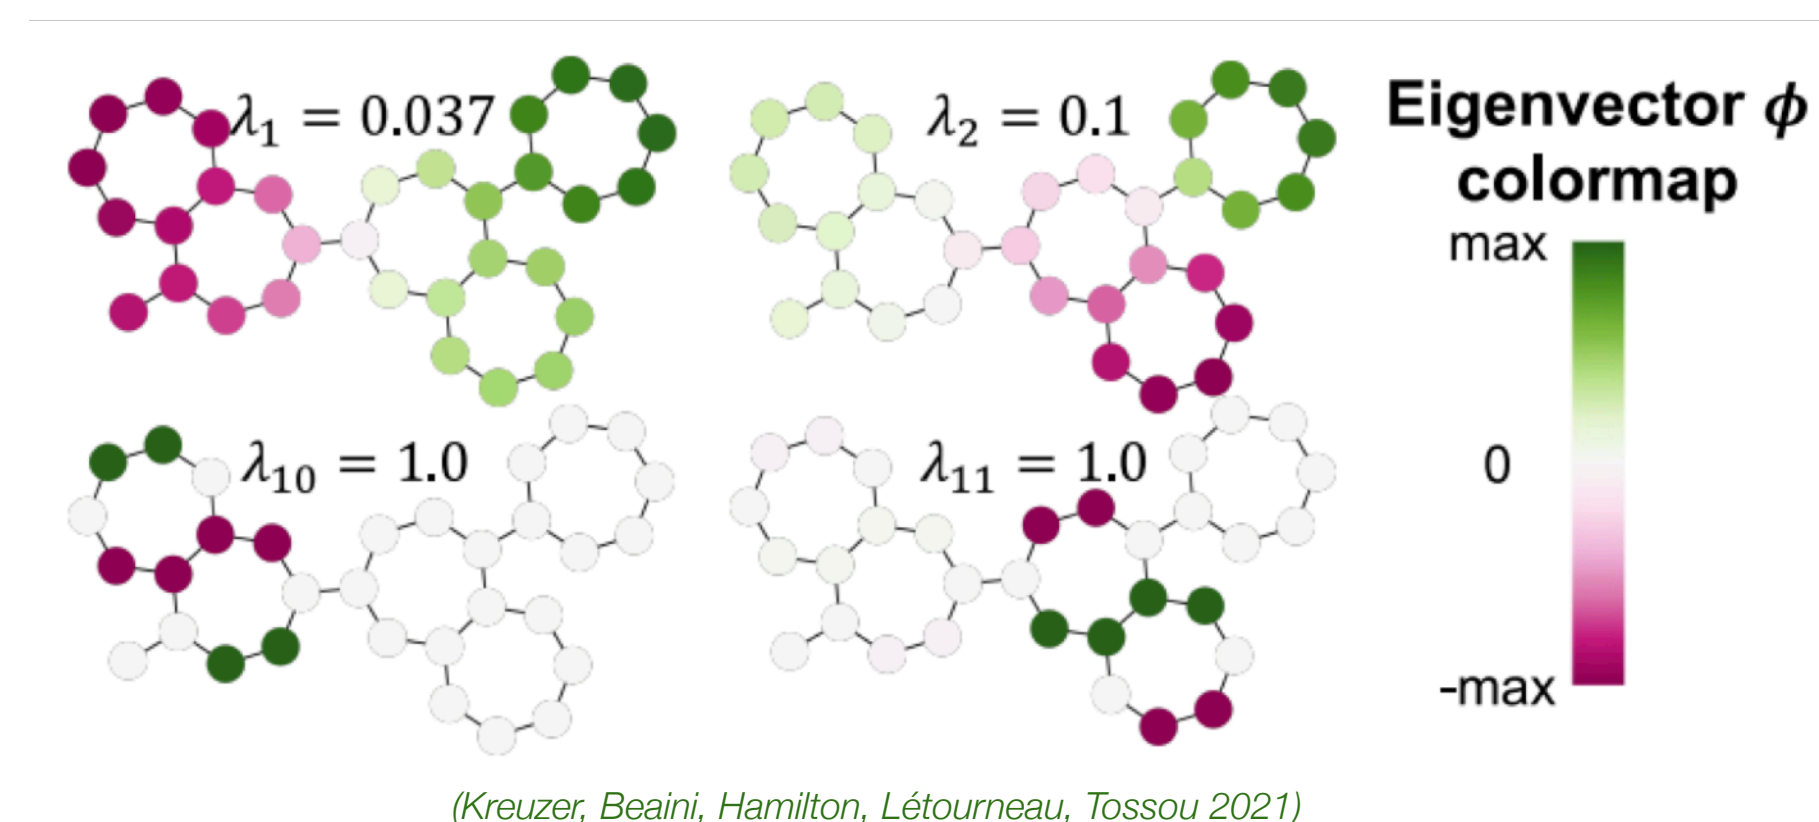

from: Lim-Robinson-Zhao-Smidt-Sra-Maron-J 22

Positional encodings



- Add node input features that encode “position” in the graph

- For instance: eigenvectors of the graph Laplacian (or its normalized versions)

$$\mathbf{L} = \mathbf{D} - \mathbf{A}$$


Diagonal matrix with node degrees *Adjacency matrix*


- adds global structural information
- Challenge: ambiguities (sign flips, eigenvalue multiplicities)

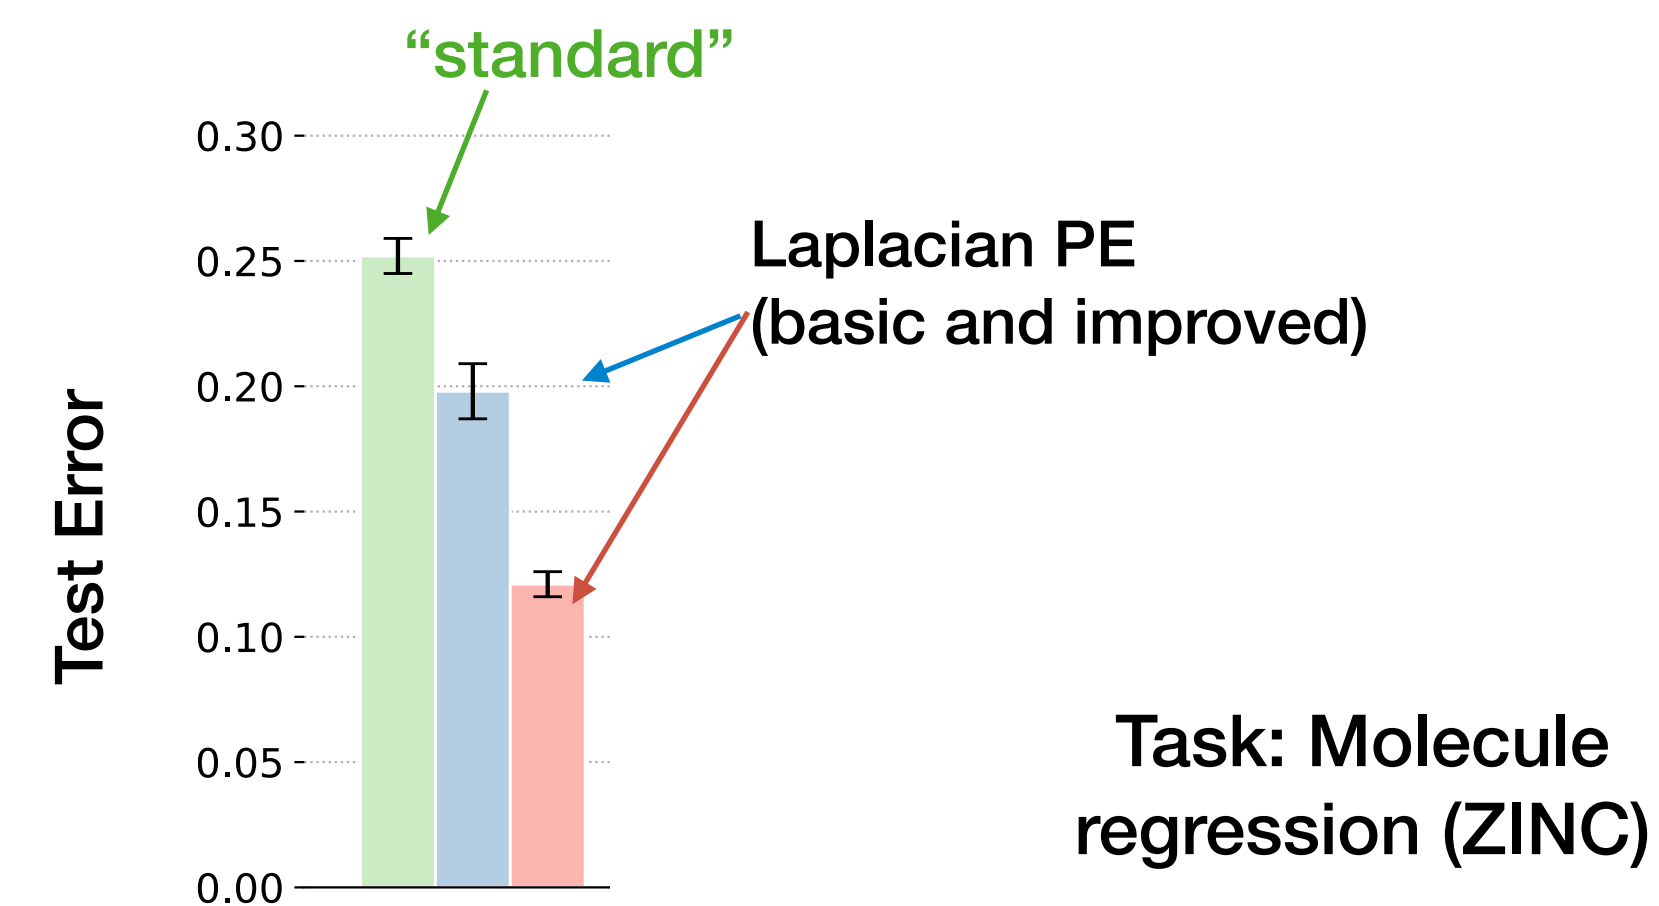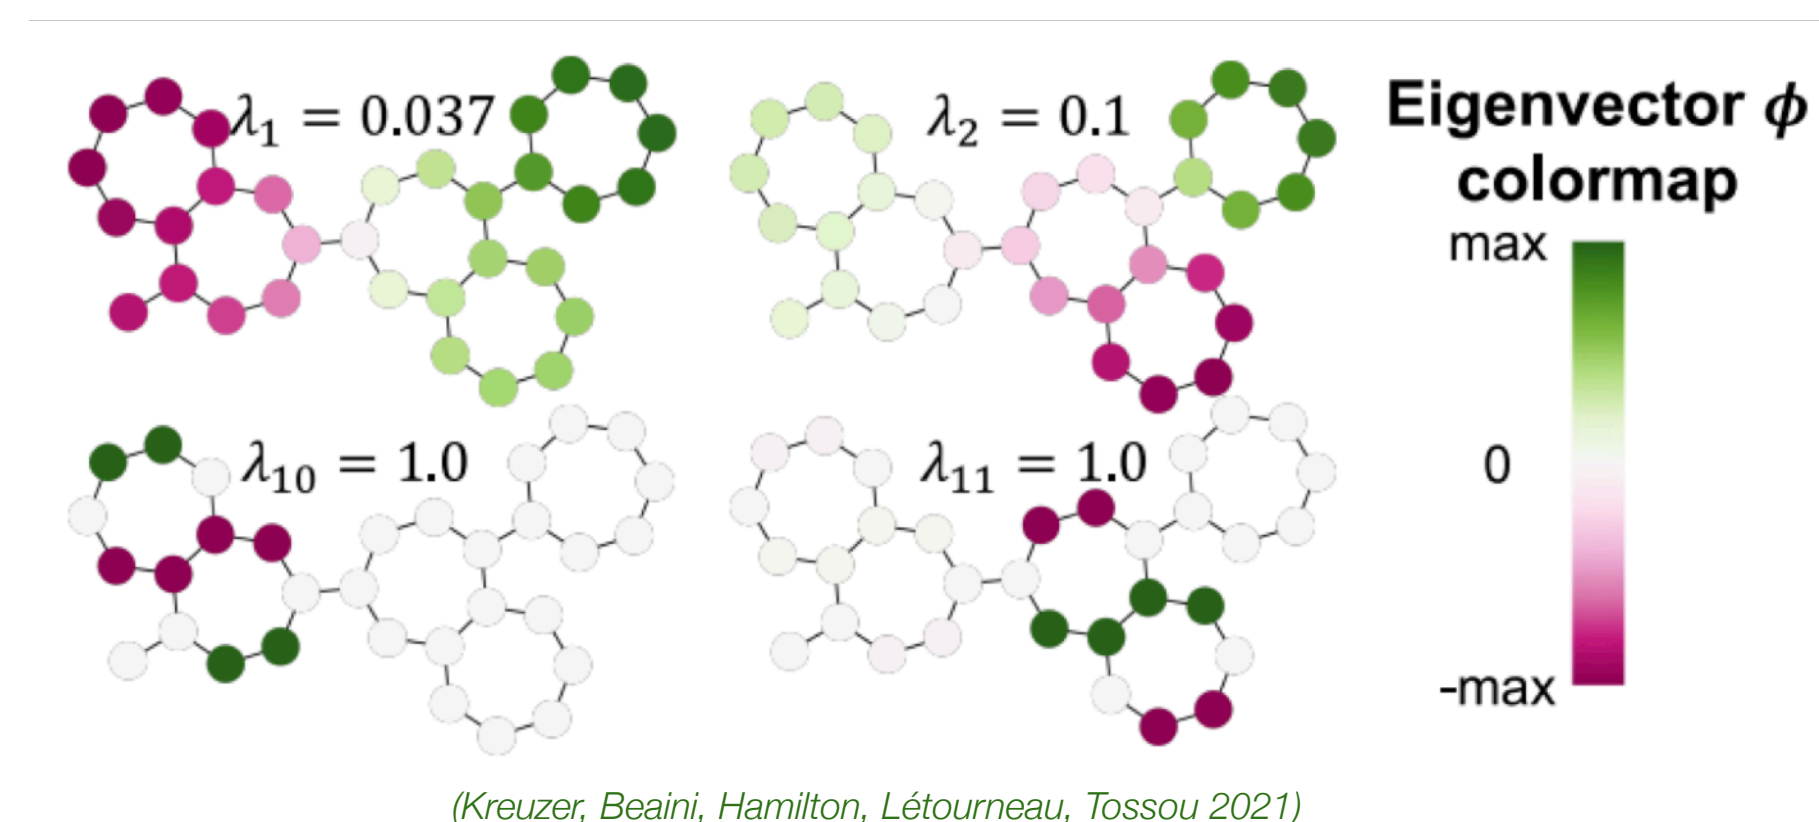

from: Lim-Robinson-Zhao-Smidt-Sra-Maron-J 22

Many connections

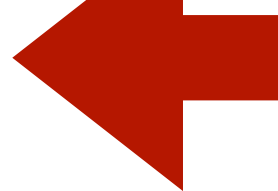- **Graph signal processing and convolutions** 
- **Inference in graphical models** *(Dai et al 2016)*
 - Node embeddings = latent variables
 - Given node features and graph, infer latent variables
 - “Neural message passing”
- **Distributed / Local algorithms** *(Sato et al 2019, Loukas 2020)*
 - Bounds for detection, verification, computation with GNNs
- **Random walks** *(Xu et al 2018)*
 - Oversmoothing, graph structure and depth
 - (Adaptive) skip connections
- **Graph isomorphism testing** *(Morris et al 2019, Xu et al 2019)*

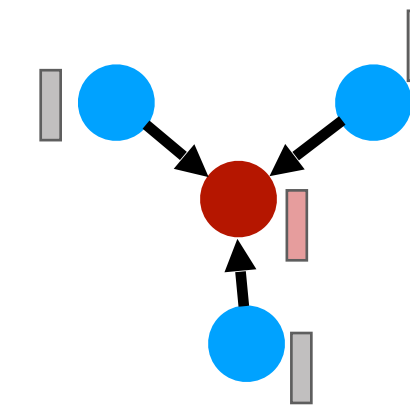

Summary

- Encodes graph structure and node/edge attributes
- Important: permutation invariance/equivariance
- Main idea: **message passing** and **aggregations**
- **can take graphs of varying size and structure** (similar to CNNs)
- Connections: graph signal processing, graphical models, distributed computing, isomorphism testing, ...
- Representational enhancements: higher-order, node IDs/augmentation

Appendix

- Graph Laplacian (unnormalized): degree matrix \mathbf{D} - adjacency matrix \mathbf{A}

$$\mathbf{L} = \mathbf{D} - \mathbf{A}$$

$$\mathbf{D}_{ii} = \deg(v_i) \text{ or } \sum_{(v_i, v_j) \in E} w_{ij} \quad \text{and} \quad \mathbf{D}_{ij} = 0 \text{ for } i \neq j$$

- normalized: $\mathbf{I} - \mathbf{D}^{-1}\mathbf{A}$ or $\mathbf{I} - \mathbf{D}^{-1/2}\mathbf{A}\mathbf{D}^{-1/2}$