

## Lecture 18

# Solving Shortest Path Problem: Dijkstra's Algorithm


October 23, 2009

# Outline

- Focus on Dijkstra's Algorithm
  - Importance: Where it has been used?
  - Algorithm's general description
  - Algorithm steps in detail
  - Example

## One-To-All Shortest Path Problem

We are given a weighted network  $(V, E, C)$  with node set  $V$ , edge set  $E$ , and the weight set  $C$  specifying weights  $c_{ij}$  for the edges  $(i, j) \in E$ . We are also given a starting node  $s \in V$ . The **one-to-all shortest path** problem is the problem of determining the shortest path from node  $s$  to all the other nodes in the network.

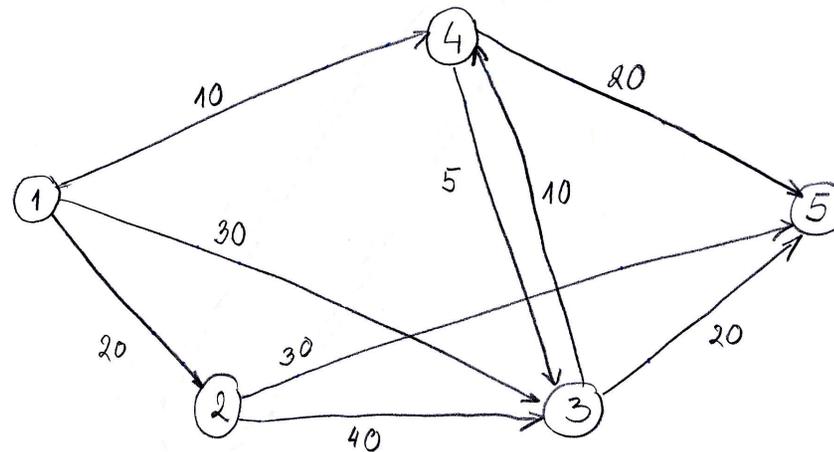

The weights on the links are also referred as **costs**.

## Algorithms Solving the Problem

- Dijkstra's algorithm
  - Solves only the problems with nonnegative costs, i.e.,  
 $c_{ij} \geq 0$  for all  $(i, j) \in E$
- Bellman-Ford algorithm
  - Applicable to problems with arbitrary costs
- Floyd-Warshall algorithm
  - Applicable to problems with arbitrary costs
  - Solves a more general all-to-all shortest path problem

Floyd-Warshall and Bellman-Ford algorithm solve the problems on graphs that do not have a cycle with negative cost.

## Importance of Dijkstra's algorithm

Many more problems than you might at first think can be cast as shortest path problems, making Dijkstra's algorithm a powerful and general tool.

For example:

- Dijkstra's algorithm is applied to automatically find directions between physical locations, such as driving directions on websites like Mapquest or Google Maps.
- In a networking or telecommunication applications, Dijkstra's algorithm has been used for solving the min-delay path problem (which is the shortest path problem). For example in data network routing, the goal is to find the path for data packets to go through a switching network with minimal delay.
- It is also used for solving a variety of shortest path problems arising in plant and facility layout, robotics, transportation, and VLSI\* design

---

\*Very Large Scale Integration

## General Description

Suppose we want to find a shortest path from a given node  $s$  to other nodes in a network (one-to-all shortest path problem)

- Dijkstra's algorithm solves such a problem
  - It finds the shortest path from a given node  $s$  to all other nodes in the network
  - Node  $s$  is called a starting node or an initial node
- How is the algorithm achieving this?
  - Dijkstra's algorithm starts by assigning some initial values for the distances from node  $s$  and to every other node in the network
  - It operates in steps, where at each step the algorithm improves the distance values.
  - At each step, the shortest distance from node  $s$  to another node is determined

## Formal Description

The algorithm characterizes each node by its state

The state of a node consists of two features:

**distance value** and **status label**

- Distance value of a node is a scalar representing an estimate of the its distance from node  $s$ .
- Status label is an attribute specifying whether the distance value of a node is equal to the shortest distance to node  $s$  or not.
  - The status label of a node is **Permanent** if its distance value is equal to the shortest distance from node  $s$
  - Otherwise, the status label of a node is **Temporary**

The algorithm maintains and step-by-step updates the states of the nodes

At each step one node is designated as **current**

## Notation

In what follows:

- $d_\ell$  denotes the distance value of a node  $\ell$ .
- $p$  or  $t$  denotes the status label of a node, where  $p$  stand for permanent and  $t$  stands for temporary
- $c_{ij}$  is the cost of traversing link  $(i, j)$  as given by the problem

The state of a node  $\ell$  is the ordered pair of its distance value  $d_\ell$  and its status label.

## Algorithm Steps

### Step 1. *Initialization*

- Assign the zero distance value to node  $s$ , and label it as **Permanent**. [The state of node  $s$  is  $(0, p)$ .]
- Assign to every node a distance value of  $\infty$  and label them as **Temporary**. [The state of every other node is  $(\infty, t)$ .]
- Designate the node  $s$  as the **current** node

## Step 2. Distance Value Update and Current Node Designation Update

Let  $i$  be the index of the current node.

- (1) Find the set  $J$  of **nodes with temporary labels** that can be reached from the current node  $i$  by a link  $(i, j)$ . **Update the distance values of these nodes.**

- For each  $j \in J$ , the distance value  $d_j$  of node  $j$  is updated as follows

$$\text{new } d_j = \min\{d_j, d_i + c_{ij}\}$$

where  $c_{ij}$  is the cost of link  $(i, j)$ , as given in the network problem.

- (2) Determine a node  $j$  that has the smallest distance value  $d_j$  among all nodes  $j \in J$ ,

$$\text{find } j^* \text{ such that } \min_{j \in J} d_j = d_{j^*}$$

- (3) Change the label of node  $j^*$  to **permanent** and designate this node as **the current node.**


**Step 3.** *Termination Criterion*

If all nodes that can be reached from node  $s$  have been permanently labeled, then stop - we are done.

If we cannot reach any temporary labeled node from the current node, then all the temporary labels become permanent - we are done.

Otherwise, go to Step 2.


## Dijkstra's Algorithm: Example

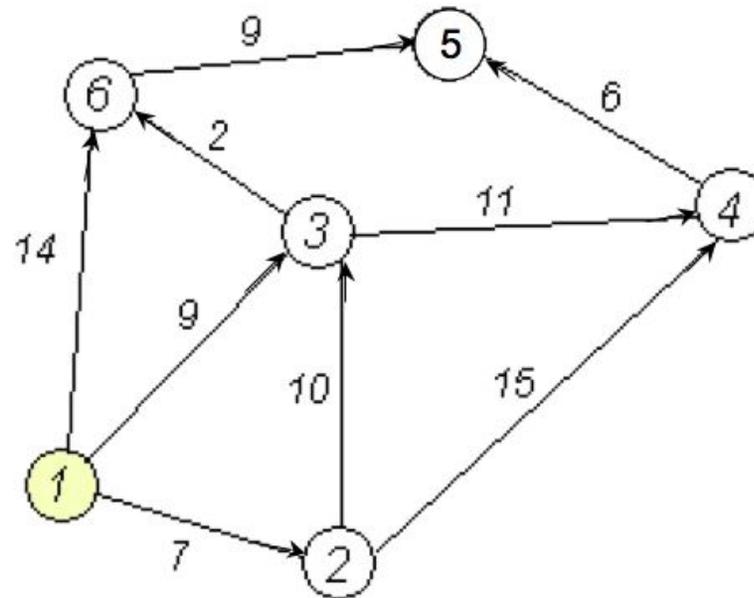

We want to find the shortest path from node 1 to all other nodes using Dijkstra's algorithm.

## Initialization - Step 1

- Node 1 is designated as the current node
- The state of node 1 is  $(0, p)$
- Every other node has state  $(\infty, t)$

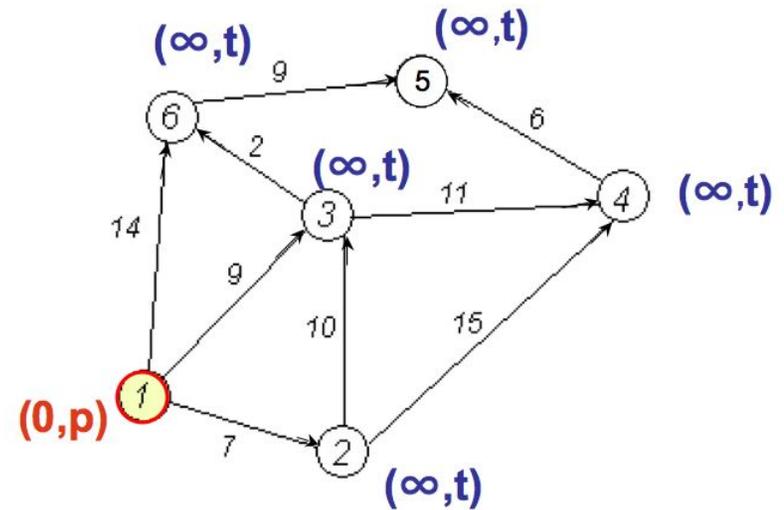

## Step 2


- Nodes 2, 3, and 6 can be reached from the current node 1
- Update distance values for these nodes

$$d_2 = \min\{\infty, 0 + 7\} = 7$$

$$d_3 = \min\{\infty, 0 + 9\} = 9$$


$$d_6 = \min\{\infty, 0 + 14\} = 14$$

- Now, among the nodes 2, 3, and 6, node 2 has the smallest distance value
- The status label of node 2 changes to permanent, so its state is  $(7, p)$ , while the status of 3 and 6 remains temporary
- Node 2 becomes the current node

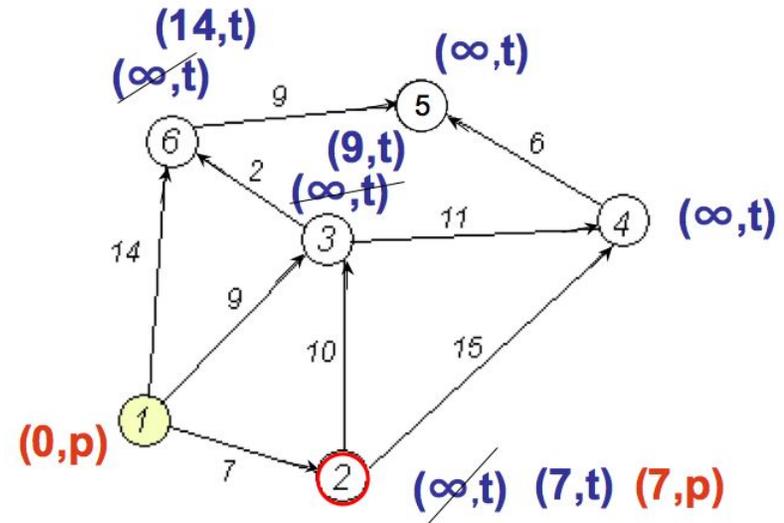

## Step 3

Graph at the end of Step 2

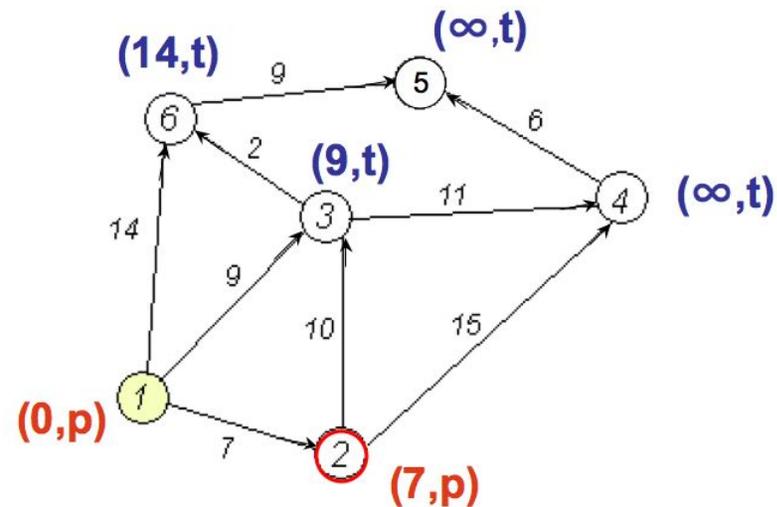


We are not done, not all nodes have been reached from node 1, so we perform another iteration (back to Step 2)

## Another Implementation of Step 2

- Nodes 3 and 4 can be reached from the current node 2
- Update distance values for these nodes

$$d_3 = \min\{9, 7 + 10\} = 9$$

$$d_6 = \min\{\infty, 7 + 15\} = 22$$

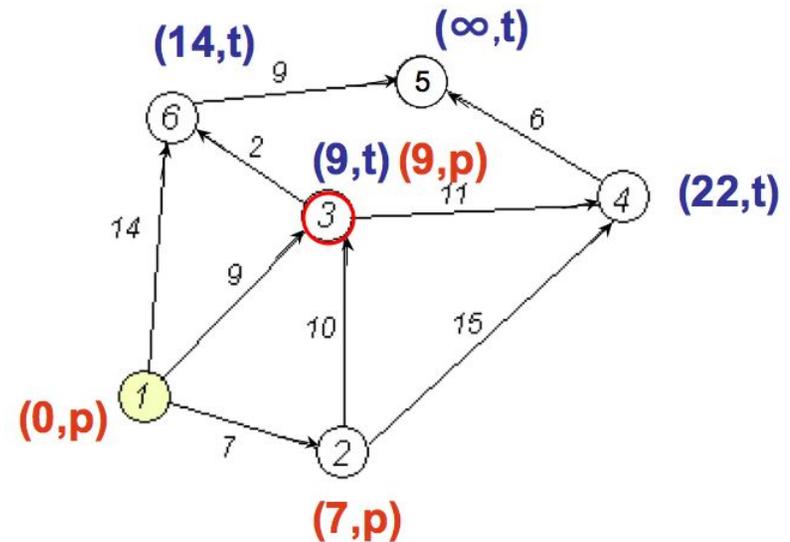

- Now, between the nodes 3 and 4 node 3 has the smallest distance value
- The status label of node 3 changes to permanent, while the status of 6 remains temporary
- Node 3 becomes the current node


We are not done (Step 3 fails), so we perform another Step 2

## Another Step 2

- Nodes 6 and 4 can be reached from the current node 3
- Update distance values for them

$$d_4 = \min\{22, 9 + 11\} = 20$$

$$d_6 = \min\{14, 9 + 2\} = 11$$

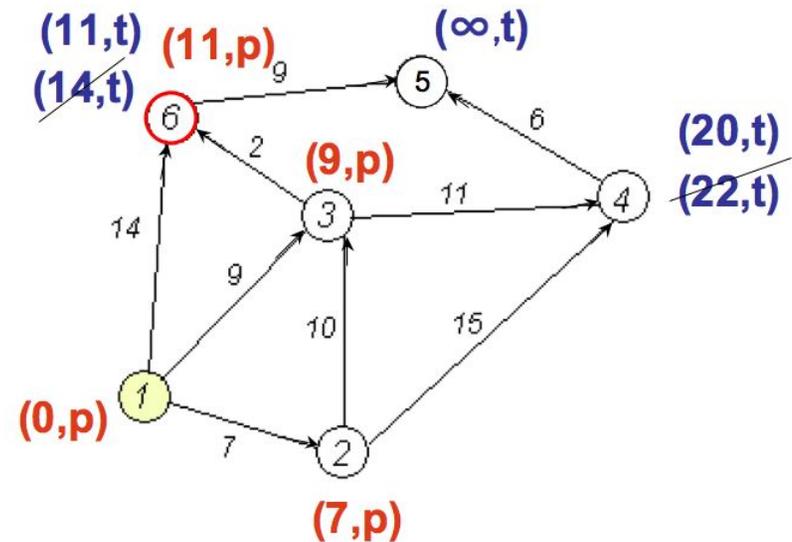


- Now, between the nodes 6 and 4 node 6 has the smallest distance value
- The status label of node 6 changes to permanent, while the status of 4 remains temporary
- Node 6 becomes the current node

We are not done (Step 3 fails), so we perform another Step 2

## Another Step 2

- Node 5 can be reached from the current node 6
- Update distance value for node 5

$$d_5 = \min\{\infty, 11 + 9\} = 20$$

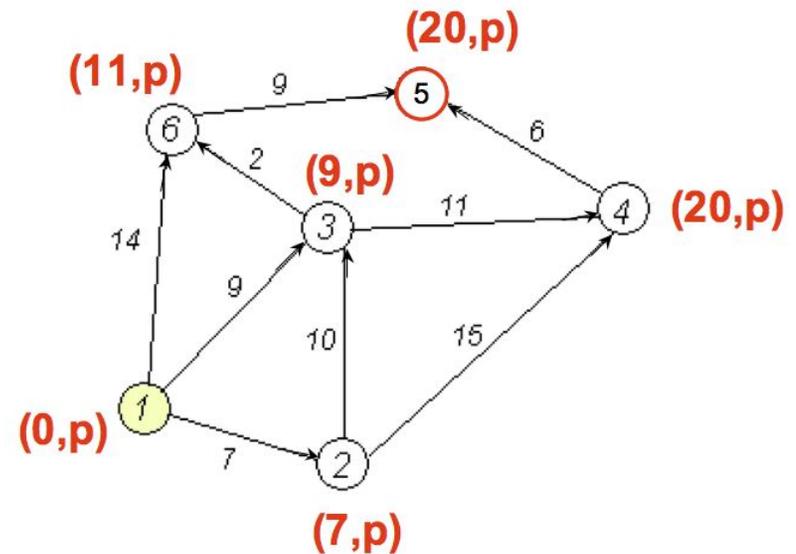

- Now, node 5 is the only candidate, so its status changes to permanent
- Node 5 becomes the current node

From node 5 we cannot reach any other node. Hence, node 4 gets permanently labeled and we are done.

Chapter 6.3.2 in your book has another example of the implementation of Dijkstra's algorithm