Cognitive Computing Laboratory

Seung-Hoon Na

2024.8

Cognitive Computing

- A technology that mimics human thought processes in a computerized model
- It involves the use of natural language processing, artificial intelligence (AI), and machine learning to create systems that can understand, reason, learn, and interact with humans and worlds in a way that is similar to how humans think and solve problems.



Cognitive Computing Laboratory

Main goal


- Developing core NLP and AI approaches to enhance computational capabilities, aiming to achieve both linguistic competence and advanced cognitive competence, which align closely with the functions of System 1 and System 2
- Developing an application based on the components of System 1 and System 2, designed to require adaptive knowledge learning, complex reasoning, holistic high-level cognitive decision-making, creative problem-solving, expert decision-making and manipulation, and advanced content generation.

Current goal

- Advancing LLM (large language model) and its extension towards world models

C.f.) Language and Thought are Distinct in Brain

Mainly cover computing mechanisms for these area

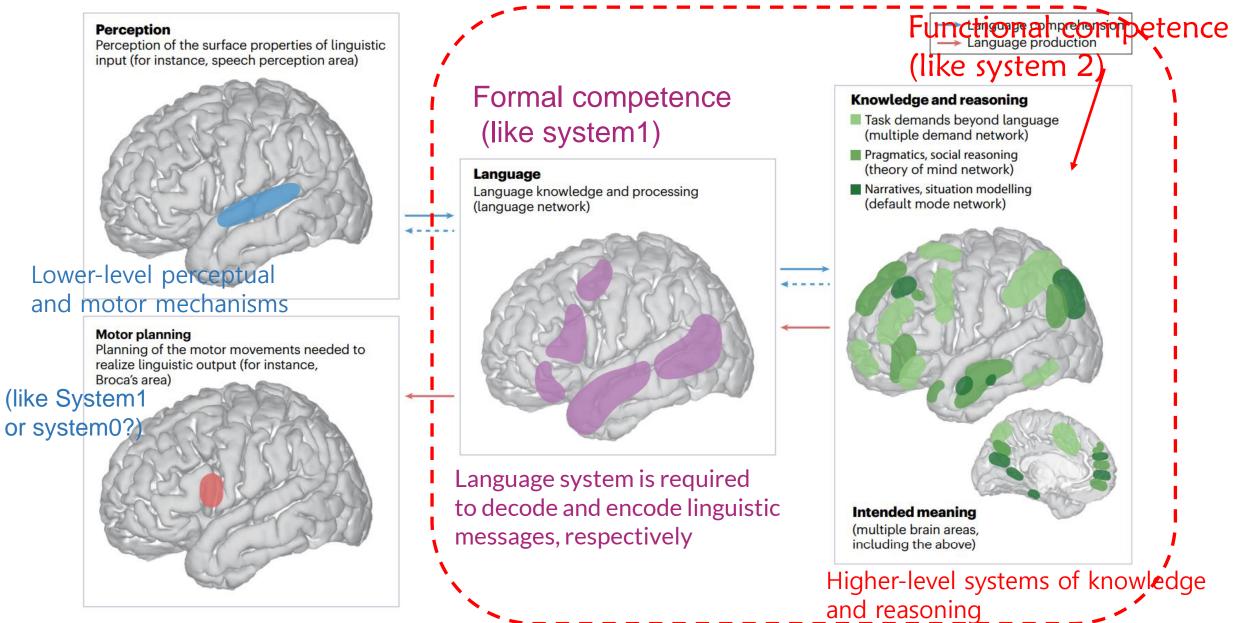

https://www.nature.com/articles/s41583-024-00802-4

Cognitive Computing Lab: Selected Research Topics

- Advancing LLMs
 - Knowledge Editing
 - Retrieval Augmented Generation
 - Mechanistic Interpretation
 - LLM-based agents
 - Alignment
 - World-grounded LLMs
 - World-interactive LLMs
 - Handling Hallucination/Biasness
 - Multi-model LLMs
- Efficient LLMs
 - Quantization/Pruning
- Diffusion models for NLP/IR
- Deep learning for NLP applications
 - Neural quality estimation
 - Fact verification
 - Meeting Summarization
 - Grammar Error Correction

Cognitive Computing Lab: Research Topics

- Classical deep learning for natural language processing
 - Deep learning for language analytics and information extraction
 - Tagging, Parsing, Semantic role labelling, AMR parsing, Semantic parsing
 - Named entity recognition, entity linking, relation extraction
 - Deep learning for information retrieval
 - BERT-based dense retrieval
 - Deep learning for question answering
 - Machine reading comprehension & Open-domain question answering
 - Knowledge graph embedding
 - Hybrid approach of KBQA and IRQA
 - ✓ KBQA: Knowledge-based QA
 - ✓ IRQA: Information retrieval-based QA
 - Multilingual Question Answering
 - Visual question answering
 - Neural machine translation


Cognitive Computing Lab: Previous Research Topics

- Statistical and machine learning for natural language processing
 - Conditional random fields for NLP
 - Statistical machine translation
- Language modeling approaches for IR
- Verbosity-normalized IR

Large Language Models


• LLMs: Pretrained LMs with huge/large model parameters
The era of LLMs

15,000x increase in 5 years

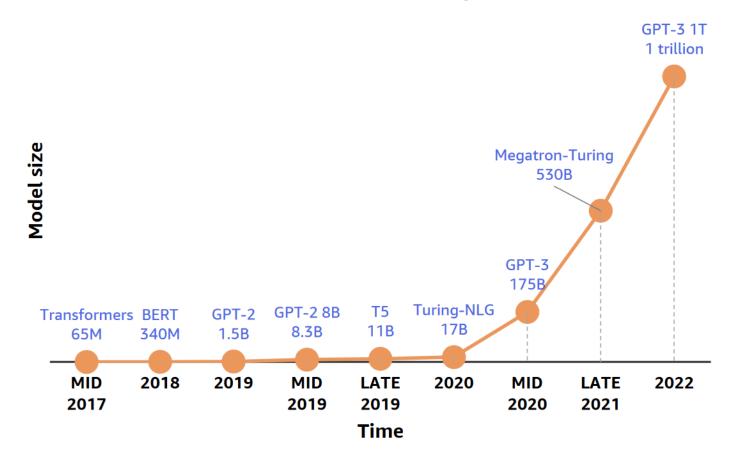

Knowledge Editing for LLM: Definition


• Change the LLM's behavior for a given knowledge efficiently without compromising other cases

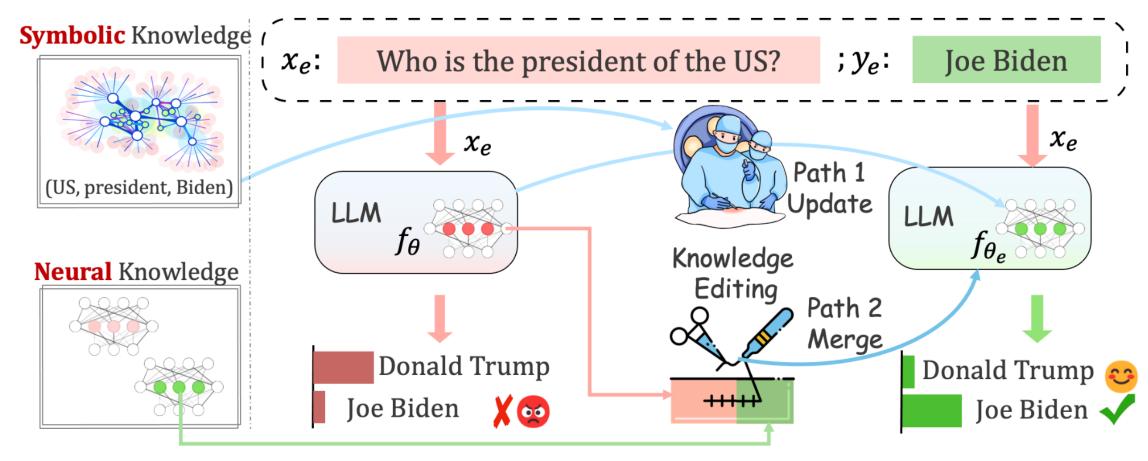

Knowledge Editing Types: Insertion Modification Erasure

https://drive.google.com/file/d/1sg3Dy3gQo2bwOoLwWMFh57NfHROf3Ahg/view

Retrieval Augmented Generation

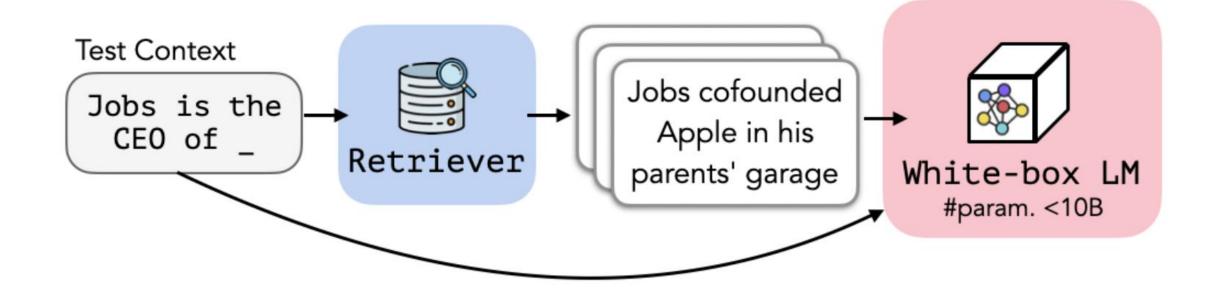

Mechanistic Interpretation

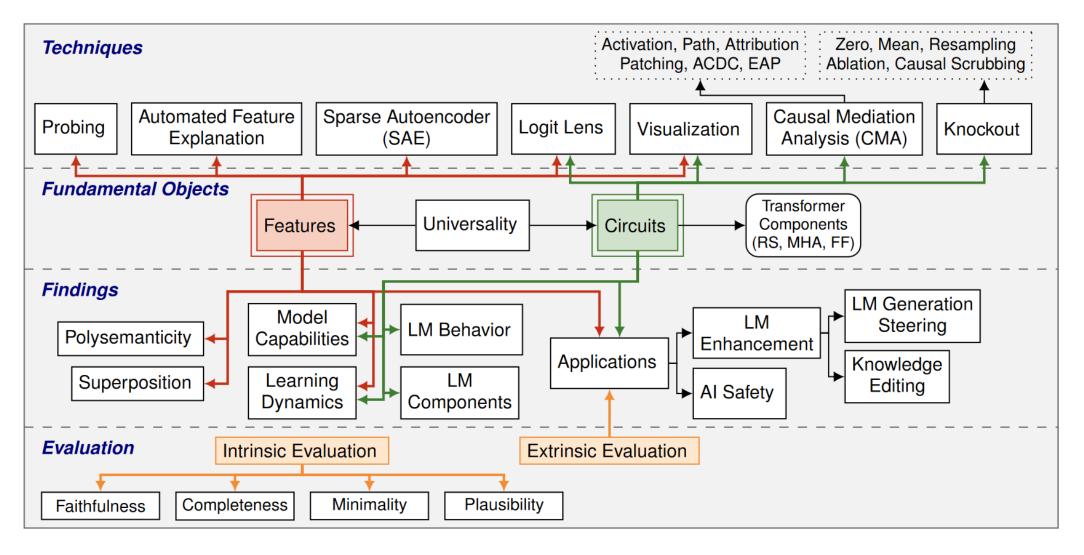


Figure 1: **Taxonomy** of the survey. Blocks are clickable to be directed to the corresponding sections.

Alignment: Reinforcement Learning from Human Feedback (RLHF)

Step 1

Collect demonstration data, and train a supervised policy.

A prompt is sampled from our prompt dataset.

A labeler demonstrates the desired output behavior.

This data is used to fine-tune GPT-3 with supervised learning.




Step 2

Collect comparison data, and train a reward model.

A prompt and several model outputs are sampled.

A labeler ranks the outputs from best to worst.

This data is used to train our reward model.



Step 3


Optimize a policy against the reward model using reinforcement learning.

A new prompt is sampled from the dataset.


The policy generates an output.

The reward model calculates a reward for the output.


The reward is used to update the policy using PPO.

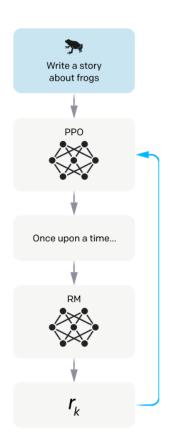

Quantization/Pruning for LLMs

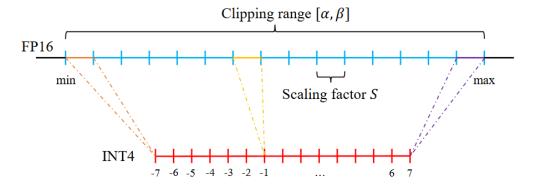


(a) Illustration of uniform quantization process

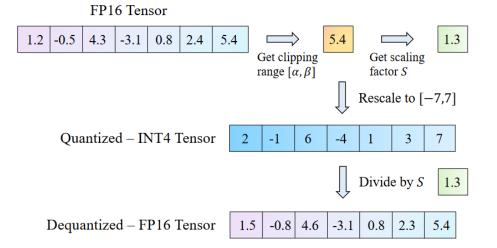

(b) Quantization and De-quantization of a FP16 tensor


Quantization

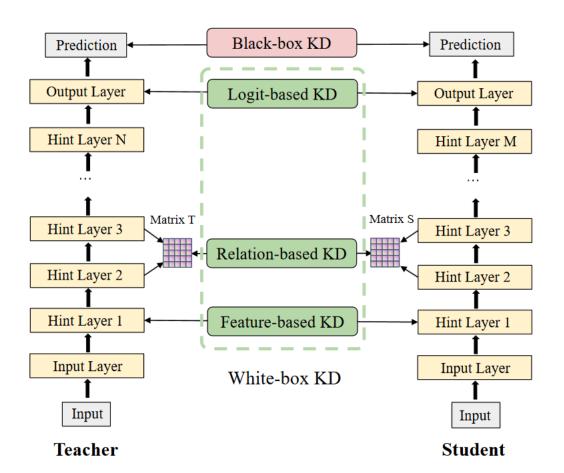

Knowledge distillation


https://arxiv.org/pdf/2402.09748

Efficient RAG: Decoupled Context Processing for Context Augmented Language Modeling [Li et al. 22]

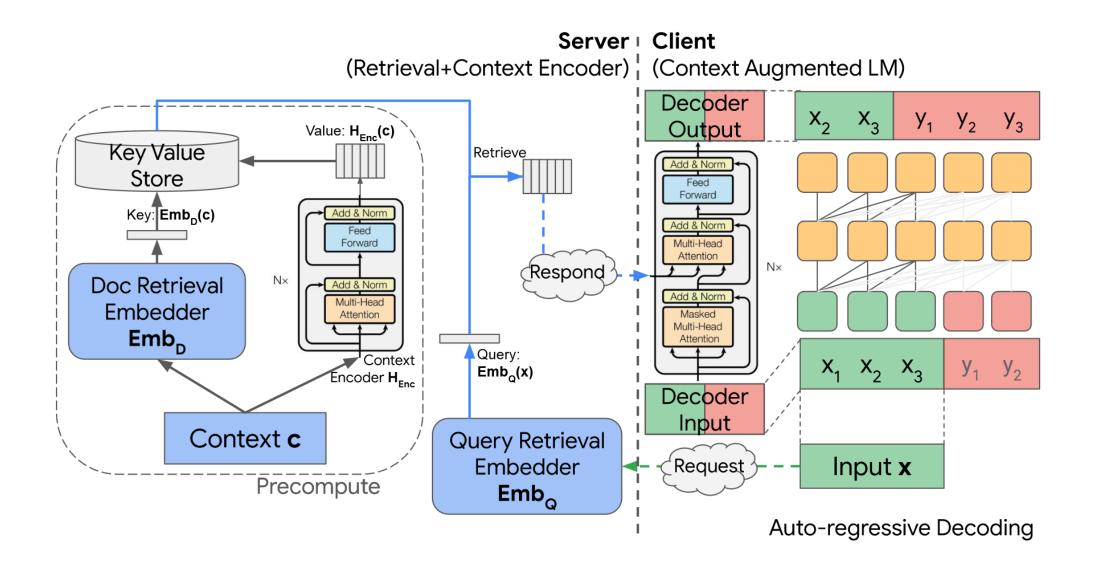



LLM-based Agents: WebArena [Zhou et al '24]

- · Websites as an environment for autonomous agents
 - a realistic and reproducible web environment designed to facilitate the development of autonomous agents

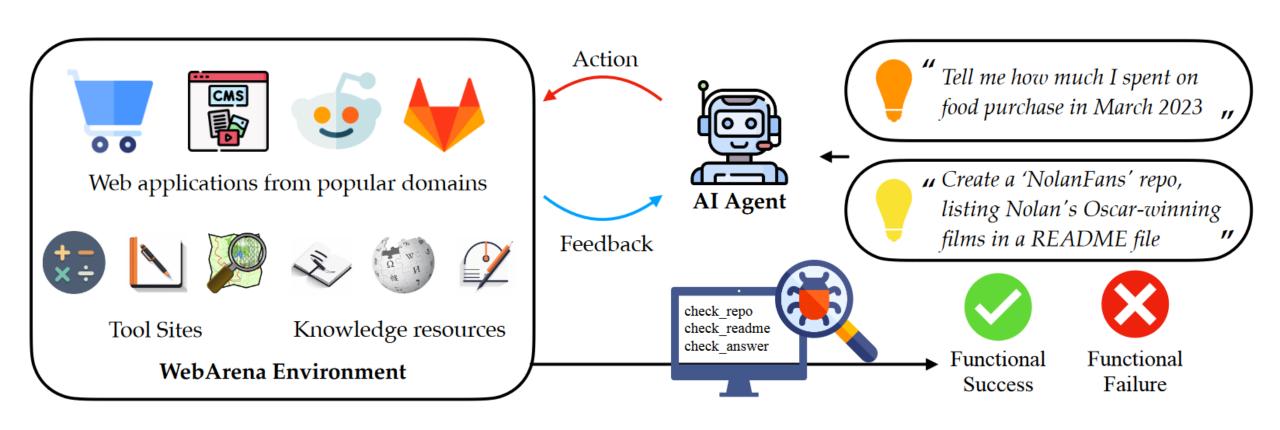

LLM-based Agents: WebArena [Zhou et al '24]

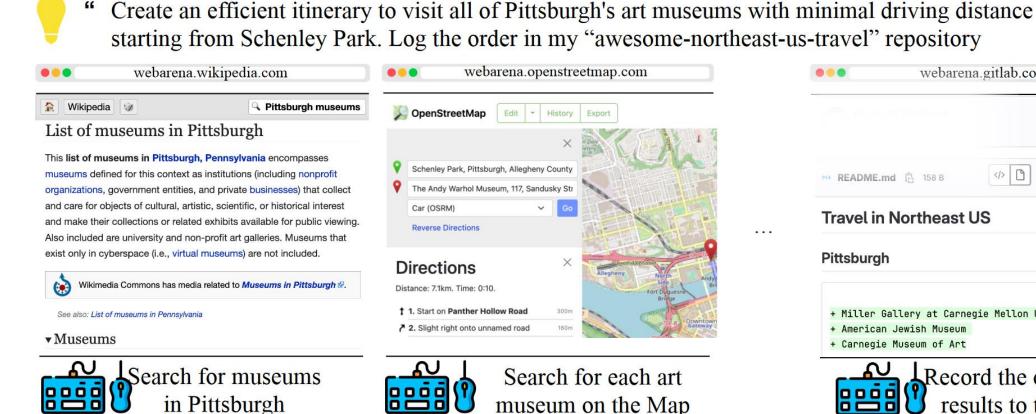


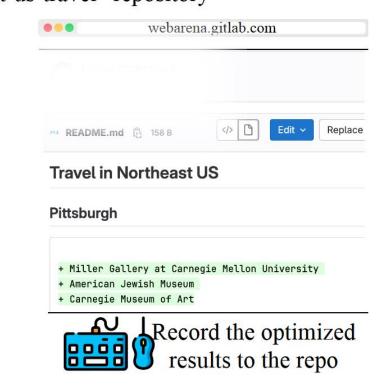

"

Figure 2: A high-level task that can be fully executed in WebArena. Success requires sophisticated, long-term planning and reasoning. To accomplish the goal (top), an agent needs to (1) find Pittsburgh art museums on Wikipedia, (2) identify their locations on a map (while optimizing the itinerary), and (3) update the README file in the appropriate repository with the planned route.

Diffusion Model

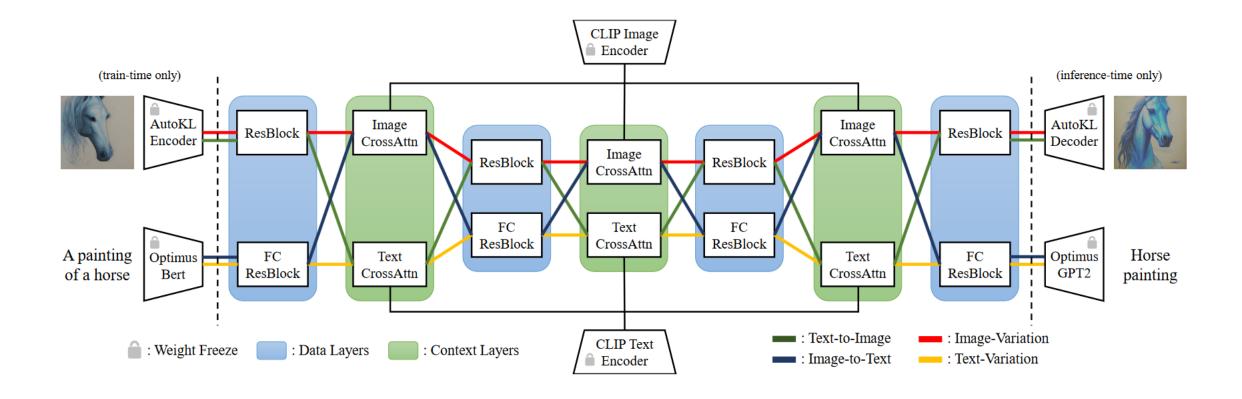

https://openaccess.thecvf.com/content/ICCV2023/papers/Xu_Versatile_Diffusion_Text_Images_and_Variations_All_in_One_Diffusion_ICCV_2023_paper.pdf

Neuro-Symbolic LLMs

Neural model

Learning

BERT


Deep learning& Pretrained language models Explanation/
Distillation




Transfer/ Injection




Symbolic model

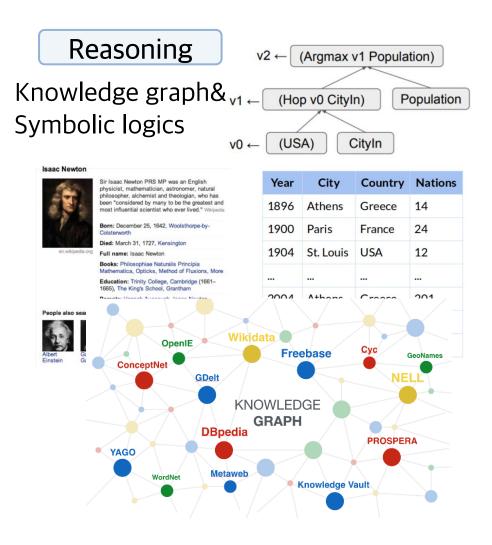


Recent Research Works: DistillMIKE [ACL 2024 Findings]

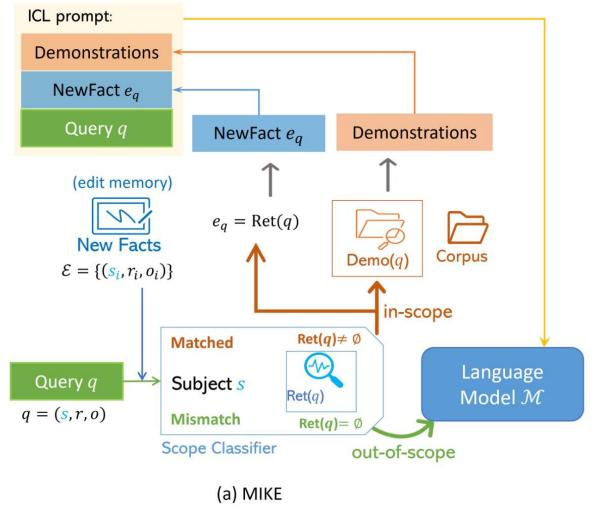




(b) Distill MIKE


Recent Research Works: COMEM [NAACL 2024 Findings]

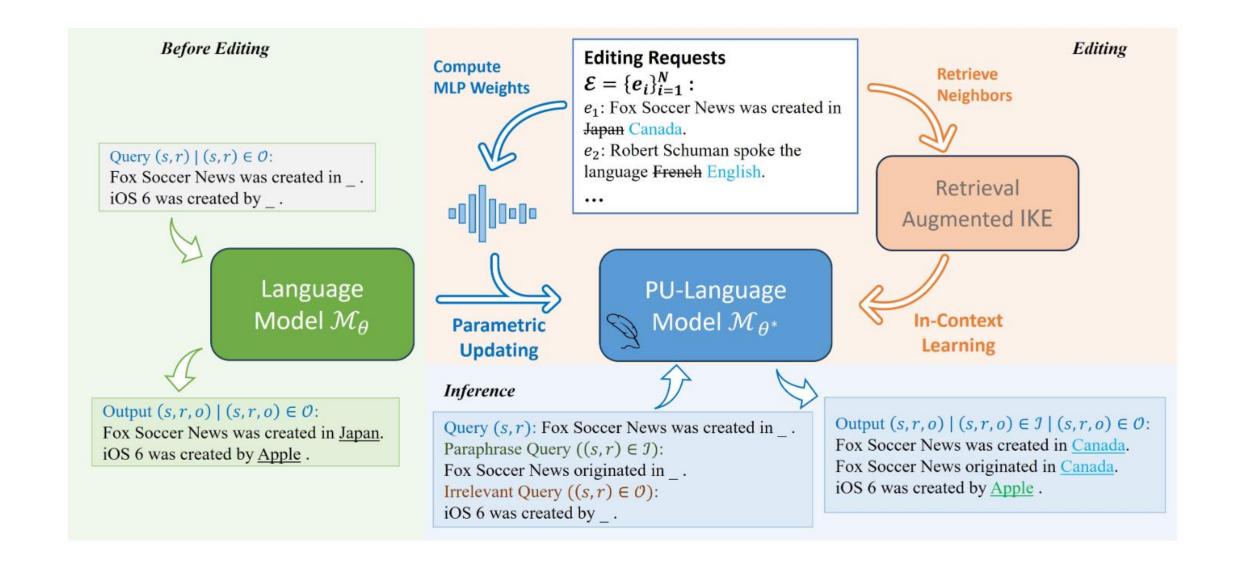

Recent Research Works: RADCoT [LREC-COLING 2024]

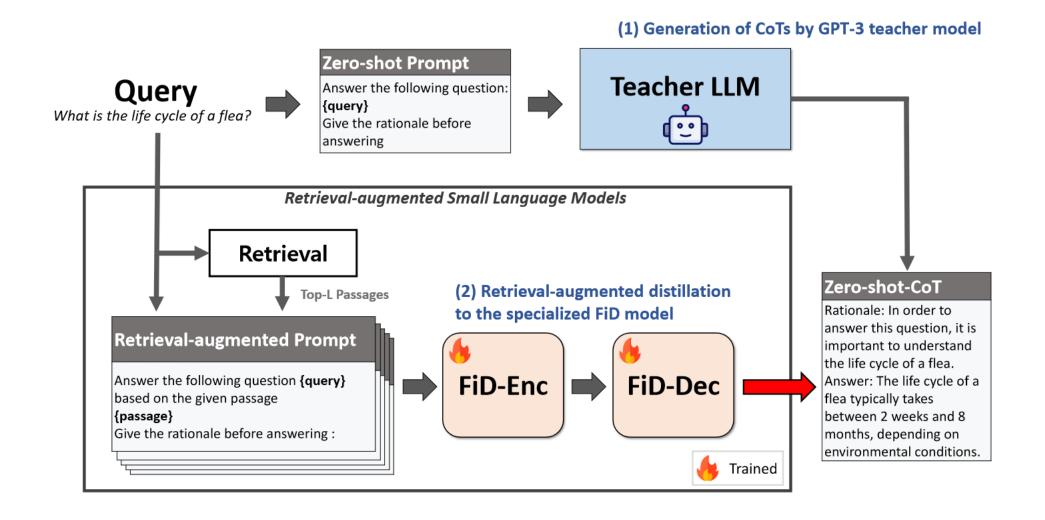

Recent Research Works: DiffusionRet [EMNLP Findings 2023]

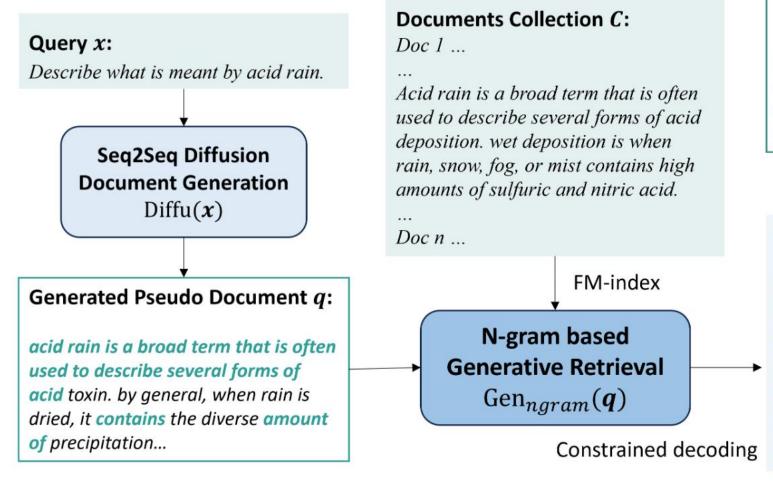

Retrieval Document d:

acid rain is a broad term that is often used to describe several forms of acid deposition. wet deposition is when rain....

Scoring $R_{\boldsymbol{Q}}(d,\boldsymbol{q})$

Generated n-grams Q:


acid rain is a broad term ...
persistent acid rain reduces tree ...
describe several forms of acid ...

...


react with the water ...
wet deposition is when rain....
water in the air react ...

Recent Research Works: ExplainMeetSum [ACL 2023]


[Meeting Transcript]

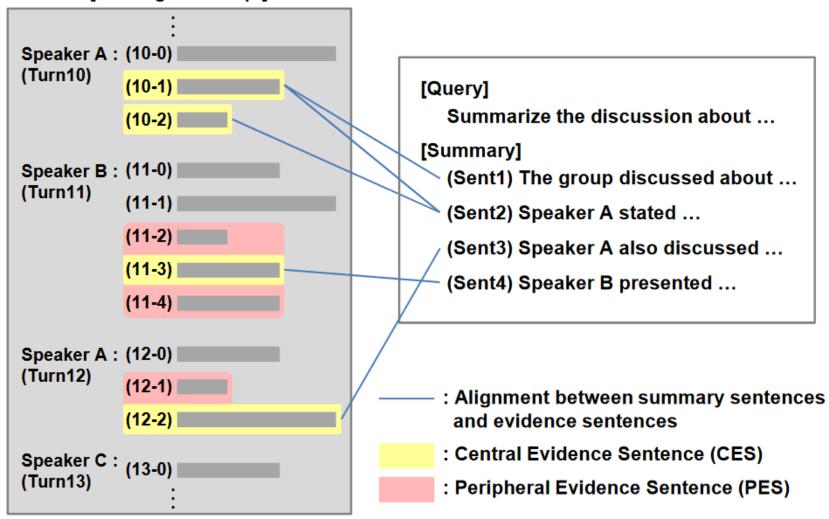


Recent Research Works: MAFiD [EACL Findings 2023]

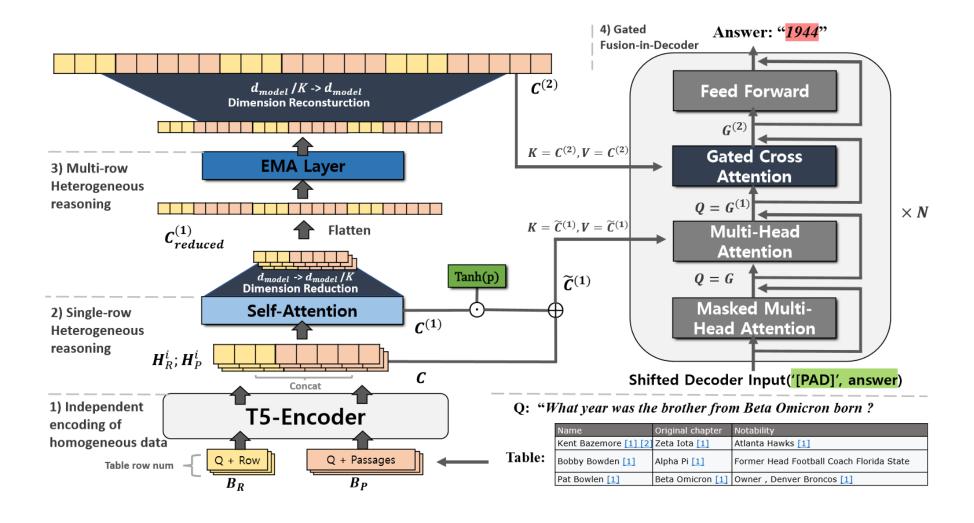

Recent Research Works: SISER [COLING 2022]

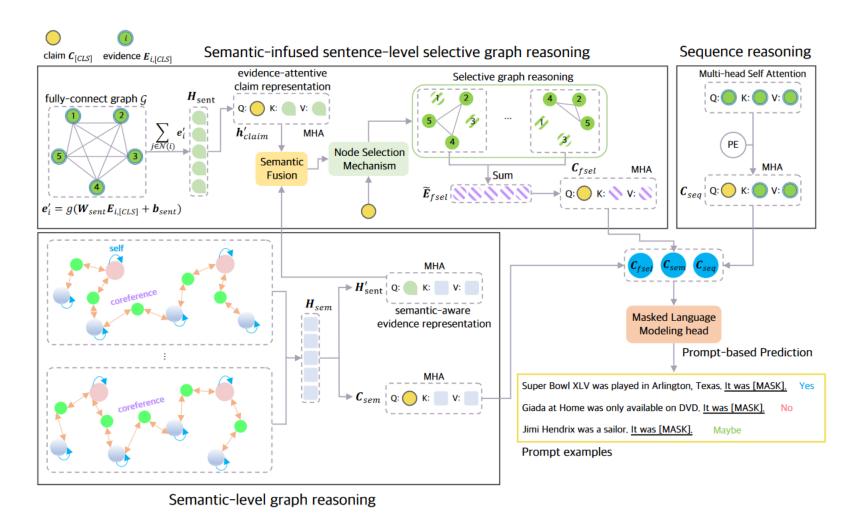


Recent Research Works: RINK [AAAI 2023]

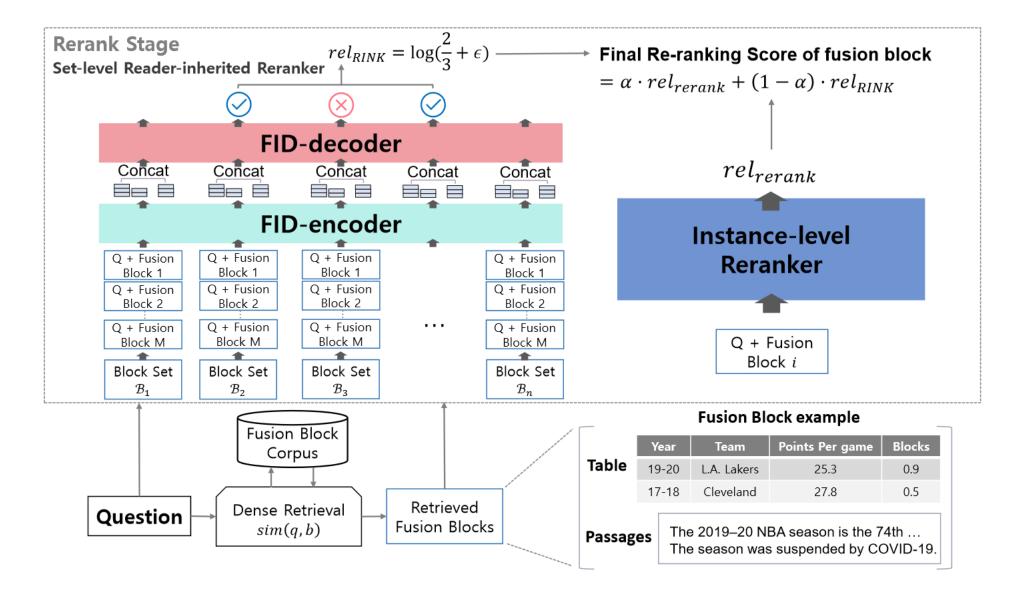

Recent Research Works: ESC [NAACL 2022]

	BEA-2019 Dev			BEA-2019 Test			BEA-2019 Test
Model	P	R	$\mathbf{F_{0.5}}$	P	R	$\mathbf{F_{0.5}}$	$\mathbf{F_{0.5}} \; (\bar{x} \pm \sigma)$
1. T5-Large	60.38	44.04	56.21	74.30	66.75	72.66	
2. GECToR XLNet	66.00	34.14	55.62	79.20	53.90	72.40	
3. GECToR Roberta	62.37	35.52	54.18	77.20	55.10	71.50	
4. Riken&Tohoku	62.89	34.39	53.95	74.7	56.7	70.2	
5. UEDIN-MS	59.07	37.57	53.00	72.28	60.12	69.47	
6. Kakao&Brain	62.73	33.23	53.27	75.19	51.91	69.00	
MEMT	68.41	41.88	60.72	82.20	63.00	77.48	76.66 ± 0.82
IBM	72.45	39.62	62.15	83.38	58.43	76.82	76.24 ± 0.38
GEC-IP	70.10	38.96	60.44	80.78	57.51	74.73	74.73 ± 0
ESC (ours)	73.63	40.12	63.09	86.65	60.91	79.90	79.86 ± 0.07

Recent Research Works: LM-BFF-MS [ACL 2022]

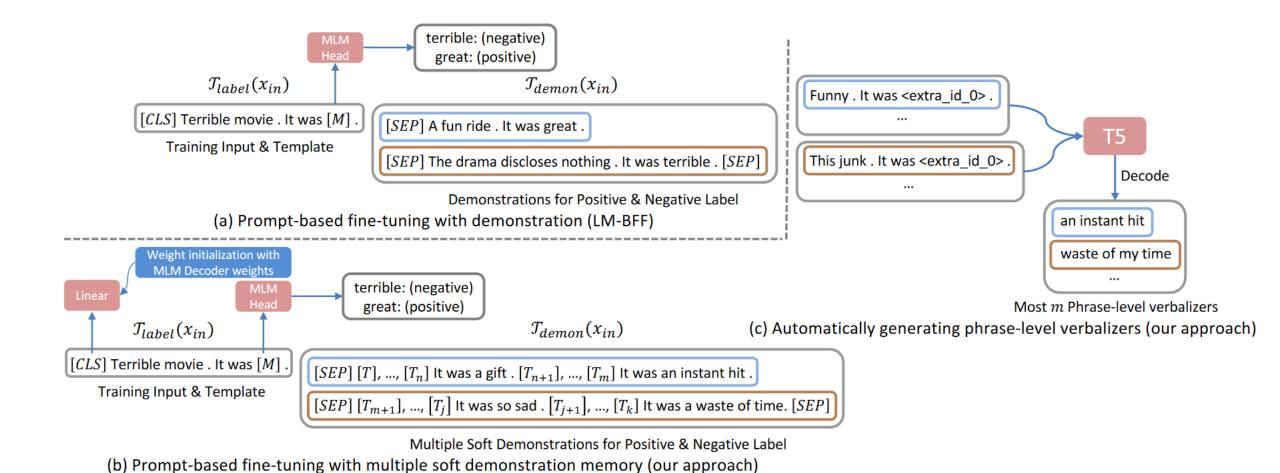

Cognitive Computing Lab: Summary

- Goal
 - Aiming to develop computing mechanism to achieve both linguistic competence and advanced cognitive competence, which align closely with the functions of System 1 and System 2
 - Mainly advance LLMs for world models
- Recent Research topics
 - ✓ Advancing LLMs
 - Knowledge Editing
 - Retrieval Augmented Generation
 - Mechanistic Interpretation
 - LLM-based agents
 - Alignment
 - World-grounded LLMs
 - World-interactive LLMs
 - Handling Hallucination/Biasness
 - Multi-model LLMs

- ✓ Efficient LLMs
 - Quantization/Pruning
- ✓ Diffusion models for NLP/IR
- ✓ Deep learning for NLP applications
 - Neural quality estimation
 - Fact verification
 - Meeting Summarization
 - Grammar Error Correction